

Procedure : Onboarding I.AM Connect TRIO API

1. Dependencies, recommendations and warning

TRIO API service was developed for use by different user groups, other user groups can only access TRIO through the Webapp and authentication via UMAN. This document is only applicable for API clients.

User Group		Section in this document
Prevention service	API, M2M Client Credentials Flow	See 2.1.3
CIN	API, M2M Client Credentials Flow	See 2.1.3
General practitioner (software)	API, authorization code flow	See 2.1.1 or 2.1.2
TRIO Backend	API, M2M Client Credentials Flow	See 2.1.3
advising doctor HIO	Only Webapp / UMAN	NA
return to work coordinators HIO	Only Webapp / UMAN	NA
members of the multidisciplinary team HIO	Only Webapp / UMAN	NA
administrative personnel HIO	Only Webapp / UMAN	NA
work doctor prevention service	Only Webapp / UMAN	NA
nursing staff prevention service	Only Webapp / UMAN	NA
administrative personnel prevention service	Only Webapp / UMAN	NA

To use TRIO through the API, the health care provider must have medical software that has integrated this service.¹

The TRIO API is accessible through REST services cf. cookbooks

2. Onboarding client for REST services

2.1 General

In the case of the REST services, it is necessary to request integration using the I.AM Connect forms.²

- IAM Connect form:
Particularity for the TRIO API: TWO forms are available, you should fill in the one that, according to the explanations in this document, corresponds to your use case.

¹ <https://www.ehealth.fgov.be/nl/software-registratie/arts> (NL)


<https://www.ehealth.fgov.be/fr/enregistrement-de-logiciel/medecin> (FR)

² <https://www.ehealth.fgov.be/ehealthplatform/fr/service-iam-identity-access-management>



Procedure : Onboarding I.AM Connect TRIO API

- Description of user groups:
It is requested to clearly describe the different user groups and/or organizations that will use your service (e.g. doctors, etc...). This description should be part of the application email, with the IAM Connect form attached.
- Description of the use cases

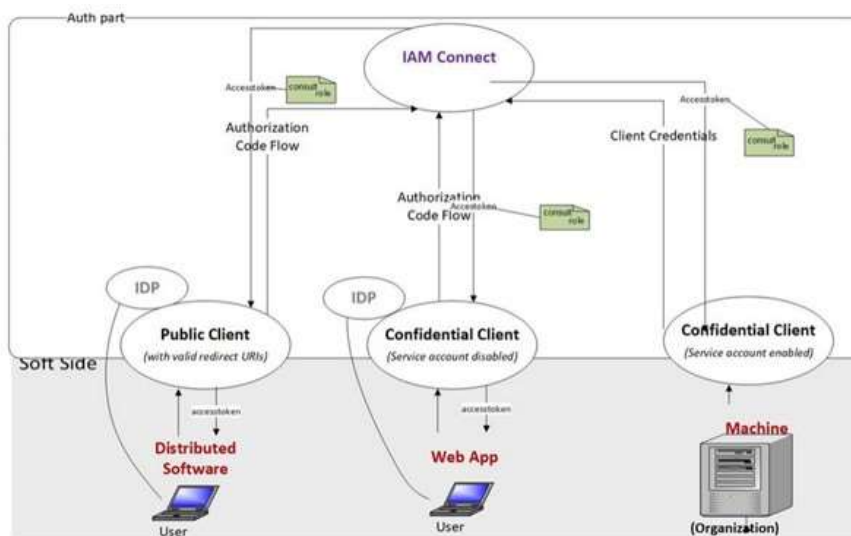

2.1.1 Case of a distributed application (and some webapps)

- The application runs 100% on a user-side client (it is not possible to manage private keys to authenticate the client application).
- The user authenticates himself directly through our IDP and FAS.
- Authorization code flow : PKCE integration.

Elements on the “*I.AM Connect – HealthCare Client registration*”³ form to complete

- Section 4 General Information / information about your software
 - **Client ID** : Client’s identifier which, by default, is the name of your company or software.
 - If an IAM Connect client for your company already exists in the healthcare realm, you should try to reuse the existing client (and therefore the client ID).

³ <https://www.ehealth.fgov.be/ehealthplatform/fr/service-iam-identity-access-management>

Procedure : Onboarding I.AM Connect TRIO API

- If an IAM Connect client for your company already exists in the healthcare realm, but it is not possible to reuse it, you need to get a new Client ID and add a suffix '-trio' after the company or software name (e.g. softwarename-trio)
- **Name:** Client's name
- **Description (optional):** TRIO if dedicated client
- Section 5.1 URL
 - **Redirect URI's** for redirection after a successful log-in are essential.
 - The other fields are optional, see in case of web application.
- Section 5.3 Access Type
 - Tick « **Public access type** »
- Section 5.4 Credentials
 - N/A in this case
- Section 5.6 Scopes
 - Mention client scope : **nihdi:trio**



Procedure : Onboarding I.AM Connect TRIO API

-

2.1.2 Case of a confidential healthcare client (some Web Apps for instance)

- Runs partly on the server side at recognized partner organizations (use of private keys for authentication of the client application itself).
- The user authenticates himself directly through our IDP and FAS.
- Authorization code flow : access token is sent from the client side to the server side of the client.

Elements on the “**I.AM Connect – HealthCare Client registration**”⁴ form to complete

- Section 4 General Information / information about your software
 - **Client ID** : Client’s identifier, which by default, is the name of your company or software.
 - If an IAM Connect client for your company already exists in the healthcare realm, you should try to reuse the existing client (and therefore the client ID).
 - If an IAM Connect client for your company already exists in the healthcare realm but it is not possible to reuse it, you need a new Client ID and add a suffix '-TRIO' after the company or software name (e.g. softwarename-TRIO).
 - **Name**: Client’s name
 - **Description** (optional): TRIO if dedicated client
- Section 5.1 URL (of the Web App concerned)
 - **Redirect URI’s** for redirection after a successful log-in are essential.
 - The **Root / Base URL** of the Web App.
- Section 5.3 Access Type
 - Tick « **Confidential access type** »
- Section 5.4 Credentials
 - JWKS information of the ETEE certificate for the JWKS URL :
 - **Identifier** : identifier of the client’s identity (NIHII or CBE or EHP number)
 - **Type** : type of identifier(e.g.: EHP, CBE, NIHII-HOSPITAL,...)
 - **Applicationidentifier** (optional): Application ID for this identifier.
Element to determine the institution's certificate used on the basis of the Application ID of the eHealth certificate. If your used certificate does not contain an application ID, leave this field blank.
- Section 5.6 Scopes
 - Mention client scope : **nihdi:trio**

⁴ <https://www.ehealth.fgov.be/ehealthplatform/fr/service-iam-identity-access-management>



Procedure : Onboarding I.AM Connect TRIO API

2.1.3 Case of a confidential client – Machine to machine (Organization)

- Runs 100% on the server side at recognised partner organizations.
- NO authentication of end-users.
- Client Credentials : access token is sent directly to the client after authentication (NOT an end-user).

Elements on the “**I.AM Connect – M2M Client registration**”⁵ form to complete

- Section 4 General Information / information about your software
 - **Client ID** : Identifier of the organization, which is different depending on the type of organization:
 - For a company: cbe-XXXXXXXXXX where XXXXXXXXXX is the CBE identifier.
 - For a health care institution: nihdi-<type>-XXXXXXXXXX where the type is the type of institution (e.g. hospital, lab, guard post,...) and XXXXXXXXXX is the NIHII identifier.
 - For an eHealth institution: ehp-XXXXXXXXXX where XXXXXXXXXX is the EHP identifier.
 - *If an IAM Connect client for your organization already exists in the M2M realm, you should try to reuse the existing client (and therefore the client ID).*
 - *If an IAM Connect client for your organization already exists in the M2M realm, but it is not possible to reuse it, you need a new Client ID and add a suffix '-trio' after the company or software name (e.g. softwarename-trio).*
 - **Name** : name of the organization.
 - **Description** (optional): You can mention the software provider.
- Section 5.1 Credentials
 - JWKS information of the ETEE certificate for the JWKS URL :
 - **Identifier** : identifier of the client's identity (NIHII or CBE or EHP number)
 - **type** : type of identifier(e.g.: EHP, CBE, NIHII-HOSPITAL,...).
 - **applicationidentifier** (optional): Application ID for this identifier.
Element to determine the institution's certificate used on the basis of the Application ID of the eHealth certificate. If your used certificate does not contain an application ID, leave this field blank.
- Section 5.2 Scopes
 - Mention client scope : **nihdi:trio**

⁵ <https://www.ehealth.fgov.be/ehealthplatform/fr/service-iam-identity-access-management>



Procedure : Onboarding I.AM Connect TRIO API

3. How to apply for TRIO service integration

3.1 REST

For a REST integration, please contact the Integration Support team

- Mail TO : integration-support@ehealth.fgov.be with CC : wolf.wauters@ehealth.fgov.be
- Mail title : Configure Client REST TRIO for <Client's name> in realm <Name Realm>
- Mail content : The email should explain the context of the use of the TRIO services, the purpose, the methods you will use, as well as a volumetric estimate of your project
- Mail attachment : Ad-hoc form (see section 2.2) filled in accurately

3.2 What are the requirements for activation of the TRIO service in production?

- When the client is configured in ACCEPTANCE.
- Run the required tests in ACCEPTANCE to demonstrate that the service is working correctly:
- Provide a report with the results of these tests to the Integration Support team, with a copy to the project manager (see Par 3.2), who will verify the traffic of your tests.

