

SWING GATE MOTOR



SMART INDIA ENTERPRISES

MANUFACTURER / EXPORTER : ENTRANCE AUTOMATION PRODUCTS

**AUTOMATIC: GATES, GARAGE DOORS, SHUTTERS, HIGH SPEED DOOR, BOOM BARRIER, BULLARDS, SECTIONAL DOORS, DOCK
LEVELER AND SHELTERS**

STOCKIST & SUPPLIER OF COMPLETE HARDWARE AND ELECTRICAL PARTS, MOTORS AND SENSORS SOLUTIONS

JIJAMATA NAGAR, A-1 BAKERY ROAD, GOREGAON WEST, MUMBAI 400104, MH - INDIA

ABOUT US

Smart India Enterprises is a specialist manufacturer and exporter of entrance automation products, serving residential, commercial and industrial customers across India. We supply and support a complete range of Sliding Gate Motors, Swing Gate Motors, Boom Barriers, Rolling Shutter Motors, Glass Door Operators, Bullards, Sectional Doors, Dock Levelers and Shelters, and are stockists & suppliers of complete gate hardware, electrical parts, motors and sensor solutions.

Our Swing Gate Motor range is engineered for reliable, everyday performance — from compact 24V arm motors for residential gates, to heavy-duty articulated, roller and underground motors built for commercial and industrial installations. Every motor in our range ships with a matching control board, remote controls and the mounting hardware required for a clean installation.

| Why Smart India Enterprises

21+

MOTOR MODELS

1 YR

WARRANTY

**24V/
230V**

DC & AC OPTIONS

**PAN
INDIA**

DISPATCH

| What We Offer

Each swing gate motor is supplied complete with a control board, two remote controls and standard fixing hardware. Optional integrations — safety sensors, WiFi touch switches, warning lamps, GSM modules, wireless keypads, dead bolt locks, video door phones and automatic vehicle sensors — are available across the range to build the exact access-control system your site requires.

RANGE OF PRODUCTS

Smart India Enterprises constantly upgrades its product range keeping quality and site-readiness in mind. Beyond the Swing Gate Motor range detailed in this catalogue, we also supply the following entrance automation product lines:

Sliding Gate Motor (AC / DC / Induction)	Side Sliding Gate Motor
Swing Arm Gate Motor (AC/DC)	Swing Gate Roller Motor
Swing Gate Articulated Arm Motor	Swing Gate Underground Motor
Sectional Garage Door Motor	Rolling Shutter Motor (Gear / Tubular / Direct Drive)
Fire Rated Rolling Shutter Motor	Aluminium & Polycarbonate Shutter
High Speed Door	Glass Door Operator
Boom Barrier	Gate Hardware & Accessories


This Catalogue Covers

The following pages present our complete **Swing Gate Motor** range — 21 motor models across arm, articulated-arm, roller and underground drive types, in 24V DC and 230V AC variants, for single leaf weights from 140kg up to 900kg and leaf lengths from 1m up to 5m.

MODEL PHOTOS



SIEL3-24V

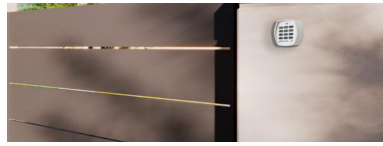

SIEPKMC02 / SIEPKMC02-2



SIESW300



SIE330K-350 / SIE330K-500



SIEL5-600



SIEL6-600



SIEDCK23AC-3M / -5M



SIEDCK25AC



SIEPKM-B01




SIEDCK680-24V



SIEDCK860-24V



SIEDESO-24V



SIEU2-24V / SIEU2-220V



SIEU3-24V / SIEU3-220V


SWING GATE MOTOR

SWING GATE ARM MOTOR

24V



SWING GATE MOTOR FOR RESIDENTIAL & COMMERCIAL GATE — SIEPKMC02

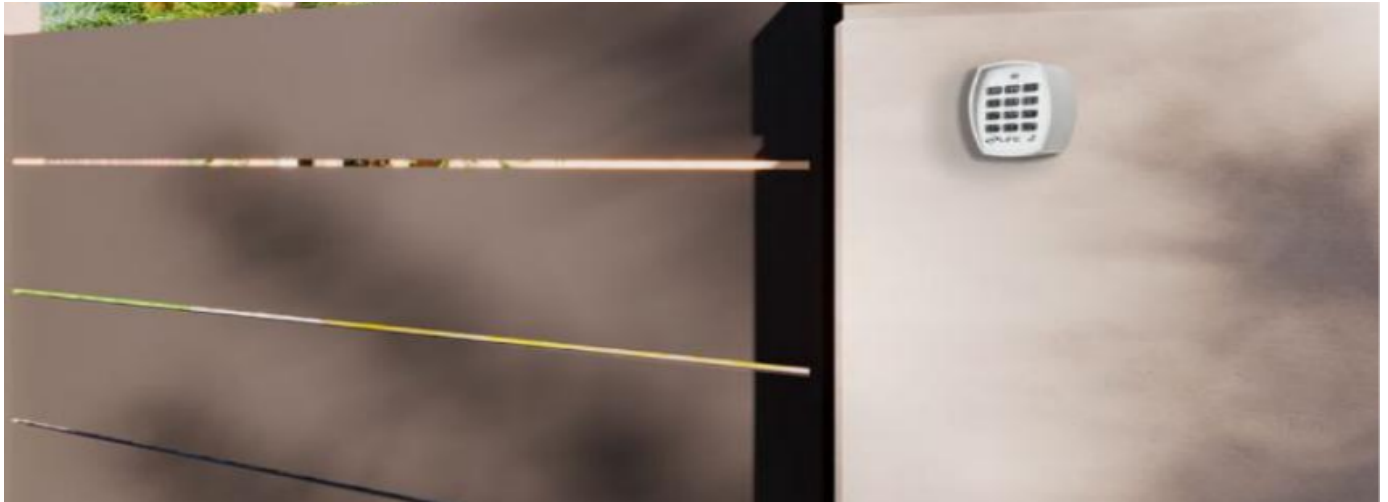

Thanks to the structure made of die-cast aluminium shells and to the high-quality materials, such as the worm screw transmission system and the bronze crown, this operator range ensures maximum strength, reliability, and resistance over time. Quick to install, it also ensures maximum comfort with extremely silent operation. Non-reversible operator for residential use — the emergency manoeuvre is always easy thanks to unlocking with the manual key.

Technical Specification

Model	SIEPKMC02
Power Supply	220V / 24V
Rotational Speed	300RPM
Motor Rated Power	60W x 2
Continuous Working Time	5 min
Arm's Max Travel	300mm / 400mm
Max Single-Leaf Weight	300-350 Kg
Max Leaf Length	2.5m / 3m
Max Gate Open Angle	90-110°
Protection Class	IP55
Frequency	433.92 MHz
Noise	≤60 dB

Key Features

- Die-cast aluminium shell construction
- Worm screw transmission with bronze crown
- Extremely silent operation
- Non-reversible for residential use
- Manual key release for emergency manoeuvre
- Supports Fingerprint, Password, Card & Bluetooth App access control

Recommended Accessories:



SWING GATE MOTOR

SWING GATE ARM MOTOR

24V



SWING GATE MOTOR FOR RESIDENTIAL & COMMERCIAL GATE — SIE330K-350 / SIE330K-500



DC Motor, supports backup battery DC24V (4.5AH/9.0AH), with optional single/double gate mode, adjustable auto-close time, and soft-start for smooth, quiet operation. Equipped with safety accessory interfaces for an alarm lamp and photo beams.

Technical Specification

Model	SIE330K-350 / SIE330K-500
Power Supply	220V / 24V
Peak Thrust	2000N / 2500N
Nominal Thrust	1700N / 2000N
Stroke Length	350mm
Current Rating	3A
Max Single-Leaf Weight	350 Kg / 500 Kg
Max Gate Length	3m
Max Gate Open Angle	90-140°
Power	80W / 100W
Extra Battery	24V 4.5Ah

Key Features

- DC Motor, supports backup battery DC24V (4.5AH / 9.0AH)
- Optional single / double gate mode
- Adjustable auto-close time
- Soft-start for smooth and quiet operation
- Safety accessory interfaces for an alarm lamp and photo beams
- Supports keypads, card readers, biometrics & automatic vehicle sensors

Recommended Accessories:




SWING GATE MOTOR

SWING GATE ARM MOTOR

230V



SWING GATE MOTOR FOR RESIDENTIAL & COMMERCIAL GATE — SIEDCK23

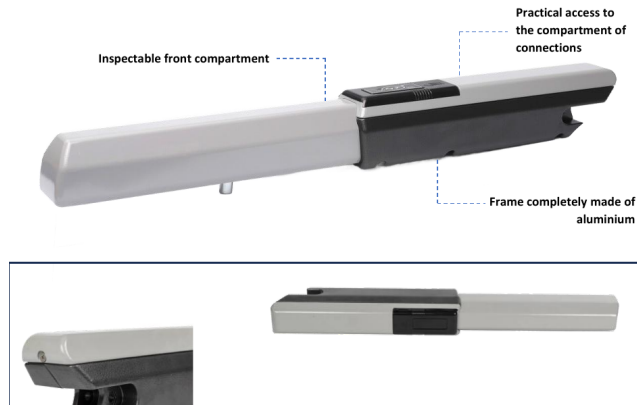

Irreversible
electromechanical
actuator

for swing gates
with leaves up to
3m/5m length

An irreversible electromechanical actuator for swing gates with leaves up to 3m/5m length. Equipped with mechanical opening and closing stop switches and a sturdy steel & bronze mechanical transmission for maximum durability and reliability.

Technical Specification

Model	SIEDCK23
Power Supply	220V
Open Thrust	320 N.m
Motor Rated Power	150W x 2
Continuous Working Time	5 min
Limit Switch	Mechanical Switch
Max Single-Leaf Weight	750-800 Kg
Travel Speed	10-15 m/min
Max Gate Open Angle	90-110°
Protection Class	IP44
Gross Weight	20 Kg/CTN

Key Features

- Equipped with mechanical opening & closing stop switches
- Sturdy steel & bronze mechanical transmission for durability
- Aluminium release handle with personalised key
- Large connection compartment at the top of the engine
- Inspectable front compartment for easy servicing
- Frame completely made of aluminium

Recommended Accessories:



SWING GATE MOTOR

SWING GATE ARM MOTOR

24V



SWING GATE MOTOR FOR RESIDENTIAL & COMMERCIAL GATE — SIESW300



A DC swing gate motor with backup battery support, equipped with an external lock for added safety and a manual override mechanism for emergency situations. Delivers smooth, quiet operation via soft-start technology.

Technical Specification

Model	SIESW300 DC
Power Supply	220V / 24V
Open Thrust	320 N.m
Motor Rated Power	50W
Continuous Working Time	5 min
Max Leaf Length	2.5m
Max Single-Leaf Weight	300 Kg
Travel Speed	2.5 cm/sec
Max Gate Open Angle	90-110°
Protection Class	IP44

Key Features

- DC Motor, supports backup battery DC24V (4.5AH / 9.0AH)
- Optional single / double gate mode
- Equipped with external lock for safety
- Manual override mechanism for emergency situations
- Soft-start for smooth, quiet operation
- Supports keypads, card readers, biometrics & automatic vehicle sensors

Recommended Accessories:



SWING GATE MOTOR

SWING GATE ARTICULATE ARM MOTOR

24V



SWING GATE MOTOR FOR RESIDENTIAL & COMMERCIAL GATE — SIEPKM-B01



The SIEPKM-B01 articulate swing gate opener is a DC motor with backup battery support, featuring a limit switch that stops on obstacle detection and an automatic closing function with adjustable time. Designed for slow, smooth start and stop operation.

Technical Specification

Model	SIEPKM-B01
Power Supply	220V / 24V
Open Thrust	400N
Motor Rated Power	80W x 2
Continuous Working Time	5 min
Limit Switch	Mechanical Switch
Max Single-Leaf Weight	250 Kg
Travel Speed	10-15 m/min
Max Gate Open Angle	90-110°
Protection Class	IP54
Gross Weight	20 Kg/CTN

Key Features

- DC Motor, supports backup battery DC24V (4.5AH / 9.0AH)
- Optional single / double gate mode
- Limit switch, stops on obstacle detection
- Automatic closing function with adjustable time (0~99s)
- Slow start and stop for smooth operation
- Manual release design for emergency purpose

Recommended Accessories:



SWING GATE MOTOR

SWING GATE ARM MOTOR

24V



SWING GATE MOTOR FOR RESIDENTIAL & COMMERCIAL GATE — SIEL3-24V



A compact DC swing gate arm motor with backup battery support and magnetic limit switches. Equipped with an external lock for added safety and a manual override mechanism for emergency situations, ideal for residential gates.

Technical Specification

Model	SIEL3-24V
Power Supply	220V / 24V
Open Thrust	200N
Motor Rated Power	12W x 2
Continuous Working Time	5 min
Limit Switch	Magnetic Limit
Max Single-Leaf Weight	200 Kg
Motor Speed	5000 RPM
Max Gate Open Angle	90-110°
Protection Class	IP45

Key Features

- DC Motor, supports backup battery DC24V (4.5AH / 9.0AH)
- Optional single / double gate mode
- Equipped with limit switches
- External lock for added safety
- Adjustable auto-close time
- Manual override for emergency situations

Recommended Accessories:



SWING GATE MOTOR

SWING GATE ARM MOTOR

230V



SWING GATE MOTOR FOR RESIDENTIAL & COMMERCIAL GATE — SIEL5-600



The two motors make up a durable and powerful AC unit with a heavy-duty gear box and metal gears throughout. Suitable for gates up to 4m, with a control board equipped with an integrated auto-close timer.

Technical Specification

Model	SIEL5-230V/600
Power Supply	220V
Open Thrust	2800N
Motor Rated Power	320W x 2
Continuous Working Time	5 min
Limit Switch	Electronic Force Sensor
Max Single-Leaf Weight	500 Kg
Motor Speed	1450 RPM
Max Gate Open Angle	90-110°
Protection Class	IP44

Key Features

- Durable, powerful AC unit with heavy-duty metal gears
- Suitable for gates up to 4m
- Control board with integrated auto-close timer
- Supports keypads, card readers, biometrics & automatic vehicle sensors

Recommended Accessories:



SWING GATE MOTOR

SWING GATE UNDERGROUND MOTOR

24V



SWING GATE MOTOR FOR RESIDENTIAL & COMMERCIAL GATE — SIEU3-24V / SIEU3-220V



The motor mechanism is installed underground in a foundation box, leaving the gate's appearance largely unaltered — only the top of the box and the connecting arm are visible at ground level. Available in 230V & 24V versions, suitable for gates up to 4m.

Technical Specification

Model	SIEU3-230 / SIEU3-24V
Power Supply	220V/50Hz / 230VAC/ 50Hz
Absorb Power	300W / 70W
Current	1.7A / 5.5A
Motor Speed	1450 / 1800 RPM
Thrust	Max 700Nm / 300Nm
Travel	10s
Protection Class	IP67
Max Weight	300 / 500 Kg
Max Width	3.5 Meter
Remote Range	30m

Key Features

- Motor mechanism installed underground, gate appearance unaltered
- Available in 230V & 24V versions
- Operable via remote, keypad, intercom or smartphone app
- Suitable for gates up to 4m
- Control board with integrated auto-close timer

Recommended Accessories:



SWING GATE MOTOR

SWING GATE ROLLER MOTOR

24V



SWING GATE MOTOR FOR RESIDENTIAL & COMMERCIAL GATE — SIEDCK860-24V



A roller-based drive system that uses a rubber roller to push or pull the gate open or closed, giving an unlimited opening angle compared to standard linear actuators. Available in both AC and DC, with a battery backup interface.

Technical Specification

Model	SIEDCK860
Power Supply	220V / 24V
Open Thrust	600N
Motor Rated Power	120W x 2
Continuous Working Time	5 min
Limit Switch	Magnetic Sensor
Max Single-Leaf Weight	500-600 Kg
Travel Speed	10-15 m/min
Max Gate Open Angle	90-140°
Protection Class	IP55
Extra Battery	24V 4.5Ah
Gross Weight	21 Kg/CTN

Key Features

- Roller-based drive system for smooth push/pull operation
- Single / double gate compatibility
- Unlimited opening angle vs. standard linear actuators
- Supports leaf weights up to 700kg, leaf lengths 3-5m
- Soft start & soft stop for minimal noise and wear
- Available in AC & DC, with battery backup interface

Recommended Accessories:

