




Node-red design flow and received data viewed in debug node:

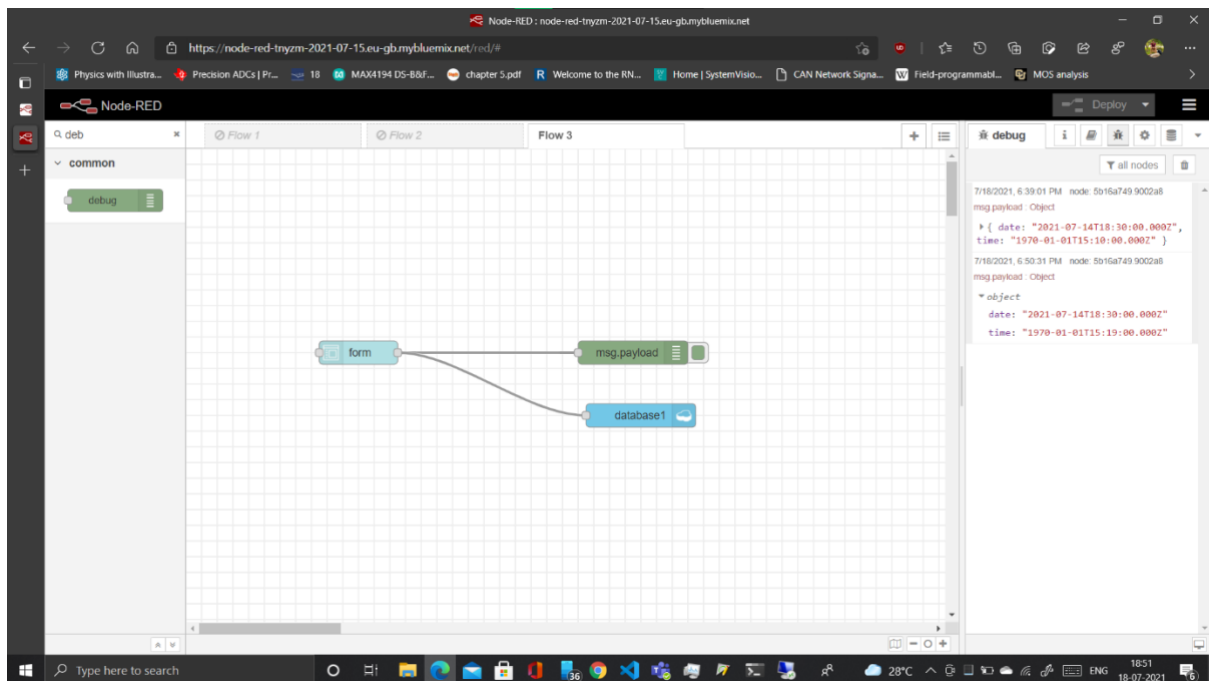


Configuration for cloudant out and form node:

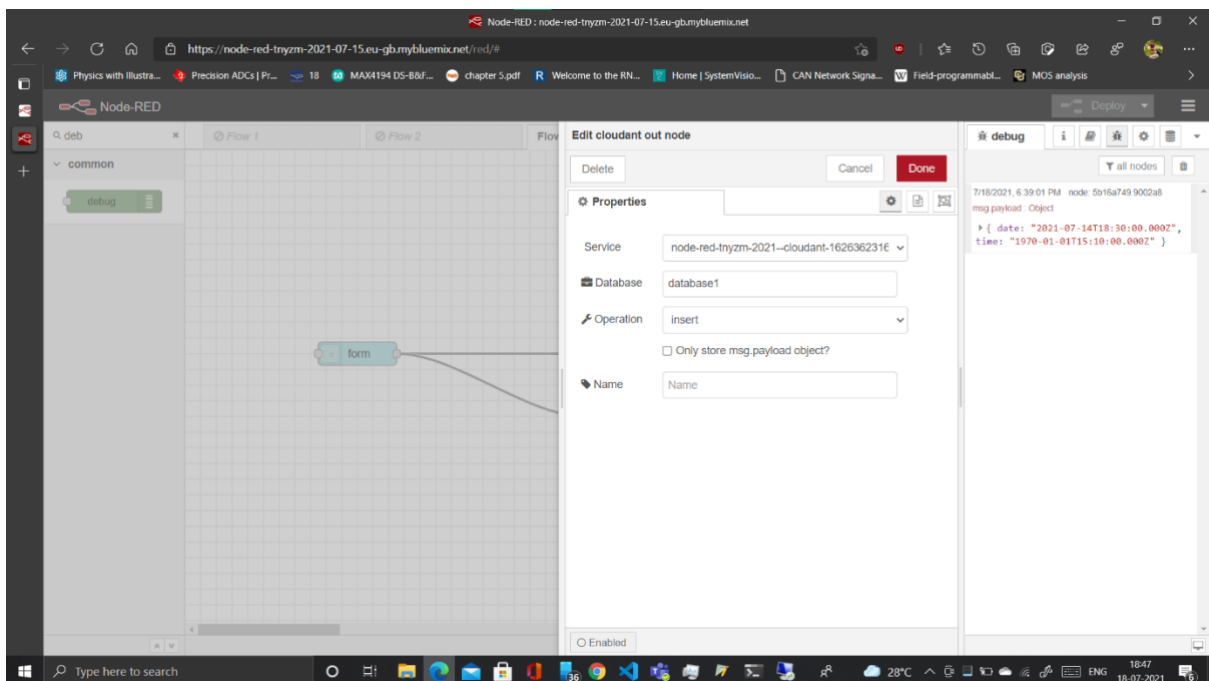


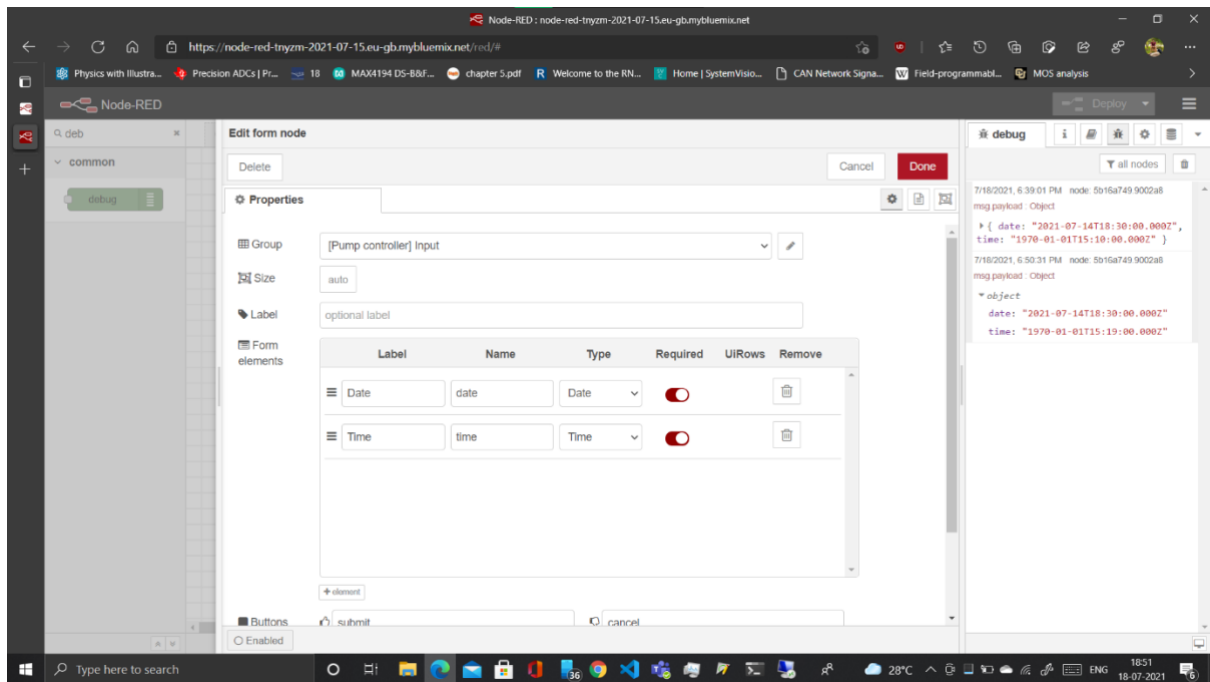

Input data feed:

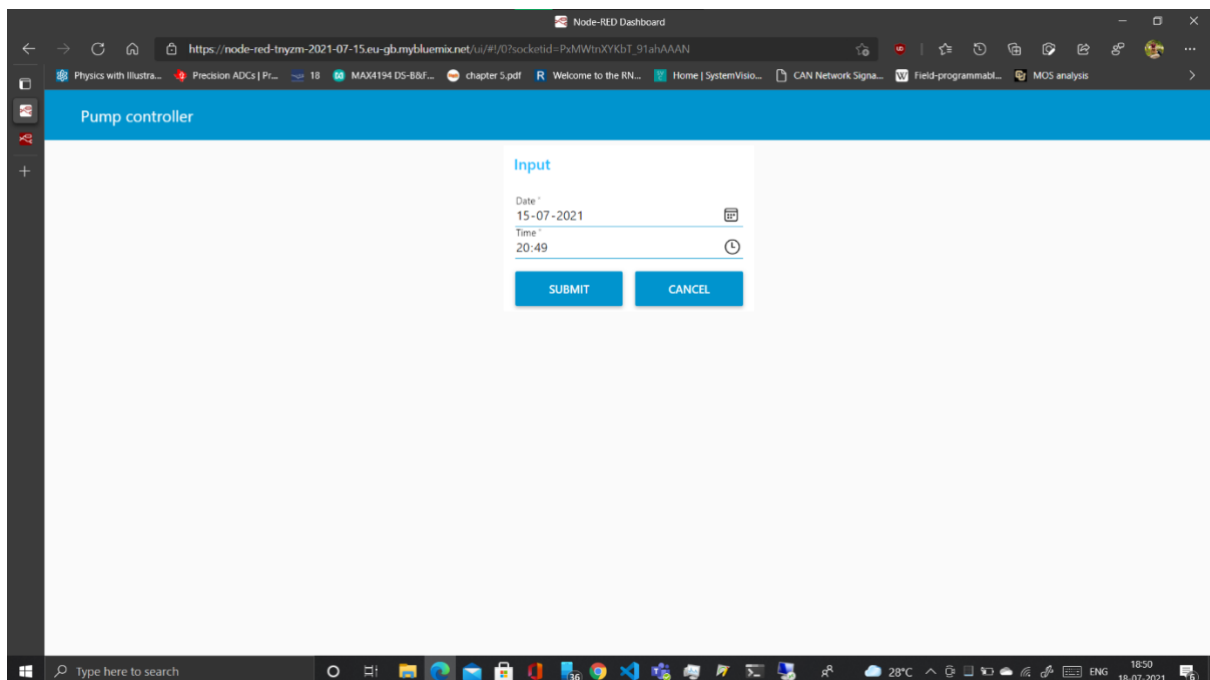

## Received data in cloud database storage

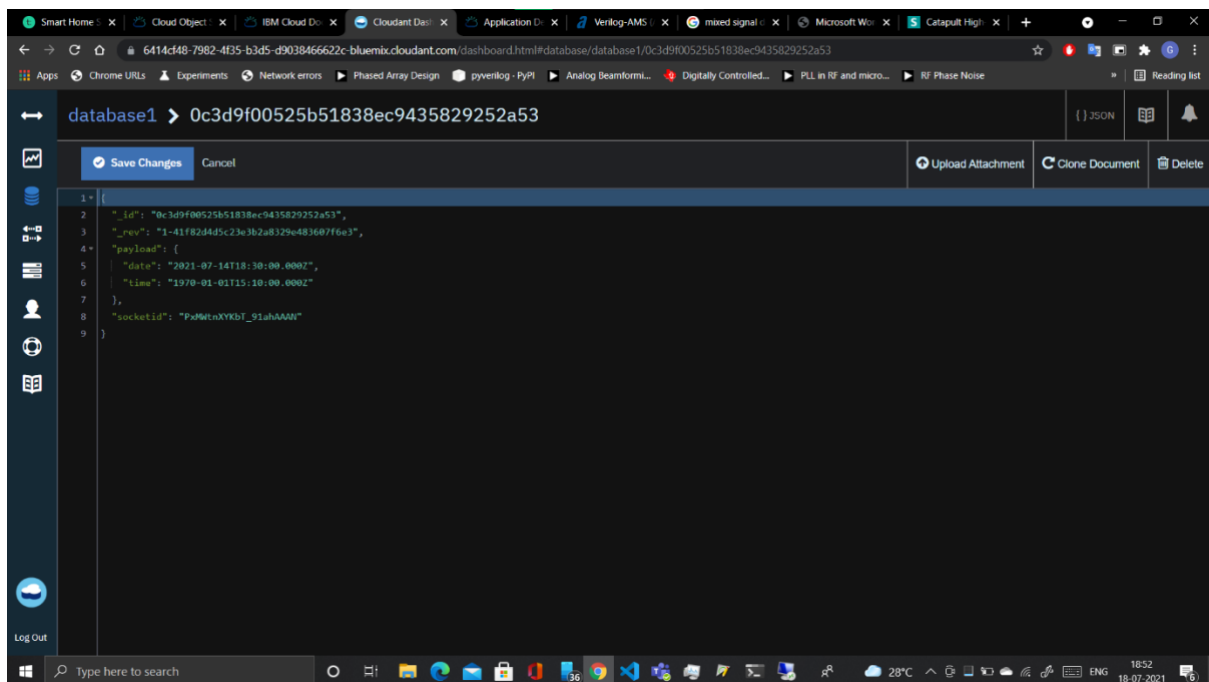

The screenshot shows a web browser window displaying the Cloudant dashboard. The address bar shows the URL: `6414cf48-7982-4f35-b3d5-d9038466622c-bluemix.cloudant.com/dashboard.html#database/database1/0c3d9f00525b51838ec9435829252a53`. The page title is `database1 > 0c3d9f00525b51838ec9435829252a53`. The document is displayed in a JSON format, showing a payload with a date, time, and socketid.

```
1 {  
2   "_id": "0c3d9f00525b51838ec9435829252a53",  
3   "_rev": "1-41f82d4d5c23e3b2a8329e483687f6e3",  
4   "payload": {  
5     "date": "2021-07-14T18:30:00.000Z",  
6     "time": "1970-01-01T15:10:00.000Z",  
7   },  
8   "socketid": "PxmMtnXYkbT_91ahAAAA"  
9 }
```

The interface includes a left sidebar with navigation icons, a top navigation bar with tabs for various applications, and a bottom status bar showing system information like temperature and time.