

```
import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sns

data=pd.read_csv('Titanic-Dataset.csv')
data.head()
```

	PassengerId	Survived	Pclass	\
0	1	0	3	
1	2	1	1	
2	3	1	3	
3	4	1	1	
4	5	0	3	

		Name	Sex	Age
SibSp	\			
0		Braund, Mr. Owen Harris	male	22.0
1				
1	Cumings, Mrs. John Bradley (Florence Briggs Th...		female	38.0
1				
2	Heikkinen, Miss. Laina		female	26.0
0				
3	Futrelle, Mrs. Jacques Heath (Lily May Peel)		female	35.0
1				
4	Allen, Mr. William Henry		male	35.0
0				

	Parch	Ticket	Fare	Cabin	Embarked
0	0	A/5 21171	7.2500	NaN	S
1	0	PC 17599	71.2833	C85	C
2	0	STON/O2. 3101282	7.9250	NaN	S
3	0	113803	53.1000	C123	S
4	0	373450	8.0500	NaN	S

```
data.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 891 entries, 0 to 890
Data columns (total 12 columns):
#   Column          Non-Null Count  Dtype
---  -
#   Column          Non-Null Count  Dtype
```

```

0   PassengerId   891 non-null   int64
1   Survived      891 non-null   int64
2   Pclass       891 non-null   int64
3   Name         891 non-null   object
4   Sex          891 non-null   object
5   Age          714 non-null   float64
6   SibSp        891 non-null   int64
7   Parch        891 non-null   int64
8   Ticket       891 non-null   object
9   Fare         891 non-null   float64
10  Cabin        204 non-null   object
11  Embarked     889 non-null   object

```

```
dtypes: float64(2), int64(5), object(5)
```

```
memory usage: 83.7+ KB
```

```
data.describe()
```

	PassengerId	Survived	Pclass	Age	SibSp \
count	891.000000	891.000000	891.000000	714.000000	891.000000
mean	446.000000	0.383838	2.308642	29.699118	0.523008
std	257.353842	0.486592	0.836071	14.526497	1.102743
min	1.000000	0.000000	1.000000	0.420000	0.000000
25%	223.500000	0.000000	2.000000	20.125000	0.000000
50%	446.000000	0.000000	3.000000	28.000000	0.000000
75%	668.500000	1.000000	3.000000	38.000000	1.000000
max	891.000000	1.000000	3.000000	80.000000	8.000000

	Parch	Fare
count	891.000000	891.000000
mean	0.381594	32.204208
std	0.806057	49.693429
min	0.000000	0.000000
25%	0.000000	7.910400
50%	0.000000	14.454200
75%	0.000000	31.000000
max	6.000000	512.329200

```
corr=data.corr()
```


```
corr
```

	PassengerId	Survived	Pclass	Age	SibSp
Parch \					
PassengerId	1.000000	-0.005007	-0.035144	0.036847	-0.057527
-0.001652					
Survived	-0.005007	1.000000	-0.338481	-0.077221	-0.035322
0.081629					
Pclass	-0.035144	-0.338481	1.000000	-0.369226	0.083081
0.018443					
Age	0.036847	-0.077221	-0.369226	1.000000	-0.308247
-0.189119					
SibSp	-0.057527	-0.035322	0.083081	-0.308247	1.000000
0.414838					
Parch	-0.001652	0.081629	0.018443	-0.189119	0.414838
1.000000					
Fare	0.012658	0.257307	-0.549500	0.096067	0.159651
0.216225					

	Fare
PassengerId	0.012658
Survived	0.257307
Pclass	-0.549500
Age	0.096067
SibSp	0.159651
Parch	0.216225
Fare	1.000000

```
sns.heatmap(corr,annot=True)
```

```
<AxesSubplot:>
```

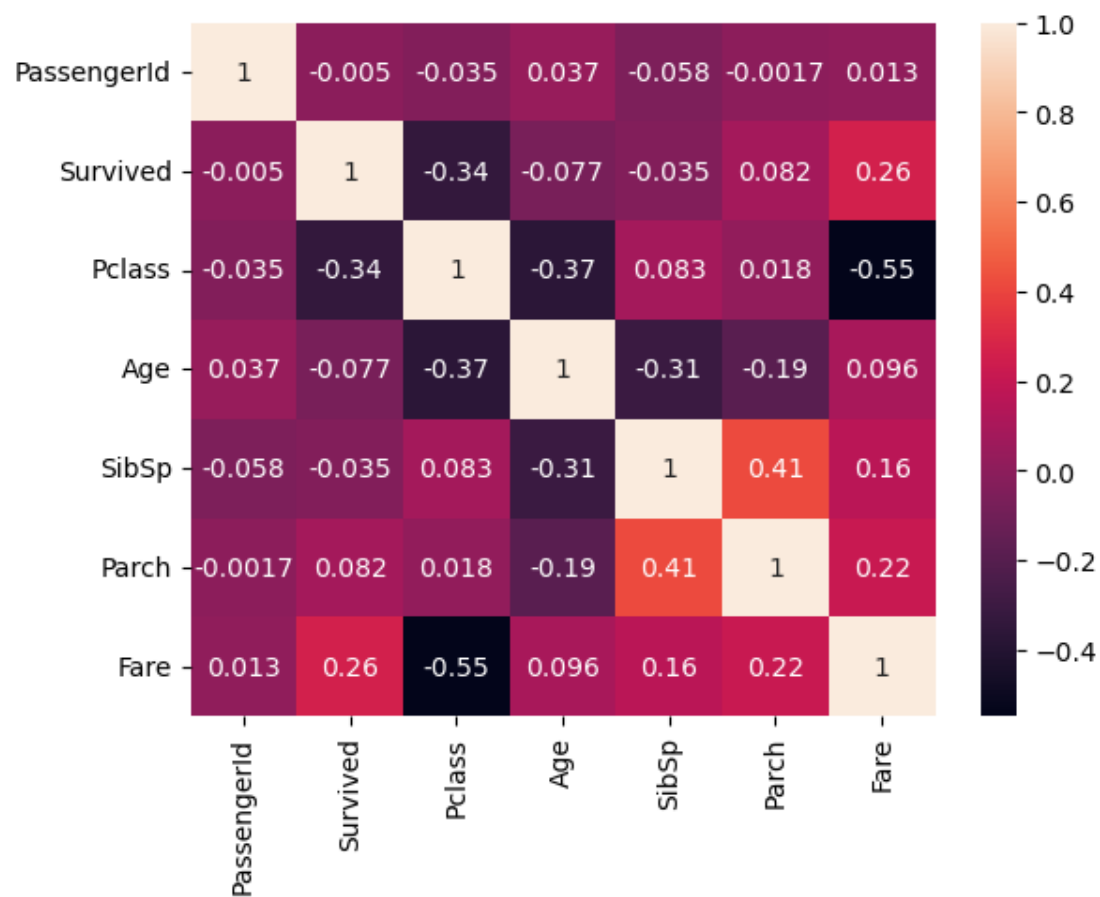

```
data.Cabin.value_counts()
```

```
B96 B98      4
G6           4
C23 C25 C27   4
C22 C26       3
F33           3
..
E34           1
C7            1
C54           1
E36           1
C148          1
Name: Cabin, Length: 147, dtype: int64
```

```
data.Embarked.value_counts()
```

```
S    644
```

```
C    168
```

```
Q     77
```

```
Name: Embarked, dtype: int64
```

```
data.Parch.value_counts()
```

```
0    678
```

```
1    118
```

```
2     80
```

```
5      5
```

```
3      5
```

```
4      4
```

```
6      1
```

```
Name: Parch, dtype: int64
```

```
data.isnull().any()
```

```
PassengerId    False
```

```
Survived       False
```

```
Pclass        False
```

```
Name          False
```

```
Sex           False
```

```
Age           True
```

```
SibSp         False
```

```
Parch         False
```

```
Ticket        False
```

```
Fare          False
```

```
Cabin         True
```

```
Embarked      True
```

```
dtype: bool
```

```
data.isnull().sum()
```

```
PassengerId    0
```

```
Survived       0
```

```
Pclass        0
```

```
Name          0
```

```
Sex           0
```

```
Age          177
```

```
SibSp          0
Parch          0
Ticket         0
Fare           0
Cabin          687
Embarked       2
dtype: int64
```


```
data["Age"].fillna(data["Age"].mean(),inplace=True)
data["Cabin"].fillna(data["Cabin"].mode()[0],inplace=True)
data["Embarked"].fillna(data["Embarked"].mode()[0],inplace=True)

data.isnull().sum() #Removed all null values
```

```
PassengerId    0
Survived        0
Pclass         0
Name           0
Sex            0
Age            0
SibSp          0
Parch          0
Ticket         0
Fare           0
Cabin          0
Embarked       0
dtype: int64
```


```
sns.scatterplot(x=data["Survived"],y=data["Parch"])

<AxesSubplot:xlabel='Survived', ylabel='Parch'>
```

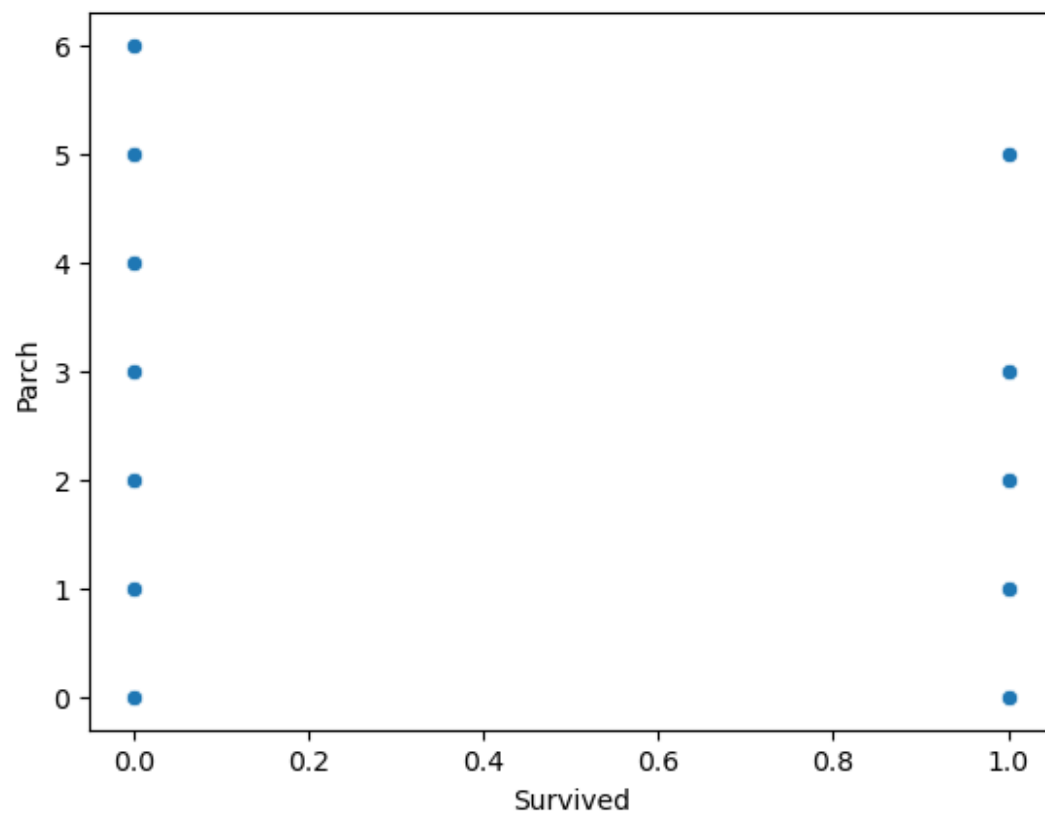


```
sns.scatterplot(x=data[ "Survived" ],y=data[ "Fare" ])
```

```
<AxesSubplot:xlabel='Survived', ylabel='Fare'>
```

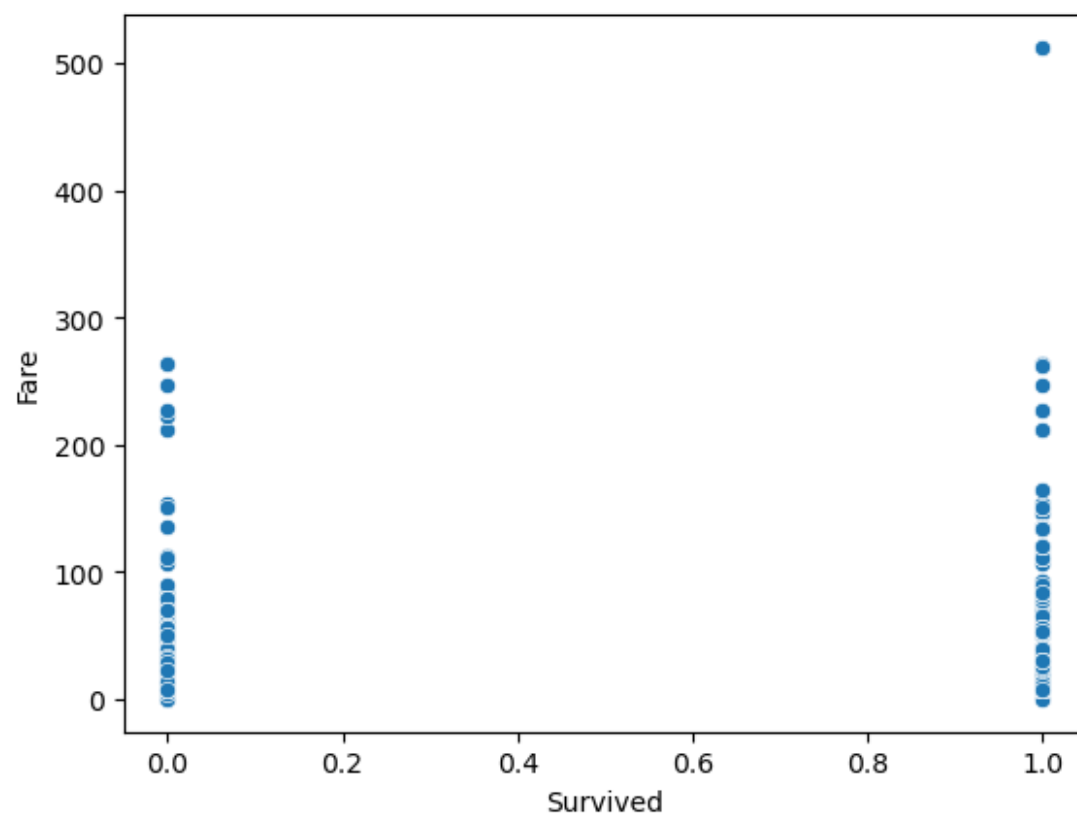

```
sns.pairplot(data)
```

```
<seaborn.axisgrid.PairGrid at 0x2064cd352e0>
```
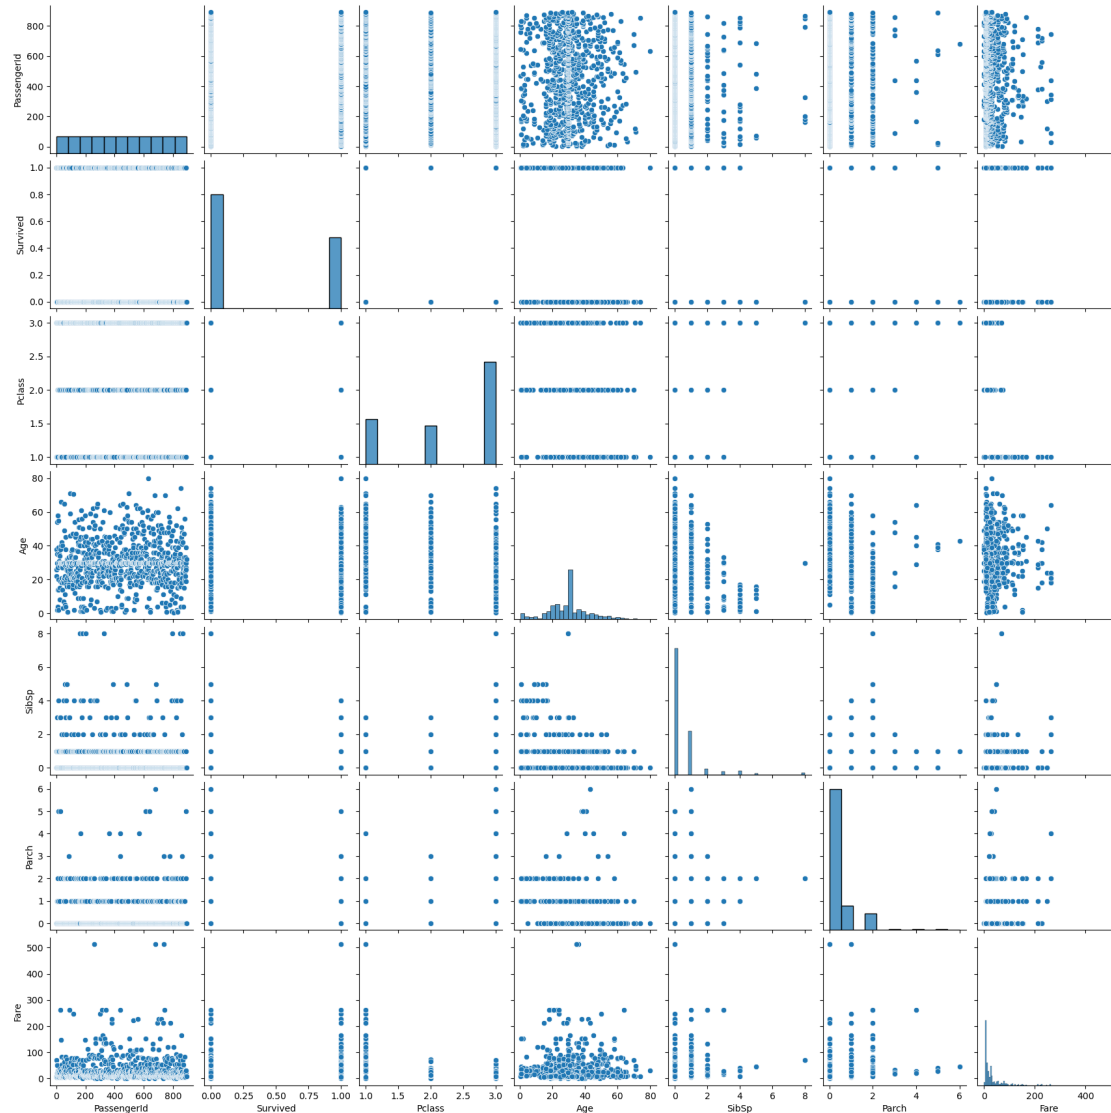
```
from sklearn.preprocessing import LabelEncoder
le=LabelEncoder()

data["Sex"]=le.fit_transform(data["Sex"])

data["Embarked"]=le.fit_transform(data["Embarked"])

data.head()
```

```
   PassengerId  Survived  Pclass  \
0             1         0       3
```

1	2	1	1
2	3	1	3
3	4	1	1
4	5	0	3

	Name	Sex	Age	SibSp
Parch \				
0	Braund, Mr. Owen Harris	1	22.0	1
0				
1	Cumings, Mrs. John Bradley (Florence Briggs Th...	0	38.0	1
0				
2	Heikkinen, Miss. Laina	0	26.0	0
0				
3	Futrelle, Mrs. Jacques Heath (Lily May Peel)	0	35.0	1
0				
4	Allen, Mr. William Henry	1	35.0	0
0				


	Ticket	Fare	Cabin	Embarked
0	A/5 21171	7.2500	B96 B98	2
1	PC 17599	71.2833	C85	0
2	STON/O2. 3101282	7.9250	B96 B98	2
3	113803	53.1000	C123	2
4	373450	8.0500	B96 B98	2

```
sns.boxplot(data['Pclass'])
```

C:\Users\abhi\anaconda3\lib\site-packages\seaborn_decorators.py:36: FutureWarning: Pass the following variable as a keyword arg: x. From version 0.12, the only valid positional argument will be `data`, and passing other arguments without an explicit keyword will result in an error or misinterpretation.

```
warnings.warn(
```

```
<AxesSubplot:xlabel='Pclass'>
```

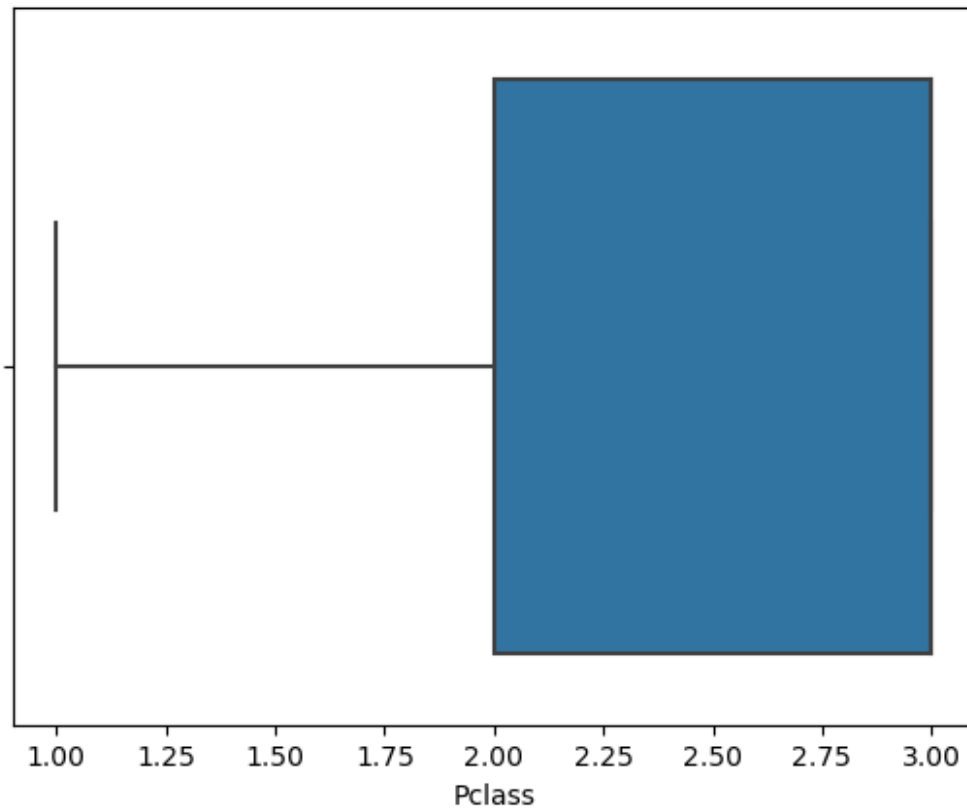


```
sns.boxplot(data[ 'Age' ])
```

```
C:\Users\abhi\anaconda3\lib\site-packages\seaborn\_decorators.py:36:  
FutureWarning: Pass the following variable as a keyword arg: x. From  
version 0.12, the only valid positional argument will be `data`, and  
passing other arguments without an explicit keyword will result in an  
error or misinterpretation.
```

```
warnings.warn(  
    "Passing other arguments without an explicit keyword will result in an  
    error or misinterpretation.",  
    FutureWarning,  
    stacklevel=2,  
)
```

```
<AxesSubplot:xlabel='Age'>
```

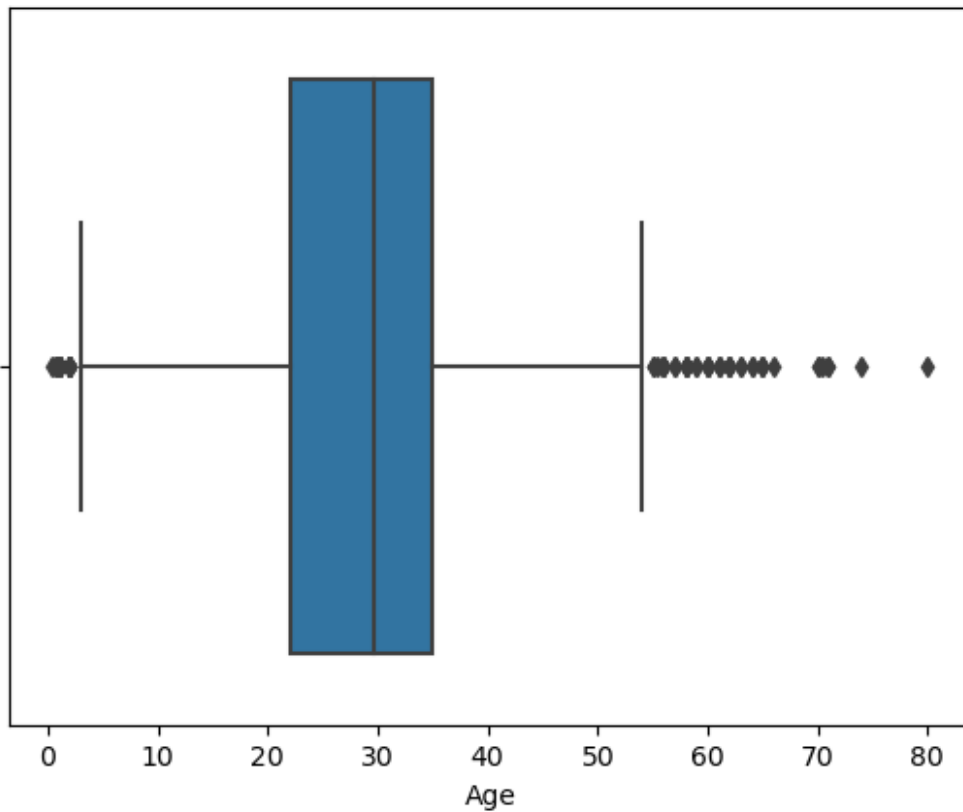


```
sns.boxplot(data['SibSp'])
```

```
C:\Users\abhi\anaconda3\lib\site-packages\seaborn\_decorators.py:36:
FutureWarning: Pass the following variable as a keyword arg: x. From
version 0.12, the only valid positional argument will be `data`, and
passing other arguments without an explicit keyword will result in an
error or misinterpretation.
```

```
warnings.warn(
```

```
<AxesSubplot:xlabel='SibSp'>
```

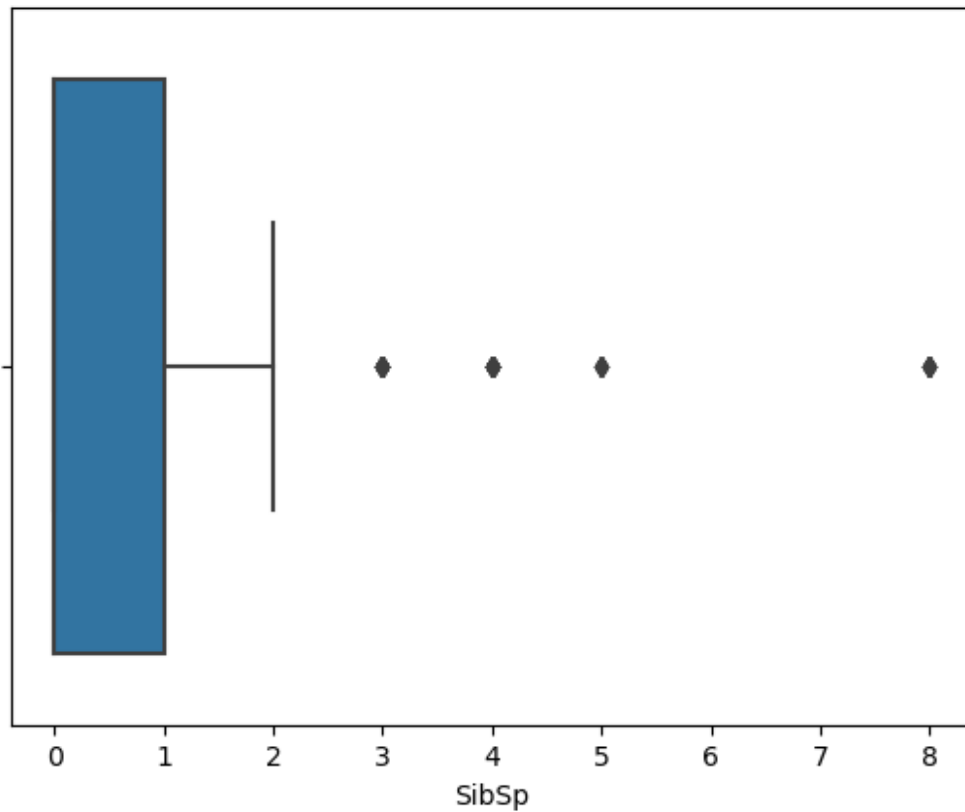


```
sns.boxplot(data[ 'Parch' ])
```

```
C:\Users\abhi\anaconda3\lib\site-packages\seaborn\_decorators.py:36:  
FutureWarning: Pass the following variable as a keyword arg: x. From  
version 0.12, the only valid positional argument will be `data`, and  
passing other arguments without an explicit keyword will result in an  
error or misinterpretation.
```

```
warnings.warn(  

```

```
<AxesSubplot:xlabel='Parch'>
```

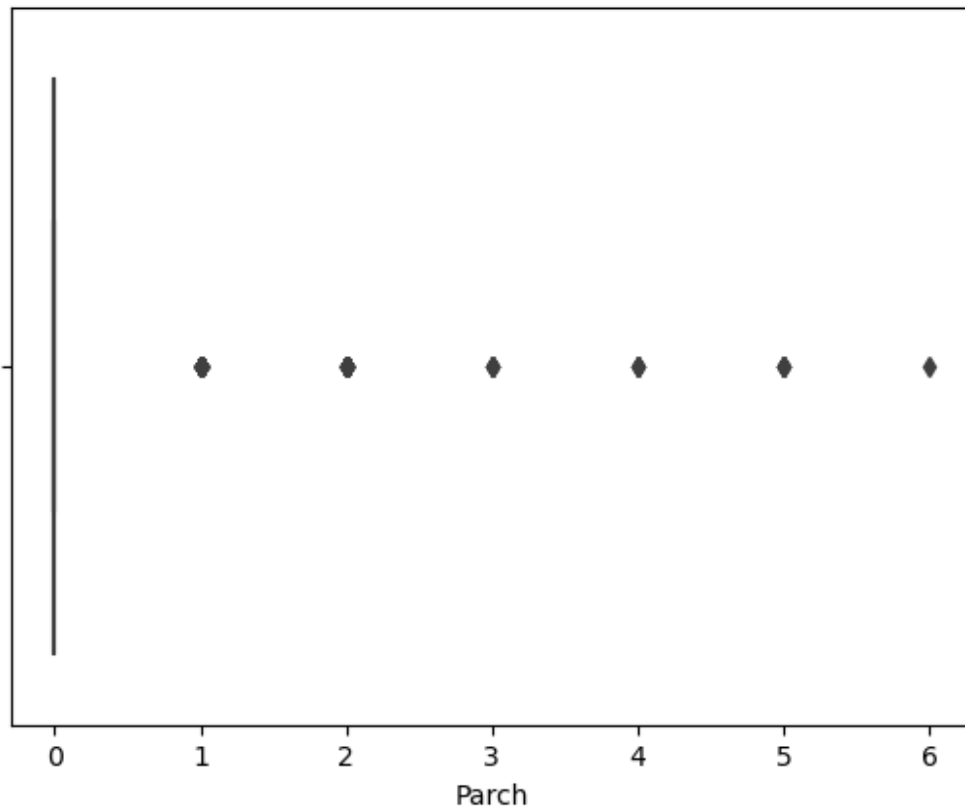


```
sns.boxplot(data[ 'Fare' ])
```

```
C:\Users\abhi\anaconda3\lib\site-packages\seaborn\_decorators.py:36:  
FutureWarning: Pass the following variable as a keyword arg: x. From  
version 0.12, the only valid positional argument will be `data`, and  
passing other arguments without an explicit keyword will result in an  
error or misinterpretation.
```

```
warnings.warn(  

```

```
<AxesSubplot:xlabel='Fare'>
```

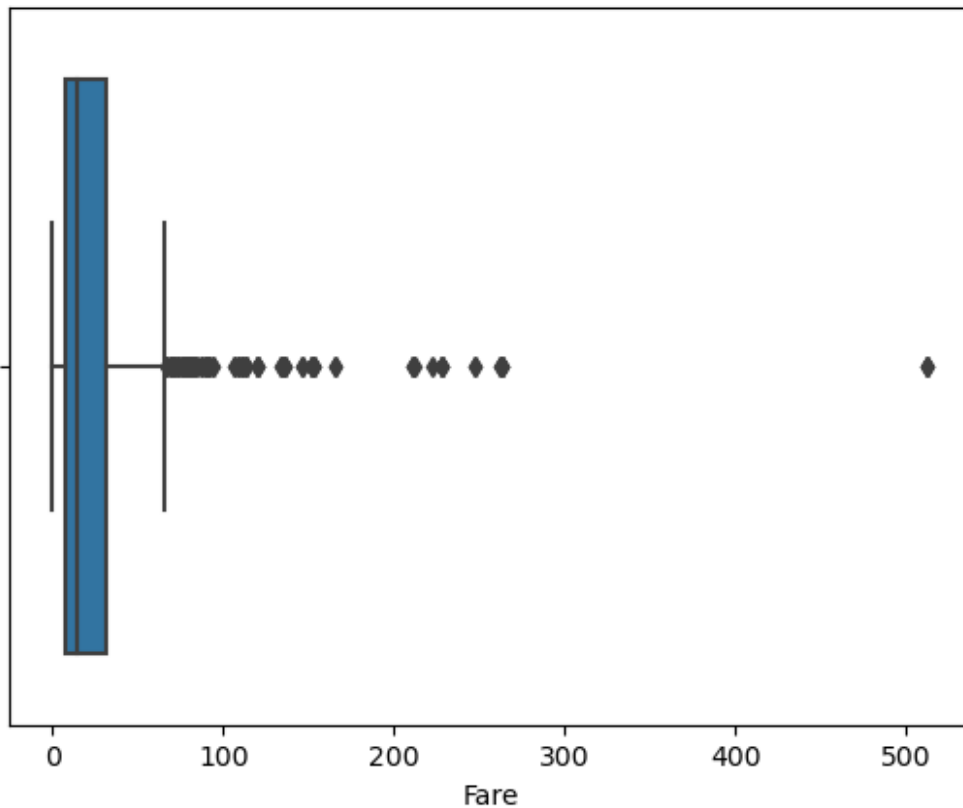


```
sns.boxplot(data[ 'Embarked' ])
```

```
C:\Users\abhi\anaconda3\lib\site-packages\seaborn\_decorators.py:36:  
FutureWarning: Pass the following variable as a keyword arg: x. From  
version 0.12, the only valid positional argument will be `data`, and  
passing other arguments without an explicit keyword will result in an  
error or misinterpretation.
```

```
warnings.warn(
```

```
<AxesSubplot:xlabel='Embarked'>
```

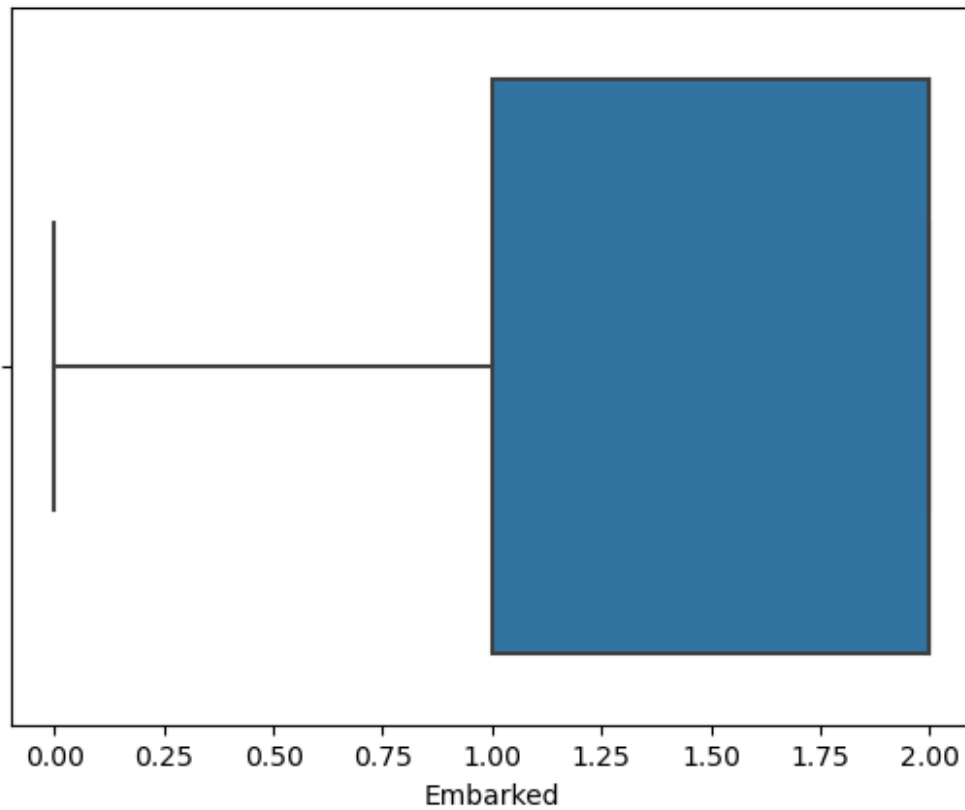

```
q1=data.Age.quantile(0.25)
q3=data.Age.quantile(0.75)
print(q1)
print(q3)
```

```
22.0
35.0
```

```
iqr=q3-q1
iqr
```

```
13.0
```

```
upperlimit = q3+1.5*iqr
upperlimit
```

```
54.5
```



```
lowerlimit=q1-1.5*iqr
lowerlimit
```

```
2.5
```

```
data.median()
```

```
C:\Users\abhi\AppData\Local\Temp\ipykernel_11488\4184645713.py:1:
FutureWarning: Dropping of nuisance columns in DataFrame reductions
(with 'numeric_only=None') is deprecated; in a future version this
will raise TypeError. Select only valid columns before calling the
reduction.
```

```
data.median()
```

```
PassengerId    446.000000
Survived        0.000000
Pclass         3.000000
Sex            1.000000
Age           29.699118
SibSp          0.000000
Parch          0.000000
Fare          14.454200
Embarked       2.000000
dtype: float64
```


```
data['Age']=np.where(data['Age']>upperlimit,29.699118,data['Age'])
data['Age'] = np.where(data['Age'] < lowerlimit,29.699118,
data['Age'])
```

```
sns.boxplot(data['Age'])
```

```
C:\Users\abhi\anaconda3\lib\site-packages\seaborn\_decorators.py:36:
FutureWarning: Pass the following variable as a keyword arg: x. From
version 0.12, the only valid positional argument will be `data`, and
passing other arguments without an explicit keyword will result in an
error or misinterpretation.
```

```
warnings.warn(
```

```
<AxesSubplot:xlabel='Age'>
```

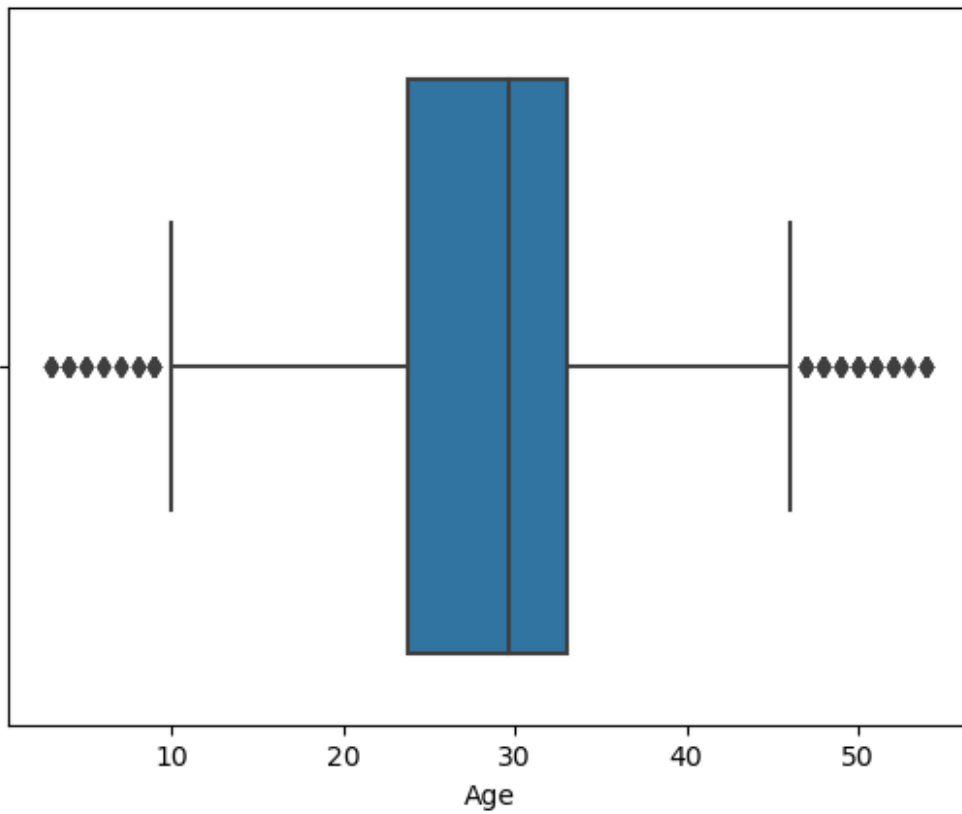

```
q1=data.SibSp.quantile(0.25)
q3=data.SibSp.quantile(0.75)
print(q1)
print(q3)
```

```
0.0
1.0
```

```
iqr=q3-q1
iqr
```

```
1.0
```

```
upperlimit = q3+1.5*iqr
upperlimit
```

```
2.5
```

```
lowerlimit=q1-1.5*iqr  
lowerlimit
```

```
-1.5
```

```
data['SibSp']=np.where(data['SibSp']>upperlimit,0.000000,data['SibSp']  
)
```


```
sns.boxplot(data['SibSp'])
```

```
C:\Users\abhi\anaconda3\lib\site-packages\seaborn\_decorators.py:36:  
FutureWarning: Pass the following variable as a keyword arg: x. From  
version 0.12, the only valid positional argument will be `data`, and  
passing other arguments without an explicit keyword will result in an  
error or misinterpretation.
```

```
warnings.warn(  

```

```
<AxesSubplot:xlabel='SibSp'>
```

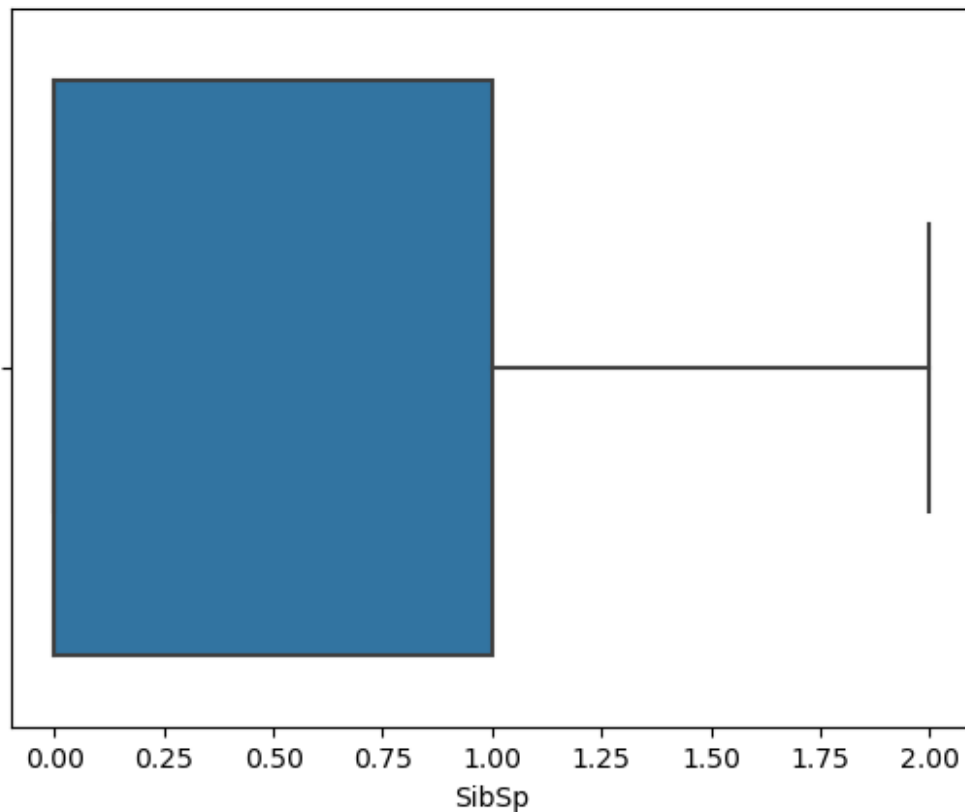

```

q1=data.Parch.quantile(0.25)
q3=data.Parch.quantile(0.75)
print(q1)
print(q3)

0.0
0.0

iqr=q3-q1
iqr

0.0

upperlimit = q3+1.5*iqr
upperlimit

0.0

lowerlimit=q1-1.5*iqr
lowerlimit

0.0


data['Parch']=np.where(data['Parch']>upperlimit,0.000000,data['Parch']
)

sns.boxplot(data['Parch'])

C:\Users\abhi\anaconda3\lib\site-packages\seaborn\_decorators.py:36:
FutureWarning: Pass the following variable as a keyword arg: x. From
version 0.12, the only valid positional argument will be `data`, and
passing other arguments without an explicit keyword will result in an
error or misinterpretation.
  warnings.warn(

<AxesSubplot:xlabel='Parch'>

```

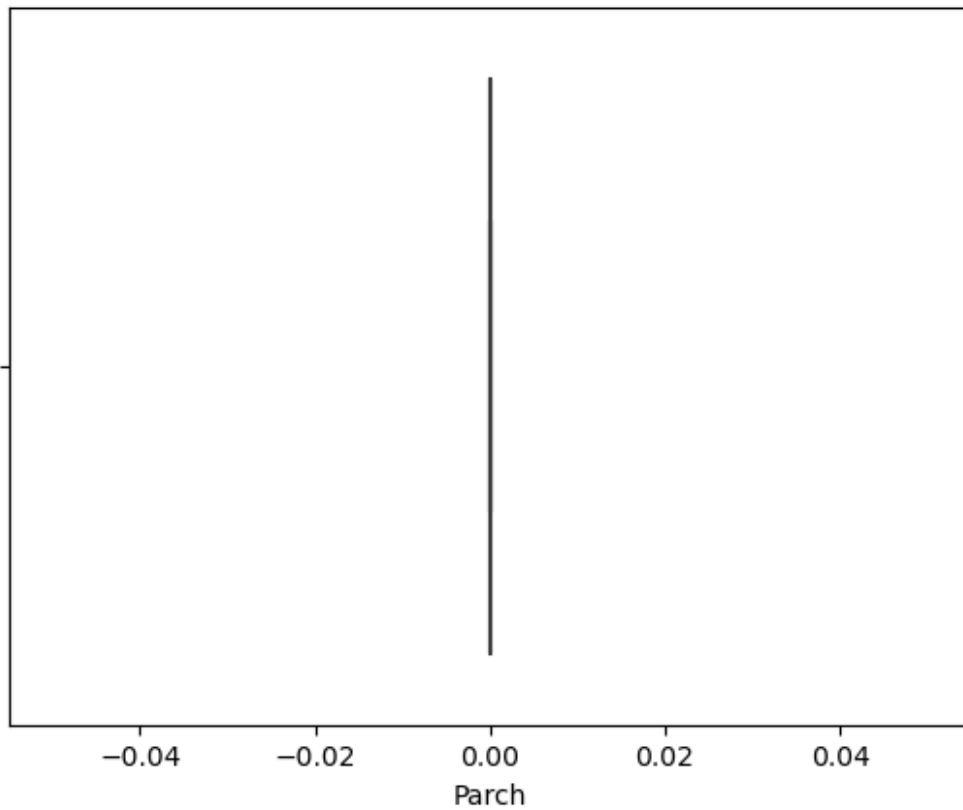

```
q1=data.Fare.quantile(0.25)
q3=data.Fare.quantile(0.75)
print(q1)
print(q3)
```

```
7.8958
30.0
```

```
iqr=q3-q1
iqr
```

```
22.1042
```

```
upperlimit = q3+1.5*iqr
upperlimit
```

```
63.1563
```

```
lowerlimit=q1-1.5*iqr  
lowerlimit
```

```
-25.2605
```

```
data.median()
```

```
C:\Users\abhi\AppData\Local\Temp\ipykernel_11488\4184645713.py:1:  
FutureWarning: Dropping of nuisance columns in DataFrame reductions  
(with 'numeric_only=None') is deprecated; in a future version this  
will raise TypeError. Select only valid columns before calling the  
reduction.
```

```
data.median()
```

```
PassengerId      447.500000  
Survived          0.000000  
Pclass           3.000000  
Sex              1.000000  
Age              29.699118  
SibSp            0.000000  
Parch            0.000000  
Fare             14.054150  
Embarked         2.000000  
dtype: float64
```


```
data['Fare']=np.where(data['Fare']>upperlimit,14.054150,data['Fare'])
```

```
sns.boxplot(data.Fare)
```

```
C:\Users\abhi\anaconda3\lib\site-packages\seaborn\_decorators.py:36:  
FutureWarning: Pass the following variable as a keyword arg: x. From  
version 0.12, the only valid positional argument will be `data`, and  
passing other arguments without an explicit keyword will result in an  
error or misinterpretation.
```

```
warnings.warn(
```

```
<AxesSubplot:xlabel='Fare'>
```

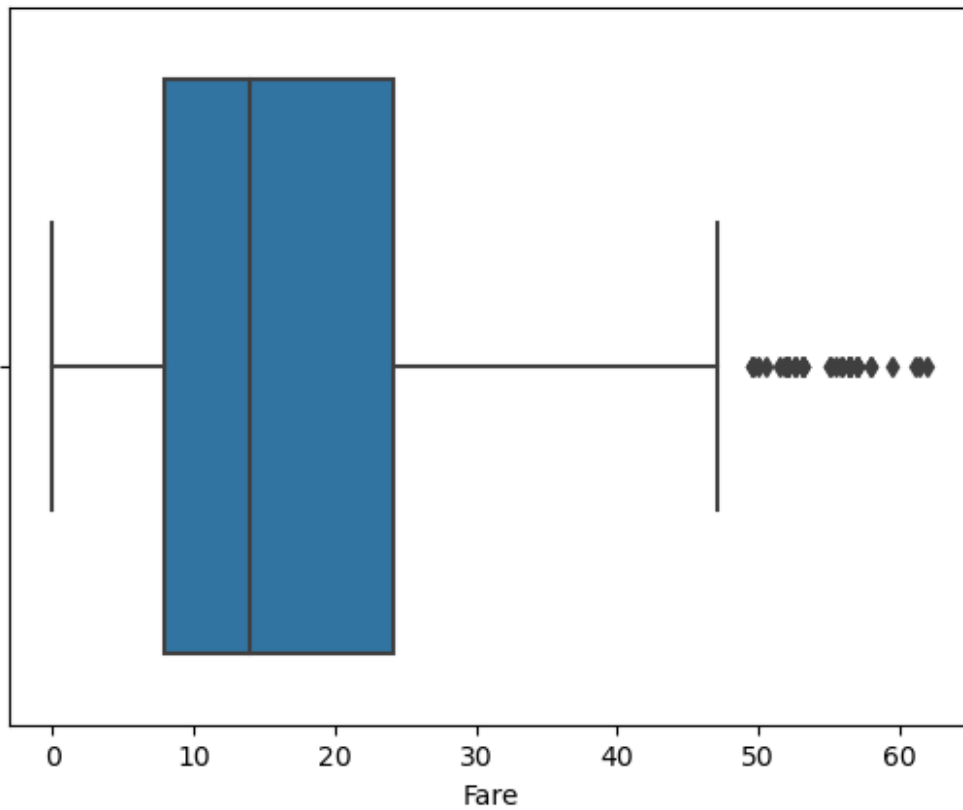

```
y=data["Survived"]

X=data.drop(columns=["Name","PassengerId","Survived","Ticket","Cabin"],axis=1)

y.head()

0    0
1    1
2    1
3    1
4    0
Name: Survived, dtype: int64

from sklearn.preprocessing import MinMaxScaler
ms=MinMaxScaler()

X_Scaled=ms.fit_transform(X)
```

```
X_Scaled=pd.DataFrame(ms.fit_transform(X),columns=X.columns)
```

```
X_Scaled.head()
```

	Pclass	Sex	Age	SibSp	Parch	Fare	Embarked
0	1.0	1.0	0.372549	0.5	0.0	0.116975	1.0
1	0.0	0.0	0.686275	0.5	0.0	0.226756	0.0
2	1.0	0.0	0.450980	0.0	0.0	0.127865	1.0
3	0.0	0.0	0.627451	0.5	0.0	0.856739	1.0
4	1.0	1.0	0.627451	0.0	0.0	0.129882	1.0

```
from sklearn.model_selection import train_test_split
x_train,x_test,y_train,y_test = train_test_split(X_Scaled,y,test_size
=0.2,random_state =0)
```

```
print(x_train.shape,x_test.shape,y_train.shape,y_test.shape)
```

```
(699, 7) (175, 7) (699,) (175,)
```