Mae Tao Clinic Laboratory

LAboratory Test Results System: LATRS

Retrieving software updates. (v1.1)

Contents

Installation assumptions

This document assumes you already have installed LATRS on a windows machine. If you haven't, please read the Installation document found at the same location you got this one from.
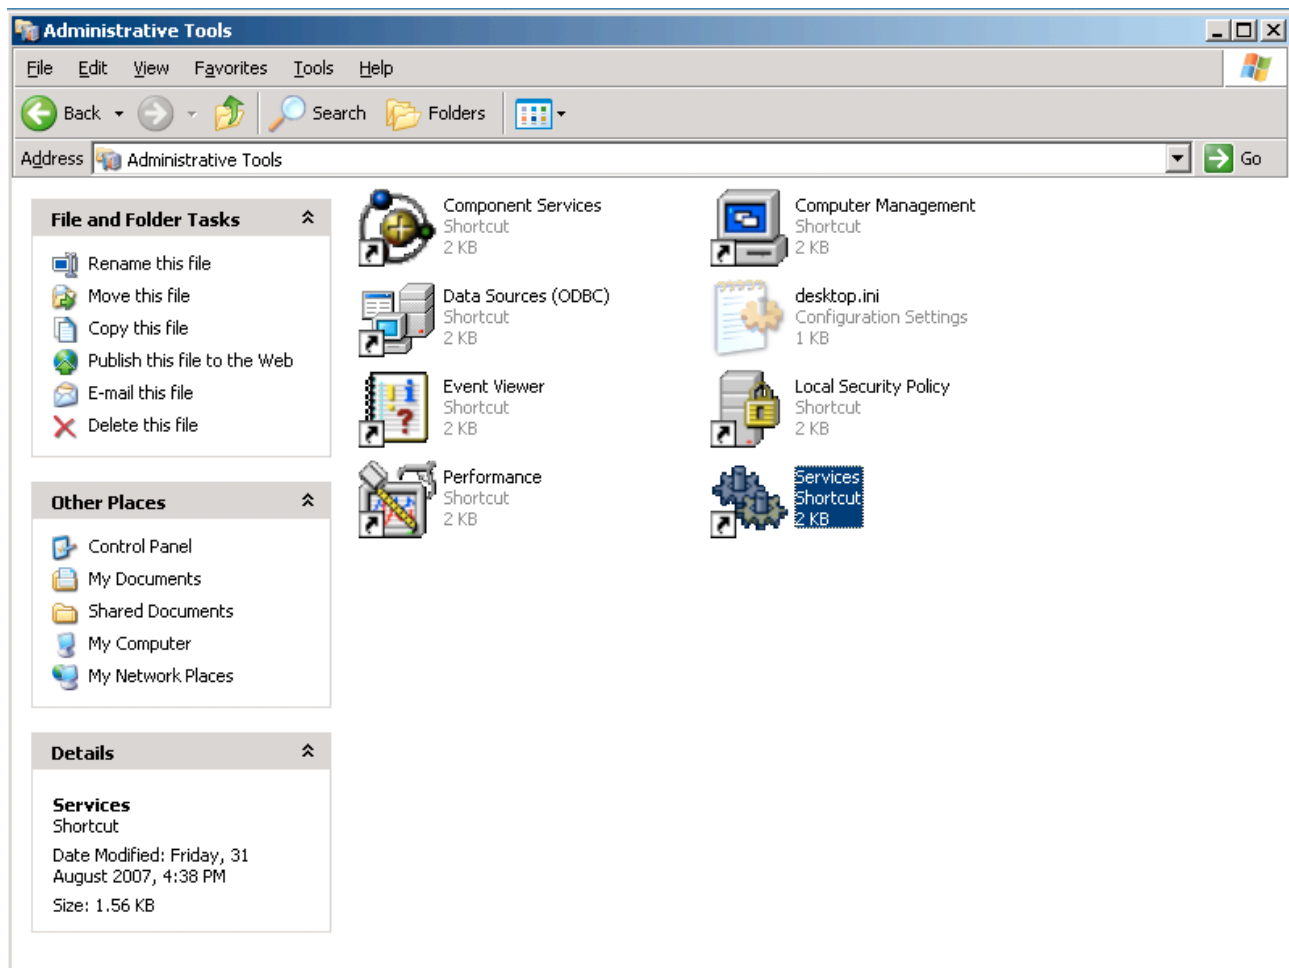
The procedure

Whenever I have updated the system, these updates can be retrieved via the Internet. All you have to do is:
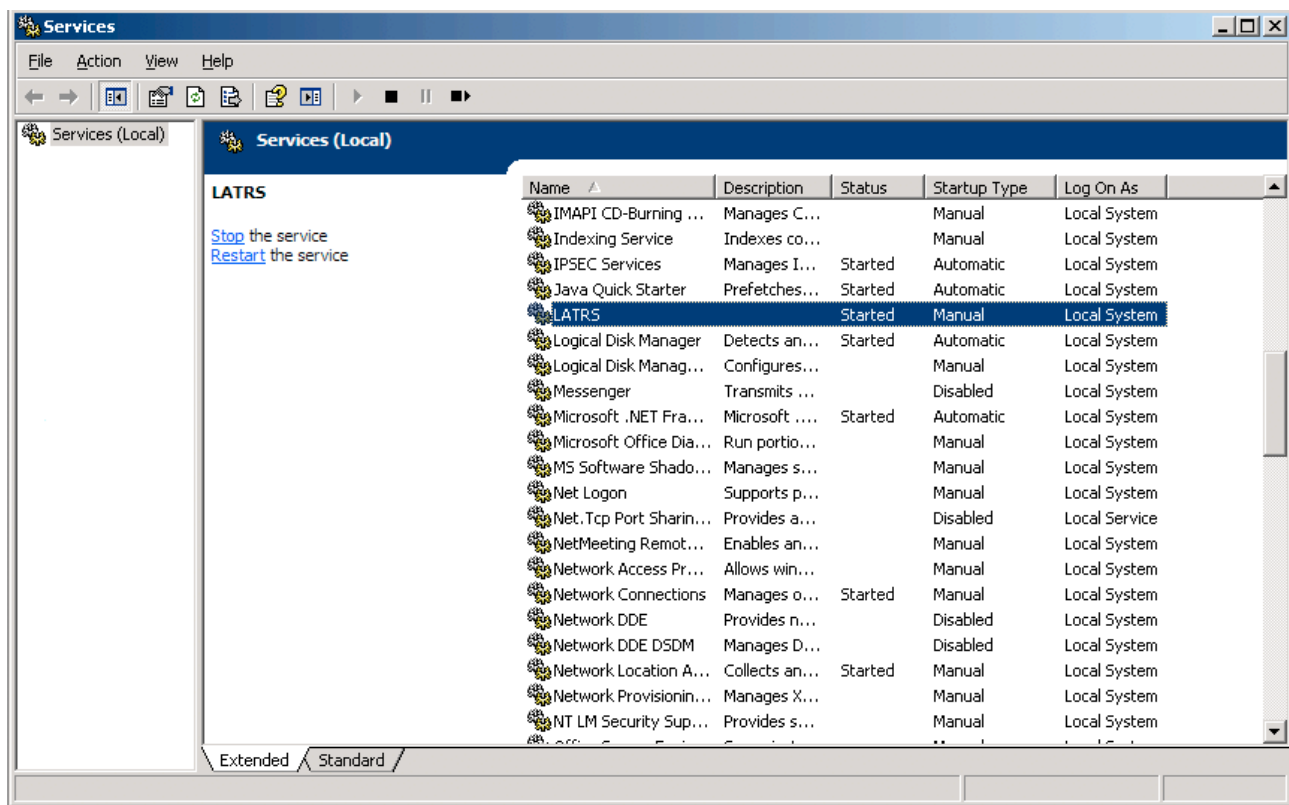
1. Stop the LATRS (and LATRS-dev) service
2. Pull the changes from **github**
3. Run a command from the command prompt
4. Start the LATRS services you stopped in step 1

Stopping services

All versions of windows these days will have an **Administrative tools** section in the **Control Panel**:
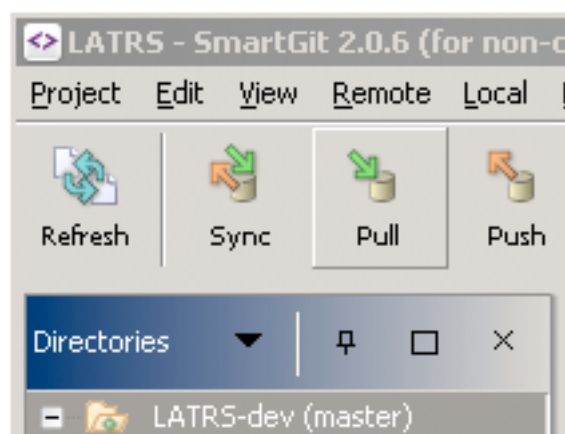
Open this by double-clicking, and find the **LATRS** and **LATRS-dev** services. Services are listed alphabetically. To stop a service, click the **stop** link once you have selected it

Pulling changes

The easiest way to retrieve changes is using **SmartGit**. Open SmartGit and select the correct project. If you have a development and production installations, choose the correct one using the black triangle next to the **Directories** label shown below. Then, click the **Pull** button in the menu.

That's it!

Running commands

Sometimes an update will require some command line usage. This will not be very often, and detailed instructions will be provided in an email.

To open a command prompt, click the **Run...** item under the **Start** menu, or hold down the Windows key and the **r** key at the same time:

In the text box, type **cmd** and press the enter key:

Now, go to the location where LATRS is installed. At Mae Tao Clinic, this is **d:\latrs** and **d:\latrs-dev**. To get there, first type in the drive letter: **d:**, and hit enter. Next type **cd**, then press the space bar, then type the rest of the location, with a leading backslash: **cd \latrs** or **cd \latrs-dev**

You can now run the commands as specified in the email. These will most likely be one (or all) of the following:

- **rake db:migrate**
- **bundle install**

Starting services
Starting the services back up again is just the reverse of stopping them. Locate the services, and click the **start** link.

Once you have done this, you can test the update by accessing the system in the usual way.

If you encounter any problems
If there is a problem with pulling the changes, email me the details: which files were said to be in conflict? Email me those files.

If the service starts, but the system cannot be accessed (or if the service fails to start), make a zip file of the **log** directory under the application installation (ie: **d:\latrs\log)** and email it to me.

Mae Tao Clinic installation details
At the Mae Tao Clinic, a **development** installation was done at **d:\latrs-dev**, and a **production** installation was done at **d:\latrs**. The machine using IP adress **192.168.1.20** was used, with the production installation using a **MySQL** database configured to use port **4306**.