

Data Visualization System

Introduction

The purpose of the Data Visualization System is to a tool that provides the user with an integrated view of the data generated by [the Evaluator Centric and Extensible Logger daemon \(ECELd\)](#) and the ability to tag and modify the data associated with a capture taken by ECELd.

Problem statement:

Data is a critical asset in cybersecurity; it helps researchers and practitioners develop novel technologies based on real past incidents. However, this asset is lacking, and even more, tools that specifically focus on the analysis of data are far and few between. The Evaluator Centric and Extensible Logger daemon (ECELd) is a tool that attempts to reduce this gap. The tool allows users to collect data for the purpose of analysis. Collected data include network data, keystrokes, system calls, and screenshots, among others. Additionally, the ECELd includes a wireshark component which allows users to annotate the network data using the popular packet sniffer application. Both the ECELd tool and the ECELd-wireshark component are integrated into the ECELd-netsys.

Team Members:

- Briana Sanchez
- Stephanie Medina
- Luisana Clarke
- Rocio Cardona
- Bianca Alvarez
- Dima Abdel Jaber

Client:

- Dr. Jaime Acosta

Guidance Team:

- Dr. Salamah Salamah

Description

The system consists of two primary components: the packet view shows ECELd-Wireshark and the timeline view shows the parsed ECELd-collected data using a horizontal layout. These two windows combined will allow for the user to have a better visualization of what is being analyzed. Many features are integrated in this system in order to bring better visualization and each feature will be specific to the type of data that is going to be displayed. In this system, each specific set of data will be considered a dataline. For example, a mouseclicks dataline will contain

different information than what a keypresses dataline contains, which will result in specific features for each. Moreover, with different datasets, there must be a way to be able to distinguish between each of them, so each dataline will have an assignable color in order to make it easier to tell them apart. This color assignment shall be displayed in both the timeline view and the packet view. Finally, the most important feature of this system will be synchronization. The synchronization feature shall be enabled and disabled depending on the user's preference. The main purpose for this feature is to allow the user to use both timeline view and packet view at the same time and be able to see the data that is correlated to where the user is currently analyzing.

Installing the Data Visualization System (DVS)

The Data Visualization System's source code can be found in the following link: <https://github.com/smedina7/DVS>. The system works in both Linux and Windows. Follow the instructions below for installation.

Windows Installation

The first step of installation is to clone the repository provided in the link above and navigate to the project folder.

Virtual Environment

Install eceld-wireshark using the installer provided. Type the following in the command prompt.

```
> eceld-wireshark-installer\Wireshark-win64-3.2.5.exe
```

You will get a prompt to install Wireshark. Install using default settings provided.

- Install Python's Virtual Environment Builder:
- Create and activate virtual environment:
- Install required dependencies:

```
> pip install virtualenv  
> virtualenv dvs-venv  
> dvs-venv\Scripts\activate
```

```
(dvs-venv)> pip install -r requirements.txt
```

Lastly, run main.py to start the DVS GUI.

```
(dvs-venv)> python main.py
```

Linux Installation

Requirements

In order for DVS to run properly, Eceld-Wireshark must be installed.

The following are ways to install it:

- Install Eceld-Netsys: Refer to the Git-Hub page

<https://github.com/ARL-UTEP-OC/eceld-netsys.git>

- Install Eceld-Wireshark: Refer to the Git-Hub page

<https://github.com/ARL-UTEP-OC/eceld-wireshark>

- Install with the DVS Installer

DVS installation steps

The first step of installation is to clone the repository provided in the link above and navigate to the project folder.

```
kali@kali:~/DVS$ sudo ./installDeb.sh
```

You will be prompted if you would like to install Eceld-Wireshark:

```
kali@kali:~/DVS$ sudo ./installDeb.sh Running apt-get updateHit:1
https://packages.microsoft.com/repos/vscode stable InReleaseHit:2
http://kali.download/kali kali-rolling InReleaseReading package
lists... DoneDVS depends on : eceld-wireshark would you like to
install it [Y/n]
```

Input "Y" to install Eceld-Wireshark, if already installed input "n" to skip.

Activate Environment:

```
kali@kali:~/DVS$ source venv/bin/activate
```

Run DVS:

```
(venv) kali@kali:~/DVS$ python3 main.py
```

Using the Data Visualization System (DVS)

The Data Visualization System has two main components: Packet View and Timeline View. This section will provide a tutorial on basic usage of each component. Furthermore, users will be able to use the DVS as a standalone program or integrated as part of ECEld.

Standalone Version

In the standalone version, users will be able to choose from what folder they'll be analyzing their data. In the event that the user already has the data that they need, this gives the flexibility to just do the data visualization and analyzation without having to open ECEld-NetSys.

Iteration 1 Components:

For the first iteration of the DVS system, the team focused on getting the Timeline View set up. This means that the packet view will not appear yet for this iteration. The reason for that is because the packet view is already implemented, and we will just need to combine the two windows once the timeline view is ready.


Iteration 2 Components:

For the second iteration of the DVS system, the team focused on getting the Packet View set up. The team updated front end and backend for this iteration.


The following sections will review what are the current available features.

Start Window

Once the DVS is started, the following window will appear:

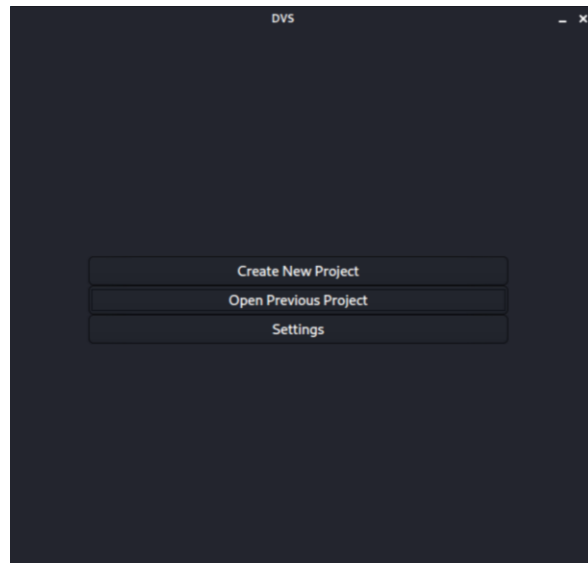


Only 1 out of the 3 buttons will take you to the timeline view. The settings button will only display a message indicating that it hasn't been implemented yet. The "Open Previous Project" a file browser should appear, however, for now no file or directory could be selected. Finally, the "Create New Project" is where it'll take you to the features that were added. This button will show the directory view to allow the user to select a project as shown in the following:

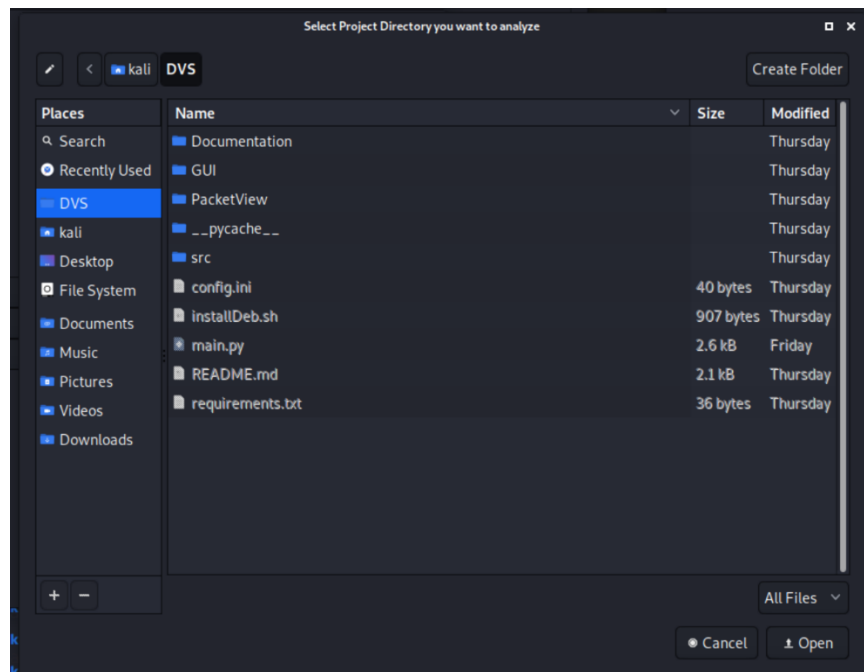

Once the user selects a project, two views will be shown, the Timeline View and the Packet View.


Packet View

The packet view consists of the ECEld version of Wireshark that is available at <https://github.com/ARL-UTEP-OC/eceld-wireshark>.

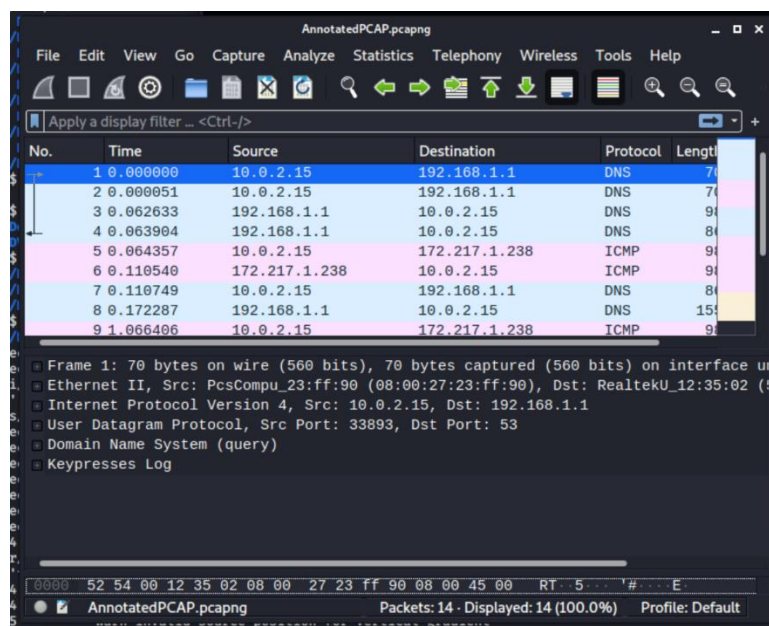


Timeline View

The Timeline View looks like the following:

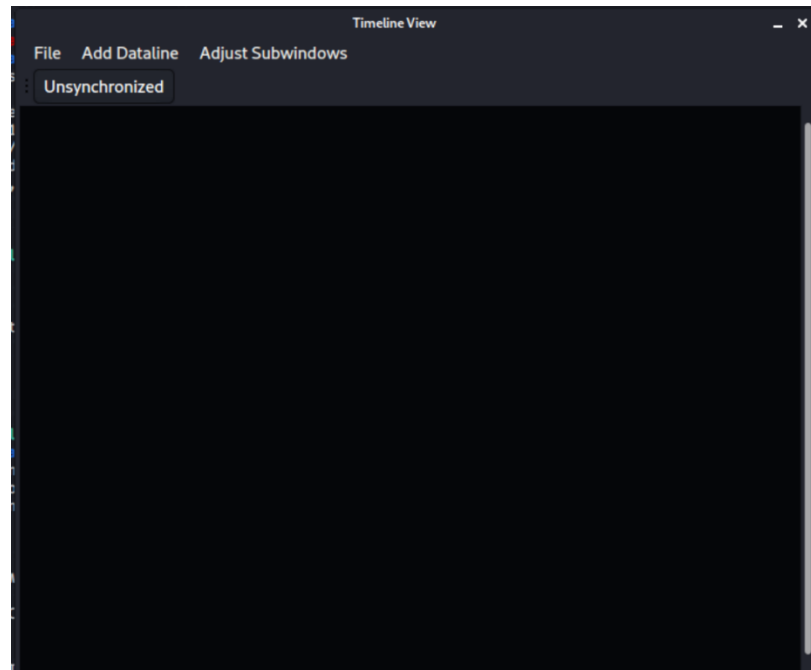


Adding and Removing Datalines

The "Add Dataline" menu option is what will be the focus for the Timeline View window. When selecting that menu option, the following selections will be available:

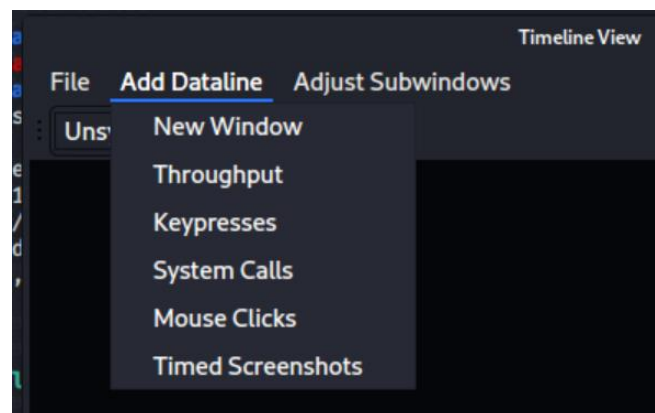

Throughput

The first dataline option is throughput. When the user selects this option, the following dataline will be shown in the main window.

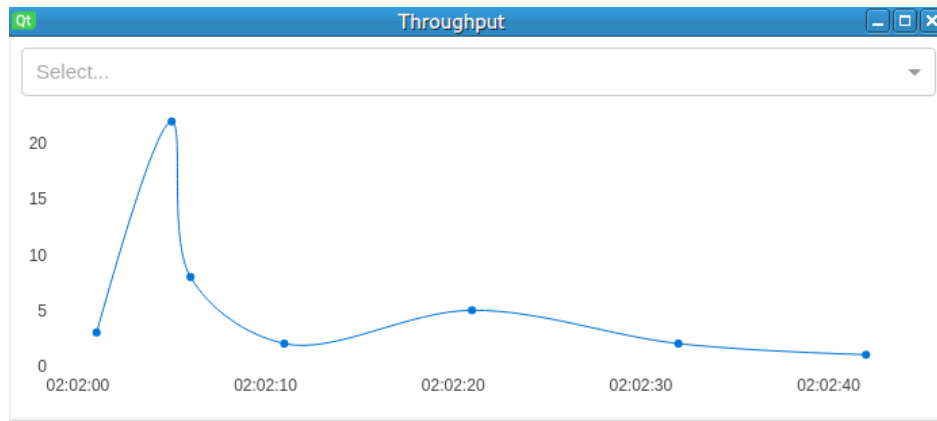

This dataline is a graph render displaying the tshark network throughput data in time intervals.

Keypresses


The second dataline option is keypresses. When the user selects this option, the following dataline will be shown in the main window:

keypresses_id	content	className	start
0	ping google.com[Return]...	Keypresses	2020-09-03T23:11:39

Here, a table containing the parsed data from <json file> will be shown. This table includes the id of the keypress (keypress_id), the content, className and the timestamp.

System Calls

The third dataline option is the system calls. When the user selects this option, the following dataline will be shown in the main window:

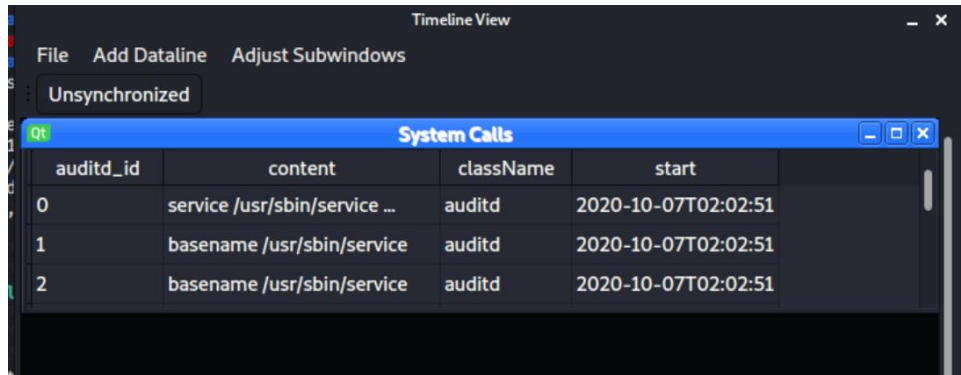






auditd_id	content	className	start
0	service /usr/sbin/service ...	auditd	2020-10-07T02:02:51
1	basename /usr/sbin/service	auditd	2020-10-07T02:02:51
2	basename /usr/sbin/service	auditd	2020-10-07T02:02:51

Here, a table containing the parsed data from <json file> will be shown. This table includes the auditd id, the system call, className and timestamp in which the system call was used.

Mouse Clicks

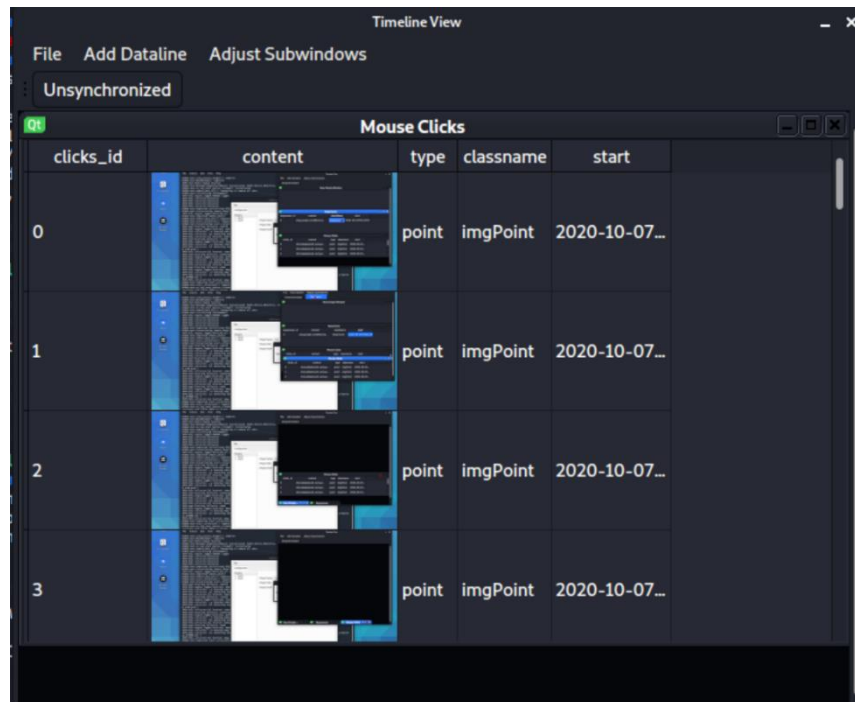The fourth dataline option is the mouseclicks. When the user selects this option, the following dataline will be shown in the main window:




clicks_id	content	type	classname	start
0		point	imgPoint	2020-10-07...
1		point	imgPoint	2020-10-07...
2		point	imgPoint	2020-10-07...
3		point	imgPoint	2020-10-07...





This table includes the click id, the screenshot, the type, className and the timestamp of the click.

Timed Screenshots

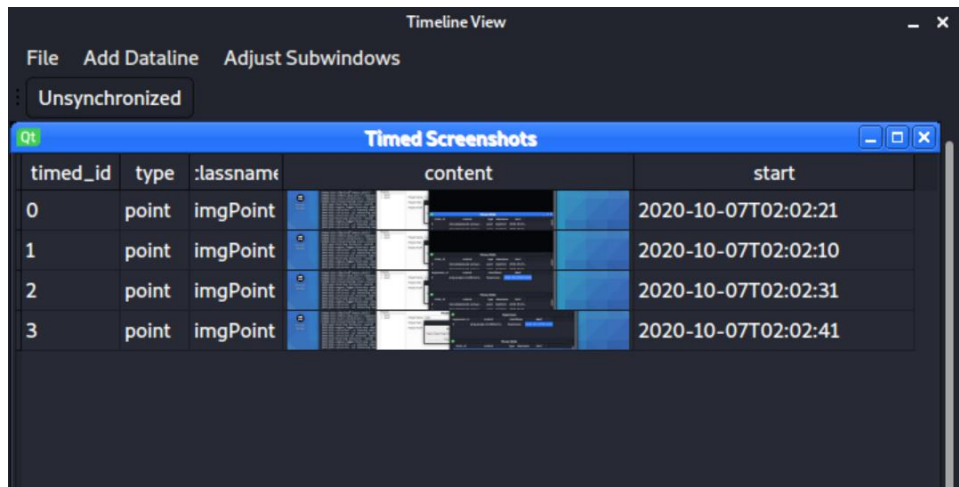The last option is the Timed screenshots. When the user selects this option, the following dataline will be shown in the main window:

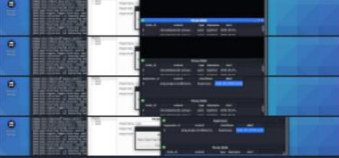

The screenshot shows a window titled 'Timeline View' with a menu bar containing 'File', 'Add Dataline', and 'Adjust Subwindows'. Below the menu bar is a button labeled 'Unsynchronized'. A subwindow titled 'Timed Screenshots' is open, displaying a table with the following data:


timed_id	type	classname	content	start
0	point	imgPoint		2020-10-07T02:02:21
1	point	imgPoint		2020-10-07T02:02:10
2	point	imgPoint		2020-10-07T02:02:31
3	point	imgPoint		2020-10-07T02:02:41

This table includes all the screenshots that were timed, the timed_id, the type, className and the timestamp of the screenshot.

The user is able to open, close and minimize each dataline window individually as well as displaying a combination of the datalines available at the same time.


Adjust Subwindows

This option allows the user to readjust the windows in a tile formatting. The following is a sample of what happens when there are 4 windows open and this option is selected:

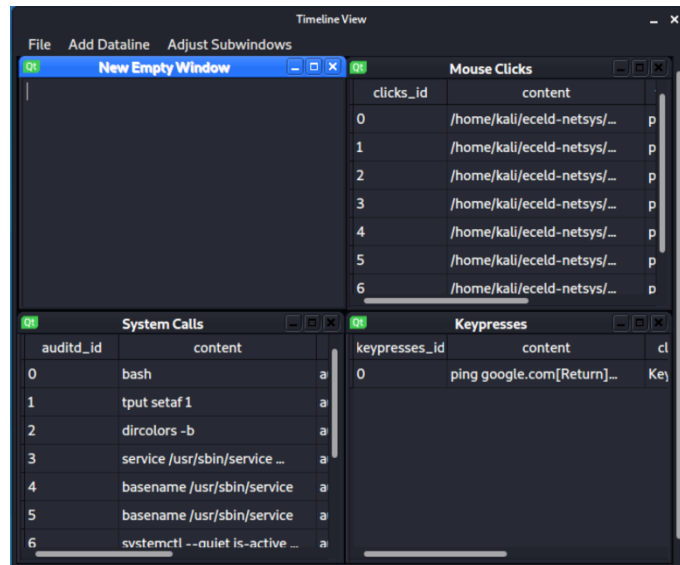

Button to enable/disable synchronization

This feature will allow the user to synchronize views. Currently, the sync behavior is not yet available.

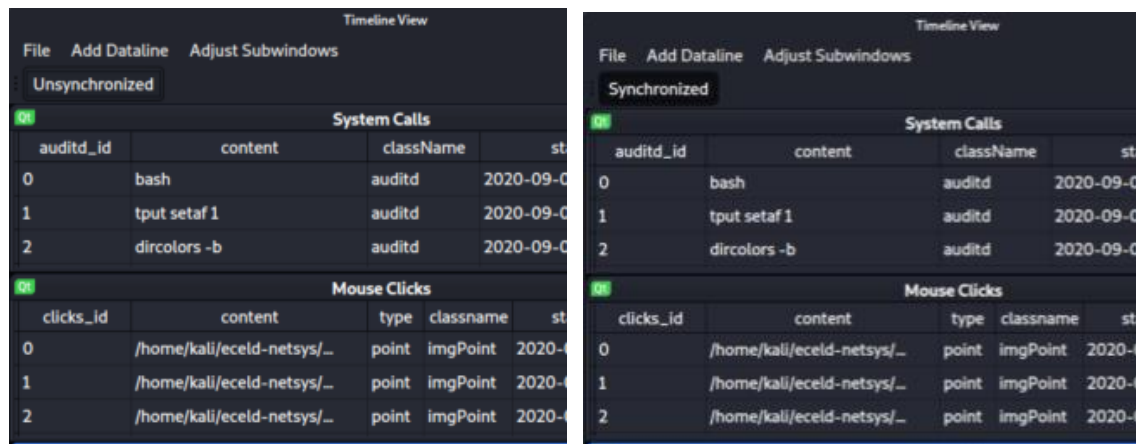

Appendix

Keywords

DVS - Data Visualization System

ECELD – Evaluator-Centric and Extensible Logger

ECELD-NetSys