



Faculty of Computer Applications

**BCA Sem-1
(AY-2026-27)**

Lab Book

**Sub Code : 05BC3103
(Programming Practices : 1)**

Roll No :	92600527026
Full Name :	Smeet Ghaghada

GitHub Link | <https://github.com/smeetsoni302john/BCA-1-PP-1--92600527026-Smeet-Ghaghada.git>

Sub.Faculty Name : Dr.Ashwin Dobariya

Index

Unit : 1	
Program No	Definition
1.	Print "Hello World".
2.	2 Values from user and Perform All Arithmetic Operations.
3.	Print numbers from 1 to 20.
4.	Input 3 values from user and find out its Average.
5.	Calculate the Square and Cube of a number.
6.	Interchange the value of two numbers.
7.	Find largest out of three numbers.
8.	Find out Fibonacci series up to given n values.
9.	Find out Number is Odd or Even.

10.	Find out sum of digits of a given number.
-----	---

(1) Print "Hello World".


Algorithm :

Step 1 : START

Step 2 : PRINT "Hello World"

Step 3 : STOP

Flowchart :

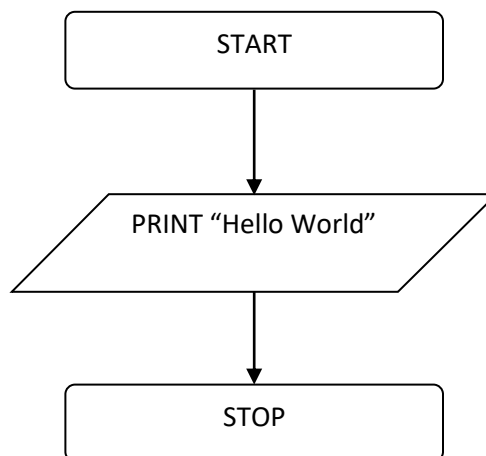


Code :

```
#include<stdio.h>
#include<conio.h>

void main(){
    clrscr();
    printf("Hello World");
    getch();
}
```

Output :

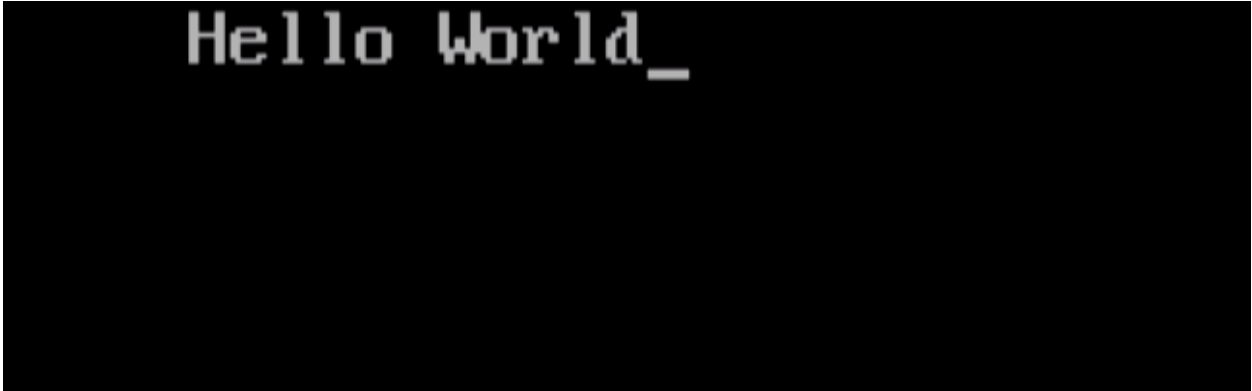
A screenshot of a terminal window with a black background. The text "Hello World_" is displayed in a light gray, monospaced font at the top left of the window. The rest of the terminal is empty.

(2) 2 Values from user and Perform All Arithmetic Operations.

Algorithm :

Step 1 : START
Step 2 : DECLARE variables $x=0.0$, $y=0.0$, a , s , m , d
Step 3 : INPUT x, y
Step 4 : $a = x + y$
Step 5 : $s = x - y$
Step 6 : $m = x * y$
Step 7 : $d = x / y$
Step 8 : OUTPUT a, s, m, d
Step 9 : STOP

Flowchart :

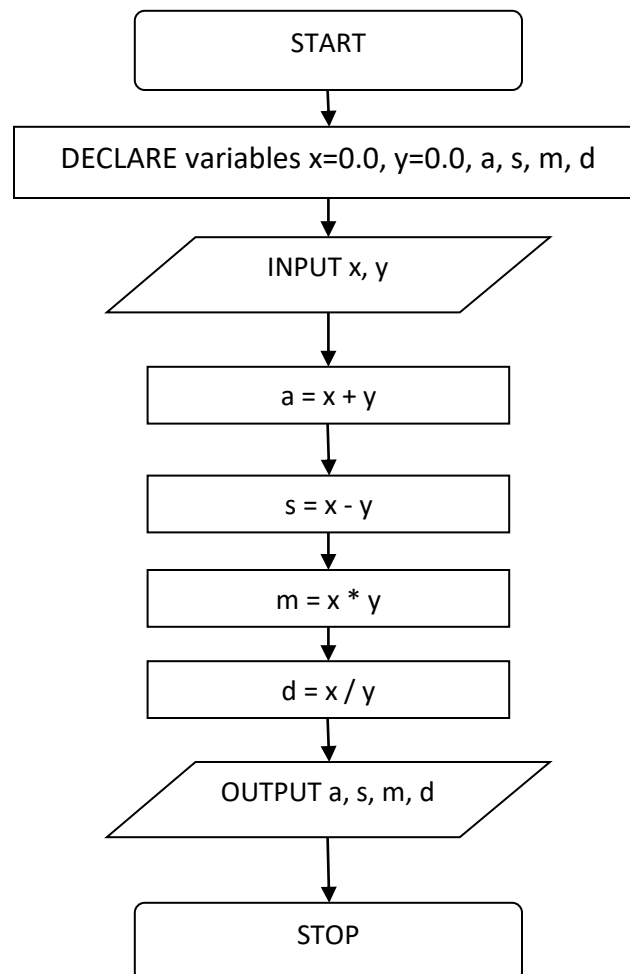

Code :


```
#include<stdio.h>
#include<conio.h>

void main()
{
    float x,y;
    clrscr();
    printf("\n Enter Number 1: ");
    scanf("%f",&x);
    printf("\n Enter Number 2: ");
    scanf("%f",&y);

    printf("Addition Is: %.2f \n",x+y);
    printf("Subtraction Is: %.2f \n",x-y);
    printf("Multiplication Is: %.2f \n",x*y);
    printf("Division Is: %.2f \n",x/y);

    getch();
}
```

Output :

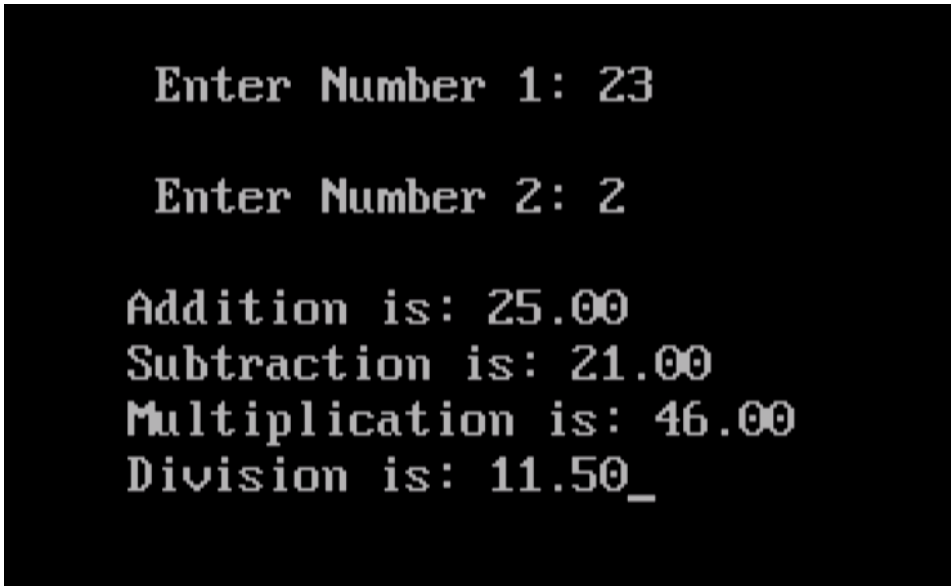A screenshot of a terminal window with a black background and white text. The text shows the execution of a C program. It starts with 'Enter Number 1: 23' and 'Enter Number 2: 2'. Then it displays the results of four operations: 'Addition is: 25.00', 'Subtraction is: 21.00', 'Multiplication is: 46.00', and 'Division is: 11.50_'.

```
Enter Number 1: 23
Enter Number 2: 2
Addition is: 25.00
Subtraction is: 21.00
Multiplication is: 46.00
Division is: 11.50_
```

(3) Print numbers from 1 to 20.

(4) Input 3 values from user and find out its Average.

Algorithm :

Step 1 : START

Step 2 : DECLARE variables x, y, z, avg


Step 3 : INPUT x, y, z

Step 4 : $\text{avg} = (x + y + z) / 3$

Step 5 : PRINT avg

Step 6 : STOP

Flowchart :

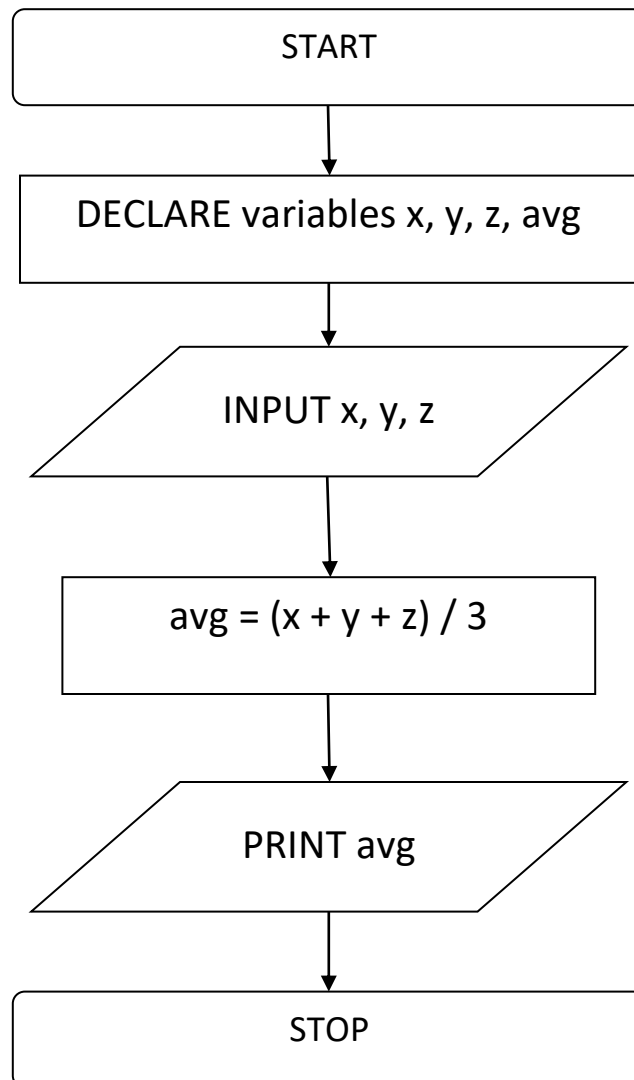


Code :

```
#include<stdio.h>
#include<conio.h>

void main()
{
    int x,y,z;
    clrscr();
    printf("\n Enter Number 1: ");
    scanf("%d",&x);
    printf("\n Enter Number 2: ");
    scanf("%d",&y);
    printf("\n Enter Number 3: ");
    scanf("%d",&z);
    printf("\n Average is: %d ",(x+y+z)/3);
    getch();
}
```

Output :

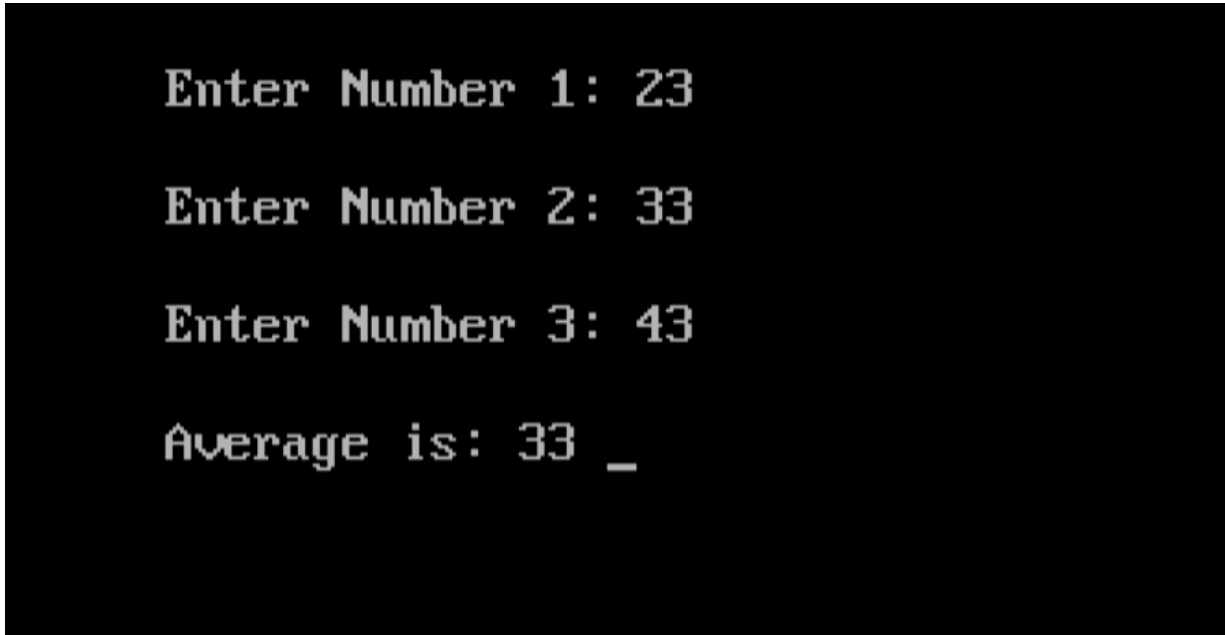A screenshot of a terminal window with a black background and white text. It shows the output of a C program. The text is: "Enter Number 1: 23", "Enter Number 2: 33", "Enter Number 3: 43", and "Average is: 33 _". The cursor is at the end of the last line.

Enter Number 1: 23

Enter Number 2: 33

Enter Number 3: 43

Average is: 33 _

(5) Calculate the Square and Cube of a number.

Algorithm :

Step 1 : START

Step 2 : DECLARE variables n, sqr, cube

Step 3 : INPUT n


Step 4 : $\text{sqr} = n * n$

Step 5 : $\text{cube} = n * n * n$

Step 6 : OUTPUT sqr, cube

Step 7 : STOP

Flowchart :

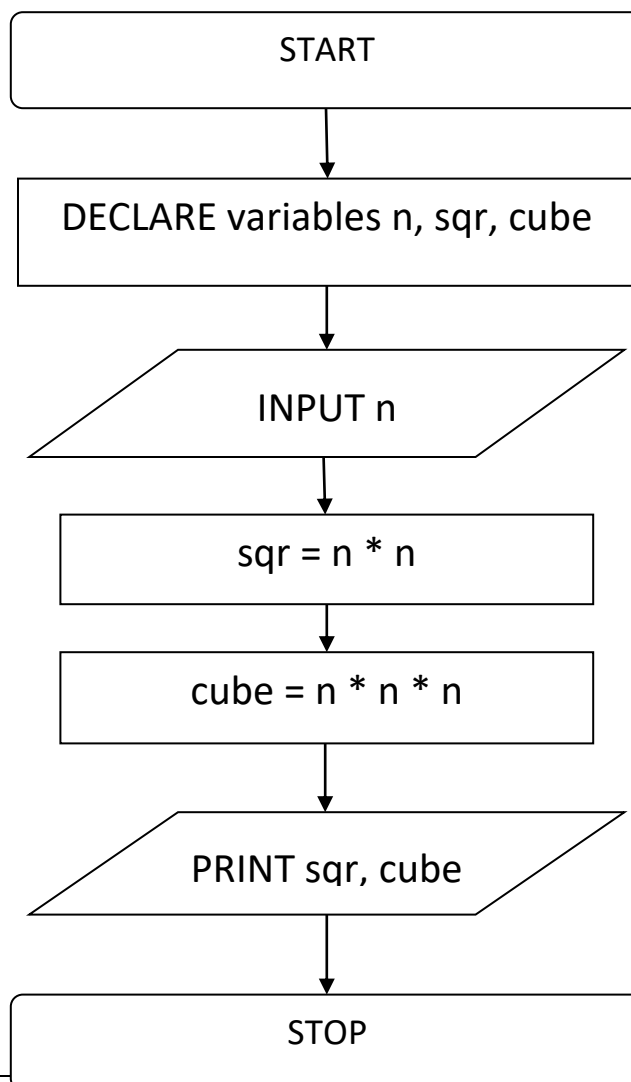


Code :

```
#include<stdio.h>
#include<conio.h>

void main()
{
    int n;
    clrscr();
    printf("\n Enter Number: ");
    scanf("%d",&n);
    printf("\n Enter Square: %d",n*n);
    printf("\n Cube is: %d",n*n*n);
    getch();
}
```

Output :

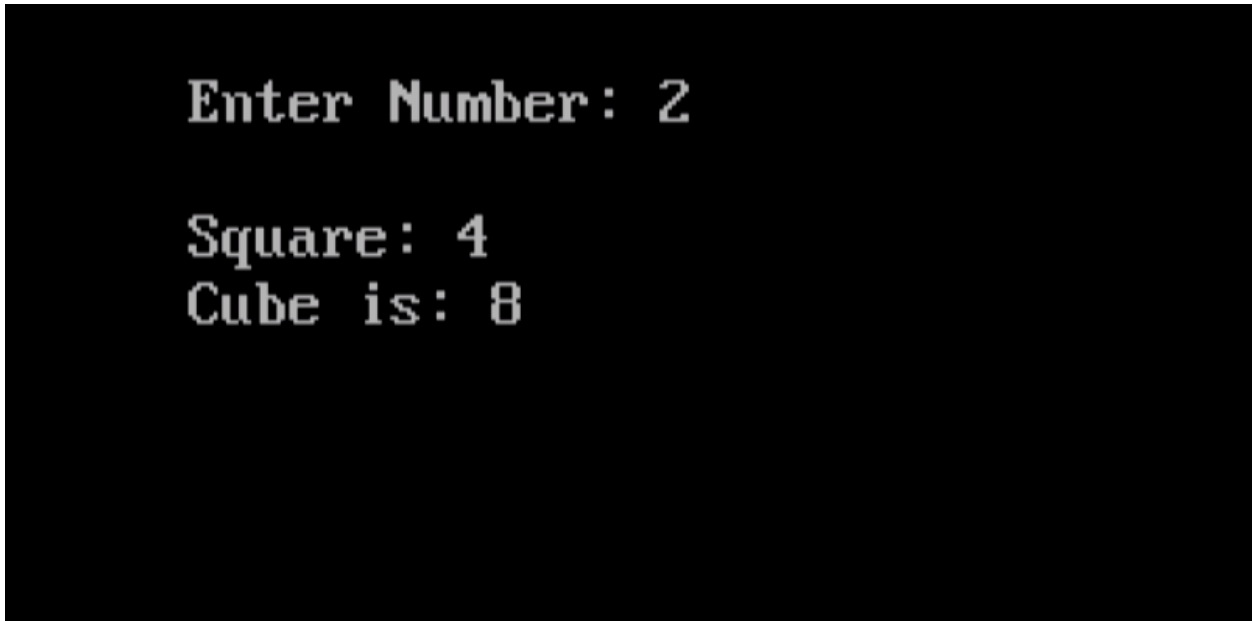

Enter Number: 2

Square: 4

Cube is: 8

(6) Interchange the value of two numbers.

Algorithm :

Step 1 : START

Step 2 : DECLARE variables temp, x, y

Step 3 : INPUT x, y

Step 4 : temp = x


Step 5 : x = y

Step 6 : y = temp

Step 7 : PRINT x, y

Step 8 : STOP

Flowchart :

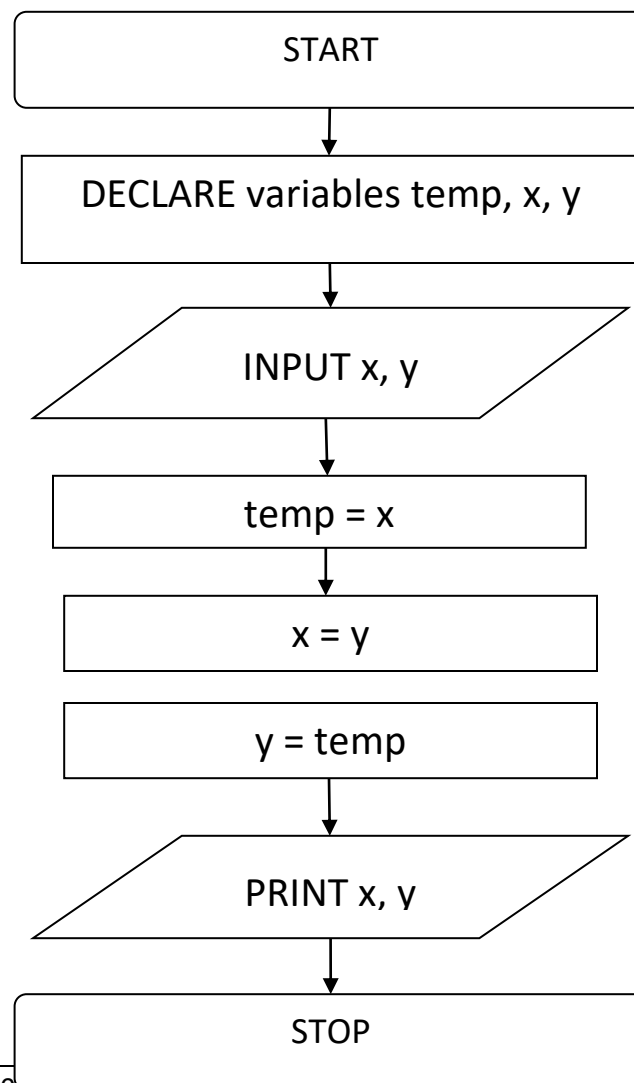


Code :

```
#include<stdio.h>
#include<conio.h>

void main()
{
    int temp,x,y;
    clrscr();
    printf("\n Enter Number 1: ");
    scanf("%d",&x);
    printf("\n Enter Number 2: ");
    scanf("%d",&y);
    temp=x;
    x=y;
    y=temp;
    printf("\nNew Number 1: %d",x);
    printf("\nNew Number 2: %d",y);
    getch();
}
```

Output :

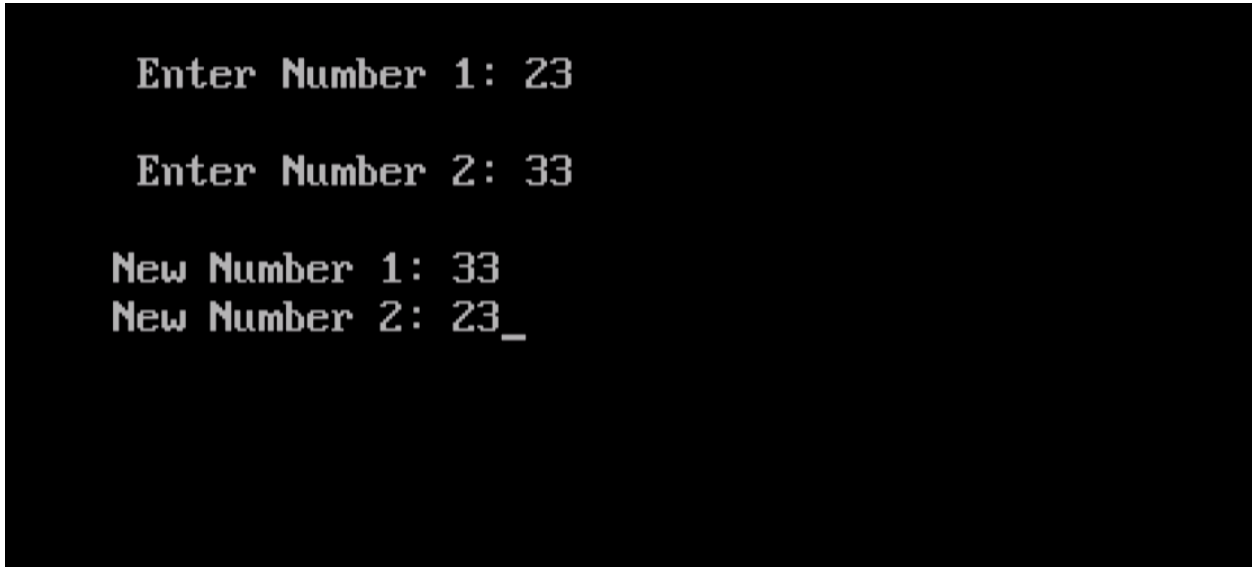A screenshot of a terminal window with a black background and white text. The text shows the execution of a C program. It starts with 'Enter Number 1: 23', followed by 'Enter Number 2: 33'. Then, after a swap, it shows 'New Number 1: 33' and 'New Number 2: 23_'.

```
Enter Number 1: 23

Enter Number 2: 33

New Number 1: 33
New Number 2: 23_
```

(7) Find largest out of three numbers.

Algorithm :

Step 1 : START

Step 2 : DECLARE variables X, Y, Z

Step 3 : INPUT X, Y, Z


Step 4 : IF $X > Y$ && $X > Z$ THEN
PRINT "X is Largest"

Step 5 : ELSE IF $Y > Z$ && $Y > X$ THEN
PRINT "Y is Largest"

Step 6 : ELSE
PRINT "Z is Largest"

Step 7 : STOP

Flowchart :

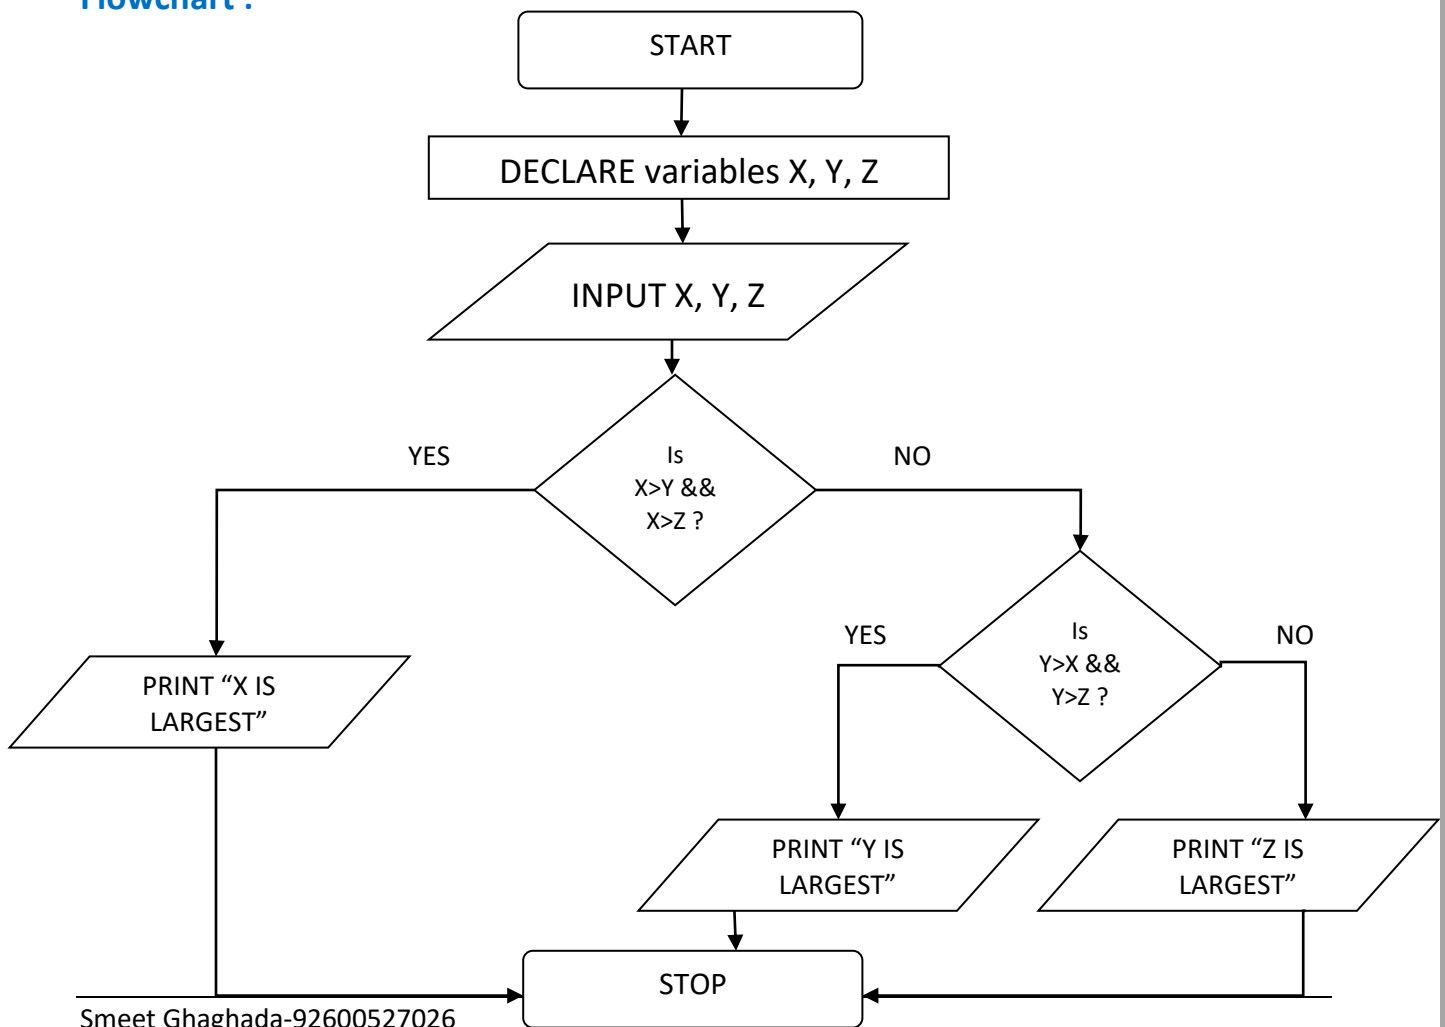


Code :

```
#include<stdio.h>
#include<conio.h>

void main(){
    int x,y,z;
    clrscr();
    printf("\n Enter Number 1: ");
    scanf("%d",&x);
    printf("\n Enter Number 2: ");
    scanf("%d",&y);
    printf("\n Enter Number 3: ");
    scanf("%d",&z);

    if(x>y && x>z){
        printf("Number 1 is largest");
    }
    else if(y>z && y>x){
        printf("Number 2 is largest");
    }
    else{
        printf("Number 3 is largest");
    }
    getch();
}
```

Output :

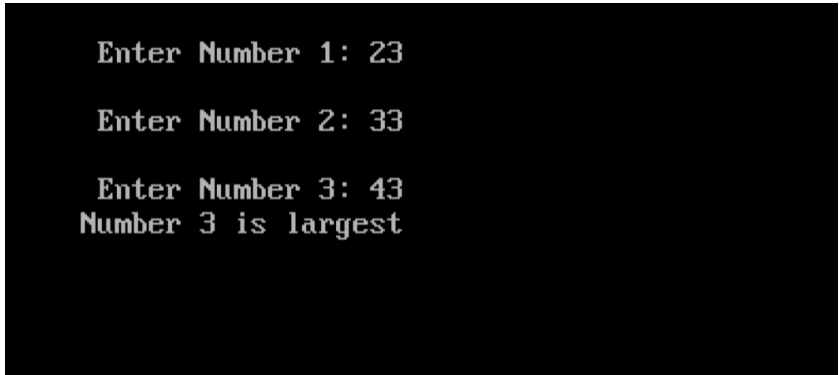A screenshot of a terminal window with a black background and white text. It shows the output of a C program where three numbers are entered and the largest is identified. The text is: Enter Number 1: 23, Enter Number 2: 33, Enter Number 3: 43, and Number 3 is largest.

```
Enter Number 1: 23
Enter Number 2: 33
Enter Number 3: 43
Number 3 is largest
```

(8) Find out Fibonacci series up to given n values.

(9) Find out Number is Odd or Even.

Algorithm :

Step 1 : START

Step 2 : DECLARE variable $x = 0$


Step 3 : INPUT x

Step 4 : IF $x \% 2 = 0$ THEN
PRINT "Even Number"

Step 5 : ELSE
PRINT "Odd Number"

Step 6 : STOP

Flowchart :

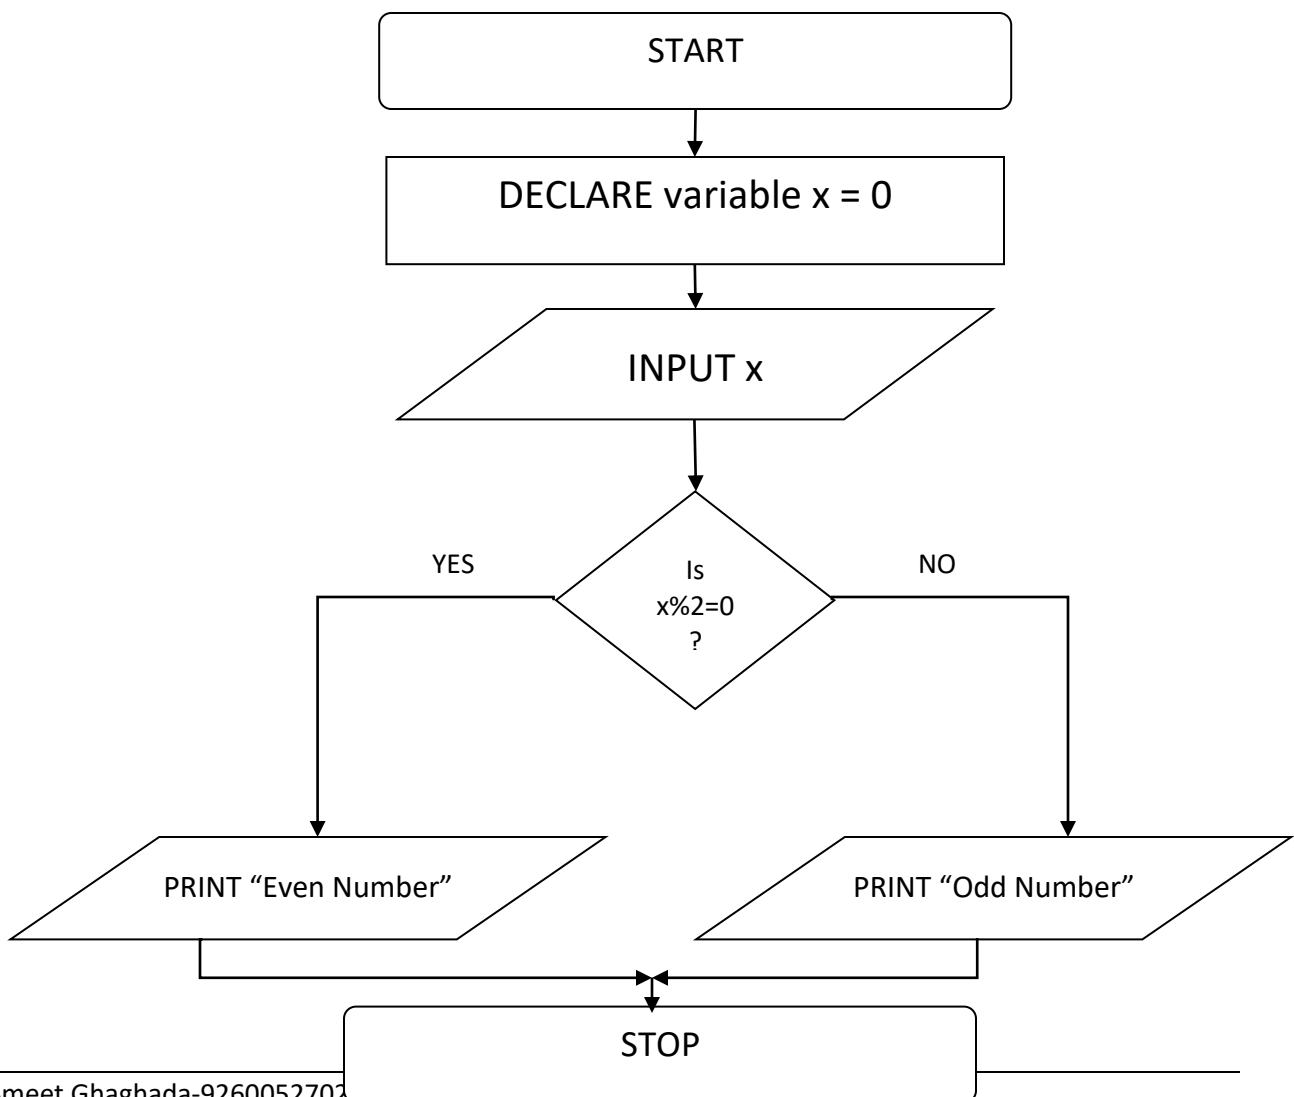


Code :

```
#include<stdio.h>
#include<conio.h>

void main()
{
    int n;
    clrscr();
    printf("\n Enter Number: ");
    scanf("%d",&n);

    if(n%2==0){
        printf("Even Number");
    }
    else
        printf("Odd Number");
    getch();
}
```

Output :

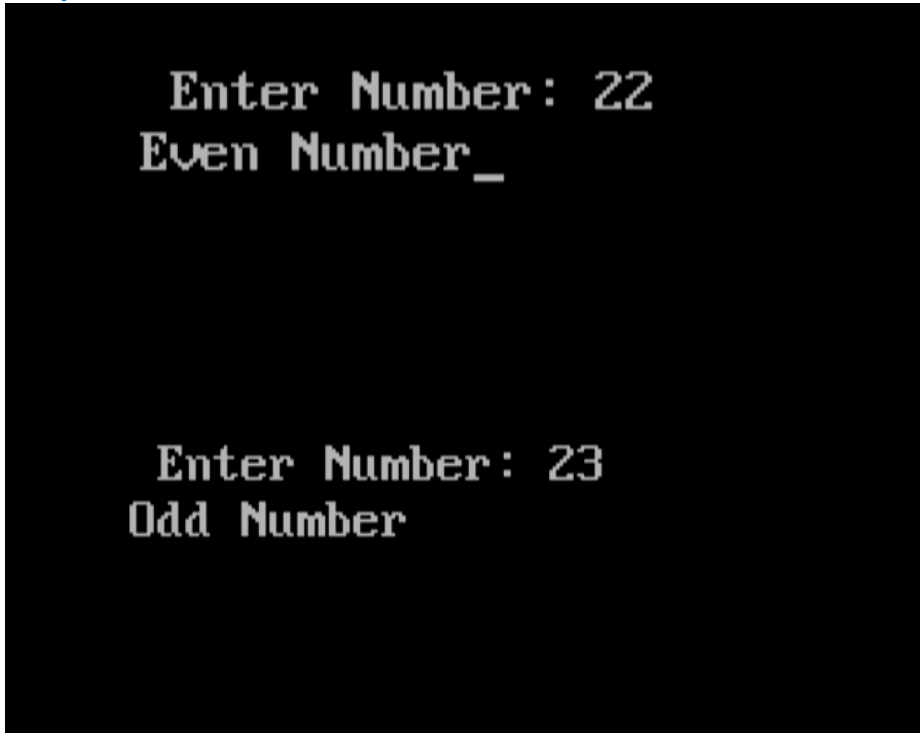A screenshot of a terminal window with a black background and white text. The text shows the program's output for the input 22. It says "Enter Number: 22" on the first line and "Even Number_" on the second line, with a cursor at the end of the second line.

```
Enter Number: 22
Even Number_
```

```
Enter Number: 23
Odd Number
```

(10) Find out sum of digits of a given number.

Algorithm :

Step 1 : START

Step 2 : DECLARE variables n, x, y

Step 3 : INPUT n


Step 4 : $x = n \% 10$

Step 5 : $y = n / 10$

Step 6 : OUTPUT $x + y$

Step 7 : STOP

Flowchart :

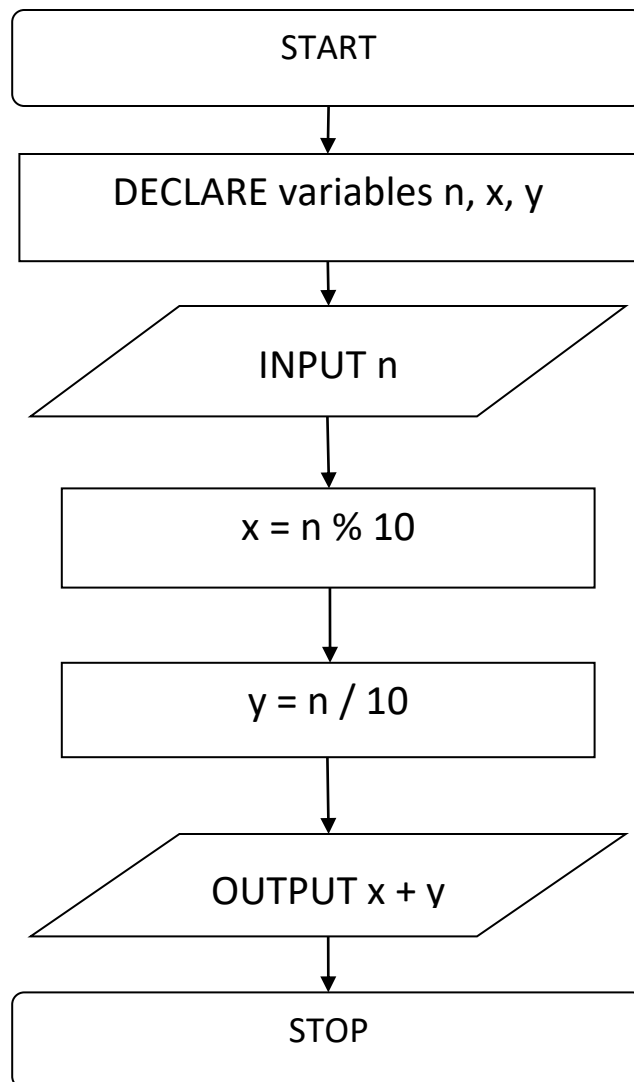


Code :

```
#include<stdio.h>
#include<conio.h>

void main()
{
    int n,x,y;
    clrscr();
    printf("\n Enter Two Digit Number: ");
    scanf("%d",&n);
    x=n%10;
    y=n/10;
    printf("Sum Of Digits is: %d",x+y);
    getch();
}
```

Output :

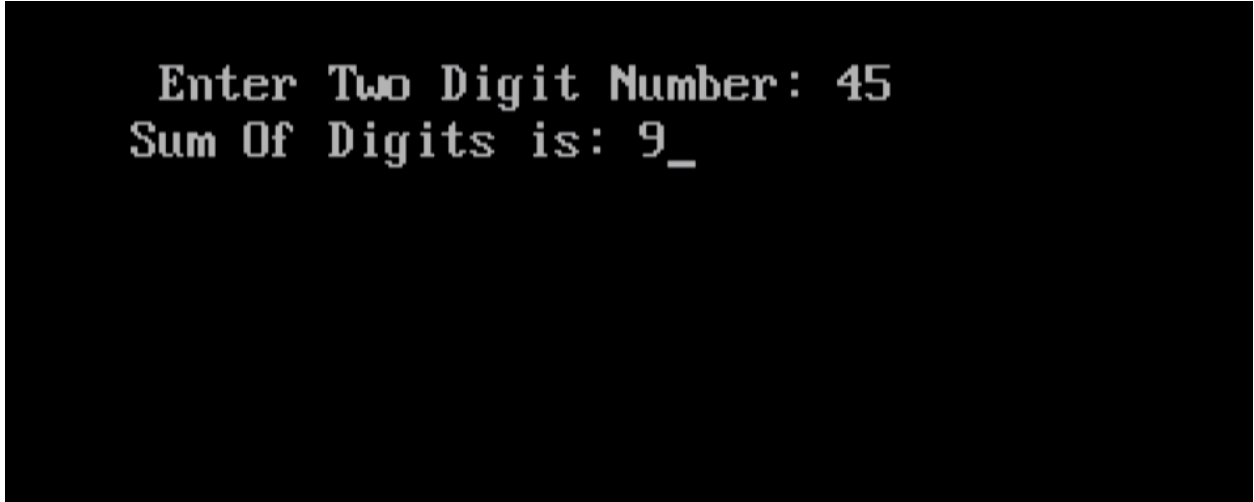A screenshot of a terminal window with a black background and white text. The text shows the program's execution: it prompts for a two-digit number, the user enters '45', and the program outputs 'Sum Of Digits is: 9_'.

```
Enter Two Digit Number: 45
Sum Of Digits is: 9_
```