
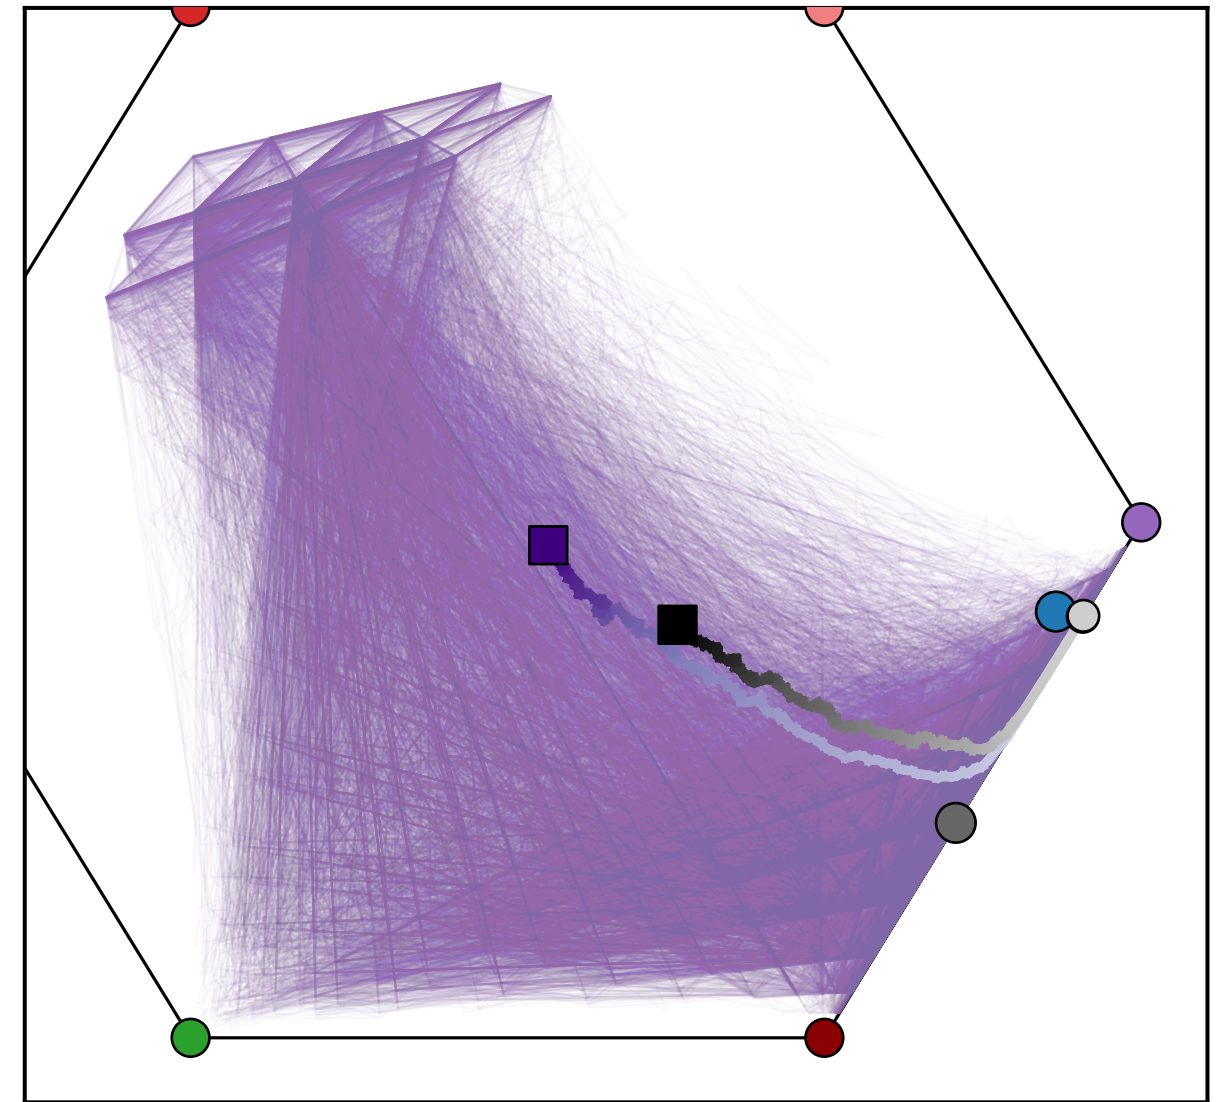


Hamming-distance RadViz projection onto 6 archetype anchors (softmax T=3)
 Simulated RORA_RORB knockdown vs. unperturbed walk trajectories (GEMM-native Arc_5/NE1 start)
 Full projection (true scale)
 dashed box = region magnified at right

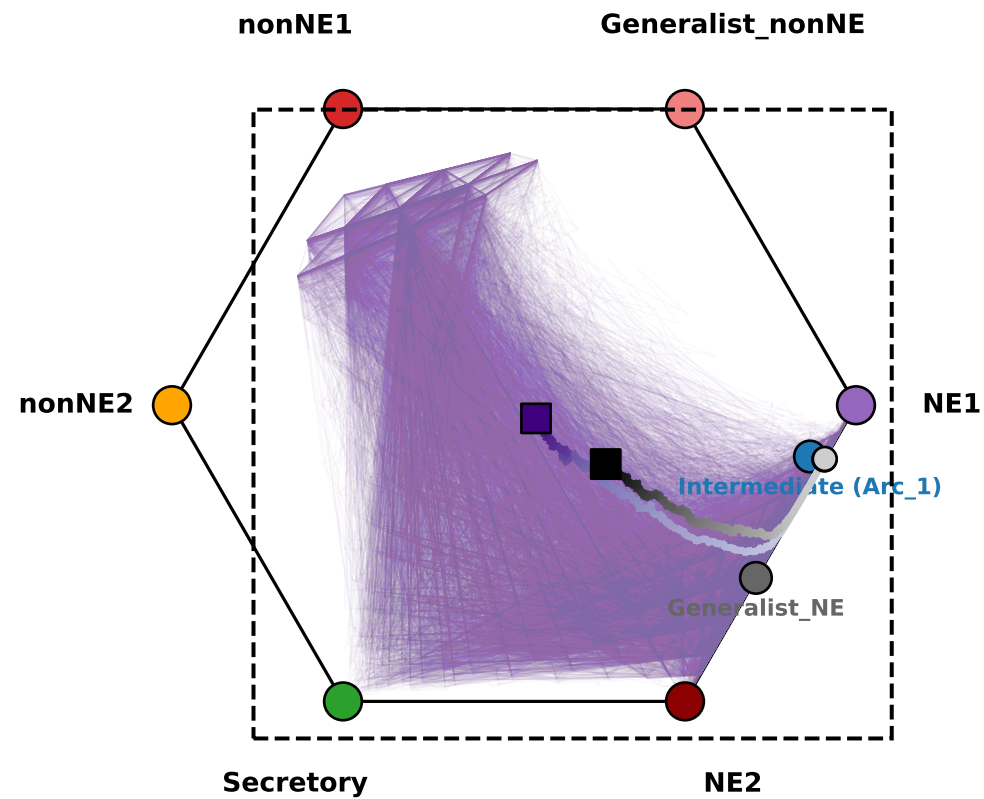

- | | |
|---|--|
| RORA_RORB knockdown: mean path (light->dark = early->late) | path start |
| Unperturbed: mean path (light->dark = early->late) | path end (step 4000) |
| RORA_RORB knockdown: 1100 individual walks (pooled across 11 Arc_5 attractor members) | Generalist_NE (archetype average state, not a hexagon vertex) |
| Unperturbed: 1100 individual walks (pooled across 11 Arc_5 attractor members) | Intermediate/Arc_1 (archetype average state, not a hexagon vertex) |

Note: starts are GEMM's own Arc_5 basin -- 11 individually-discovered attractor member states, each seeding its own set of long walks; all pooled here (unlike the organoid-seeded companion plot, which starts from one representative state). Every labeled point (6 hexagon vertices + the 2 circles) is one of bobaT's 8 fitted archetype average states, projected by Hamming distance to the 6 vertex archetypes (softmax, T=3) -- not the continuous archetype-signature scores used in the original reference figure.