



Hamming-distance RadViz projection onto 6 archetype anchors (softmax T=10)
RORA_RORB overexpression vs. unperturbed walk trajectories (GEMM nonNE2/Arc_2 (archetype average state) start)

Full projection (true scale)
dashed box = region magnified at right

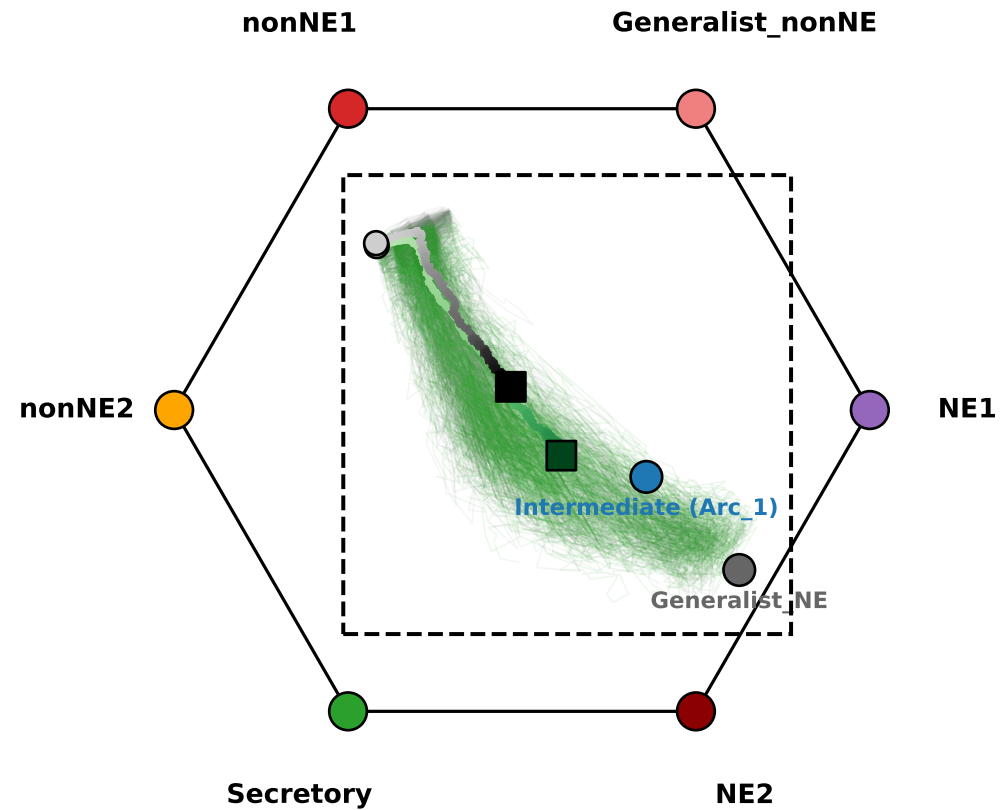

Zoomed inset -- same data, magnified

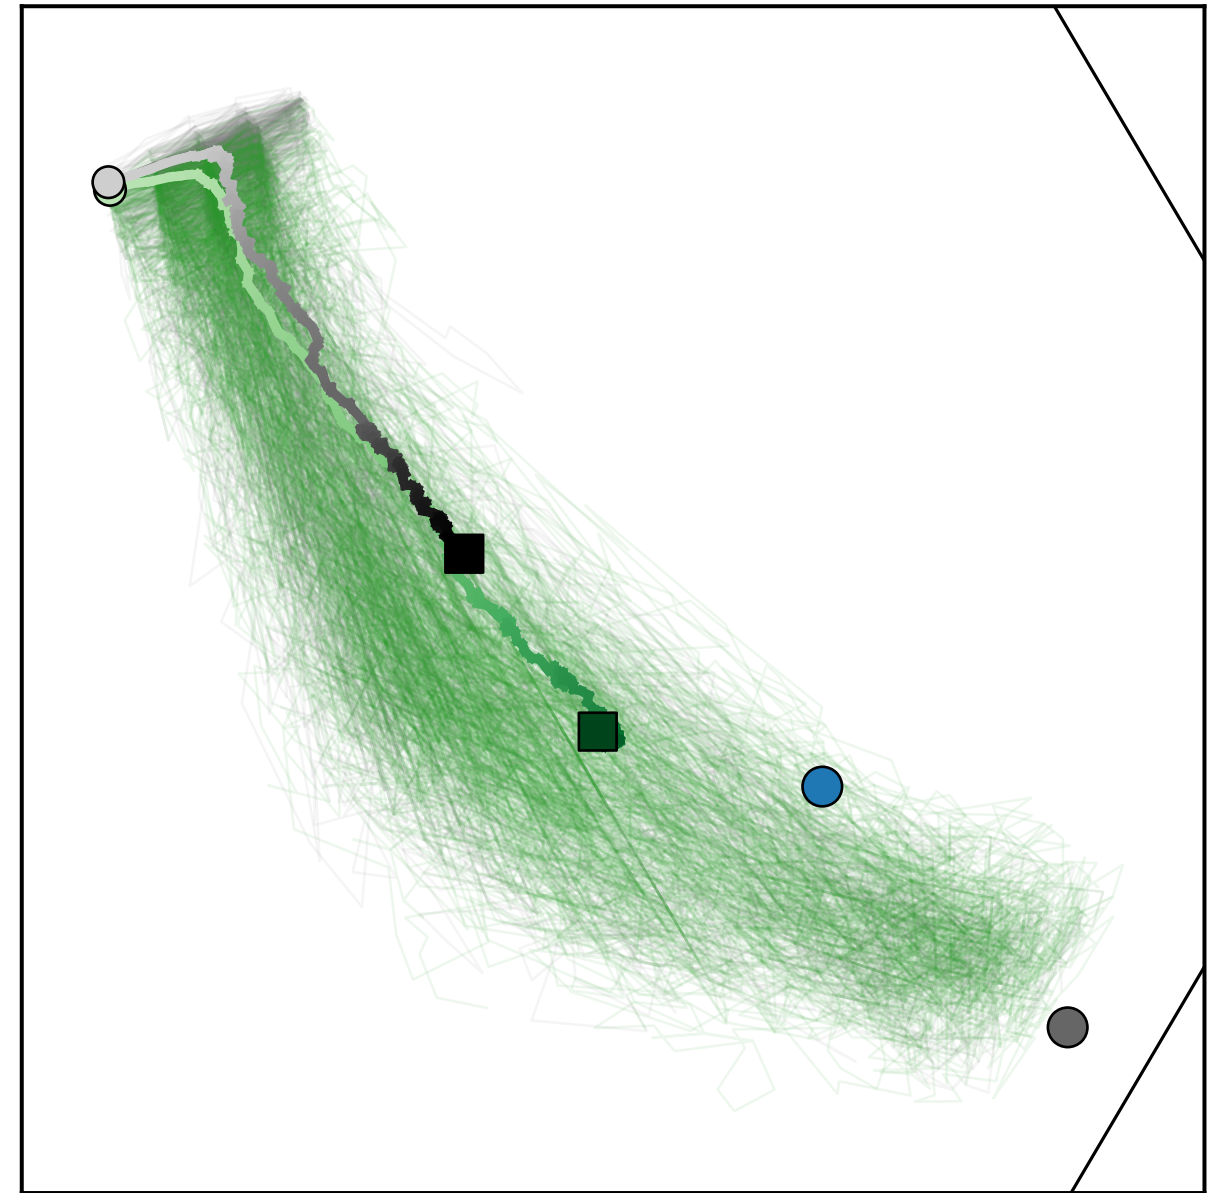

- | | |
|--|--|
| — RORA_RORB overexpression: mean path (light->dark = early->late) | ● path start |
| — Unperturbed: mean path (light->dark = early->late) | ■ path end (step 4000) |
| — RORA_RORB overexpression: 100 individual walks | ● Generalist_NE (archetype average state) |
| — Unperturbed: 100 individual walks | ● Intermediate/Arc_1 (archetype average state) |

Note: start is the archetype's own AVERAGE state (average_states.txt; confirmed matched exactly by real cells) -- NOT one of bobaT's own dynamically-discovered attractor states. A genuine attractor has 0/53 genes with >50% flip probability under the fitted rules; this average state does not (see FINDINGS.md and the companion *_true_attractor plots, which start from an actual discovered attractor instead).