


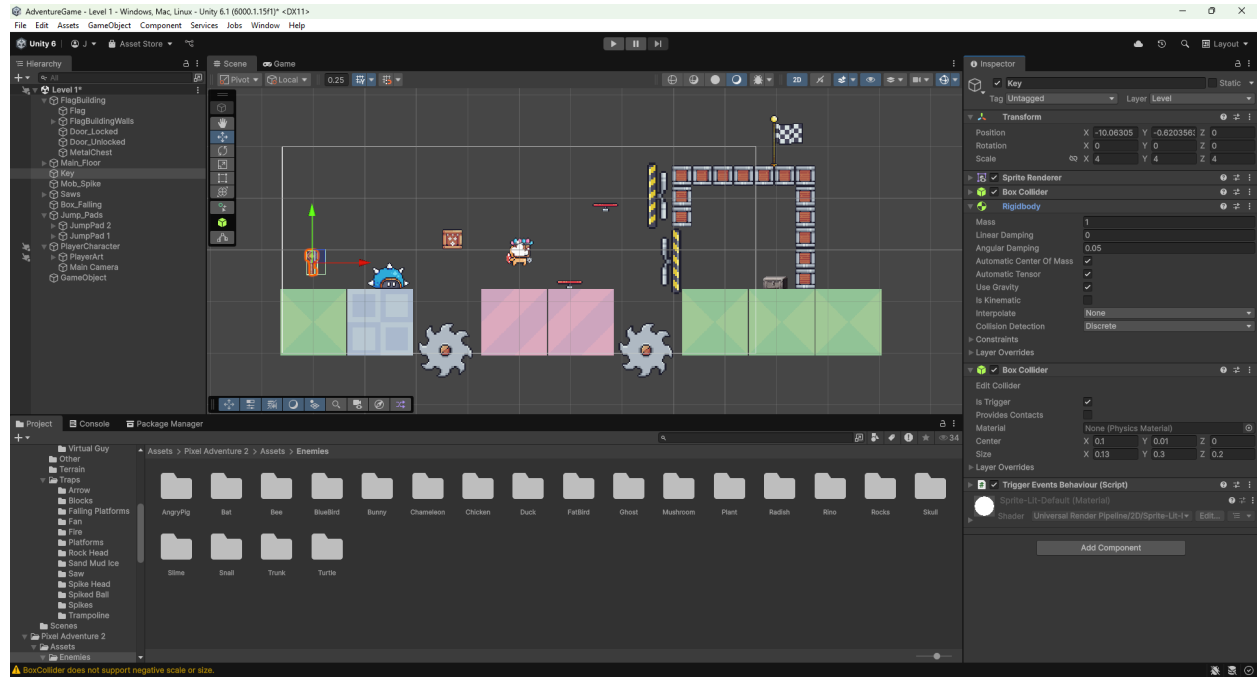
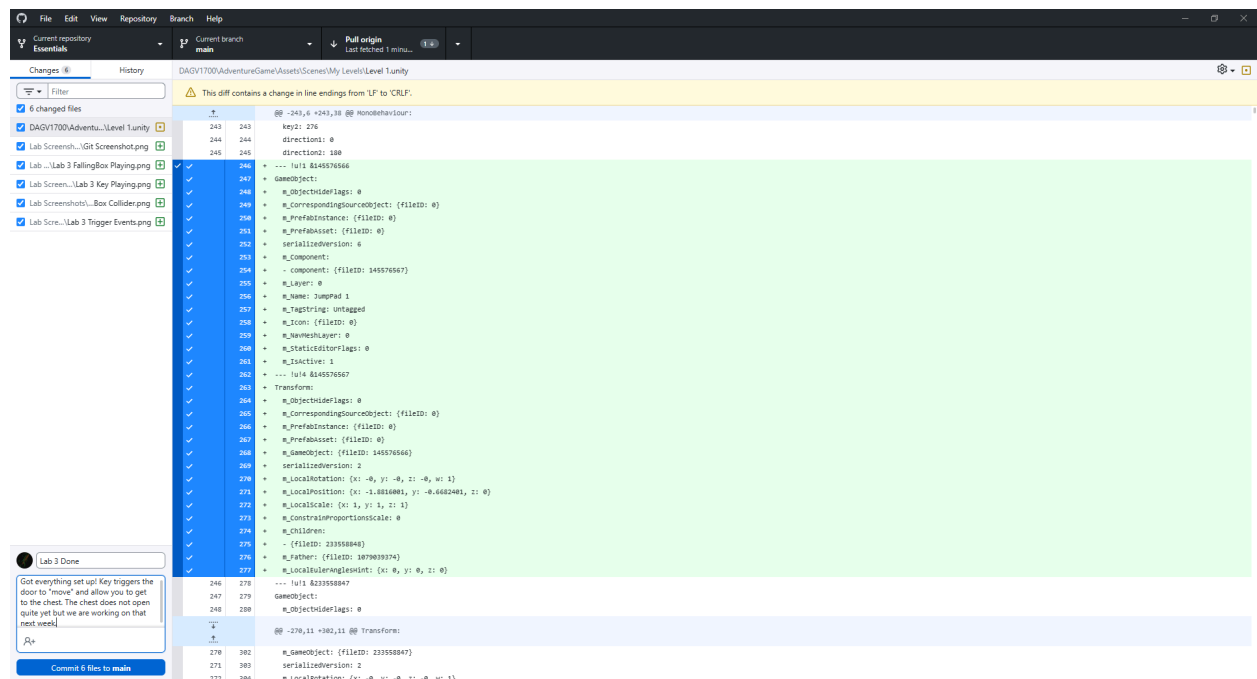


Jesse Smith

Lab 3 Submission

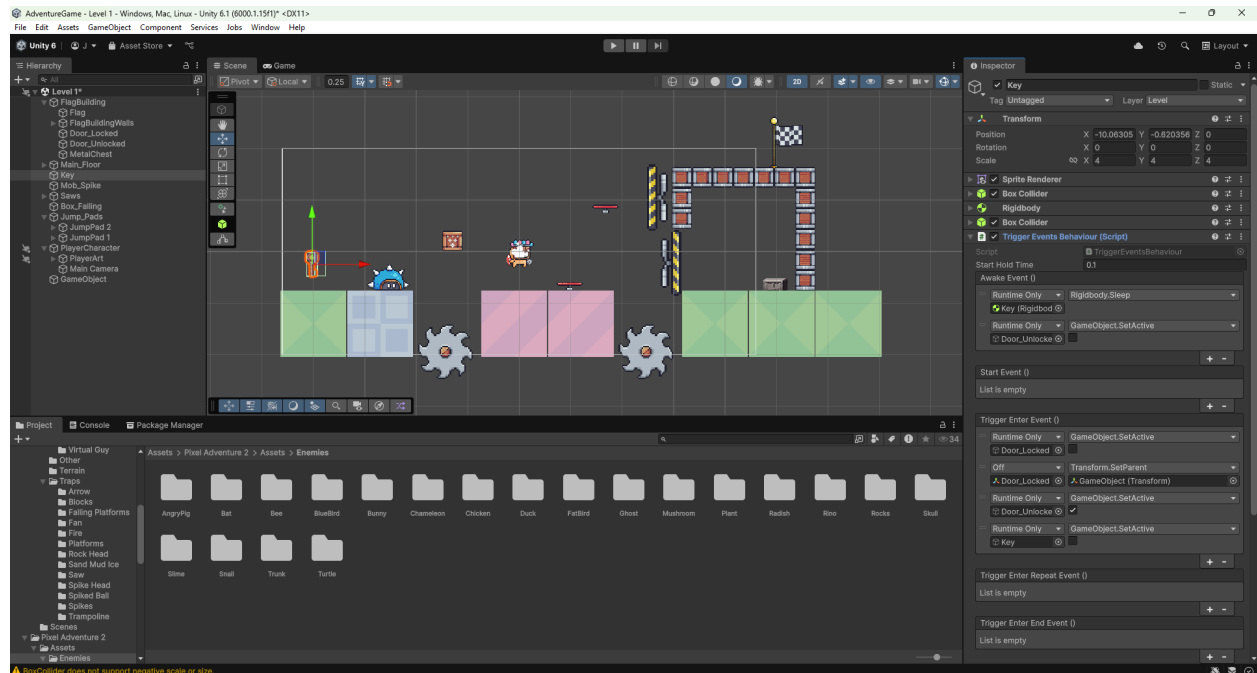

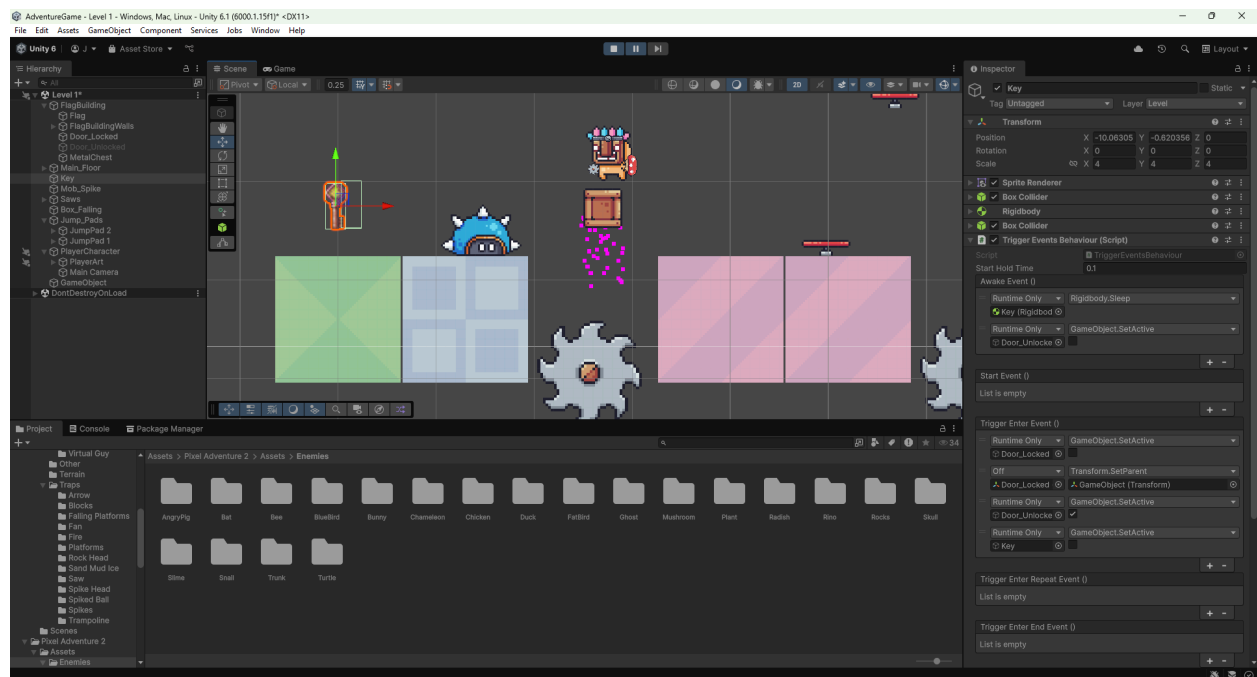

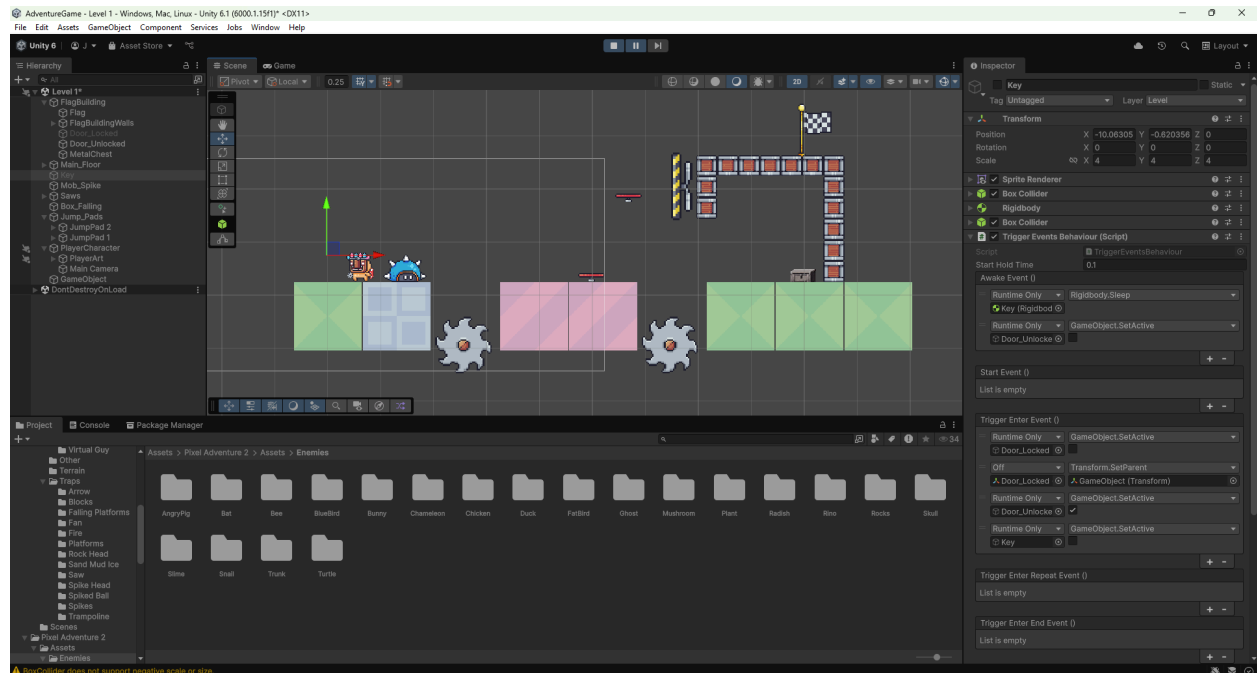

GitHub URL:

<https://github.com/smithjes024/Essentials/tree/main/DAGV1700/AdventureGame>

200-Word Writeup: A concise summary (≈200 words) Summarize your steps, explain how colliders vs. triggers differ, and describe your creative extension.

I followed along in class today and quickly realized how I can make this really unique. I was able to add that box that falls down and has the particles on it today in class, but then I also set up my Key so that when you walk into it you “collect” the key and the door opens (off screen but we are working on that). I also was able to set up another collision box onto my Chest but we will go over how to change the sprite next week with that. Colliders are different from triggers because a collider is more like an immovable wall. You cannot go through the box, whereas triggers are separate from the actual sprite of the model and, for example, when your character moves into the trigger box, *something* happens. That something can vary depending on what you want it to do, but the basics are there. I also made a change to my boxes so that the “building” holding the chest and flag on top have a different more supported box sprite and the box that falls has just the simple wooden box. This will add more coherence between levels and allow the player a clear visual representation of what should happen when stepping on each box. I also changed my jump height from 4 to 2 because that was just way too high and 2 is more in size with the scale of the level.