Duration: 14.969 s End: Apr 19, 2:34:57.031 PM Start: Apr 19, 2:34:42.062 PM Scenarios **Features** Steps PASSED - 0 PASSED - 0 PASSED - 6 SKIPPED - 0 SKIPPED - 0 SKIPPED - 0 40 50 60 40 50 60 40 50 60 30 Pass % Pass % 70 30 Pass % 70 20 20 20 80 80 80 90 90 10 66 % 100 100

Feature			Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S	
Invalid Credentials	14.969 s	3	0	3	0	9	6	3	0	

FAIL & SKIP SCENARIOS -- 3 --


#	Feature Name	Scenario Name
1	Invalid Credentials	Login with invalid credentials
2		Login with invalid credentials
3		Login with invalid credentials

TAG	Scenario			Feature				
Name	T	P	F	S	T	P	F	S
@InvalidCredentials	3	0	3	0	1	0	1	0
@tag	3	0	3	0	1	0	1	0

FEATURES SUMMARY -- 5 --



#	Feature Name	T	P	F	S	Duration
1	Invalid Credentials	3	0	3	0	14.969 s

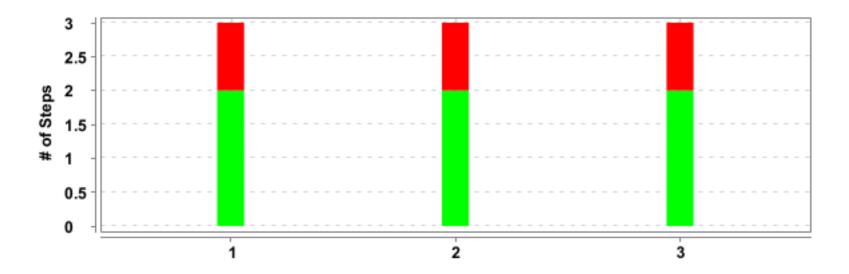


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Invalid Credentials	Login with invalid credentials	3	2	1	0	5.504 s
2		Login with invalid credentials	3	2	1	0	4.716 s
3		Login with invalid credentials	3	2	1	0	4.702 s

DETAILED SECTION -- 7 -

Invalid Credentials

FAILED	DURATION - 14.969 s	Scenarios		Steps	
		Total - 3		Total - 9	
/ 2:34:42.062 PM // 2	2:34:57.031 PM /	Pass - 0	3	Pass - 6	9
		Fail - 3	, , , , , , , , , , , , , , , , , , ,	Fail - 3	📜 📜
		Skip - 0		Skip - 0	


Login with invalid credentials

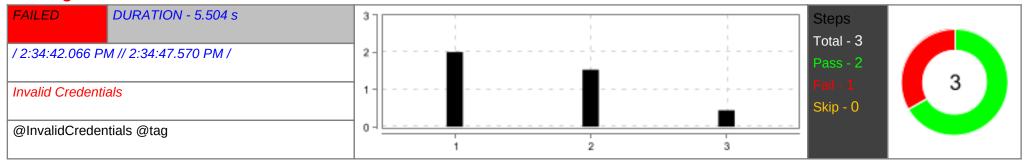

#	Step / Hook Details	Status	Duration
1	Given User is on HRMLogin page "https://opensource-demo.orangehrmlive.com/"	PASSED	2.005 s
2	When User enters username as "Admin" and password as "admin12\$\$"	PASSED	1.530 s
3	Then User should be able to see error message "errorMessage"	FAILED	0.438 s
	org.opentest4j.AssertionFailedError: expected: <invalid credentials=""> but was: <errormessage> at org.junit.jupiter.api.AssertionFailureBuilder.build(AssertionFailureBuilder.java:151) at org.junit.jupiter.api.AssertionFailureBuilder.buildAndThrow(AssertionFailureBuilder.java:132) at org.junit.jupiter.api.AssertEquals.failNotEqual(AssertEquals.java:197) at org.junit.jupiter.api.AssertEquals.assertEquals(AssertEquals.java:182) at org.junit.jupiter.api.AssertEquals.assertEquals(AssertEquals.java:177) at org.junit.jupiter.api.Assertions.assertEquals(AssertEquals.java:1145) at com.example.definitions.LoginPageDefinitions.verifyErrorMessage(LoginPageDefinitions.java:61) at ?.User should be able to see error message "errorMessage"(file:///C:/Users/Suzanne/eclipse-workspace/ExtentReport5/src/test/resources/features/InvalidCredentials.feature:27) * Not displayable characters are replaced by '?'.</errormessage></invalid>		
	AFTER - com.example.definitions.Hooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.319 s
	Login with invalid credentials		

#	Step / Hook Details	Status	Duration
	Congress Log Construction C		


Login with invalid credentials

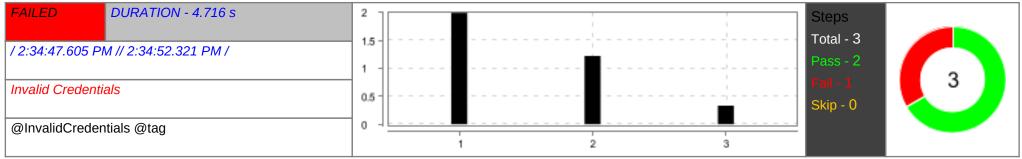

#	Step / Hook Details	Status	Duration
1	Given User is on HRMLogin page "https://opensource-demo.orangehrmlive.com/"	PASSED	1.995 s
2	When User enters username as "admin\$\$" and password as "admin123"	PASSED	1.224 s
3	Then User should be able to see error message "errorMessage"	FAILED	0.331 s
	org.opentest4j.AssertionFailedError: expected: <invalid credentials=""> but was: <errormessage> at org.junit.jupiter.api.AssertionFailureBuilder.build(AssertionFailureBuilder.java:151) at org.junit.jupiter.api.AssertionFailureBuilder.buildAndThrow(AssertionFailureBuilder.java:132) at org.junit.jupiter.api.AssertEquals.failNotEqual(AssertEquals.java:197) at org.junit.jupiter.api.AssertEquals.assertEquals(AssertEquals.java:182) at org.junit.jupiter.api.AssertEquals.assertEquals(AssertEquals.java:177) at org.junit.jupiter.api.Assertions.assertEquals(Assertions.java:1145) at com.example.definitions.LoginPageDefinitions.verifyErrorMessage(LoginPageDefinitions.java:61) at ?.User should be able to see error message "errorMessage"(file:///C:/Users/Suzanne/eclipse-workspace/ExtentReport5/src/test/resources/features/InvalidCredentials.feature:27) * Not displayable characters are replaced by '?'.</errormessage></invalid>		
	AFTER - com.example.definitions.Hooks.tearDown(io.cucumber.java.Scenario) Login with invalid credentials	PASSED	0.236 s

#	Step / Hook Details	Status	Duration
	Grange 84. Lugh Lugh		

Login with invalid credentials

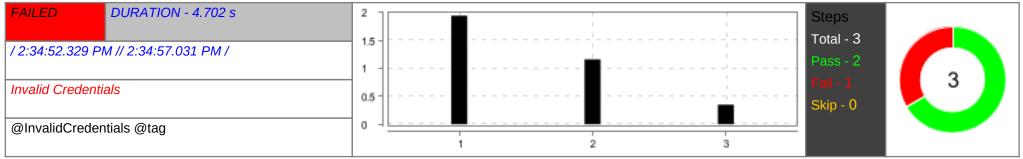

#	Step / Hook Details	Status	Duration
1	Given User is on HRMLogin page "https://opensource-demo.orangehrmlive.com/"	PASSED	1.945 s
2	When User enters username as "abc123" and password as "xyz\$\$"	PASSED	1.161 s
3	Then User should be able to see error message "errorMessage"	FAILED	0.349 s
	org.opentest4j.AssertionFailedError: expected: <invalid credentials=""> but was: <errormessage> at org.junit.jupiter.api.AssertionFailureBuilder.build(AssertionFailureBuilder.java:151) at org.junit.jupiter.api.AssertionFailureBuilder.buildAndThrow(AssertionFailureBuilder.java:132) at org.junit.jupiter.api.AssertEquals.failNotEqual(AssertEquals.java:197) at org.junit.jupiter.api.AssertEquals.assertEquals(AssertEquals.java:182) at org.junit.jupiter.api.AssertEquals.assertEquals(AssertEquals.java:177) at org.junit.jupiter.api.Assertions.assertEquals(AssertEquals.java:1145) at com.example.definitions.LoginPageDefinitions.verifyErrorMessage(LoginPageDefinitions.java:61) at ?.User should be able to see error message "errorMessage"(file:///C:/Users/Suzanne/eclipse-workspace/ExtentReport5/src/test/resources/features/InvalidCredentials.feature:27) * Not displayable characters are replaced by '?'.</errormessage></invalid>		
	AFTER - com.example.definitions.Hooks.tearDown(io.cucumber.java.Scenario) Login with invalid credentials	PASSED	0.238 s

DETAILED SECTION -- 10 --

#	Step / Hook Details	Status	Duration
	Cange 84 Lugh Some area Lugh Lugh		