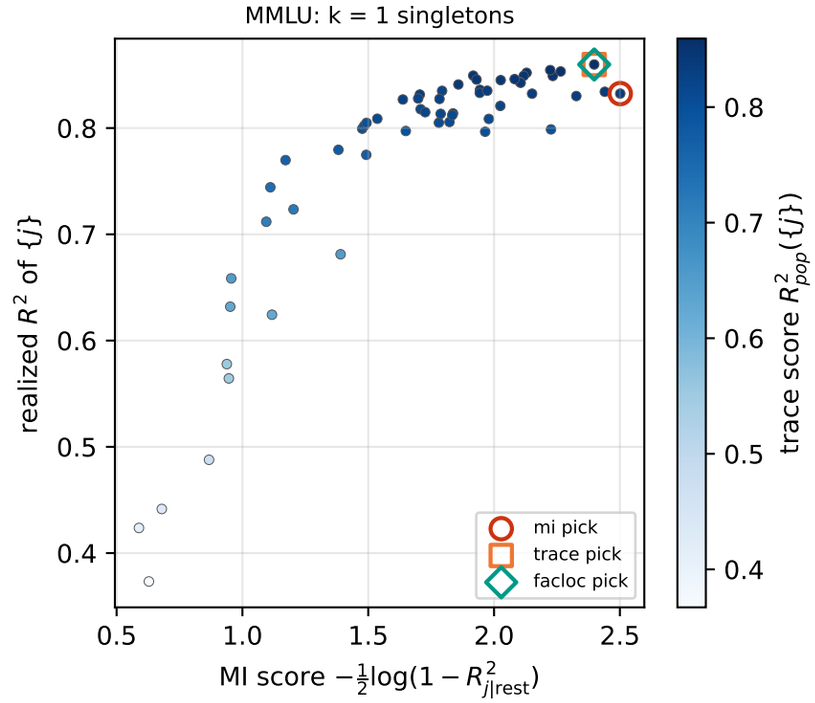
MMLU: k = 1 singletons
realized R^2 of {j}
MI score $-\frac{1}{2}\log(1-R^2_{j|\text{rest}})$
trace score $R^2_{pop}(\{j\})$
mi pick
trace pick
facloc pick

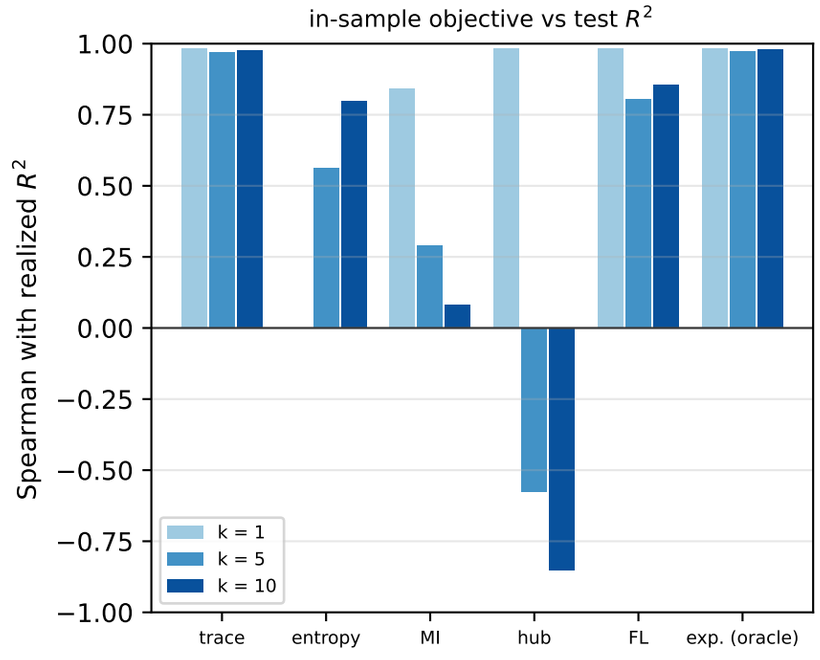
in-sample objective vs test R^2
Spearman with realized R^2
k = 1
k = 5
k = 10
trace
entropy
MI
hub
FL
exp. (oracle)

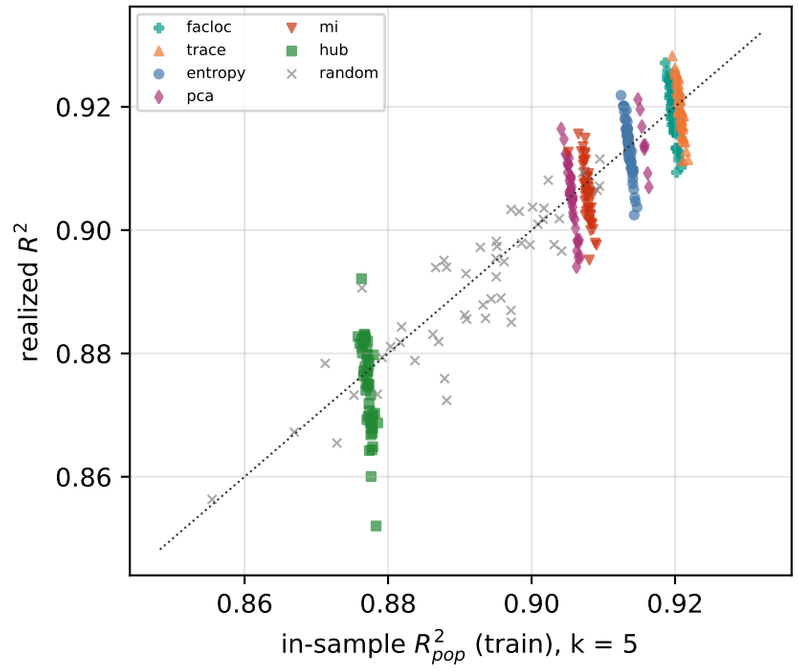
facloc
trace
entropy
pca
mi
hub
random
realized R^2
in-sample R^2_{pop} (train), k = 5

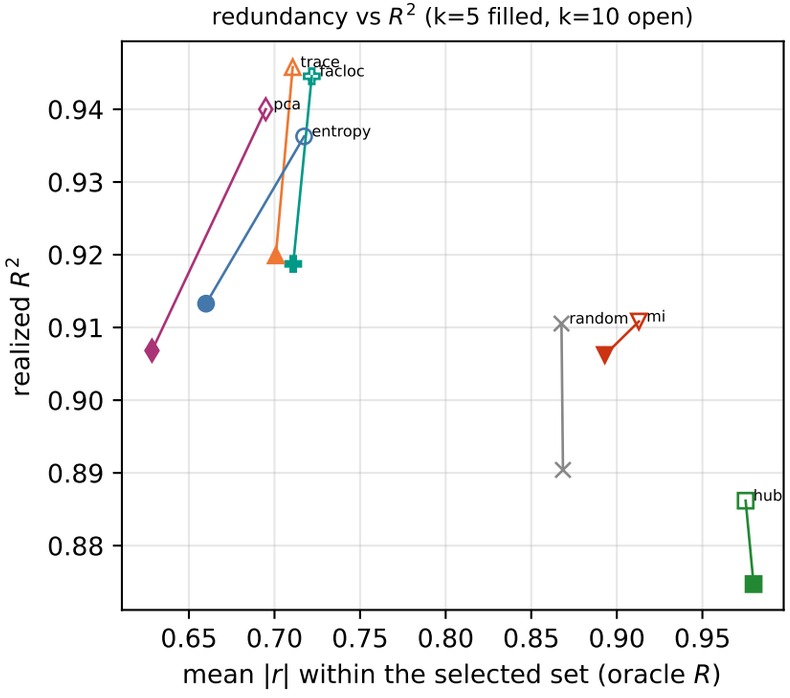
redundancy vs R^2 (k=5 filled, k=10 open)
trace
facloc
pca
entropy
random
mi
hub
realized R^2
mean |r| within the selected set (oracle R)

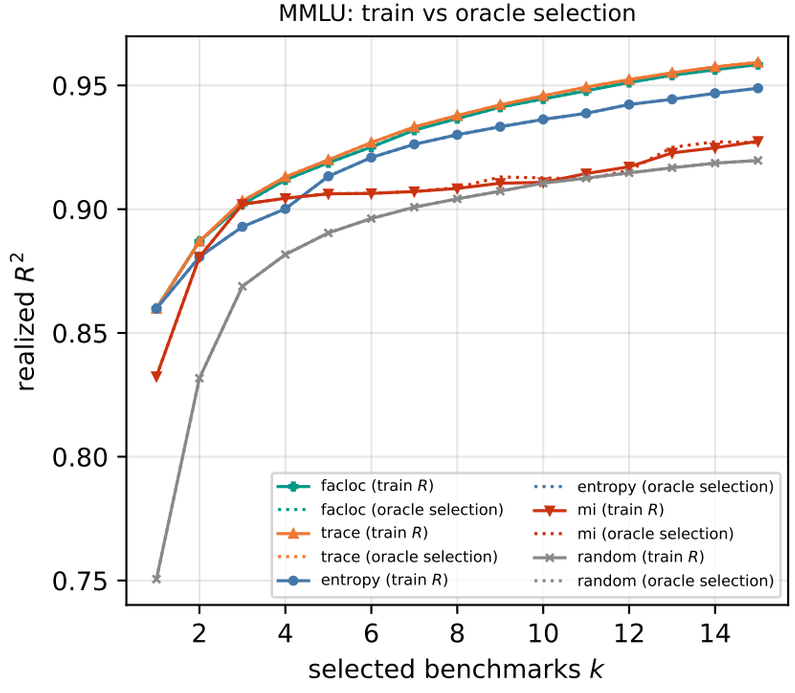
MMLU: train vs oracle selection
realized R^2
facloc (train R)
facloc (oracle selection)
trace (train R)
trace (oracle selection)
entropy (train R)
entropy (oracle selection)
mi (train R)
mi (oracle selection)
random (train R)
random (oracle selection)
selected benchmarks k

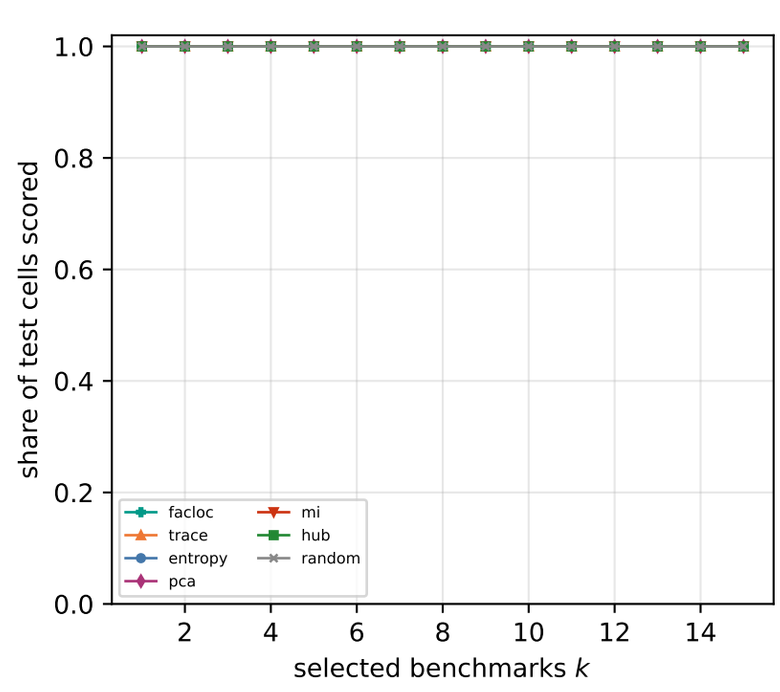
share of test cells scored
facloc
trace
entropy
pca
mi
hub
random
selected benchmarks k