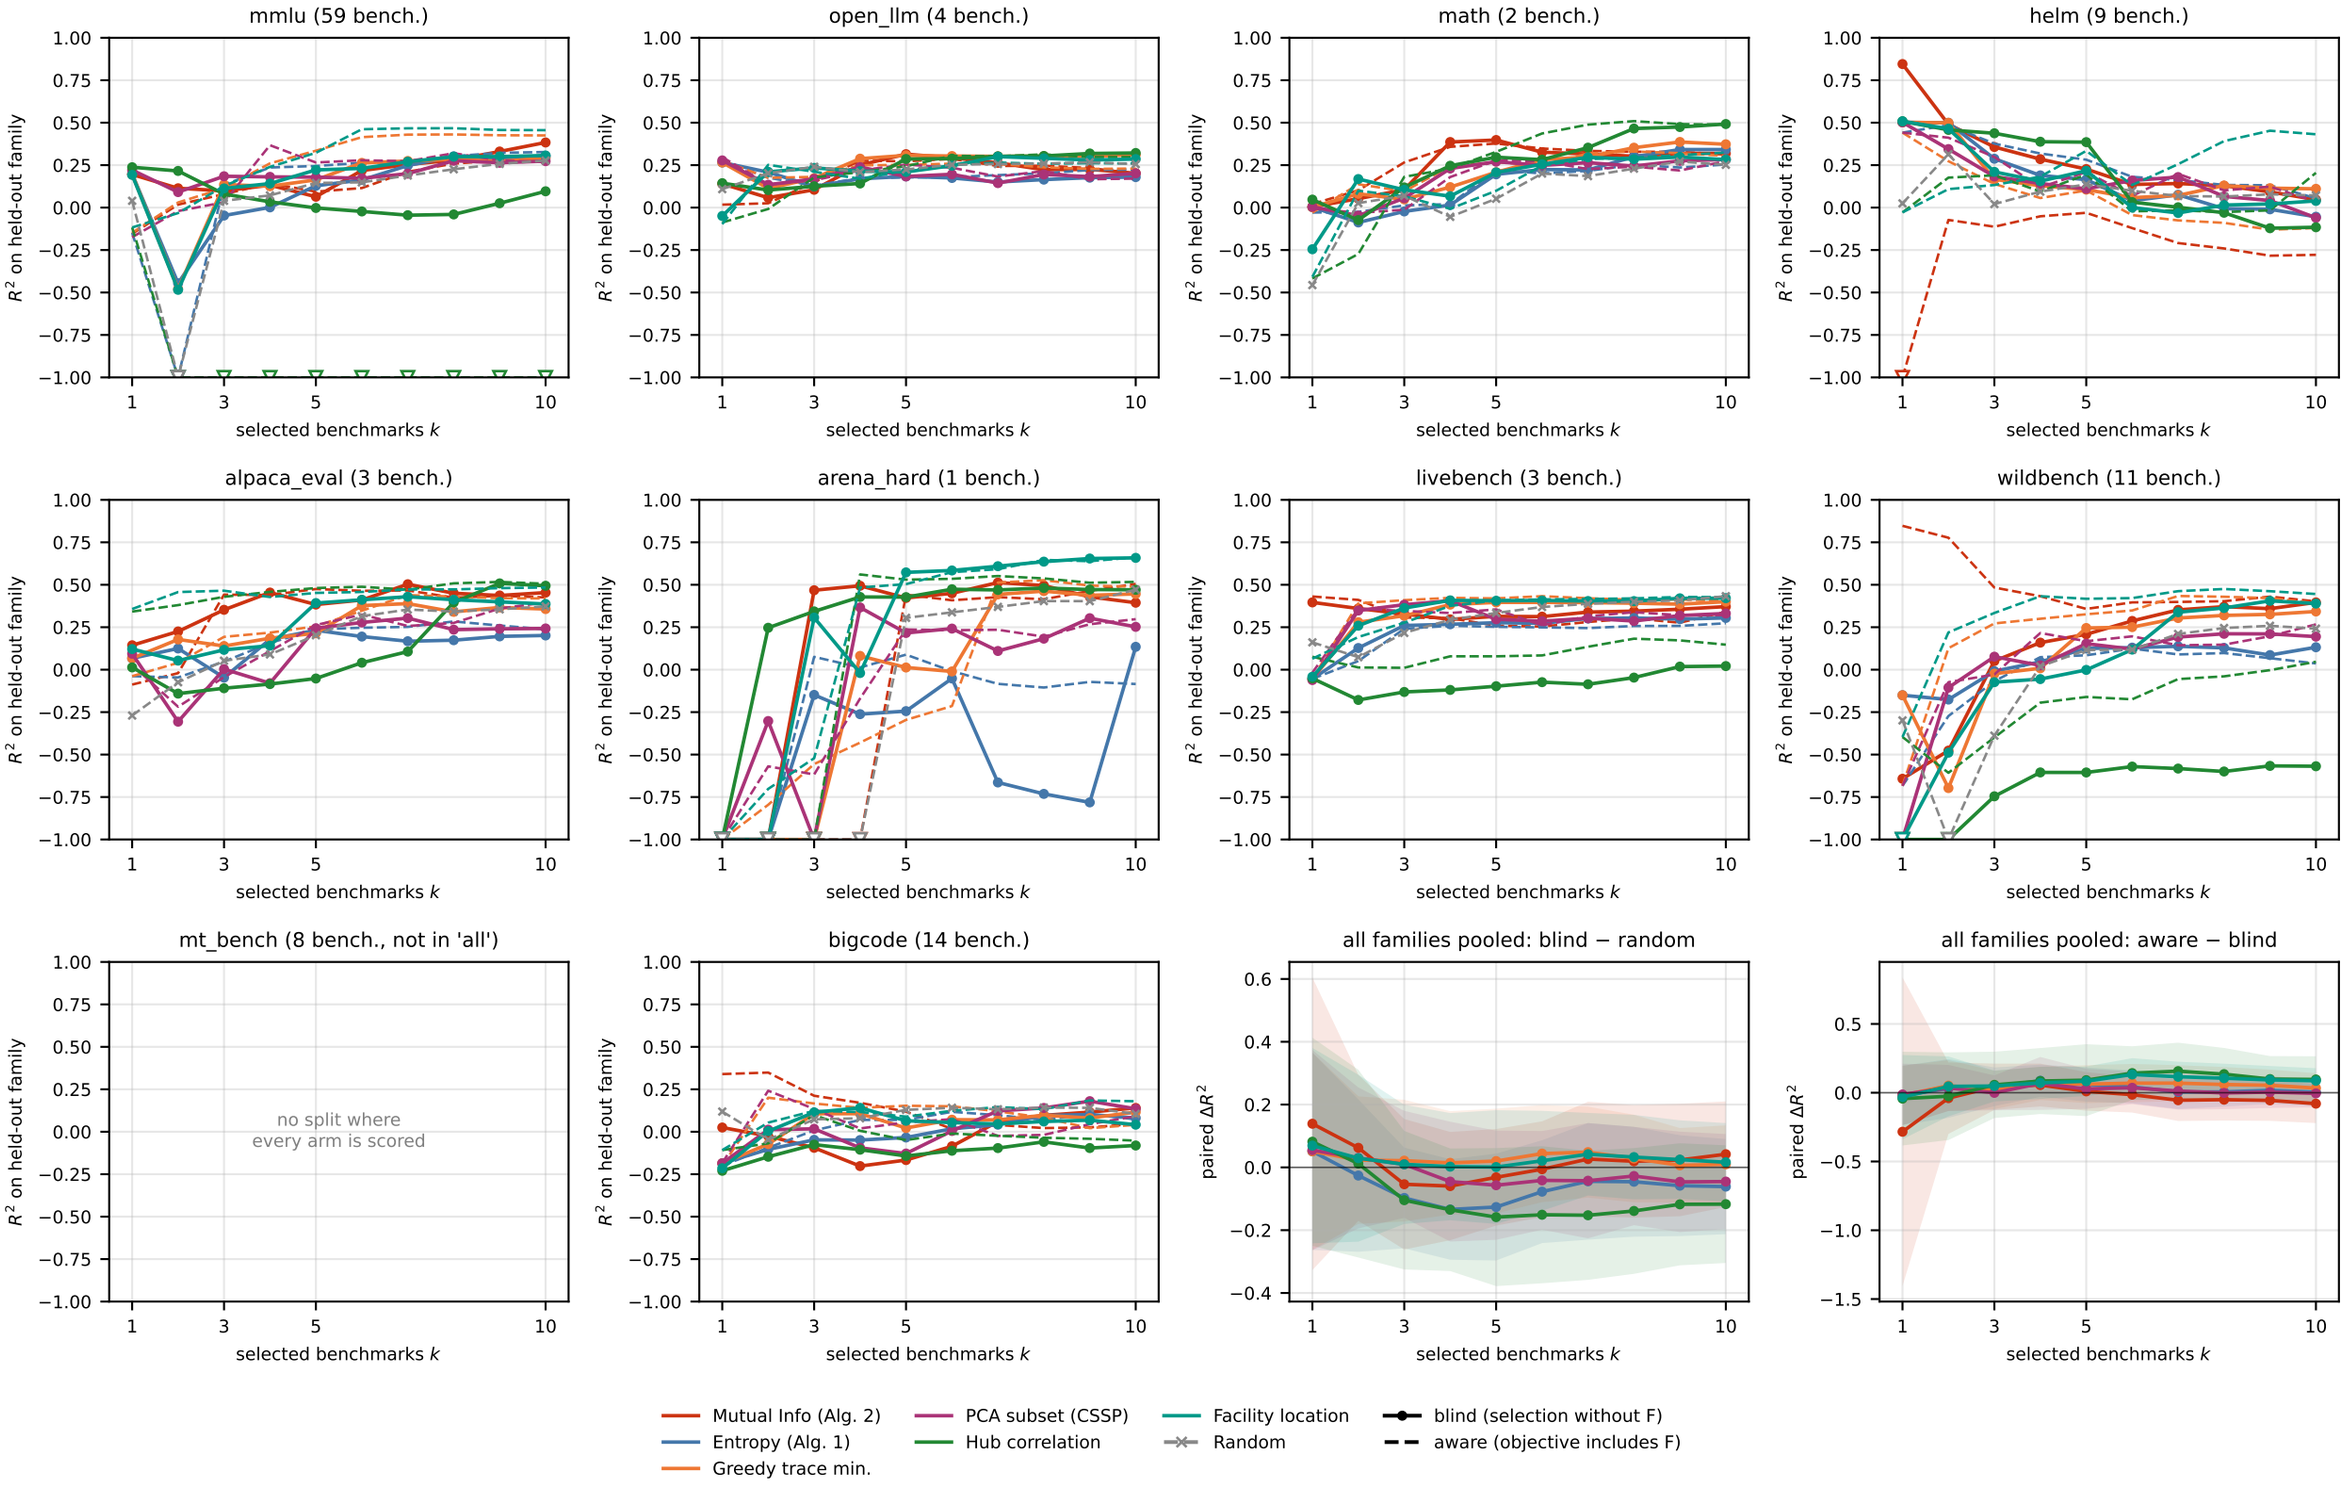

Merged: benchmark-family holdout (50 splits, blind covariance refit)
mmlu (59 bench.)
open_llm (4 bench.)
math (2 bench.)
helm (9 bench.)
alpaca_eval (3 bench.)
arena_hard (1 bench.)
livebench (3 bench.)
wildbench (11 bench.)
mt_bench (8 bench., not in 'all')
no split where
every arm is scored
bigcode (14 bench.)
all families pooled: blind − random
all families pooled: aware − blind
R^2 on held-out family
paired ΔR^2
selected benchmarks k
Mutual Info (Alg. 2)
Entropy (Alg. 1)
Greedy trace min.
PCA subset (CSSP)
Hub correlation
Facility location
Random
blind (selection without F)
aware (objective includes F)