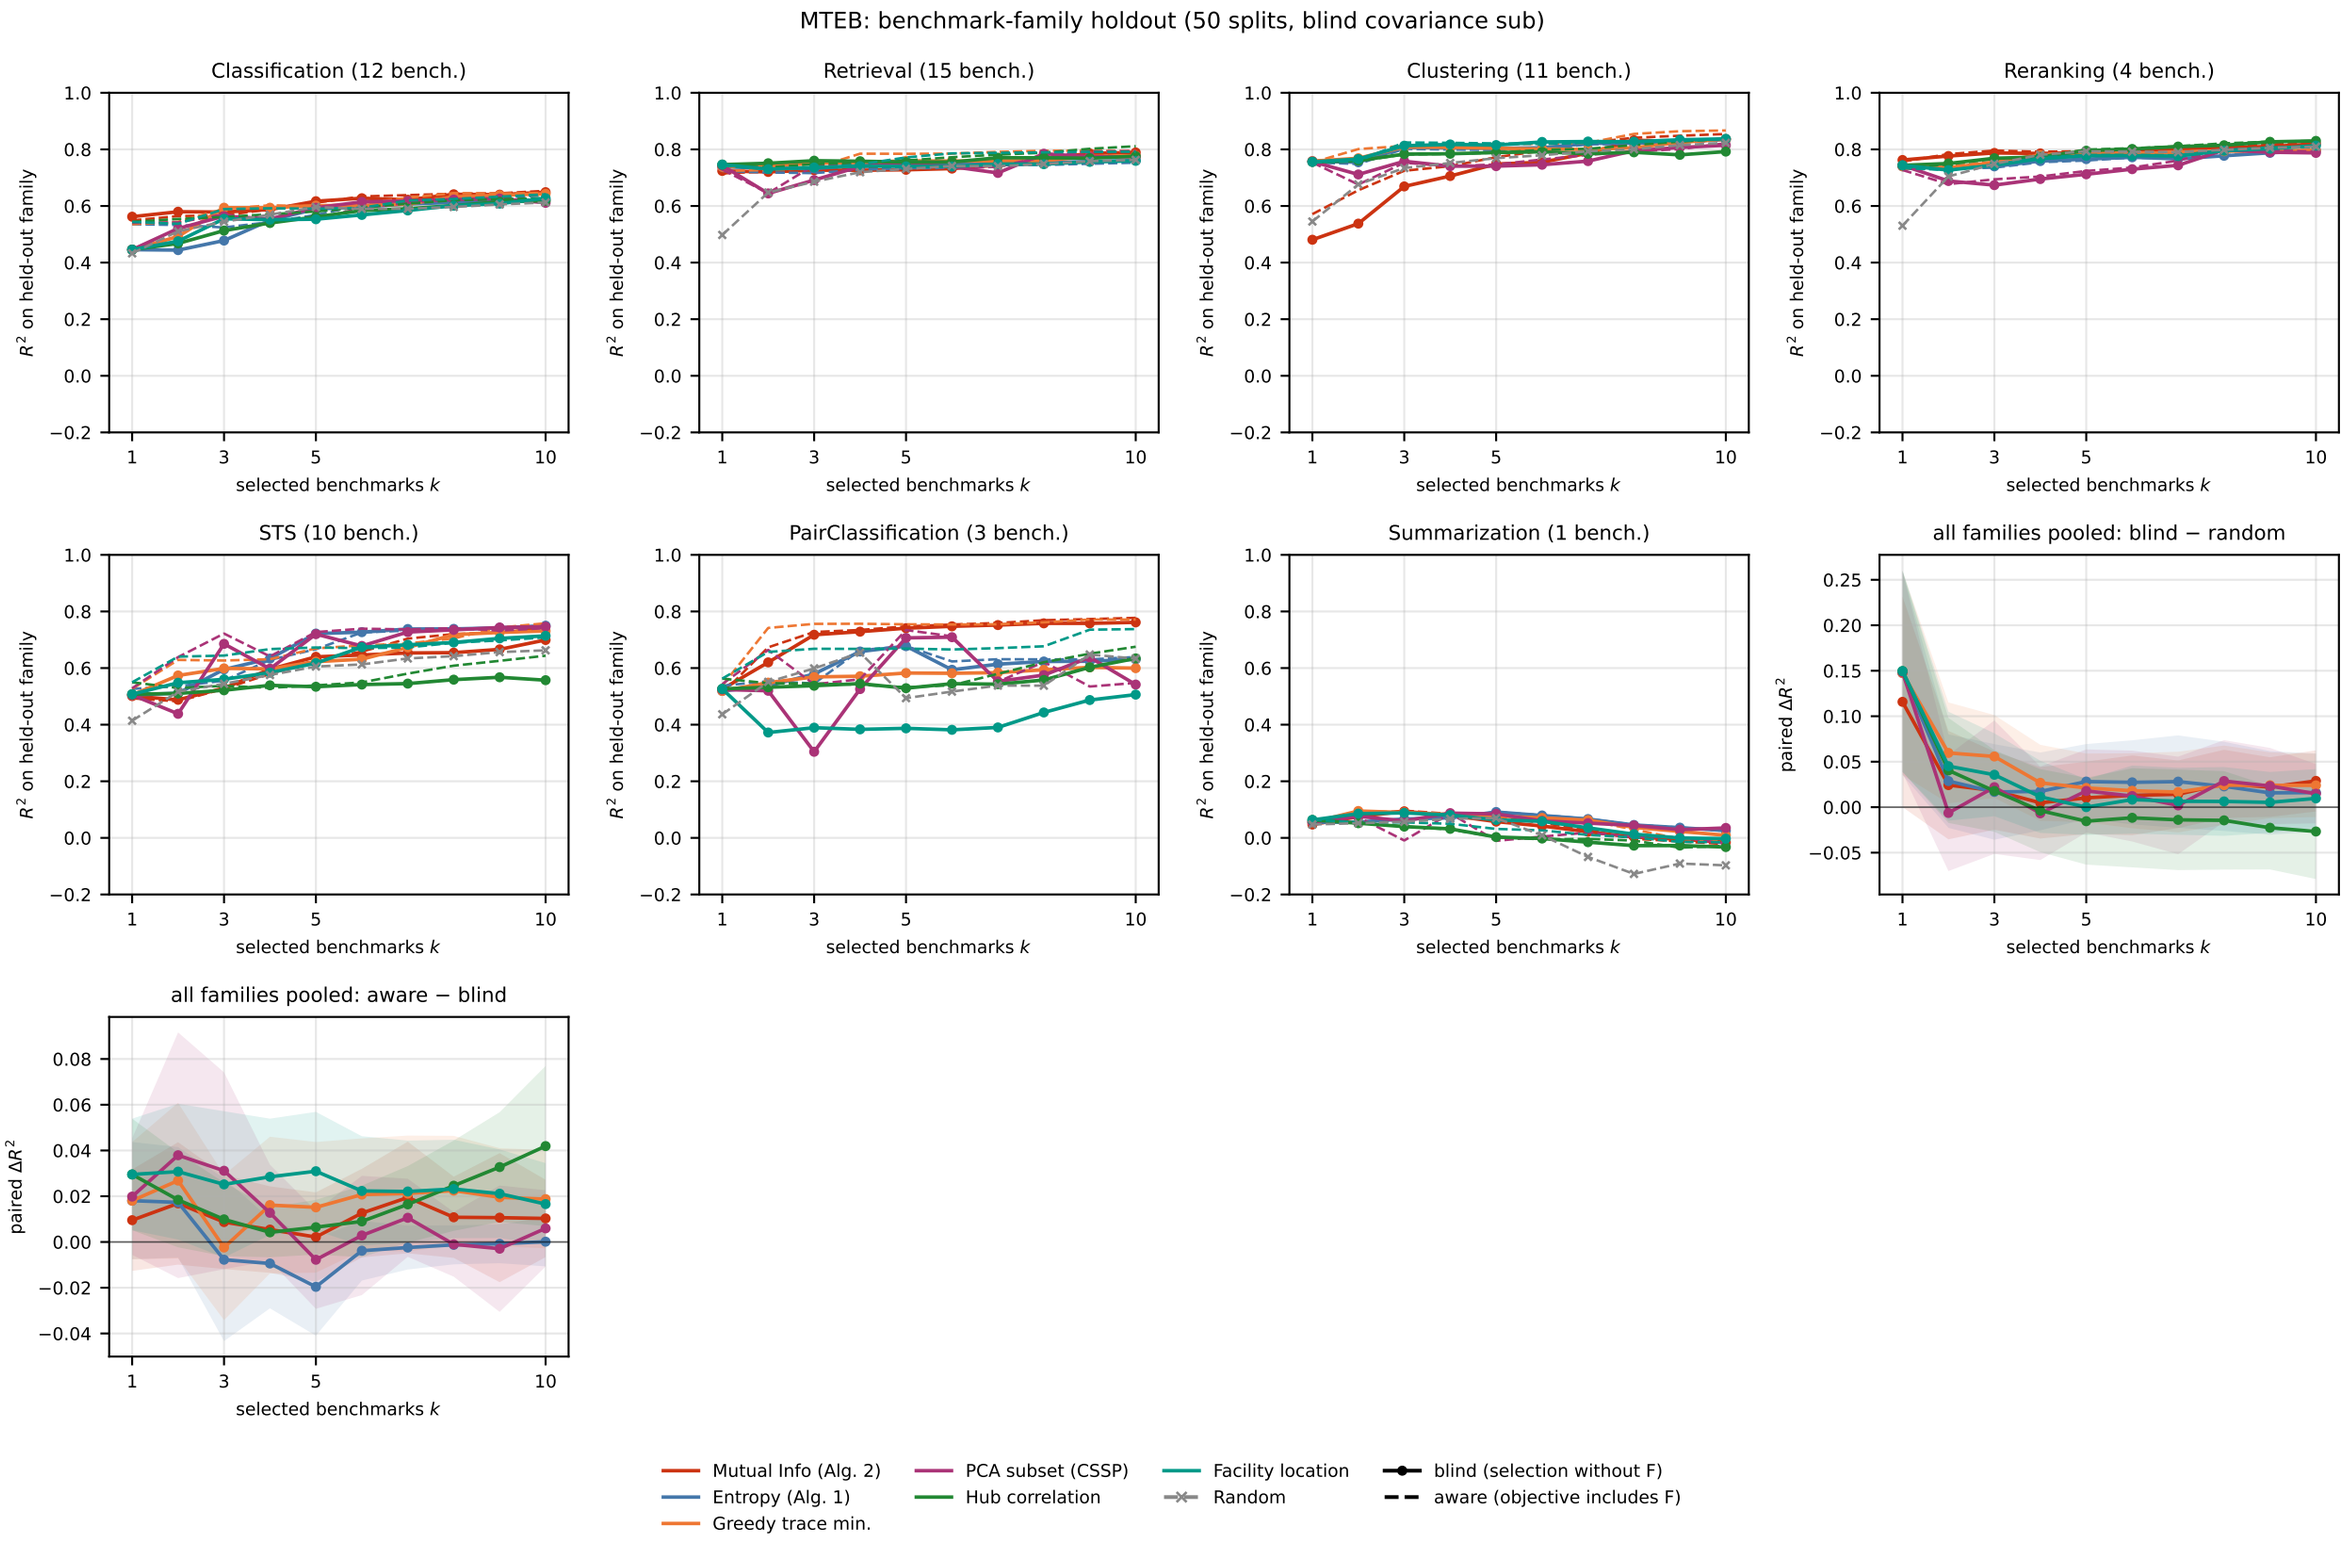

MTEB: benchmark-family holdout (50 splits, blind covariance sub)
Classification (12 bench.)
Retrieval (15 bench.)
Clustering (11 bench.)
Reranking (4 bench.)
STS (10 bench.)
PairClassification (3 bench.)
Summarization (1 bench.)
all families pooled: blind − random
all families pooled: aware − blind
R^2 on held-out family
paired ΔR^2
selected benchmarks k
Mutual Info (Alg. 2)
Entropy (Alg. 1)
Greedy trace min.
PCA subset (CSSP)
Hub correlation
Facility location
Random
blind (selection without F)
aware (objective includes F)