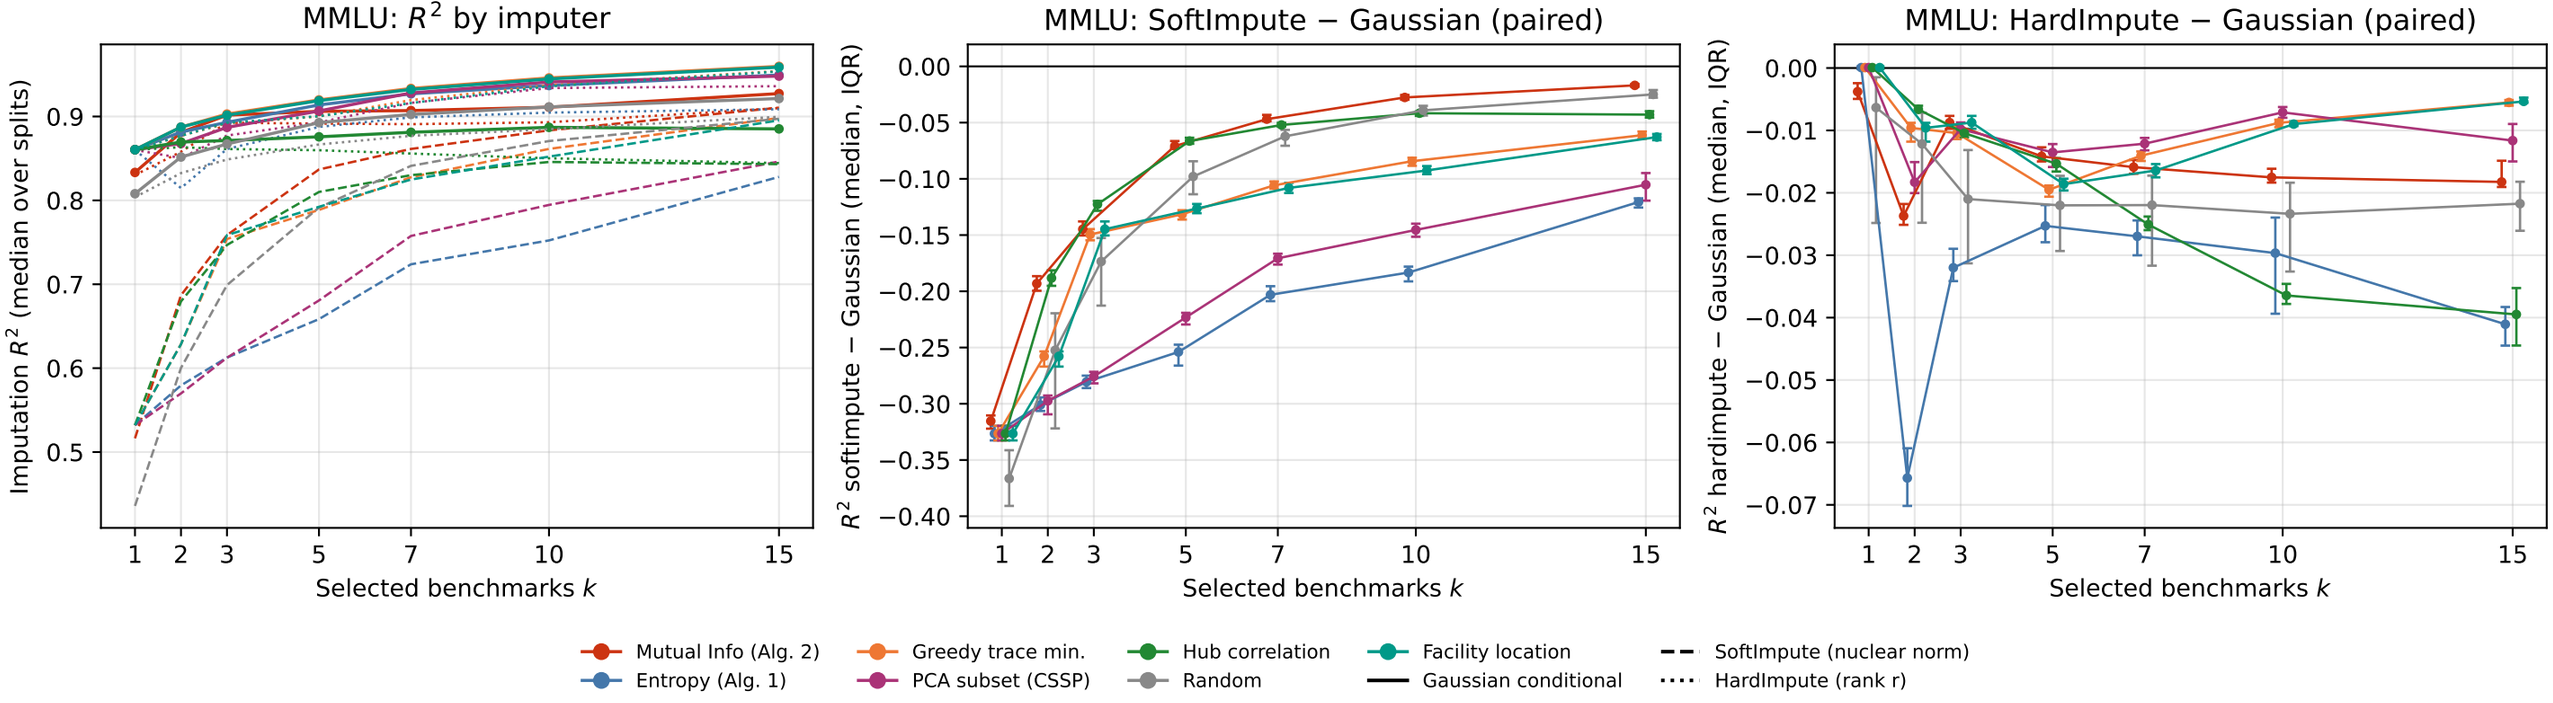
MMLU: R^2 by imputer
Imputation R^2 (median over splits)
Selected benchmarks k
MMLU: SoftImpute − Gaussian (paired)
R^2 softimpute − Gaussian (median, IQR)
Selected benchmarks k
MMLU: HardImpute − Gaussian (paired)
R^2 hardimpute − Gaussian (median, IQR)
Selected benchmarks k
Mutual Info (Alg. 2)
Entropy (Alg. 1)
Greedy trace min.
PCA subset (CSSP)
Hub correlation
Random
Facility location
Gaussian conditional
SoftImpute (nuclear norm)
HardImpute (rank r)