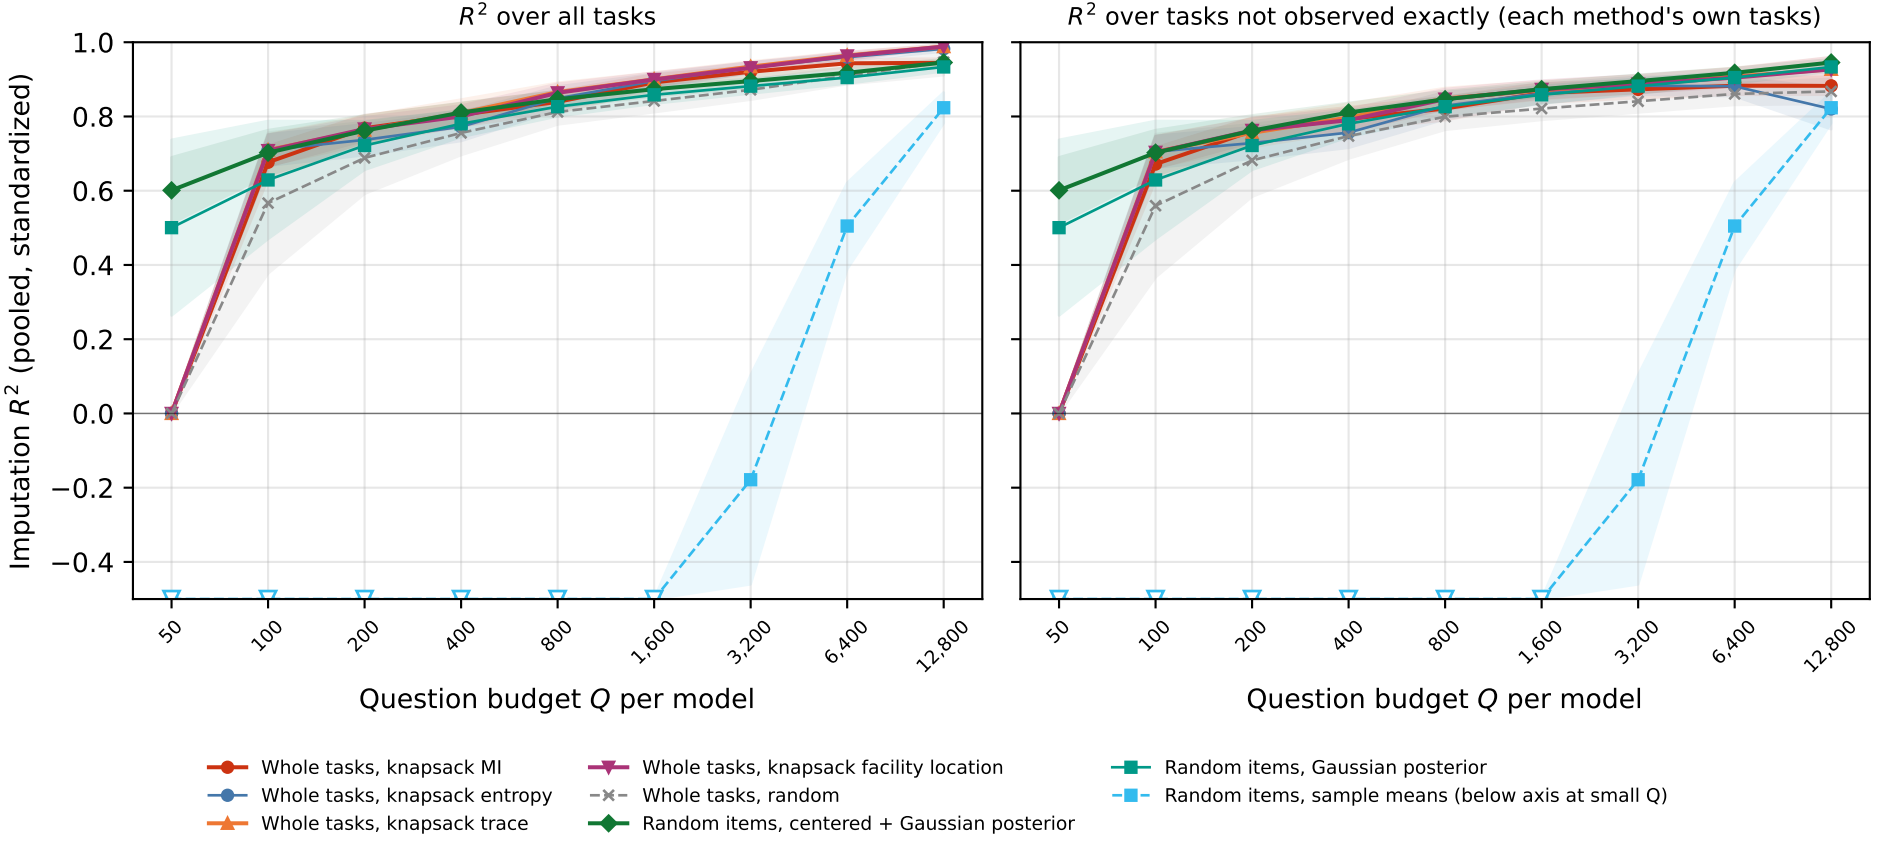
R^2 over all tasks
R^2 over tasks not observed exactly (each method's own tasks)
Imputation R^2 (pooled, standardized)
1.0
0.8
0.6
0.4
0.2
0.0
−0.2
−0.4
50
100
200
400
800
1,600
3,200
6,400
12,800
Question budget Q per model
Whole tasks, knapsack MI
Whole tasks, knapsack entropy
Whole tasks, knapsack trace
Whole tasks, knapsack facility location
Whole tasks, random
Random items, centered + Gaussian posterior
Random items, Gaussian posterior
Random items, sample means (below axis at small Q)