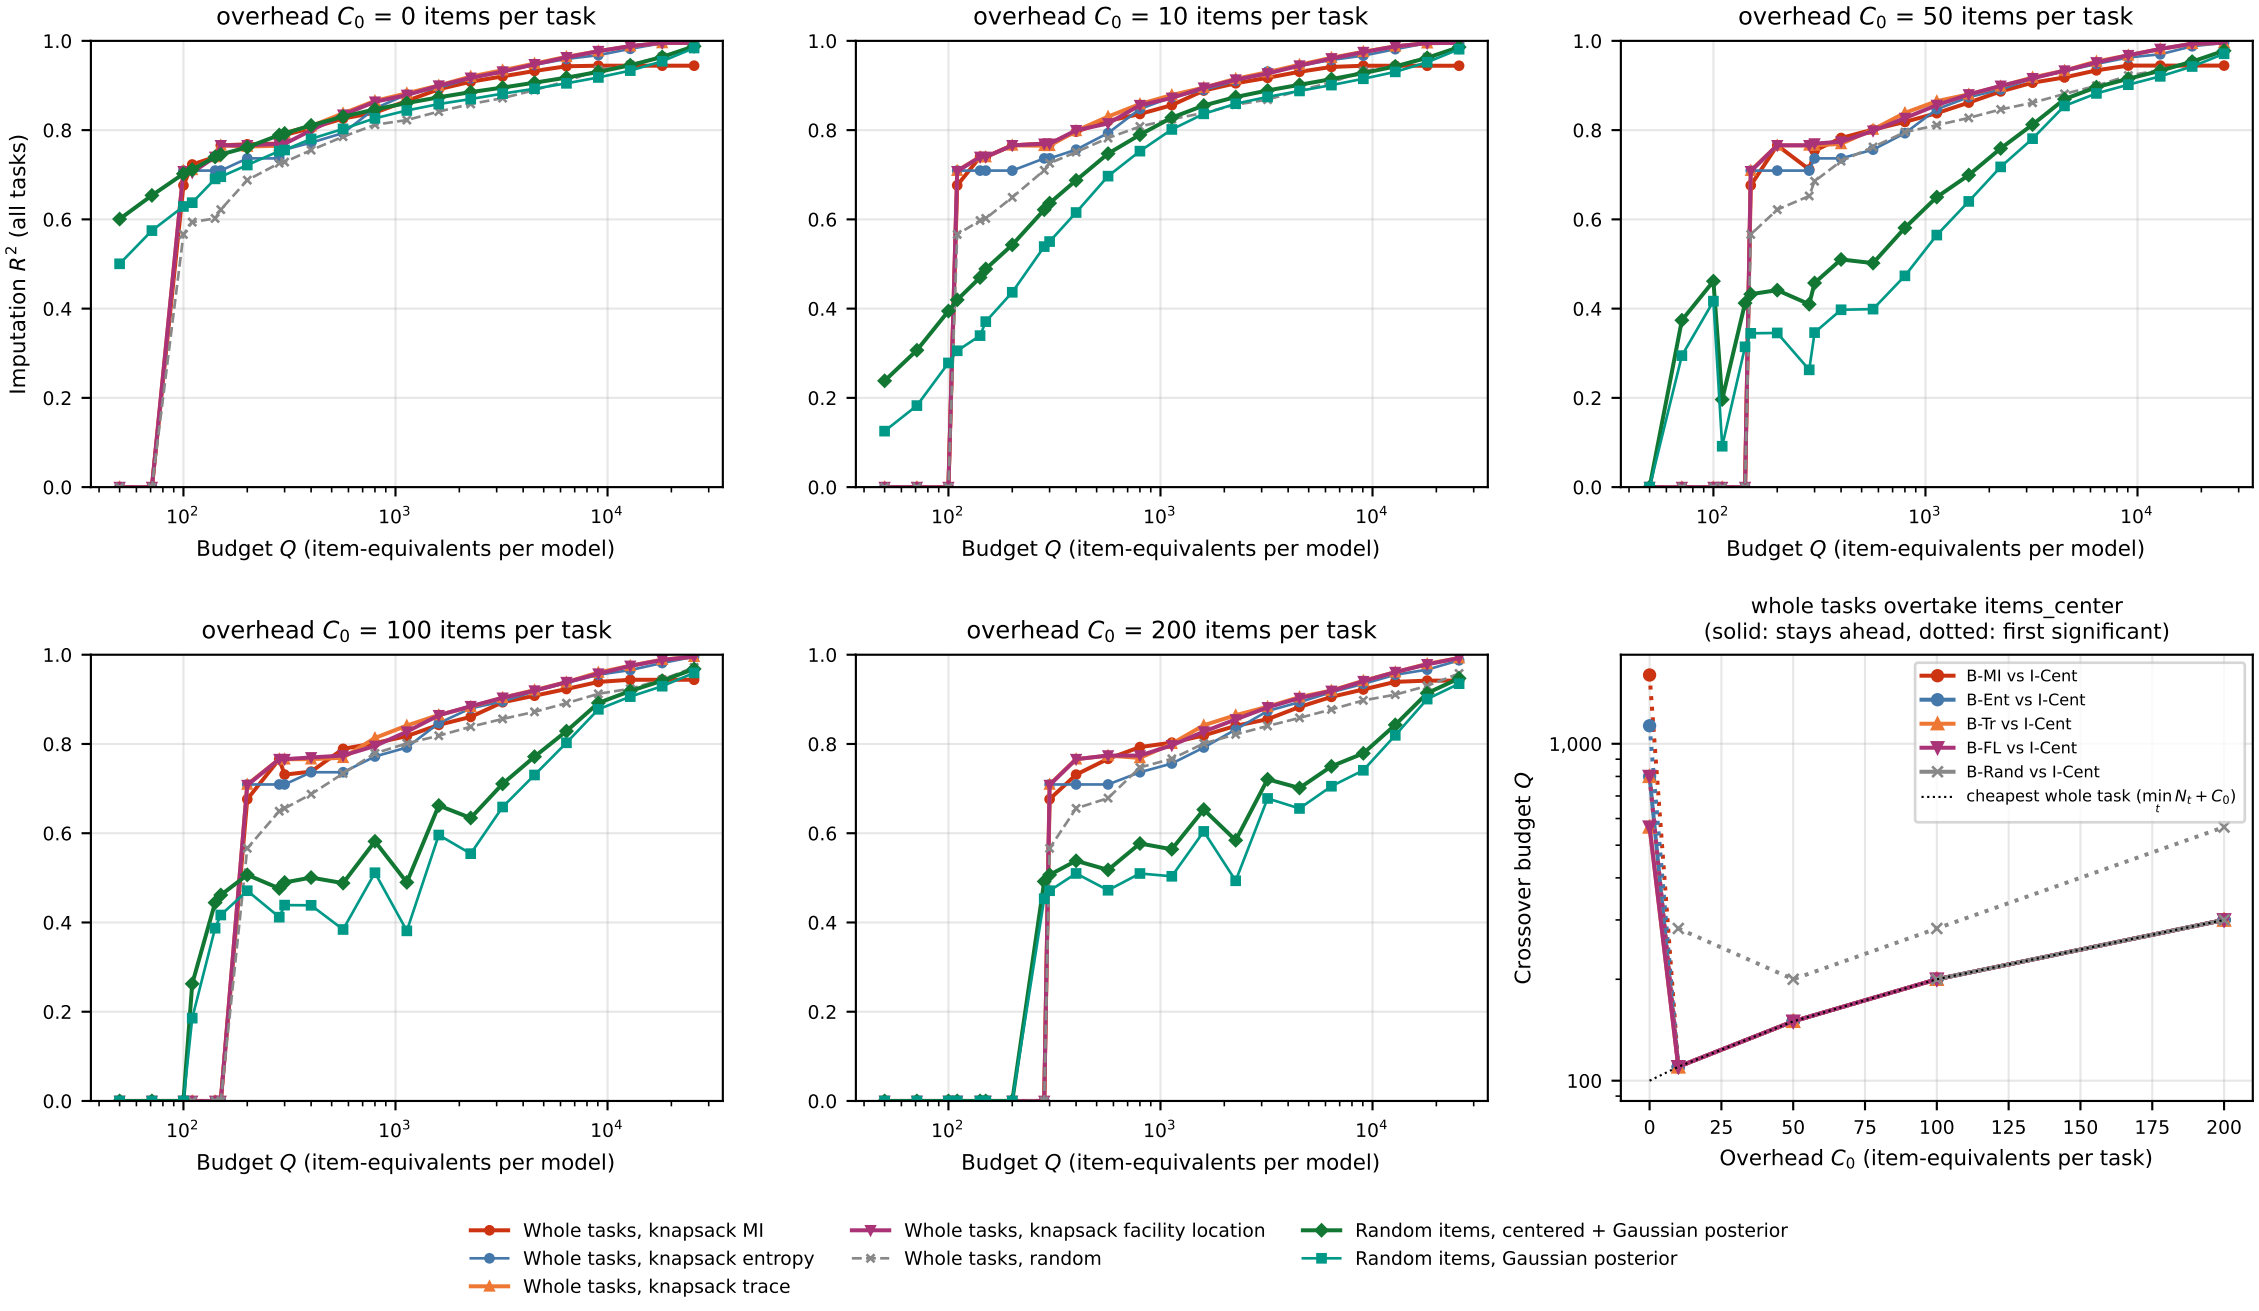
overhead C_0 = 0 items per task
overhead C_0 = 10 items per task
overhead C_0 = 50 items per task
overhead C_0 = 100 items per task
overhead C_0 = 200 items per task
Imputation R^2 (all tasks)
Budget Q (item-equivalents per model)
whole tasks overtake items_center
(solid: stays ahead, dotted: first significant)
Crossover budget Q
Overhead C_0 (item-equivalents per task)
B-MI vs I-Cent
B-Ent vs I-Cent
B-Tr vs I-Cent
B-FL vs I-Cent
B-Rand vs I-Cent
cheapest whole task ($\min_t N_t + C_0$)
Whole tasks, knapsack MI
Whole tasks, knapsack entropy
Whole tasks, knapsack trace
Whole tasks, knapsack facility location
Whole tasks, random
Random items, centered + Gaussian posterior
Random items, Gaussian posterior