

SpyREST in Action: An Automated RESTful API Documentation Tool

S M Sohan, Craig Anslow, and Frank Maurer

Department of Computer Science

University of Calgary

Calgary, Alberta T2N 1N4

Email: {smsohan, craig.anslow, frank.maurer}@ucalgary.ca

Abstract—RESTful APIs are often manually documented. As a result, the process is both expensive and error-prone to maintain the documentation of RESTful APIs over time. In this demonstration paper, we present SpyREST as an automated software as a service tool that can be used to document RESTful APIs. SpyREST leverages a HTTP Proxy server to intercept real API calls to automatically collect and generate RESTful API documentation by synthesizing HTTP traffic involved in API calls. SpyREST provides an automated yet customizable documentation solutions for RESTful APIs. The generated documentation includes both the API references as well as executable API examples and collaboration features. RESTful API developers can use SpyREST to auto generate and publish documentation for their APIs instead of using a manual approach.

I. OVERVIEW

A. How SpyREST Works?

SpyREST is a web-based software as a service tool that can be accessed at <http://SpyREST.com>. To auto-generate documentation for RESTful APIs, SpyREST relies on HTTP traffic information captured while example API calls are made using a HTTP proxy. The high level process can be described as a 3 step process: API developers make example API calls using a HTTP proxy server, the HTTP proxy server captures the HTTP headers, request and response data, the collected data is synthesized and presented on a web application.

The proxy server used in SpyREST is a “value-added” one specialized for RESTful API documentation. A typical HTTP proxy server can intercept and record the HTTP traffic for example API calls but further processing is required to generate a usable RESTful API documentation out of it. For example, API reference documentations need to be version aware so that the documentation can clearly refer to the relevant API versions. To provide human readable description to the example API calls, relevant information needs to be captured in addition to the raw HTTP traffic. Post processing is required to generate the structure of request and response payloads by parsing and consolidating raw HTTP data from multiple example API calls since the optional fields may not be obvious when looked at individual example calls.

To generate usable documentation, SpyREST automatically parses the captured HTTP request and response data and presents summary tables showing the structure for HTTP query parameters, headers, request and response data. For each field, SpyREST displays the name of the field, example values and automatically inferred data type information such

as integer, date time, etc. To reduce verbosity from large API responses, SpyREST automatically strips large responses to only show representative samples from repeated values in arrays. SpyREST does not capture and strip off any authorization header used in the example API calls to prevent confidential information from being part of the documentation.

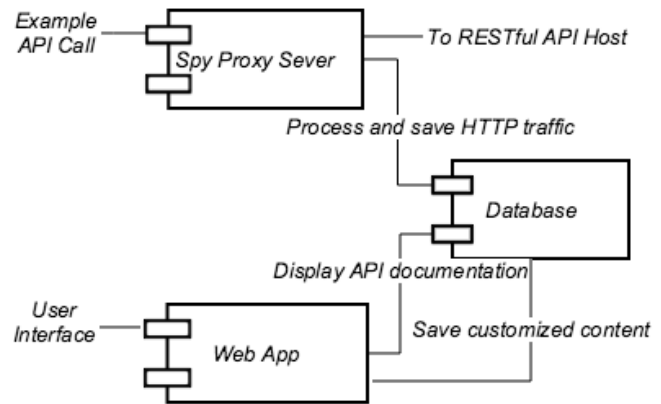


Fig. 1: SpyREST Component Diagram

By using a HTTP proxy server, SpyREST enables the documentation of different RESTful APIs independent of the implementation technology behind the APIs. Since SpyREST is offered as a software as a service tool, it can be used as a reusable platform for generating and publishing documentation of many different RESTful APIs. When isolation is desired, SpyREST can also be used as a self-hosted tool. SpyREST is released as an open-source product and for self-hosted solutions it can be customized to fit unique requirements.

The web interface of SpyREST provides a hierarchical navigation for RESTful API documentation as follows: each API host has one or more API versions, each API version has one or more resources, each API resource has one or more API actions, each API action may have a structure of HTTP query parameters, headers, request and response payloads as well as many API examples, each API example may have HTTP query parameters, headers, request and response payloads. The web interface also provides a wiki-like editor to allow API developers to override auto generated API documentation using Markdown syntax. On each page, the web interface includes collaboration features so that API developers can discuss questions and collect feedbacks about specific API doc-

Home » [api.github.com](#) Versions » v3 Resources »
[Notifications](#) » GET /notifications

GET /notifications

Description 

Query Parameters

Name	Type	Example Values	Description
<code>since</code>	String (Time ISO8601)	2014-01-01T00:00:00Z	
<code>participating</code>	Boolean	true	
<code>all</code>	Boolean	true	

Response Fields

Name	Type	Description
	Array	
<code>[],id</code>	String	
<code>[],unread</code>	Boolean	
<code>[],reason</code>	String	
<code>[],updated_at</code>	String (Time ISO8601)	

(a) API documentation summary section

Examples

List notifications since a ...

List all unread notificatio...

List notifications only whe...

List all notifications incl...

List all unread notifications for the current user, grouped by repository.

Recorded at

2015-05-14 18:20:49 UTC

Try with cURL

Request URL

Requires Authorization

GET /notifications

Request Headers

```
authorization: FILTERED
content-type: application/json
accept: application/vnd.github.v3+json
user-agent: curl/7.37.1
```

Response Headers

```
transfer-encoding: chunked
```

(b) API documentation examples section

Fig. 2: SpyREST Screen shots showing auto generated API documentation

umentation pages. For each API example, SpyREST generates a cURL command that can be run to execute the API examples without writing any code.

B. Implementation

SpyREST is composed of three main components as shown in Fig. 1. The “Spy” component is the “value-added” HTTP proxy server. This component is written using NodeJS. The Spy has internal logic to decode HTTP request URL and headers and auto-detect API versions for the commonly used version identifier patterns. Table I shows examples of auto detected versions from accept HTTP header and URL.

The Spy also parses the URL to auto detect the API resources, API actions and query parameters for the example API calls. For example, given an example API call made to *GET https://api.github.com/repositories?since=100*, the Spy automatically detects the API resource as *repositories*, the API action as *GET /repositories*, and a query parameter *since* with an example value of 100.

TABLE I: Examples of auto detected versions

Type	Example Value	Detected version
“accept” header	application/vnd.ex.ca.v3+json	v3
“accept” header	application/vnd.ex.ca.v3.1+json	v3.1
URL	/v2/x	v2
URL	/v2.1/x	v2.1
URL	/v2.1-pre/users	v2.1-pre

Even though the auto detected API version, resource and actions cover the commonly observed patterns, API developers can override the auto-detections of any of these fields by using custom Spy specific HTTP headers when making the example API calls. The HTTP headers *x-spy-rest-version*, *x-spy-rest-resource*, and *x-spy-rest-action* can be used to override auto-detection of these respective fields. Additionally, API developers can use *x-spy-rest-desc* header to attach human readable descriptions for each API example so that the web interface can tag the examples against meaningful descriptions.

The Web App component is implemented using Ruby on Rails. To allow RESTful API developers to edit auto generated documentation, it uses the popular GitHub Flavored Markdown. To facilitate collaboration across all the API documentation pages, the Web App uses Disqus, a popular third-party collaboration service.

The Spy writes the captured and synthesized API example data into a MongoDB database. The Web App reads and saves custom edits on the same database. The technology choice behind for our implementation of SpyREST components is based on our past experience of using these tools but the concepts behind SpyREST is not dependent on the aforementioned technology choice. As a proof of concept, SpyREST only analyzes JSON based API request and response payloads because of its popularity among modern day RESTful APIs.

All three SpyREST components are released as docker containers. Docker is a popular lightweight visualization solution that can either be hosted in-house or using many of the popular cloud hosting providers. The public instance of SpyREST (<http://SpyREST.com>) has the three components in three separate docker containers running on a single linux server with 512MB memory, 1 core processor, and 20GB disk space.

II. USE CASES

In this section, we describe two different use cases from the perspective of initially generating a RESTful API documentation for the first time and maintaining the documentation over time as the API evolves.

A. Initial API Documentation

When releasing a RESTful API, API developers need to publish the API documentation so that other developers can use the APIs. For demonstration, let's consider generating a documentation for the "GET /notifications (List your notifications)" API that is exposed by GitHub¹. Using this API a developer can paginate through the list of all public repositories within GitHub. This API action takes an optional parameter "since" that can be used to specify a time filter.

To manually generate a documentation for this API, a developer needs to follow these steps: 1) make example authenticated API calls to *GET/notifications*, 2) record the HTTP headers with request and response data, 3) remove duplicate information, 4) remove authentication information, 5) format and stylize the reduced information, 6) add custom content, 7) organize multiple formatted documents together on a web site with navigation, and 8) publish the documentation website. This step needs to be repeated for each of the API endpoints. Since this is a manual process, there is also a room for human errors in the aforementioned steps. SpyREST aims to automate all but steps 1 and 6 of this process.

To use SpyREST for auto-generating the documentation of this API, an API developer only needs to make the example API calls via the Spy proxy server with custom HTTP headers for human readable descriptions for the API examples. If desired, custom edits to the auto generated documentation

may be made by using the Markdown editor. Fig 2 shows a partial screen shot of SpyREST generated documentation for this API given 4 example API calls. SpyREST fully automates the steps 2-5, and 7-8 and so that API developers only need to focus on finding good example API calls and describing the complex rules about APIs that are not otherwise derivable from looking at the request and response data alone. In addition to automating the RESTful API documentation process, SpyREST also displays a cURL command for each recorded API example so that developers can try the API examples without having to write any code. In page collaboration allows the users to discuss API related questions and find past conversation all in one place. In this specific example, we see the official documentation of *GET/notifications* provided by GitHub was outdated and missing several fields (e.g. *subscription_url*, *repository.releases_url*, *repository.labels_url*, *repository.notifications_url* and 28 more) that are automatically documented by SpyREST. Users can also customize the auto generated summary information using a Markdown based editor on SpyREST as shown in Fig. 3.

GET /notifications

Description

Write

Preview

Describe this action in markdown

```
[].subject.url[String]
[].subject.latest_comment_url[String]
[].subject.type[String]
[].repository.id[Integer]
[].repository.name[String]
[].repository.full_name[String]
[].repository.owner.login[String]
```

Update

Fig. 3: SpyREST Markdown Editor

B. Maintaining API Documentation for evolving APIs

Maintenance of RESTful API documentation is another use case of interest since the documentation for RESTful APIs need to evolve with the APIs to reflect the updated information. The 8 steps mentioned previously need to be repeated every time any of the API objects changes when a manual process is followed. Since APIs continue to evolve throughout its lifetime, manually maintaining their documentation incurs further cost or causes the outdated documentation.

SpyREST automatically updates the recorded information for each example API call, so rerunning the API examples automatically updates the auto-generated documentation. To uniquely identify each example API call, the Spy computes a SHA1 based digital signature of example API call based on its API version, resource, URL and custom description. To replay the example API calls, API developers can use automated scripts so that once an API example is scripted, it can be run repeatedly. Moreover, the automated scripts can

¹<https://developer.github.com/v3/activity/notifications/#list-your-notifications>

Listing 1: Example API call using SpyREST

```

1 class Github
2
3   include HTTParty
4
5   base_uri 'https://api.github.com'
6   headers('Accept' => 'application/vnd.github.v3+
   json',
7     'User-Agent' => 'curl/7.37.1',
8     'content-type' => 'application/json',
9     'Authorization' => "token GITHUB_API_TOKEN"
10  )
11
12  host, port = 'spyrest.com', 9081
13  http_proxy host, port
14
15 end
16
17 describe 'Notifications' do
18
19   it 'List all notifications for the current user,
   where they are participating, since a time' do
20
21     response = Github.get '/notifications?all=true&
   participating=true&since=2014-01-01T00:00:00
   Z'
22     assert_equal 200, response.code
23   end
24
25 end

```

be written as functional tests where the generation of API documentation becomes a side-benefit of running the tests. Running the automated scripts to exercise the API examples frequently can prevent out of date API documentations as shown on the previous use case.

Listing 1 shows an example script written using Ruby based test framework Minitest. In this example script, the class *Github* is setup with connection information so that it uses the Spy proxy server to make example API calls. Then, on line 21 we make an example API call which automatically generates a documentation for the *GET/notifications* API action. The results of the API call can be used to test against expected results. Using this 25 line script a developer may generate the documentation for this API and auto-update the documentation by rerunning the script anytime the API changes while still getting test coverage.

III. DISCUSSION

With SpyREST we have aimed to provide an automated solution to the RESTful API documentation problem since a manual approach to generate and maintain RESTful API documentation is both expensive and error-prone. SpyREST offers several benefits over the existing API documentation tools. Most general purpose API documentation tools such as Javadoc extract documentation based on formatted comments from the source code. Since comments are not executable code, it requires manual effort to keep the comments updated as the underlying API changes. RESTful API documentation typically includes additional information about HTTP headers, request and response payloads as well as example API calls that are not natively supported by general purpose API documentation tools. Also, general purpose API documentation

tools are often programming language specific. SpyREST overcomes these limitations of code comments based API documentation tools by leveraging a “value-added” HTTP proxy server where executable API examples are converted into API documentation that can be used to document RESTful APIs independent of how the RESTful APIs are implemented.

SpyREST offers unique features compared to several commercially available RESTful API documentation services. Swagger and Blueprint are two popular software as a service tools for RESTful API documentation. The key difference between SpyREST and these tools is in the underlying approach used. These tools require the API developers to follow custom vendor specific API specification formats to describe the API objects. Once the APIs are described, the tools can auto-generate the documentations for the APIs. There is no automated tool support to generate the required API description in the vendor specific formats. Thus manual effort is required to produce the required API specifications and maintain it over time. SpyREST does not require on any intermediate API specification since data for documentation is sourced based on live API calls. This eliminates the need for an intermediate step. The commercially cannot be used as a self-hosted service. SpyREST can be used as a self-hosted service to document RESTful APIs that cannot be externally shared for confidentiality issues.

Using automated tests to generate documentation serves a dual purpose for maintaining a test suite since the documentation of the RESTful API becomes an artifact of execution of tests. This is a unique advantage of SpyREST over other API documentation tools that translate manually edited API descriptions into API documents instead of executing actual API calls.

We performed a preliminary evaluation of SpyREST by generating documentation of 25 RESTful API actions from 3 different products (Github.com, KISSMetrics.com, LiquidPlanner.com) using 272 lines of test code². Comparing SpyREST generated documents against the official documentation we found that the official documentation for 5 of the 25 API actions had outdated response information that didn’t match with the actual API responses as captured by SpyREST. This is an expected advantage of automation, since an updated documentation can be produced by replaying existing scripts instead of requiring any manual efforts.

A. Limitations

SpyREST is a proof of concept implementation for a novel RESTful API documentation technique that uses a “value-added” HTTP proxy server to automate an otherwise largely manual process. An evaluation with a large number of RESTful APIs as well as evaluation involving API developers is required to understand the strengths and weaknesses of SpyREST. The current implementation of SpyREST only works on JSON based RESTful APIs. SpyREST needs to be enhanced to support other data types such as XML, CSV, etc. SpyREST allows API developers to customize the the summary portion of the auto generated API documentation where the structure of the API elements are defined. Custom edits on the summary information sustain after subsequent replay of the

²https://github.com/smsohan/spyrest_examples

example API calls and as a result the summary may not reflect structural changes in the API objects unless custom edits are later reverted.

IV. RELATED WORK

Several papers have studied API documentation to understand and recommend requirements for effective API documentation tools. Robillard recommended the following requirements for API documentation: include good examples, be complete, support many complex usage scenarios, be conveniently organized, and include relevant design elements [1], [2]. Kuhn et al. discussed the importance of examples in API documentation as a key recommendation based on a survey of software developers using APIs [3]. Kuhn et al. identified trustworthiness, confidentiality, and limiting information overload as other key recommendations for API documentation. Hoffman et al. recommended providing executable test cases with API documentation [4]. Nasehi et al. recommended the use of wiki-like editing features for online API documentation to foster collaboration [5]. Parnin et al. and Chen et al. also recommended incorporating collaborative features with API documentations [6], [7]. Stepalina identified several benefits of using software as a service for API documentations as follows: cost effective yet powerful, platform agnostic and high accessibility, improved document quality, content reuse, automated tools, and organization of robust and scalable documentation process [8].

Several papers have discussed the topic of RESTful API documentation. Espinha et al. found most RESTful API documentations to be less reliable because they are manually generated [9]. Danielsen et al. proposed a vocabulary called Web Interface Language (WiL) for documenting RESTful APIs so that different APIs can be described using a standard terminology [10]. RESTdesc, RDDDL and hRESTS have been proposed as custom specifications to describe RESTful APIs [11]–[13]. For RESTful API documentation, Myers et al. recommended providing a consistent look-and-feel and an overall map comprising of both text and diagrams, providing a browsing experience with breadcrumb trail following a hierarchy, an effective search interface, providing example code and a way to exercise the examples without writing code.

In addition to the research papers, several tools exist that are used for API documentation. Tools similar to JavaDoc³, RDoc⁴, etc. exist for documenting local APIs based on formatted comments from the source code. For RESTful API documentation, Swagger⁵, RAML⁶ and Blueprint⁷ provide custom API specification formats that can be used to describe RESTful APIs.

Our work on SpyREST is a result of following the recommendations as found on the aforementioned related work as well as critically analyzing existing API documentation tools to identify the unmet requirements.

V. CONCLUSION

In this paper we have presented SpyREST as a prototype tool to demonstrate an automated solution to RESTful API documentation. Our main contribution is a novel technique that leverages a HTTP proxy server to intercept and automatically extract API documentation from example API calls. SpyREST provides an integrated solution for RESTful API documentation by providing features for automated generation, customization, maintenance, collaboration and executable examples under a single cloud based software as a service platform. By automating the repeated parts of the RESTful API documentation process, it provides a better alternative to the manual process. API developers can use SpyREST to save the time and cost associated with RESTful API documentation. The future work on SpyREST will involve performing a quantitative evaluation by using SpyREST to auto generate documentation for a large set of RESTful APIs as well as involving API developers to collect qualitative feedback about the strengths and weaknesses of SpyREST. The outcome of the evaluations will be used to enhance SpyREST in future work.

REFERENCES

- [1] M. Robillard, “What makes APIs hard to learn? the answers of developers,” *Software, IEEE*, vol. PP, no. 99, pp. 1–1, 2011.
- [2] M. Robillard and R. DeLine, “A field study of API learning obstacles,” *Empirical Software Engineering*, vol. 16, no. 6, pp. 703–732, 2011.
- [3] A. Kuhn and R. DeLine, “On designing better tools for learning APIs,” in *Search-Driven Development - Users, Infrastructure, Tools and Evaluation (SUITE)*, 2012 ICSE Workshop on, 2012, pp. 27–30.
- [4] D. Hoffman and P. Strooper, “API documentation with executable examples,” *Journal of Systems and Software*, vol. 66, no. 2, pp. 143 – 156, 2003.
- [5] S. M. Nasehi, J. Sillito, F. Maurer, and C. Burns, “What makes a good code example?: A study of programming Q&A in StackOverflow,” in *IEEE International Conference on Software Maintenance*, 2012, pp. 25–34.
- [6] C. Parnin and C. Treude, “Measuring API documentation on the web,” in *Proceedings of the International Workshop on Web 2.0 for Software Engineering*, ser. Web2SE ’11. ACM, 2011, pp. 25–30.
- [7] C. Chen and K. Zhang, “Who asked what: Integrating crowdsourced faqs into api documentation,” in *Companion Proceedings of the International Conference on Software Engineering*, ser. ICSE Companion 2014. ACM, 2014, pp. 456–459.
- [8] E. Stepalina, “SaaS support in software documentation systems,” in *Software Engineering Conference (CEE-SECR)*, 2010 6th Central and Eastern European, 2010, pp. 192–197.
- [9] T. Espinha, A. Zaidman, and H.-G. Gross, “Web API growing pains: Stories from client developers and their code,” *IEEE*, 2014, pp. 84–93.
- [10] P. Danielsen and A. Jeffrey, “Validation and interactivity of web API documentation,” in *International Conference on Web Services*. IEEE, 2013, pp. 523–530.
- [11] R. Verborgh, T. Steiner, D. Van Deursen, S. Coppens, J. G. Vallés, and R. Van de Walle, “Functional descriptions as the bridge between hypermedia APIs and the semantic web,” in *Proceedings of the Third International Workshop on RESTful Design*, ser. WS-REST ’12. ACM, 2012, pp. 33–40.
- [12] J. Mangler, P. Beran, and E. Schikuta, “On the origin of services using riddl for description, evolution and composition of restful services,” in *Cluster, Cloud and Grid Computing (CCGrid)*, *IEEE/ACM International Conference on*, 2010, pp. 505–508.
- [13] J. Kopecky, K. Gomadam, and T. Vitvar, “hrests: An html microformat for describing restful web services,” in *Proc. of International Conference on Web Intelligence and Intelligent Agent Technology (WI-IAT)*, vol. 1, 2008, pp. 619–625.

³<http://www.oracle.com/technetwork/java/javase/documentation/index-jsp-135444.html>

⁴<http://rdoc.sourceforge.net/>

⁵<https://github.com/swagger-api/swagger-spec/blob/master/versions/2.0.md>

⁶<http://raml.org/spec.html>

⁷<https://github.com/apiaryio/api-blueprint>