TRIPORY

UX Flow + Wireframe

Plan the trip. Live the moment. Keep the story.

A complete UX working document translating the agreed product concept and Information Architecture into user journeys, task flows, screen responsibilities, interaction logic, and low-fidelity mobile wireframes.



Document	UX Flow + Wireframe
Product	Tripory
Platform	Mobile-first
Status	UX foundation / low-fidelity
Version	1.0 • October 2026

1. Executive Summary

Tripory is a personal travel companion, not a generic travel planner. The trip is the primary object and the UX follows the complete journey from preparation to memory.

Packing, item tracking, destination context, moment capture, return checking, and memory are states of the same trip—not disconnected utilities.

Core loop	Primary UX responsibility
Create Trip	Establish trip context, dates, and destinations.
Destinations	Create ordered place-based context.
Items	Connect reusable personal belongings to the trip.
Pack	Turn planned items into a preparation checklist.
Go	Switch from planning to active-trip context.
Actual Items	Record what was actually used.
Moments	Capture photo + note against trip/destination.
Return Check	Confirm belongings come home.
Close → Memory	Turn completed trip into an accessible story.

Design thesis: the traveler should not have to decide which feature to use. The current trip state should make the next useful action obvious.

2. UX Principles & Design Rules

Principle	UX implication
Trip is the primary object	Users enter a trip first; supporting objects remain contextual.
Context before utility	Prioritize the next relevant action for the current trip state.
Planned ≠ Actual	A planned item is never assumed to have been used.
Progressive state	Items move through PLANNED → PACKED → USED → RETURNED.
Destination as context	Destinations organize planned items, actual usage, and moments.
Capture is frictionless	Moment capture should take only a few intentional actions.
Return is first-class	The product explicitly helps bring belongings home.
Memory is the outcome	Completed trips become meaningful stories.
Local-first behavior	Core trip state remains coherent with limited connectivity.

Primary mental model



Trip contains Destinations; reusable Items become trip-specific through usage; Moments attach to trip/destination; Return closes the physical loop.

3. End-to-End UX Flow

The main flow is the backbone. Secondary flows branch from trip context instead of becoming independent journeys.



Stage	User intent	System response	Primary CTA
Create	Start a journey.	Create trip container.	Create trip
Destinations	Define where I go.	Build ordered context.	Add destination
Items	Decide what I need.	Reuse personal items.	Add to trip
Pack	Prepare.	Track packing completion.	Mark packed
Go	Start traveling.	Activate trip context.	Start trip
Actual	Track real usage.	Record usage by destination.	Mark used
Moments	Remember the experience.	Save photo/note.	Save moment
Return	Bring things home.	Verify belongings.	Mark returned
Close	Finish journey.	Generate memory.	Close trip

4. Primary User Flow — Puncak Example

The validation scenario is a package trip to Puncak with three destinations: Kebun Teh → Pemandian Air Panas → Cafe Bukit.

Before the trip



The traveler creates the trip, adds the three destinations in sequence, selects reusable items, and prepares until ready.

During the trip



The app shifts from checklist manager to contextual companion. The current destination becomes the center of the experience.

After the trip



The trip does not silently disappear into history: the physical state of belongings is resolved first.

5. Detailed Task Flows

5.1 Create Trip

Step	Screen / action	User decision	Success condition
1	Home → Create Trip	Start new journey.	Trip form opens.
2	Trip details	Name + dates + optional cover.	Draft created.
3	Destinations	Add and order places.	At least one destination.
4	Items	Reuse or add items.	Planned items exist.
5	Review	Check summary.	User confirms.
6	Trip Detail	Enter preparation workspace.	Status = PREPARING.

5.2 Packing

Trigger	Flow	Exit condition
Preparation	Trip Detail → Packing → checklist → mark packed/unpacked	Critical items resolved or intentionally left p
Item change	Item → detail → update/remove	Trip plan stays synchronized.

5.3 In-Trip

Trigger	Flow	Exit condition
Start	Go → active trip → current destination	Status = ACTIVE.
Arrival	Destination → Actual Items → mark used	Usage recorded.
Moment	Destination → Capture → photo/note → save	Moment appears in trip.
Move	Next destination	Previous context preserved.

5.4 Return & Memory

Trigger	Flow	Exit condition
End	Return → checklist → returned	Items resolved.
Close	Close Trip → confirmation	Status = COMPLETED.
Remember	Memory → trip story	Story is revisitable.

6. Navigation & Screen Hierarchy

The mobile IA uses Home, Trips, Items, More. A trip is a contextual workspace with its own navigation.

Level	Area	Purpose
Global	Home	Next action, active trip, recent memories.
Global	Trips	Upcoming, active, completed trips.
Global	Items	Reusable personal items.
Global	More	Settings and secondary functions.
Trip	Overview	Status, progress, next action, summary.
Trip	Destinations	Ordered route and destination workspaces.
Trip	Packing	Pre-departure checklist.
Trip	Memories	Moments and trip story.
Trip	Return	Post-trip return checklist.

Context rule

After entering a trip, keep the trip context persistent. Adding a moment, marking an item used, or checking return status should not require repeatedly selecting the trip.

7. Screen Inventory


ID	Screen	Priority	Role
S01	Home	P0	Entry point + next action.
S02	Trips List	P0	Upcoming / active / completed trips.
S03	Create Trip	P0	Create core trip object.
S04	Trip Detail / Overview	P0	Trip control center.
S05	Destination Detail	P0	Destination-specific context.
S06	Packing Checklist	P0	Prepare items.
S07	Item Library	P0	Reusable item management.
S08	Trip Item Detail	P1	Trip-specific item state.
S09	Actual Items	P0	Record actual usage.
S10	Capture Moment	P0	Photo + note capture.
S11	Moments / Memory	P0	Review trip story.
S12	Return Check	P0	Confirm belongings return.
S13	Close Trip	P0	Resolve and archive trip.

P0 = required for the core product loop. P1 = supporting detail that can be simplified in an MVP.

8. Low-Fidelity Wireframes


These wireframes define information hierarchy, interaction zones, and state transitions. They are intentionally not visual UI specifications.

8.1 Home — Next Action First

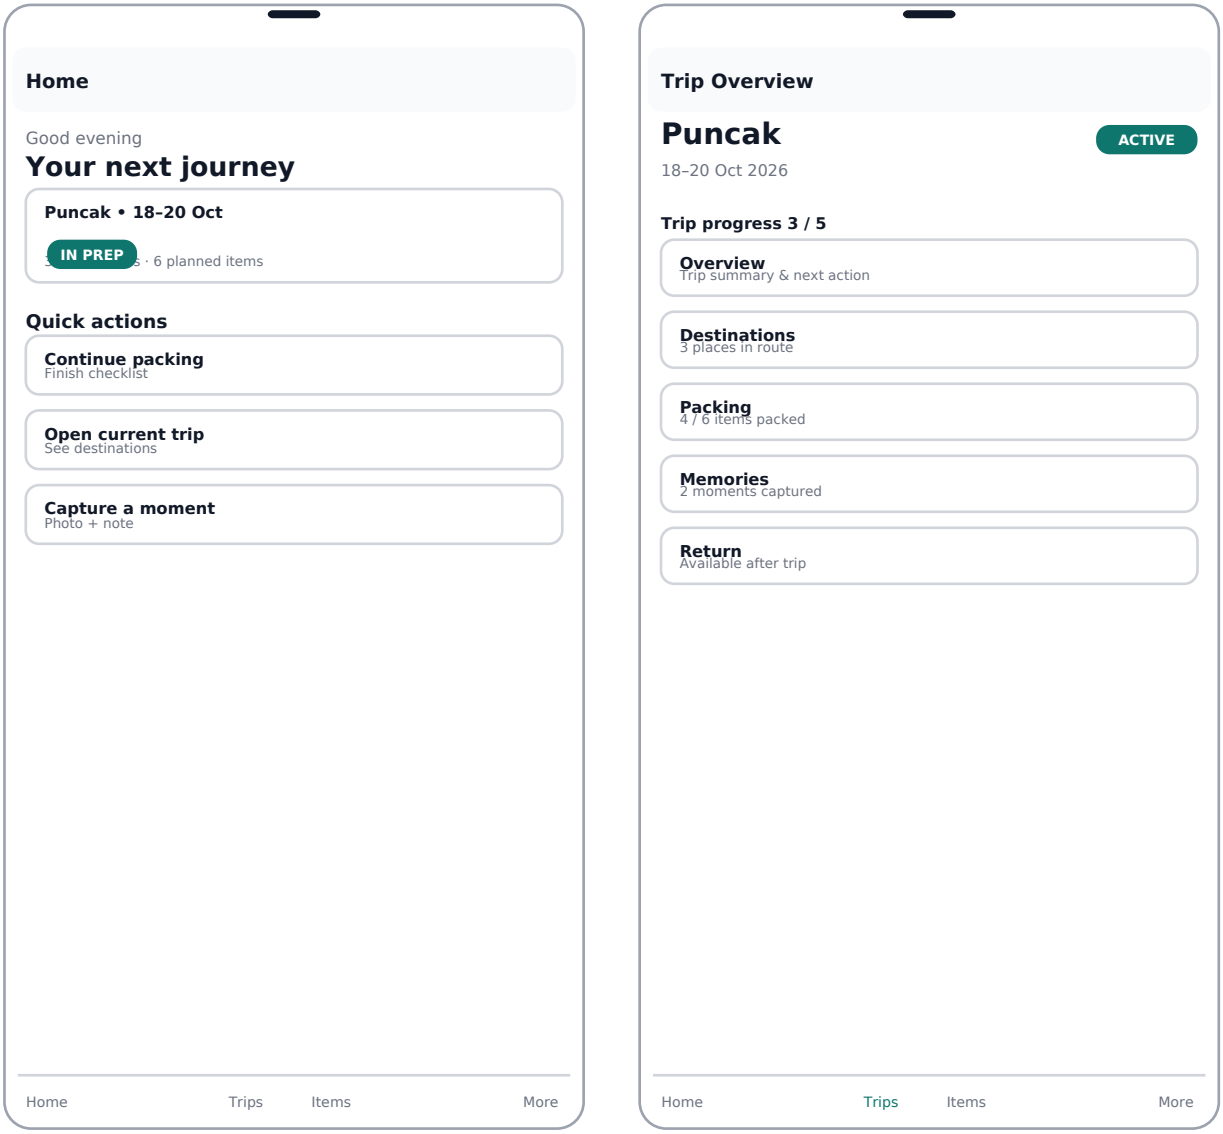


Home answers: “What should I do next?” The active trip and preparation progress dominate generic discovery.

8.2 Trip Overview & Destination

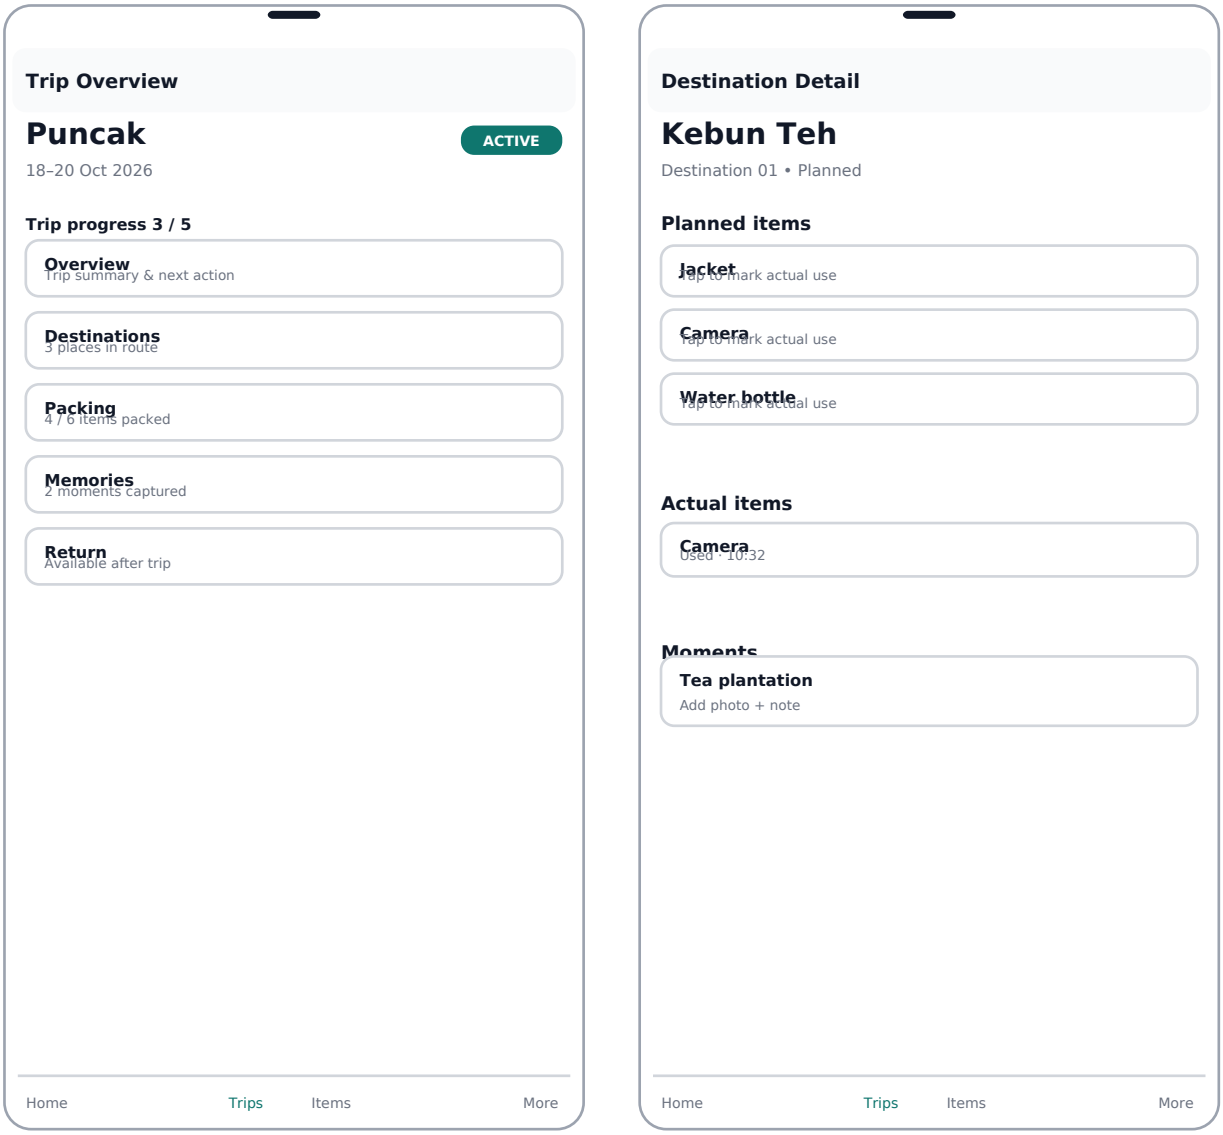


Trip Overview is the contextual control center. Destination Detail narrows the context to a place where planned items, actual usage, and moments meet.

8.3 Packing & Actual Items

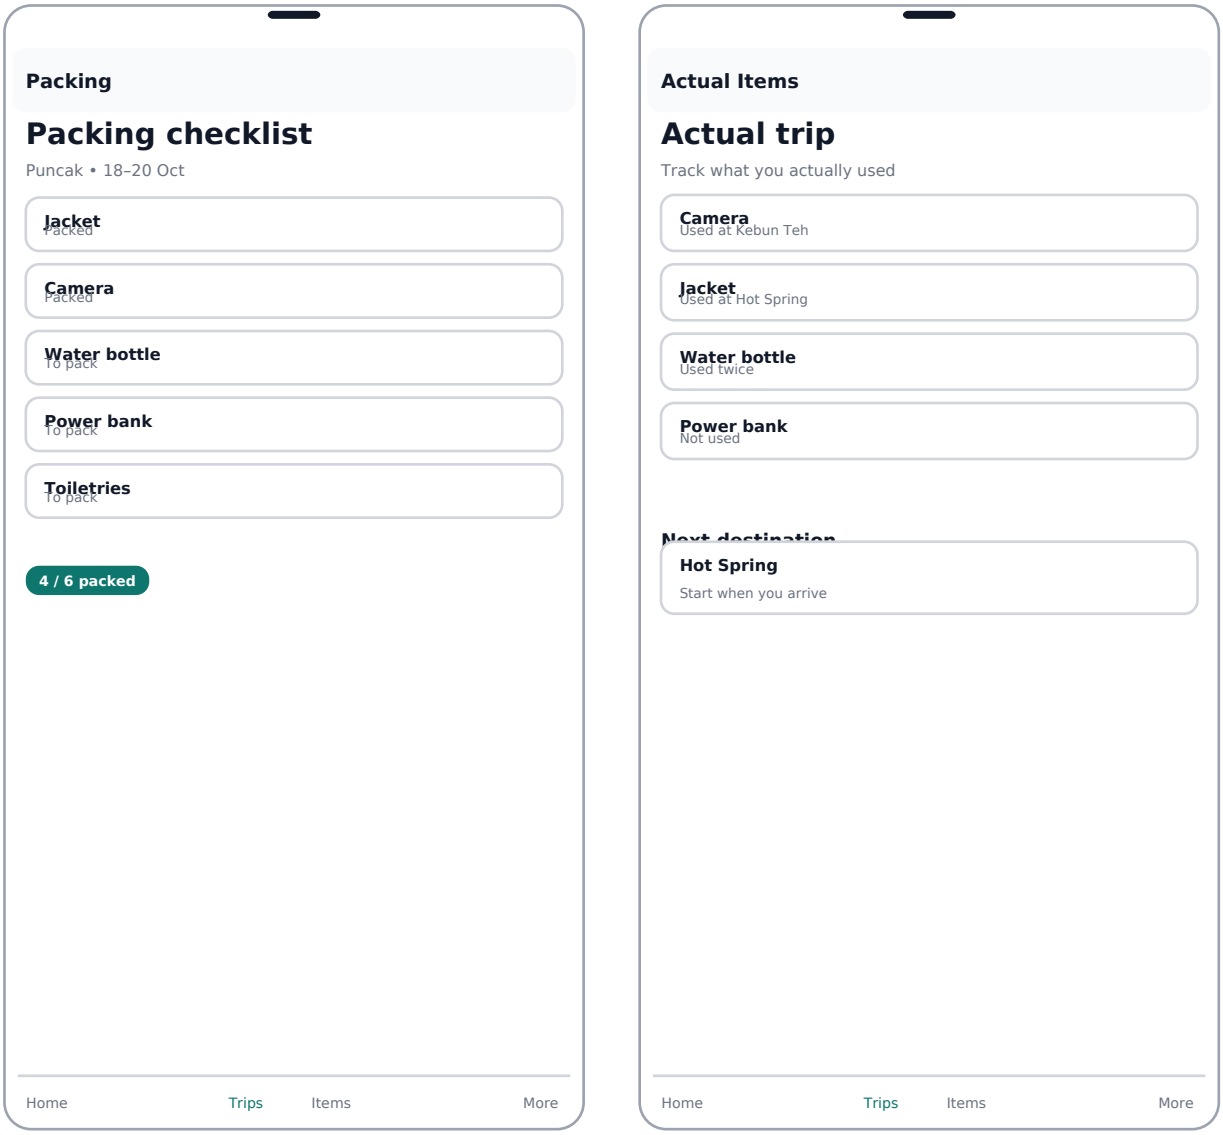


Packing answers “Did I bring it?”; Actual Items answers “Did I use it?”. These must remain distinct.

8.4 Capture Moment & Memory

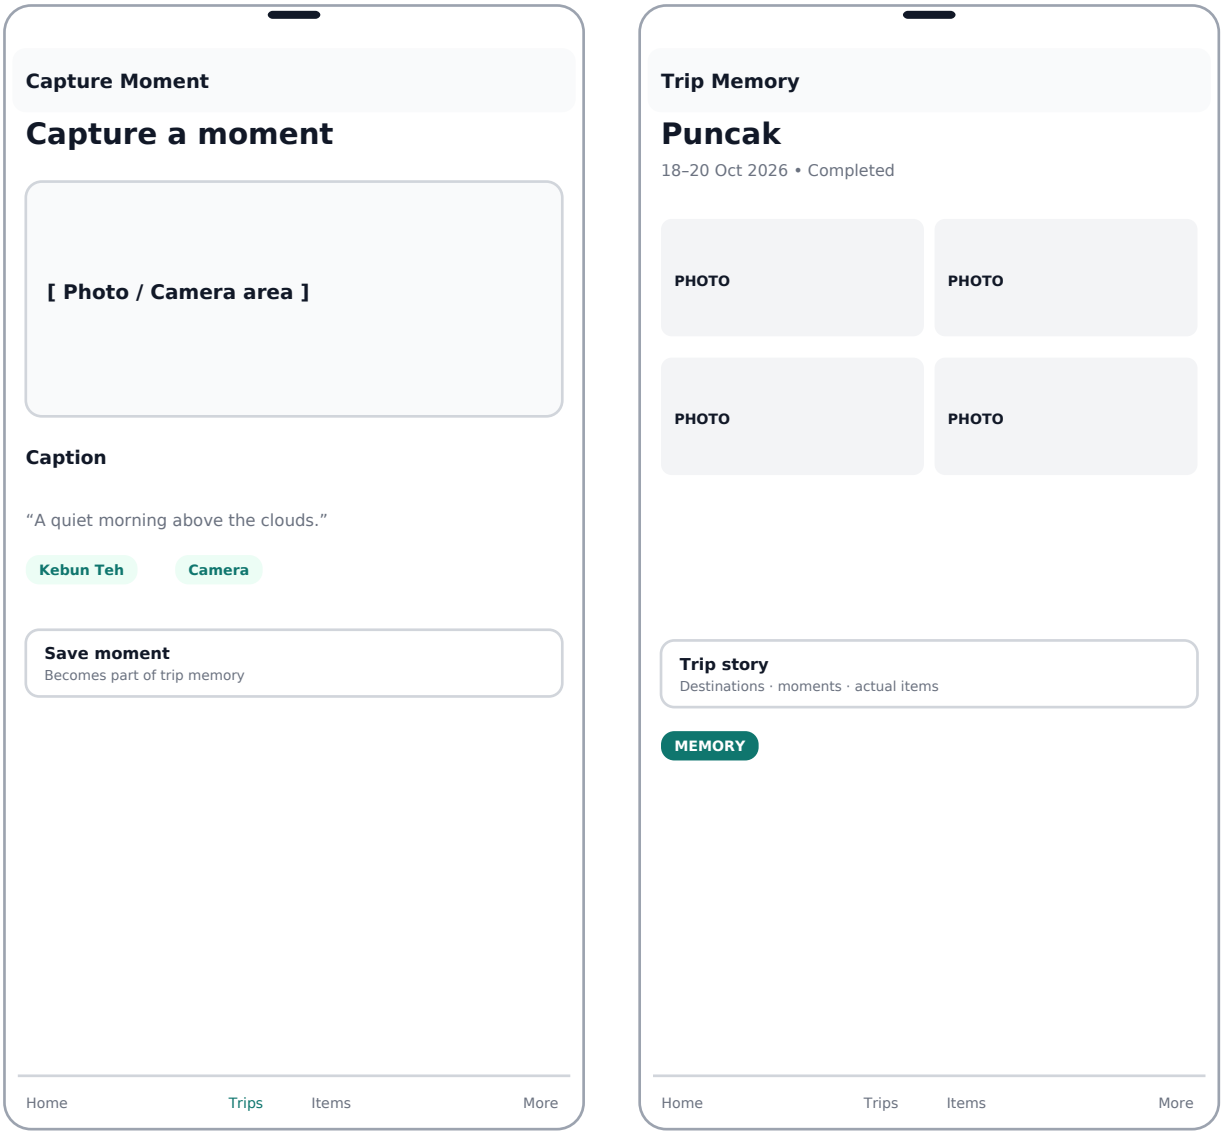

Moment capture is lightweight. Memory is a story assembled from destinations, moments, and real trip activity—not merely a photo gallery.

8.5 Return Check & Item Library

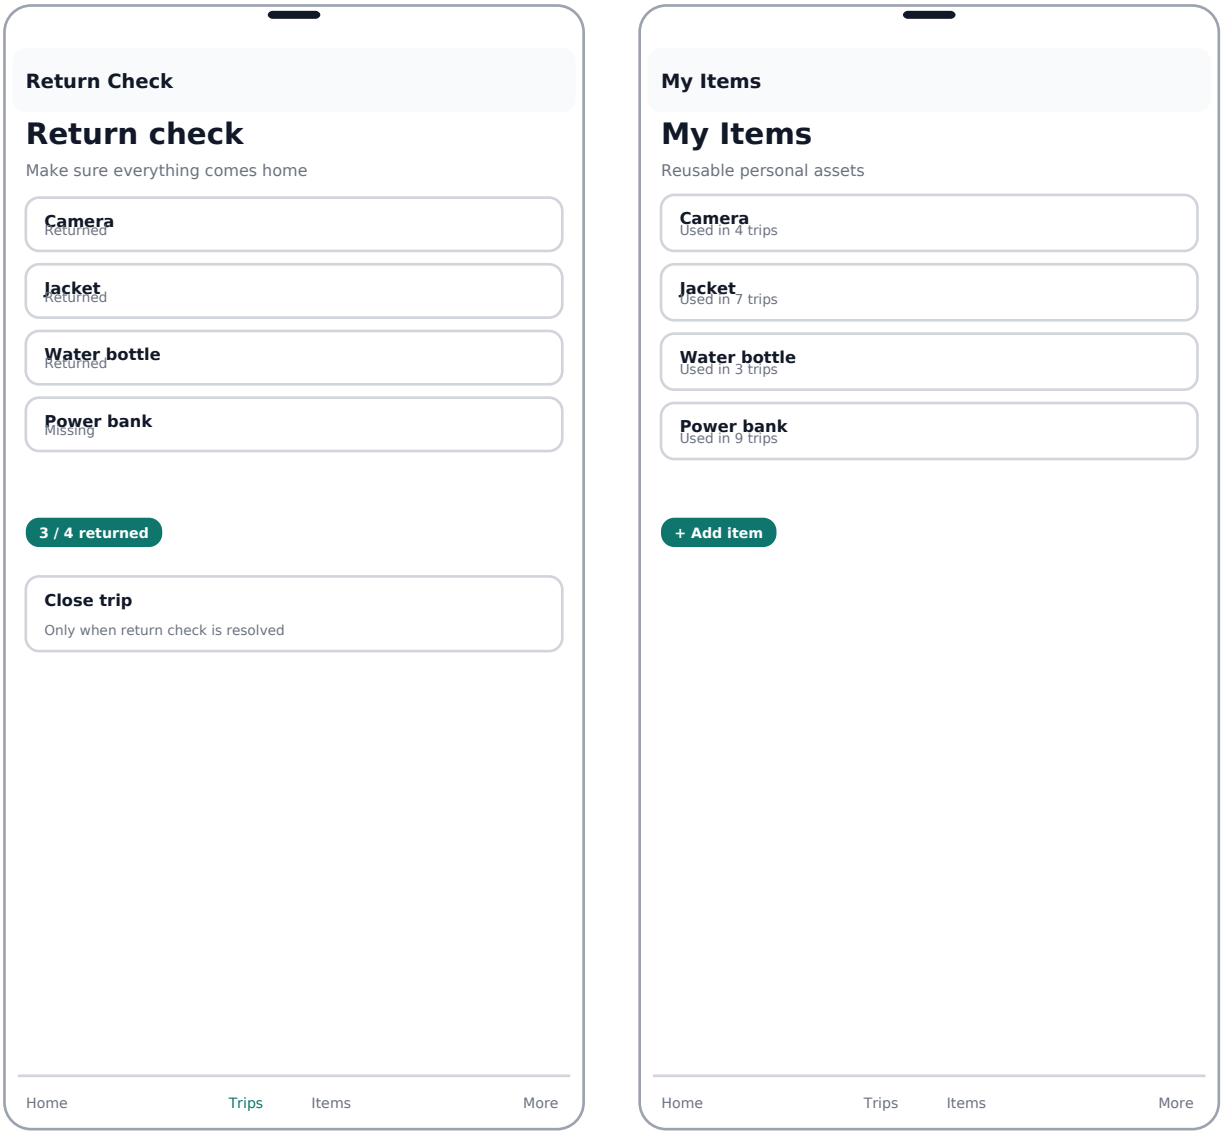

Return Check closes the physical loop. Item Library provides compounding value across repeated trips.

9. Interaction & State Specifications

Object	States	Transition
Trip	DRAFT → PREPARING → ACTIVE → RETURNING → COMPLETED	User confirmed
Item	PLANNED → PACKED → USED → RETURNED	Trip-specific state.
Destination	PLANNED → ACTIVE → COMPLETED	Current destination context.
Moment	DRAFT → SAVED	Saved to trip/destination.
Memory	GENERATED → VIEWABLE / EDITABLE	Created when trip closes.

Important interaction rule

State changes with real-world consequences should be explicit: Start Trip, Mark Used, and Mark Returned should not happen implicitly.

10. Edge Cases & Empty States

Situation	Expected UX behavior
No trips yet	Explain Tripory briefly + “Create your first trip”.
No destination	Keep trip valid but prompt “Add a destination”.
No reusable items	Allow direct item creation from trip.
Packing incomplete	Show remaining items without blocking trip access.
Planned but not used	Allow “Not used / Skip” so history stays truthful.
Moment without photo	Allow note-only moments if desired.
Missing item on return	Flag unresolved item and keep return stage open.
Close with unresolved items	Require explicit confirmation and preserve unresolved state.
Completed trip	Read-only core journey; memory metadata can remain editable.
Offline / weak connection	Preserve local trip state and queue sync where applicable.

11. UX Acceptance Criteria

Area	Acceptance criterion
Orientation	A first-time user can identify the active trip and current stage.
Preparation	User can create a trip, add destinations, select items, and reach a clear packing state.
Context	From a destination, relevant planned items, actual items, and moments are accessible without losing
Actual tracking	Usage can be recorded independently from packing.
Moments	A moment can be captured and saved with minimal interaction.
Return	User can identify unresolved belongings before closing.
Memory	Completed trip can be revisited as a coherent story.
Recovery	Back navigation and editing do not accidentally destroy trip state.
Clarity	Primary CTA is obvious at each stage.

12. Prototype & Validation Priority

Do not prototype every screen equally. The highest learning value sits in the transitions that define Tripory's differentiation.

Priority	Prototype deeply	Why
1	Trip creation → destinations → items → packing	Tests the preparation model.
2	Destination → actual item → moment	Tests contextual in-trip behavior.
3	Return → close → memory	Tests the unique end-to-end loop.
4	Home next-action behavior	Tests whether Tripory feels like a companion.
5	Item library reuse	Tests compounding value across trips.

Recommended usability questions

- “What do you think Tripory wants you to do next?”
- “What is the difference between packed and used?”
- “If you are at the hot spring right now, where would you record what you used?”
- “How would you make sure you brought your camera home?”
- “After the trip is finished, where would you go to remember it?”

13. Traceability to Information Architecture

This UX document preserves the established IA rather than introducing a competing structure.

IA concept	UX expression
Trip → Destination → Moment	Trip Overview → Destination Detail → Capture / Memory.
User → Item → Trip Item	My Items → Packing → Actual Items → Return.
Planned vs Actual	Separate Packing and Actual Items experiences.
Destination Usage	Actual item records can attach to a destination.
Return	Dedicated Return Check stage before close.
Completed trips = memory archive	Close Trip creates/reveals Memory experience.

The key architectural decision is that Trip remains the center of gravity. Items and memories gain meaning from their relationship to a trip.

14. UX Blueprint — Final Product Loop

The final UX is best understood as one continuous loop:



Before	During	After
Create trip Add destinations Select items Pack	Start trip Current destination Actual items Capture moments	Return check Close trip Memory archive Reuse items

North-star UX principle:

> **Tripory should reduce the cognitive load of travel preparation while increasing the quality of the travel memory afterward. The product earns its place by connecting the two—not by adding more planning features.**

Next artifact: high-fidelity UI / interactive prototype based on this flow, followed by usability testing and iteration.