


User's Guide of the Program UNIMoVIB

(Ver. 1.3.0)

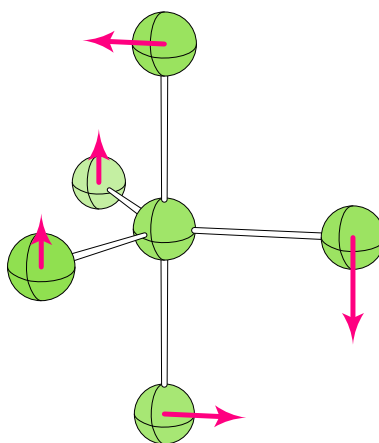

Wenli Zou
qcband@gmail.com

May 20, 2020

Institute of Modern Physics, Northwest University, Xi'an, Shaanxi, China

Contents

1	About UNIMOVIB	2
1.1	Features	2
1.2	Symmetry	2
2	Compiling and Running	4
2.1	Compiling the program	4
2.2	Running the program	4
3	Input description	5
3.1	\$Contrl group	5
3.2	\$QCData group	8
3.3	\$IsoMas group	10
3.4	\$ExpFrq group	10
3.5	\$GSVA group	11
3.6	\$Thermo group	11
3.7	Atomic thermochemistry calculation	12
4	Examples	14
4.1	Atomic thermochemistry calculation	14
4.2	Frequency calculation by GAUSSIAN	14
4.3	Frequency calculation by MOLPRO	14
4.4	Calculation of the “experimental” frequencies of HDO	14
4.5	Calculation of the intrinsic fragmental vibrations of CH ₄ inside C ₆₀ with general- ized subsystem vibrational analysis (GSVA)	16
5	Known problems	17
A	Appendix	18
A.1	Format of the UniMoVib data file	18
A.2	For developers: interface to other QC programs	19

1 About UNIMOVIB

UNIMOVIB is a Unified interface for MOlecular VIBrational harmonic frequency calculations.

The UNIMOVIB program was originally written by Wenli Zou in FORTRAN 77 during 2014 and 2015 at Southern Methodist University (SMU), Dallas, Texas, within the framework of the LOCALMODE program (now LMODEA) of the Computational and Theoretical Chemistry Group (CATCO) of SMU. This work was supported by the NSF grants CHE 1152357 and CHE 1464906. Guidance from the late Dr. Dieter Cremer is acknowledged. After being rewritten in Fortran 90 in the spring of 2017, UNIMOVIB has been released as a stand-alone program.

1.1 Features

- Calculate harmonic vibrational frequencies and (optional) I.R. intensities from Hessian, coordinates, and other related data generated by quantum chemistry programs or by the user manually.
Nearly 30 quantum chemistry programs have been supported (see Section 3.1), although some of them may do these calculations much better.
- Analyze point group of geometry and irreducible representations (*irreps.*) of normal modes in full symmetry (for *irreps.*: closed-shell molecule only).
Symmetry analysis is based on the symmetry subroutines from MOPAC 7.1, which is fully in the public domain (at openmopac.net and sourceforge.net).
- Thermochemistry calculation uses the point group in full symmetry, and the results are printed in Gaussian-style (for detailed explanations, see Foresman and Frisch, *Exploring Chemistry With Electronic Structure Methods*, Ed.2, Gaussian Inc., Pittsburgh, PA, **1996**, p.66).
- Generalized subsystem vibrational analysis (GSVA) to calculate intrinsic fragmental vibrations (see *J. Chem. Theory Comput.* 14(5), 2558-2569, 2018).
- Save a MOLDEN file for animation of normal modes.
- Set up isotopic masses, temperature, pressure, scale factor and/or experimental frequencies, and so on.
- Can be used as a third party module for frequency and thermochemistry calculations in a quantum chemistry program, especially when non-Abelian group is not supported therein.

1.2 Symmetry

The point group symmetries supported are listed in Table 1.

Table 1: Available Point Groups.

C_n	$n = 1 \dots 8$
C_s, C_{nv}	$n = 2 \dots 8$
C_i, C_{nh}	$n = 2 \dots 8$
D_n	$n = 2 \dots 8$
D_{nd}	$n = 2 \dots 7$
D_{nh}	$n = 2 \dots 8$
S_n	$n = 4, 6, 8$
Others	$R_3, T, T_d, T_h, O, O_h, I, I_h, C_{\infty v}, D_{\infty h}$

Two point groups will be printed by the program, *i.e.* the molecular point group of “Electronic Wavefunctions” and the molecular point group of “Nuclear & Total Wavefunctions”. The former does not depend on isotopic masses whereas the latter does. The latter point group symmetry should be used to analyze vibrations and do thermochemistry calculations. However, some quantum chemistry programs use the former symmetry by mistake, and therefore the *irreps.* cannot be correctly analyzed and the Gibbs free energy may be wrong. A extreme case is the fullerene $^{12}\text{C}_{59}^{13}\text{C}$, which has I_h symmetry for electronic wavefunctions, but C_1 for nuclear wavefunctions and total wavefunctions. If I_h is used in thermochemistry calculations, the error in the Gibbs free energy will be as large as 2.5 kcal/mol!

2 Compiling and Running

2.1 Compiling the program

```
$ cd $UniMoVib/src  
$ make
```

A Fortran90 compiler is required, which is defined in Makefile.

2.2 Running the program

Double-click the binary program `unimovib.exe`, and type in the name of input file (MS-Windows only),

or

in the terminal, type in

```
$ ./unimovib.exe
```

and then type in the name of input file (if no input file name provided, the default name `job.inp` will be assumed),

or

in the terminal, type in

```
$ ./unimovib.exe -b < input > output
```

In the last way, one can prepare a batch script to perform a series of calculations.

3 Input description

The input options are grouped by namelists, which are ended by \$END. These groups may be given in any order as desired. Before each \$ symbol there should be at least one space.

The input file is case-insensitive except the data file names specified in the \$QCData group (section 3.2).

3.1 \$Contrl group

This group specifies the type of calculation. Keywords:

QCProg="XXXX": XXXX is either the name of quantum chemistry program to calculate Hessian matrix and vibrational frequencies or the file format containing those data. The following programs or formats are supported:

- Gaussian (default).
- GAMESS (GAMESS-US and GAMESSUS are synonyms).
- Firefly (PCGamess and PC-Gamess are synonyms).
- GAMESS-UK (GAMESSUK is synonym).
- ORCA.
- Molpro.
- QChem (Q-Chem is synonym).
- NWChem.
- CFour.
- Turbomole.
- deMon2k (deMon is synonym).
- PQS.
- OpenMOPAC (MOPAC is synonym). MOPAC 6 and MOPAC 7 are also supported, but the closely related FUJITSU MOPAC 200x (now MO-G in SCIGRESS) has not been tested.
- AMSOL (AMPAC is synonym). AMPAC 2.x is also supported, but the higher versions of AMPAC have not been tested.
- Dalton.
- FHI-AIMS (FHIAIMS and AIMS are synonyms).
- CP2k. The QUICKSTEP module.

- Hyperchem.
- Jaguar. A quantum chemistry module in SCHRÖDINGER SUITE.
- ADF. Only the molecular ADF module was tested.
- MOLDEN, which was generated by a frequency calculation and there should be at least three sections: [FREQ], [FR-COORD], and [FR-NORM-COORD] in it. Through the MOLDEN file, ACES-II, COLUMBUS, DALTON (analytic frequency calculation), MOLCAS, and so on may be supported by the program.
- Crystal. Molecular harmonic frequency is supported and CRYSTAL 14 has been tested.
- Spartan.
- PSI. Only PSI 4 has been tested.
- DMOL3 (DMOL is synonym). Molecular harmonic frequency is supported.
- ACES. Both ACES-II and ACES-III have been tested.
- UniMoVib (ALM is synonym). A plain text file generated by the UNIMOVIB program or a third party program. See Appendix A.1.

In addition, QCProg="AtomCalc" will do an atomic thermochemistry calculation (see section 3.7).

Isotop: Sets up isotopic masses.

- = 0: (default) all the atomic masses will be read from the data file of frequency calculation; if there was none, then the masses are taken from the library (the most abundant isotopic masses will be used except for several quantum chemistry programs).
- = 1: all the atomic masses will be read from library or the data file of frequency calculation (same as 0), and then the masses of a list of isotopes will be replaced by the values provided after the \$IsoMas group (section 3.3).
- = 2: all the atomic masses are provided after the \$IsoMas group (section 3.3).

IFExp: (.True./.False.) Correct the Hessian matrix using experimental vibrational frequencies which are provided after the \$ExpFrq group (section 3.4). Default: .False.

IFGSVA: (.True./.False.) Carry out generalized subsystem vibrational analysis (GSVA) for a fragment within the whole molecular system. The atom labels specifying the subsystem are provided after the \$GSVA group (section 3.5). Default: .False.

3.1.1 Keywords to save data

IFSAVE: (.True./.False.) Save the atomic masses (affected by Isotop), Cartesian coordinates, Hessian matrix (affected by IFExp), and the APT matrix into a plain text data file *.umv. This keyword doesn't work with QCProg="AtomCalc" or "UniMoVib". Default: .False. See Appendix A.1 for the format.

IFMOLDEN: (.True./.False.) Save a MOLDEN file except for QCProg="AtomCalc", which may be opened by the MOLDEN or GABEDIT program to view geometry and normal vibration modes. Default: .False.

IFLOCAL: (.True./.False.) Save a data file for the local mode analysis by LMODEA (URL: <https://sites.smu.edu/dedman/catco/>). It doesn't work with QCProg="AtomCalc". Default: .False.

IFGauTS: (.True./.False.) Save a templet input file for GAUSSIAN with Cartesian coordinates and Hessian, which (after some modifications) may be used for the calculation of transition state optimization. It doesn't work with QCProg="AtomCalc". Default: .False.
Since the ONIOM method in GAUSSIAN uses redundant coordinates only, this templet doesn't work in this case.

3.1.2 Keywords for experts

Usually it is not necessary to set up the following keywords in \$Contr1.

QCProg="XYZ": For debugging only.

IFConc: (.True./.False.) Concise output of frequencies or not. Default: .False.

ISyTol = MN: the symmetry tolerance is defined by $M * 10^{N-3}$ where M is always positive and the sign of ISyTol will be assigned to N. So ISyTol = 21 means 0.02 whereas -21 means 0.0002. Default: 10, *i.e.* the tolerance is 0.001.

IFRdNM: (.True./.False.) The normal modes are read directly from the data files specified in the \$QCData group, which may significantly save memory and speed up the calculations since the diagonalization is not performed any more. This keyword doesn't work with Isotop and IFExp=.True.. Only QCProg="Gaussian" is supported at present. Default: .False.

IFSymtz: (.True./.False.) Due to Jahn-Teller effects (for open-shell systems) or numerical noise, sometimes the *irreps.* of vibrational normal modes cannot be determined by the program.

This keyword may symmetrize the vibrational normal modes. This keyword doesn't work with `IFRdNM=.True.` Default: `.False.`

`IFApprx: (.True./.False.)` The force constants ($\text{mDyn}/\text{\AA}$ for stretchings and $\text{mDyn}\cdot\text{\AA}/\text{Rad}^2$ for angles) and Wilson's B-matrix of internal coordinates will be read from an external data file (specified in the `$QCData` group), and then an approximate Hessian matrix will be constructed to calculate vibrational normal frequencies. This keyword doesn't work with `IFRdNM=.True.` Default: `.False.`

3.2 \$QCData group

This group specifies data file(s) enclosed by quotes, where the data (atomic masses, coordinates, APT, and Hessian) are obtained. In general, only one data file is required, which is defined by the option `FCHK`. However for some programs, multiple data files should be defined separately by the keywords `HESS`, `DDIP`, and/or `GEOM`.

If `IFApprx=.True.`, the data file to construct an approximate Hessian matrix is specified by the keyword `BMAT`.

- **GAUSSIAN:** `*.fchk`. By default, the atomic masses are not included in the `fchk` file, so the most abundant isotopic masses are assumed, but for **GAUSSIAN 09** (and maybe higher versions in the future), one can also use `FREQ(SaveNormalModes)` instead to save atomic masses automatically. Polarizability derivatives can also be saved by `FREQ(Raman)` for the calculations of Raman intensity.
- **GAMESS:** `*.dat` (by `FCHK`) + `*.out` (by `GEOM`).
- **FIREFLY:** data file (by `FCHK`; default name: `PUNCH`) + `*.out` (by `GEOM`).
- **GAMESS-UK:** `*.out` file. Use `RUNTYPE INFRARED` in the frequency calculation to print APT if you are interested in the IR intensities.
- **ORCA:** `*.hess`.
- **MOLPRO:** `*.out` file. Use the following commands to print Hessian and APT:
`{frequencies,print=1;print,hessian}`
- **Q-CHEM:** `*.fchk`. In your Q-CHEM frequency calculation, use `GUI=2` to generate the `*.fchk` file. The atomic masses are not included in the `fchk` file, so the most abundant isotopic masses are assumed.
- **NWCHEM:** `*.out` file (by `FCHK`) + `*.fd_ddipole` (by `DDIP`) + `*.hess` (by `HESS`), where `DDIP` is optional and can be neglected if you are not interested in the IR intensities.
- **CFour**

For analytical frequency (`VIB=ANALYTIC`): `*.out` file (by `FCHK`) + `GRD` (by `GEOM`).

For both numerical frequency (`VIB=FINDIF`) and analytical frequency: Use the `MOLDEN` file. However, no IR intensities. See also `MOLDEN` below.

If the GRD file or the MOLDEN file is missing, or the MOLDEN file doesn't contain frequency data due to some reasons, you may use the *.out file only by FCHK and then UNIMOVIB tries to construct the Hessian matrix from atomic masses, vibrational frequencies, and normal modes printed in the *.out file. However, this option is not fully supported due to some defects and errors in the printed normal modes by CFOUR (see the Known problems section (5)), and therefore is NOT SUGGESTED.

- TURBOMOLE: *.out file of aoforce (by FCHK; default: aoforce.out) + dipgrad (by DDIP), where DDIP is optional and can be neglected if you are not interested in the IR intensities.
- DEMON2K: *.out file (by FCHK; default: deMon.out). DEMON2K can print Hessian by PRINT DE2.
- PQS: *.coord file (by FCHK) + *.deriv (by DDIP) + *.hess (by HESS), where DDIP is optional and can be neglected if you are not interested in the IR intensities.
- OPENMOPAC: *.out file (by FCHK). Use FORCE DFORCE or FORCE=DFORCE to print Hessian. The averaged isotopic masses are used, which may be not consistent with some very old versions of MOPAC.
- AMSOL: *.out file (by FCHK). Use FORCE DFORCE to print Hessian. The averaged isotopic masses are used, which may be not consistent with some very old versions of AMSOL/AMPAC.
- DALTON: *.out file (by FCHK). Since DALTON doesn't print nuclear charges and element symbols, the standard element symbols have to be specified in the input file of DALTON's frequency calculation (*ie.*, Mg is okay, but Mg01 and Mgxx don't work).
- FHI-AIMS: masses/*.dat file (by FCHK) + grad_dipole/*.dat (by DDIP) + hessian/*.dat (by HESS), where DDIP is optional and can be neglected if you are not interested in the IR intensities.
- CP2K: the output file of frequency calculation (by FCHK) using the QUICKSTEP module.
- HYPERCHEM: the log file of frequency calculation (by FCHK). HYPERCHEM doesn't generate the log file by default. Before doing a frequency calculation, go to the **File** menu and select **Save log** with print level = 9 to save a log file.
- JAGUAR: the output file of frequency calculation (by FCHK).
- ADF: the formatted TAPE21 or TAPE13 data file (by FCHK). There are some problems in the case of numerical frequency calculation of ADF. See the Known problems section (5).
- MOLDEN: a data file (by FCHK), which contains [FREQ], [FR-COORD], and [FR-NORM-COORD] sections. See the Known problems section (5).
- CRYSTAL: the output file from molecular harmonic frequency calculation (by FCHK).
- SPARTAN: the *.smol archive file (by FCHK). The most abundant isotopic masses are assumed.

- PSI: the output file (by FCHK). In your PSI 4 numerical frequency calculation, use `set print 3` to print Hessian matrix.
- DMOL3: the output file (by FCHK).
- ACES: the output file (by FCHK). But using the MOLDEN file can achieve higher accuracy. See the Known problems section (5).
- UNIMOVIB: an ASCII data file (by FCHK), which was generated by UNIMOVIB with the option `IFSAVE=.TRUE.`, or created manually (see Appendix A.1).
- XYZ: a standard XYZ data file (by FCHK). For debugging only.

See the examples in `$UniMoVib/test`.

3.3 \$IsoMas group

This group is required when `Isotop = 1` or `2`. There is no option in this group. After this group, the isotopic masses are provided.

If `Isotop = 1`, one atom per line, including the atom index and its mass. The program will read isotopic masses until a blank line or the end is encountered. For example,

```
$IsoMas $End
2 15.99491
4 2.01410
```

It means that the masses of the second and the forth atoms are 15.99491 and 2.01410, respectively.

If `Isotop = 2`, all the N atomic masses are defined in free format. For example,

```
$IsoMas $End
12.0 1.0 1.0
1.0
1.0
```

5 atomic masses are defined for CH₄ in the above example.

3.4 \$ExpFrq group

This group is required when `IFExp=.True.` There is only one option `MODE` in this group. After this group, the experimental vibrational frequencies are provided.

If `MODE = 0` (default), all the N_{Vib} vibrational frequency values, which MUST have been correctly ordered according to the calculated frequencies, are defined in free format. For example,

```
$ExpFrq $End
835.0248 835.3904 926.0930 926.2148
2160.9759
```

If MODE = 1, a list of theoretical frequencies will be replaced by the provided experimental ones. One frequency per line, including the frequency index and its experimental value. The program will read experimental frequencies until a blank line or the end is encountered. For example,

```
$ExpFrq MODE=1 $End
3 926.0930
5 2160.9759
```

3.5 \$GSVA group

This group defines the subsystem via the keyword `subsystem` by specifying the atom labels. For example,

```
$GSVA
subsystem="4,5,1-3"
$End
```

The atom labels need to be enclosed by quotation marks as a string without space. The comma is used as delimiter. Two ways of selecting atoms are supported: (1) provide a single number and (2) provide a range with hyphen (-). At least two atoms are needed to define a subsystem.

3.6 \$Thermo group

This group controls the thermochemistry calculation. Keywords:

Eel: total energy taken from quantum chemistry calculation (in Hartree). Default: 0.

NDeg: degeneracy of the (spin-orbit) electronic state, which affects the entropy and Gibbs free energy. Default: 1.

Temp: temperature (in K). Default: 298.15. If Temp < 0, a series of additional temperatures will also be provided after this group.

Press: pressure (in atm). Default: 1.0. If Press < 0, a series of additional pressures will also be provided after this group.

Scale: scaling factor for real frequencies. Default: 1.0. Experimental frequencies defined in the \$ExpFrq group will not be scaled.

ScTol: tolerance of scaling (in cm^{-1}). Low frequencies below this value will not be scaled. All the frequencies except experimental and imaginary ones will be scaled by default.

PG: specify the name of point group to calculate rotational entropy. It may affect the entropy and Gibbs free energy, so the correct point group name must be provided.

= 0: (default) =2.

= 1: use the isotope independent point group. If isotope leads to lower symmetry, this option may reproduce the results of other quantum chemistry programs, but unfortunately this is not correct.

= 2: use the isotope dependent point group.

= "XXXX": specify the name of point group, which is useful for the high symmetry not supported by the program, for example, "D10h". Don't forget the quotes.

Gibbs free energy may be affected by all of the above keywords except Ee1.

If Temp < 0 or Press < 0, a list of additional temperatures or pressures will be provided. One value per line. The program will read the values until a blank line or the end is encountered. For example,

```
$Thermo Temp=-1 $End
100
200
400
```

In addition to the default temperature 298.15 K, thermochemistry calculations will also be performed at 100, 200, and 400 K in the above example. If both Temp < 0 and Press < 0, two values per line should be provided (a temperature, then a pressure). For example,

```
$Thermo Temp=-1 Press=-1 $End
100 0.5
200 -1
-1 2.0
```

Negative values in the additional data mean the default temperature (298.15 K) or pressure (1.0 atm).

3.7 Atomic thermochemistry calculation

Atomic thermochemistry data can also be calculated using the UNIMOVIB program, which are useful to study some atom related chemical reactions, for example, $\text{CH}_3 + \text{H}_2 \rightarrow \text{CH}_4 + \text{H}$. The atomic thermochemistry calculation does not require any data and files from quantum chemistry calculations except the optional total energy. Three groups of keywords may be provided:

\$Contr1 group (section 3.1): qcprog="atomcalc" should be specified.

`$IsoMas` group (section 3.3): the atomic mass should be specified (Isotop in the `$Contrl` group is always 2).

`$Thermo` group (section 3.6): `Eel`, `NDeg`, `Temp`, and `Press` can be specified, which are optional.

The other namelists and keywords do not make sense and will be ignored. See Example 4.1.

4 Examples

4.1 Atomic thermochemistry calculation

example

```
1 Atomic thermochemistry calculation (Ne atom)
2 The total energy was calculated at the HF/STO-3G level
3
4 $contrl
5   qcprog="atomcalc"
6 $end
7
8 $Thermo
9   Eel=-127.8038245 Temp=500 Press=10
10 $end
11
12 $IsoMas $End
13 19.99244
```

4.2 Frequency calculation by GAUSSIAN

example

```
1 a test job
2
3 $contrl
4   qcprog="gaussian"
5 $end
6
7 $qcddata
8   fchk="xef6.fchk"
9 $end
```

4.3 Frequency calculation by MOLPRO

MOLPRO cannot handle non-Abelian point group symmetries, like T_d in CH_4 . Using UNIMOVIB, you can get *irreps.* of normal vibrational modes in full symmetry.

example

```
1 a test job
2
3 $contrl
4   qcprog="molpro"
5 $end
6
7 $qcddata
8   fchk="ch4.out"
9 $end
```

4.4 Calculation of the “experimental” frequencies of HDO

One can estimate frequencies of HDO from experimental frequencies of H_2O .

— example —

```
1 Step 1.  
2 Save data file using experimental frequencies of H2O.  
3 The normal modes should be calculated at high level of theory.
```

```
4  
5 $contrl  
6   qcprog="cfour"  
7   ifsave=.true.  
8   ifexp=.true.  
9 $end  
10  
11 $qcdata  
12   fchk="h2o.out"  
13   geom="GRD"  
14 $end  
15  
16 $expfrq mode=1 $end  
17 1   1595  
18 2   3657  
19 3   3756   B2
```

— example —

```
1 Step 2.  
2 Calculate "experimental" frequencies of HDO using the experimental frequencies of H2O.  
3 CCSD(T)/cc-pVTZ frequencies:      1463  2828  3895 cm-1  
4 "experimental" frequencies:      1398  2692  3708 cm-1  
5 genuine experimental frequencies:  1402  2727  3707 cm-1
```

```
6  
7 $contrl  
8   qcprog="unimovib"  
9   isotop=1  
10 $end  
11  
12 $qcdata  
13   fchk="step1.umv"  
14 $end  
15  
16 $IsoMas $End  
17 2  2.01410
```


4.5 Calculation of the intrinsic fragmental vibrations of CH₄ inside C₆₀ with generalized subsystem vibrational analysis (GSVA)

example

```
1 The CH4 molecule is defined by atoms 1-5 in this CH4@C60 complex.  
2  
3 $contrl  
4   qcprog="gaussian"  
5   ifgsva=.true.  
6 $end  
7  
8 $gsva  
9   subsystem="3,4,5,1-2"  
10 $end  
11  
12 $qcdata  
13   fchk="ch4-c60.fchk"  
14 $end
```

5 Known problems

- ADF

For a numerical frequency calculation (for example, by two-component ZORA): if symmetry is used by ADF, and if there are symmetry-equivalent atoms, the IR intensities cannot be calculated correctly since some elements in the APT matrix are missing. The correct values can be obtained from ADF output if you are interested in the IR intensities.

- MOLDEN

1. If there are imaginary frequencies, some program may print positive frequency values by mistake (for example, CFOUR), then the results will be wrong. So you have to check the imaginary frequencies in the MOLDEN file, and correct them manually if the negative sign is missing.
2. Since there is no isotopic mass information in the MOLDEN file, the most abundant isotopic masses are assumed. If this is not true, however, the results will be totally wrong. So you have to use the most abundant isotopic masses in your frequency calculation to generate a MOLDEN file.

- ACES

Since there is no isotopic mass information in ACES output, the most abundant isotopic masses are assumed. If this is not true, however, the results will be totally wrong. So you have to use the most abundant isotopic masses in your frequency calculation (this is default in ACES) to generate a ACES output file.

- CFOUR

If only a single *.out file is specified by FCHK, UNIMOVIB tries to construct the Hessian matrix. However this may do not work well due to some defects and errors in the printed normal modes by CFOUR,

1. If the molecule has a high symmetry, the atoms therein may be reordered in the frequency output, and therefore the atom orderings in the geometry and frequency parts will be different.
2. For linear polyatomic molecules, one normal mode can be missing.
3. Due to very low accuracy of the printed normal mode data (3 significant digits for the first column and 4 for the others), some low frequencies cannot be well reproduced by UNIMOVIB.

A Appendix

A.1 Format of the UniMoVib data file

The UNIMOVIB data file is an ASCII one in free format.

Format(Ver.1.0.3 2020.02.10)

```
(One title line)
NATM
  (An positive integer)
AMASS
  (NATM number of atomic masses;
  Use NOMASS instead if no atomic masses provided)
ZA
  (NATM number of nuclear charge numbers)
XYZ
  (3*NATM elements of Cartesian coordinates in a.u.;
  Use XYZANG instead if in Angstrom)
FFX
  (3*NATM*3NATM elements of Hessian matrix;
  Use FFXLT instead for L.T. matrix)
APT
  (3*3NATM elements of APT data;
  Use NOAPT instead if no APT data provided)
DPR
  (6*3NATM elements of polarizability derivatives;
  Use DPRSQ instead if in the form of 9*3NATM;
  Use NODPR instead if no DPR data provided)
GRD
  (3*NATM elements of Cartesian gradients;
  Use NOGRD instead if no GRD data provided)
```

At present DPR data and Raman intensities are supported only for the .fchk file generated by GAUSSIAN. Only some external programs (*e.g.* LMODEA) need the GRD data.

A.2 For developers: interface to other QC programs

To support other QC programs which can do harmonic frequency calculation, two interface subroutines should be provided in *interface.f90*.

1. Read or count the number of atoms (NAtm). Dummy atoms are not included. This subroutine is called in subroutine RdNAtm1. Example:

```
1  !-----
2  ! Read NAtm from XXXX output
3  !-----
4  subroutine RdNAtmXXXX(ifchk,NAtm,tag,ctmp)
5  implicit real(kind=8) (a-h,o-z)
6  character*100 :: ctmp
7  character*100 :: tag
8  (...)
9  return
10 end
```

2. Read in Cartesian coordinates in *a.u.* (XYZ), atomic nuclear charge number (ZA), atomic or isotopic masses in *a.u.* (AMass; optional), Cartesian force constant matrix in *a.u.* (FFx; a mass-unweighted square matrix), dipole moment gradient (*i.e.* atomic polar tensor; APT) in *a.u.* (APT; optional), and polarizability derivatives in *a.u.* (DPol; optional). This subroutine is called in subroutine RdData1. Example:

```
1  !-----
2  ! Read data from XXXX output
3  !-----
4  subroutine RdXXXX(ifchk,tag,ctmp,NAtm,AMass,ZA,XYZ,FFx,APT,DPol)
5  implicit real(kind=8) (a-h,o-z)
6  real(kind=8) :: AMass(NAtm),ZA(NAtm),XYZ(3,NAtm),FFx(3*NAtm,3*NAtm), &
7     APT(3,3*NAtm),DPol(6,3*NAtm)
8  character*100 :: ctmp
9  character*100 :: tag
10 (...)
11 return
12 end
```

3. In addition, add the program name as a new option of QCProg in subroutine RdContrl in *rw.f90*.
4. At last, do not forget to update this manual.