

Bubbles: debugging 2D UMAPs

SK

2021-11-23



# Contents

<b>1</b>	<b>About</b>	<b>5</b>
<b>2</b>	<b>UMAP</b>	<b>7</b>
2.1	UMAP parameters . . . . .	8
<b>3</b>	<b>Cross-references</b>	<b>9</b>
3.1	Chapters and sub-chapters . . . . .	9
3.2	Captioned figures and tables . . . . .	9
<b>4</b>	<b>Parts</b>	<b>13</b>
<b>5</b>	<b>Footnotes and citations</b>	<b>15</b>
5.1	Footnotes . . . . .	15
5.2	Citations . . . . .	15
<b>6</b>	<b>Blocks</b>	<b>17</b>
6.1	Equations . . . . .	17
6.2	Theorems and proofs . . . . .	17
6.3	Callout blocks . . . . .	17
<b>7</b>	<b>Sharing your book</b>	<b>19</b>
7.1	Publishing . . . . .	19
7.2	404 pages . . . . .	19
7.3	Metadata for sharing . . . . .	19



# Chapter 1

## About

In this tutorial we will use Uniform Manifold Approximation and Projection (UMAP) algorithm for dimension reduction of single cell expression data. We will ask and answer the following questions:

1. why do people use UMAP?
2. does UMAP work as advertised for datasets with varying complexity
3. do we get similar UMAPs with different pre-processing steps (e.g. data normalization)
4. can we think of an alternative/enhancement of UMAP?



## Chapter 2

# UMAP

UMAP is an algorithm for non-linear dimension reduction. UMAP learns the manifold structure of the input data, and finds a **low dimensional embedding** that preserves the topological structure of that manifold.


```
require(Seurat)
require(ggplot2)

y <- cbind(c(rnorm(n = 50, mean = 0, sd = 1),
             rnorm(n = 50, mean = 10, sd = 1)),
          rnorm(n = 100, mean = 0, sd = 1))
rownames(y) <- paste0("C-", 1:nrow(y))
colnames(y) <- paste0("F-", 1:ncol(y))

# umap
u <- umap::umap(d = y)

# data.frame of UMAP coordinates
y <- data.frame(u$layout)
y$G <- rep(x = c("A", "B"), each = 50)

ggplot(data = y)+
  geom_point(aes(x = X1, y = X2, col = G))+
  xlab(label = "UMAP_1")+
  ylab(label = "UMAP_2")+
  theme_bw()+
  theme(legend.position = "top")
```

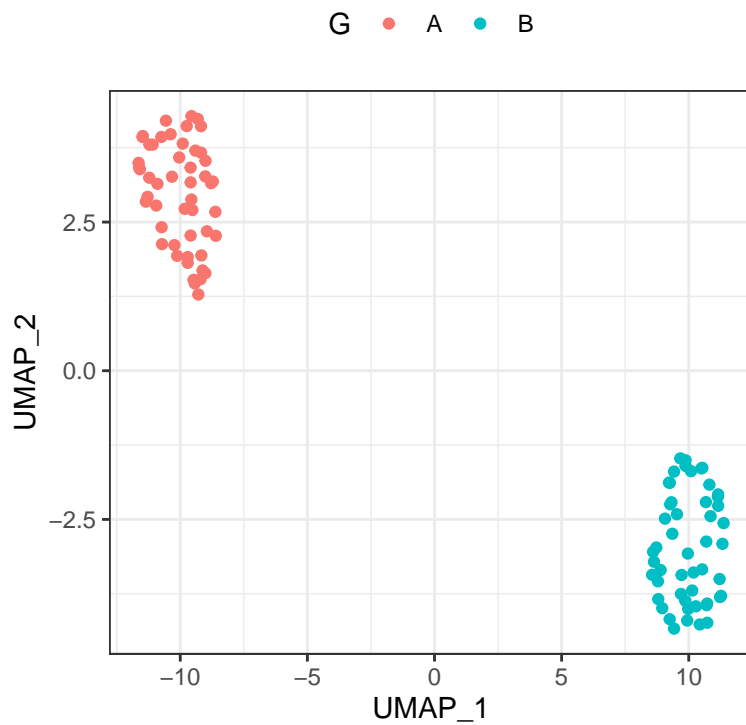

## 2.1 UMAP parameters

- *n\_neighbors*: controls balance between local and global structure, i.e. at what resolution to we learn the manifold structure of the data.
- *min\_dist*
- *n\_components*
- *metric*



## Chapter 3

# Cross-references

Cross-references make it easier for your readers to find and link to elements in your book.

### 3.1 Chapters and sub-chapters

There are two steps to cross-reference any heading:

1. Label the heading: `# Hello world {#nice-label}`.
  - Leave the label off if you like the automated heading generated based on your heading title: for example, `# Hello world = # Hello world {#hello-world}`.
  - To label an un-numbered heading, use: `# Hello world {-#nice-label}` or `{# Hello world .unnumbered}`.
2. Next, reference the labeled heading anywhere in the text using `\@ref(nice-label)`; for example, please see Chapter 3.
  - If you prefer text as the link instead of a numbered reference use: any text you want can go here.

### 3.2 Captioned figures and tables

Figures and tables *with captions* can also be cross-referenced from elsewhere in your book using `\@ref(fig:chunk-label)` and `\@ref(tab:chunk-label)`, respectively.

See Figure 3.1.

```
par(mar = c(4, 4, .1, .1))
plot(pressure, type = 'b', pch = 19)
```

Don't miss Table 3.1.



Figure 3.1: Here is a nice figure!

```
knitr::kable(  
  head(pressure, 10), caption = 'Here is a nice table!',  
  booktabs = TRUE  
)
```

Table 3.1: Here is a nice table!

temperature	pressure
0	0.0002
20	0.0012
40	0.0060
60	0.0300
80	0.0900
100	0.2700
120	0.7500
140	1.8500
160	4.2000
180	8.8000



## Chapter 4

# Parts

You can add parts to organize one or more book chapters together. Parts can be inserted at the top of an .Rmd file, before the first-level chapter heading in that same file.

Add a numbered part: `# (PART) Act one {-}` (followed by `# A chapter`)

Add an unnumbered part: `# (PART\*) Act one {-}` (followed by `# A chapter`)

Add an appendix as a special kind of un-numbered part: `# (APPENDIX) Other stuff {-}` (followed by `# A chapter`). Chapters in an appendix are prepended with letters instead of numbers.



## Chapter 5

# Footnotes and citations

### 5.1 Footnotes

Footnotes are put inside the square brackets after a caret `^[]`. Like this one <sup>1</sup>.

### 5.2 Citations

Reference items in your bibliography file(s) using `@key`.

For example, we are using the **bookdown** package [Xie, 2021] (check out the last code chunk in `index.Rmd` to see how this citation key was added) in this sample book, which was built on top of R Markdown and **knitr** [Xie, 2015] (this citation was added manually in an external file `book.bib`). Note that the `.bib` files need to be listed in the `index.Rmd` with the YAML `bibliography` key.

The RStudio Visual Markdown Editor can also make it easier to insert citations: <https://rstudio.github.io/visual-markdown-editing/#/citations>

---

<sup>1</sup>This is a footnote.





## Chapter 6

# Blocks

### 6.1 Equations

Here is an equation.

$$f(k) = \binom{n}{k} p^k (1-p)^{n-k} \quad (6.1)$$

You may refer to using `\@ref{eq:binom}`, like see Equation (6.1).

### 6.2 Theorems and proofs

Labeled theorems can be referenced in text using `\@ref{thm:tri}`, for example, check out this smart theorem 6.1.

**Theorem 6.1.** *For a right triangle, if  $c$  denotes the length of the hypotenuse and  $a$  and  $b$  denote the lengths of the **other** two sides, we have*

$$a^2 + b^2 = c^2$$

Read more here <https://bookdown.org/yihui/bookdown/markdown-extensions-by-bookdown.html>.

### 6.3 Callout blocks

The R Markdown Cookbook provides more help on how to use custom blocks to design your own callouts: <https://bookdown.org/yihui/rmarkdown-cookbook/custom-blocks.html>



## Chapter 7

# Sharing your book

### 7.1 Publishing

HTML books can be published online, see: <https://bookdown.org/yihui/bookdown/publishing.html>

### 7.2 404 pages

By default, users will be directed to a 404 page if they try to access a webpage that cannot be found. If you'd like to customize your 404 page instead of using the default, you may add either a `_404.Rmd` or `_404.md` file to your project root and use code and/or Markdown syntax.

### 7.3 Metadata for sharing

Bookdown HTML books will provide HTML metadata for social sharing on platforms like Twitter, Facebook, and LinkedIn, using information you provide in the `index.Rmd` YAML. To setup, set the `url` for your book and the path to your `cover-image` file. Your book's `title` and `description` are also used.

This `gitbook` uses the same social sharing data across all chapters in your book—all links shared will look the same.

Specify your book's source repository on GitHub using the `edit` key under the configuration options in the `_output.yml` file, which allows users to suggest an edit by linking to a chapter's source file.

Read more about the features of this output format here:

<https://pkgs.rstudio.com/bookdown/reference/gitbook.html>

Or use:

```
?bookdown::gitbook
```

# Bibliography

Yihui Xie. *Dynamic Documents with R and knitr*. Chapman and Hall/CRC, Boca Raton, Florida, 2nd edition, 2015. URL <http://yihui.org/knitr/>. ISBN 978-1498716963.

Yihui Xie. *bookdown: Authoring Books and Technical Documents with R Markdown*, 2021. URL <https://CRAN.R-project.org/package=bookdown>. R package version 0.24.