

Extrapolating expected accuracies for recognition tasks

Charles Zheng

*Department of Statistics
Stanford University
Palo Alto, CA*

CHARLES.Y.ZHANG@GMAIL.COM

Rakesh Achanta

*Department of Statistics
Stanford University
Palo Alto, CA*

Yuval Benjamini

*Department of Statistics
The Hebrew University of Jerusalem,
Jerusalem, Israel*

YUVAL.BENJAMINI@MAIL.HUJI.AC.IL

Editor: No One Yet

Abstract

The difficulty of multi-class classification generally increases with the number of classes. Using data from a subset of the classes, can we predict how well a classifier will scale with an increased number of classes? Under the assumption that the classes are sampled identically and independently from a population, and under the assumption that the classifier is based on independently learned scoring functions, we show that the expected accuracy when the classifier is trained on k classes is the $k - 1$ st moment of a certain distribution that can be estimated from data. We present an unbiased estimation method based on the theory, and demonstrate its application on a facial recognition example.

Keywords: Multiclass classification

1. Introduction

Many machine learning tasks are interested in recognizing or identifying an individual instance within a large set of possible candidates. These problems are usually modeled as multi-class classification problems, with a large and possibly complex label set. Leading examples include detecting the speaker from his voice patterns (?), identifying the author from her written text (?), or labeling the object category from its image (??). In all these examples, the algorithm observes an input x , and uses the classifier function h to guess the label y from a large label set \mathcal{S} .

There are multiple practical challenges in developing recognition systems for large label sets. Collecting high quality training data is perhaps the main obstacle, as the costs scale with the number of classes. It can be affordable to first collect data for a small set of classes, even if the long-term goal is to generalize to a larger set. Furthermore, classifier development can be accelerated by training first on fewer classes, as each training cycle may require substantially less resources. Indeed, due to interest in how small-set performance

generalizes to larger sets, such comparisons can be found in the literature (??). A natural question is how does changing the size of the label set affect the classification accuracy?

Technically, we consider a pair of classification problems on finite label sets: a source task with label set \mathcal{S}_{k_1} of size k_1 , and a target task with a larger label set \mathcal{S}_{k_2} of size $k_2 > k_1$. For each label set \mathcal{S}_k , one constructs the classification rule $h^{(k)} : \mathcal{X} \rightarrow \mathcal{S}_k$. Supposing that in each task, the test example (X^*, Y^*) has a joint distribution, define the generalization accuracy for label set \mathcal{S}_k as

$$\text{GA}_k = \Pr[h^{(k)}(X^*) = Y^*]. \quad (1)$$

The problem of *performance extrapolation* is the following: using data from only the source task \mathcal{S}_{k_1} , predict the accuracy for a target task with a larger unobserved label set \mathcal{S}_{k_2} .

A natural use case for performance extrapolation would be in the deployment of a facial recognition system. Suppose a system was developed in the lab on a database of k_1 individuals. Clients would like to deploy this system on a new larger set of k_2 individuals. Performance extrapolation could allow the lab to predict how well the algorithm will perform on the client's problem, accounting for the difference in label set size.

Extrapolation should be possible when the source and target classifications are two instances of a similar recognition problem. In many cases, the set of categories \mathcal{S} is to some degree a random or arbitrary selection out of a larger, perhaps infinite, set of potential categories \mathcal{Y} . Yet any specific experiment uses a fixed finite set. For example, categories in the classical Caltech-256 image recognition dataset (?) were assembled by aggregating keywords proposed by students and then collecting matching images from the web. The arbitrary nature of the label set is even more apparent in biometric applications (face recognition, authorship, fingerprint identification) where the labels correspond to human individuals (??). In all these cases, the number of the labels used to define a concrete dataset is therefore an experimental choice rather than a property of the domain. Despite the arbitrary nature of these choices, such datasets are viewed as representing the larger problem of recognition within the given domain, in the sense that success on such a dataset should inform performance on similar problems.

In this paper, we assume that both \mathcal{S}_{k_1} and \mathcal{S}_{k_2} are independent identically distributed (i.i.d.) samples from a population (or distribution) of labels π , which is defined on the label space \mathcal{Y} . These assumptions help concretely analyze the generalization accuracy, although both are only approximate characterizations of the label selection process, which is often at least partially manual. Since we assume the label set is random, the generalization accuracy of a given classifier becomes a random variable. Performance extrapolation then becomes the problem of estimating the average generalization accuracy AGA_k of an i.i.d. label set \mathcal{S}_k of size k . The condition of i.i.d. sampling of labels ensures that the separation of labels in a random set \mathcal{S}_{k_2} can be inferred by looking at the empirical separation in \mathcal{S}_{k_1} , and therefore that some estimate of the average accuracy on \mathcal{S}_{k_2} can be obtained. We also make the assumption that the classifiers train a separate model for each class. This convenient property allows us to characterize the accuracy of the classifier by selectively conditioning on one class at a time.

Our paper presents two main contributions related to extrapolation. First, we present theoretical formula describing how average accuracy for smaller k is linked to average accuracy for label set of size $K > k$. We show that accuracy at any size depends on a

favorability function D , which is determined by properties of the data distribution and the classifier. Second, we propose an estimation procedure that allows extrapolation of the observed average accuracy curve from k_1 -class data to a larger number of classes, based on the theoretical formula. Under certain conditions, the estimation method has the property of being an unbiased estimator of the average accuracy.

The paper is organized as follows. In the rest of this section, we discuss related work. The framework of randomized classification is introduced in Section 2, and there we also introduce a toy example which is revisited throughout the paper. Section 3 develops our theory of extrapolation, and Section 3.3 we suggest an estimation method. In Section 5, we demonstrate our method on a facial recognition problem, making use of the OpenFace feature extraction network ?. In Section ?? we discuss modeling choices and limitations of our theory, as well as potential extensions.

1.1 Related work

Linking performance between two different but related classification tasks can be considered an instance of transfer learning (?). Under ?'s terminology, our setup is an example of multi-task learning, because the source task has labeled data, which is used to predict performance on a target task that also has labeled data. Applied examples of transfer learning from one label set to another include ?, ?, ?. However, there is little theory for predicting the behavior of the learned classifier on a new label set. Instead, most research classification for large label sets deal with the computational challenges of jointly optimizing the many parameters required for these models for specific classification algorithms (???). ? presents a method for estimating the accuracy of a classifier which can be used to improve performance for general classifiers, but doesn't apply for different set sizes.

The theoretical framework we adopt is one where there exists a family of classification problems with increasing number of classes. This framework can be traced back to ?, who considered the error rate of a random codebook, which is a special case of randomized classification. More recently, a number of authors have considered the problem of high-dimensional feature selection for multiclass classification with a large number of classes (???). All of these works assume specific distributional models for classification compared to our more general setup. However, we do not deal with the problem of feature selection.

Perhaps the most similar method that deals with extrapolation of classification error to a larger number of classes can be found in ?. They trained a classifier for identifying the observed stimulus from a functional MRI scan of brain activity, and were interested in its performance on larger stimuli sets. They proposed an extrapolation algorithm as a heuristic with little theoretical discussion. In Section 4 we interpret their method within the our theory, and discuss cases where it performs well compared to our algorithm.

2. Randomized classification

2.1 Setup

The randomized classification model we study has the following features. We assume that there exists an infinite, perhaps continuous, label space \mathcal{Y} and a example space $\mathcal{X} \in \mathbb{R}^p$. We assume there exists a prior distribution π on the label space \mathcal{Y} . And for each label $y \in \mathcal{Y}$,

there exists a distribution of examples F_y . In other words, for an example-label pair (X, Y) , the conditional distribution of X given $Y = y$ is given by F_y .

A random classification task can be generated as follows. The label set $\mathcal{S} = \{Y^{(1)}, \dots, Y^{(k)}\}$ is generated by drawing labels $Y^{(1)}, \dots, Y^{(k)}$ i.i.d. from π . For each label, we sample a training set and a test set. The training set is obtained by sampling r_{train} observations $X_{j,train}^{(i)}$ i.i.d. from $F_{Y^{(i)}}$ for $j = 1, \dots, r_{train}$ and $i = 1, \dots, k$. The test set is likewise obtained by sampling r observations $X_j^{(i)}$ i.i.d. from $F_{Y^{(i)}}$ for $j = 1, \dots, r$.

We assume that the classifier $h(x)$ works by assigning a score to each label $y^{(i)} \in \mathcal{S}$, then choosing the label with the highest score. That is, there exist real-valued *score functions* $m_{y^{(i)}}(x)$ for each label $y^{(i)} \in \mathcal{S}$. Since the classifier is allowed to depend on the training data, it is convenient to view it (and its associated score functions) as random. We write $H(x)$ when we wish to work with the classifier as a random function, and likewise $M_y(x)$ to denote the score functions when they are considered as random.

For a fixed instance of the classification task with labels $\mathcal{S} = \{y^{(i)}\}_{i=1}^k$ and associated score functions $\{m_{y^{(i)}}\}_{i=1}^k$, recall the definition of the k -class generalization error (1). Assuming that there are no ties, it can be written in terms of score functions as

$$\text{GA}_k(h) = \frac{1}{k} \sum_{i=1}^k \Pr[m_{y^{(i)}}(X^{(i)}) = \max_j m_{y^{(j)}}(X^{(i)})],$$

where $X^{(i)} \sim F_{y^{(i)}}$ for $i = 1, \dots, k$. However, when we consider the labels $\{Y^{(i)}\}_{i=1}^k$ and associated score functions to be random, the generalization accuracy also becomes a random variable.

Suppose we specify k but do not fix any of the random quantities in the classification task. Then the k -class *average generalization accuracy* of a classifier is the expected value of the generalization accuracy $\text{GA}_k(H)$ resulting from a random set of k labels, $Y^{(1)}, \dots, Y^{(k)} \stackrel{iid}{\sim} \pi$, and their associated score functions:

$$\begin{aligned} \text{AGA}_k &= \frac{1}{k} \sum_{i=1}^k \Pr[M_{Y^{(i)}}(X^{(i)}) = \max_j M_{Y^{(j)}}(X^{(i)})] \\ &= \Pr[M_{Y^{(1)}}(X^{(1)}) = \max_j M_{Y^{(j)}}(X^{(1)})]. \end{aligned}$$

The last line follows from noting that all k summands in the previous line are identical. [The definition of average generalization accuracy is illustrated in Figure 1.]

2.1.1 MARGINAL CLASSIFIER

In our analysis, we do not want the classifier to rely too strongly on complicated interactions between the labels in the set. We therefore propose the following property of marginal separability for classification models:

Definition 1 *The classifier $H(x)$ is called a marginal classifier if the score function $M_{y^{(i)}}(x)$ only depends on the label $y^{(i)}$ and the class training set $X_{j,train}^{(i)}$.*

$$M_{y^{(i)}}(x) = g(x; y^{(i)}, X_{1,train}^{(i)}, \dots, X_{r_{train},train}^{(i)})$$

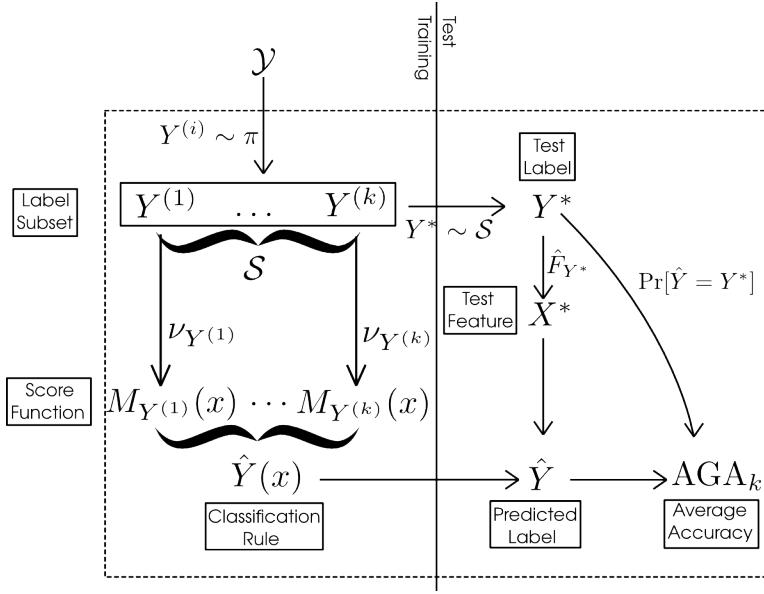


Figure 1: **Average generalization accuracy:** A diagram of the random quantities underlying the average generalization accuracy for k labels (AGA_k). At the training stage (left), a set of k labels \mathcal{S} is sampled from the prior π , and score functions are trained from examples for these classes. At the test stage (right), one true class Y^* is sampled uniformly from \mathcal{S} , as well as a test example X^* . AGA_k measures the expected accuracy over these random variables.

This means that the score function for $y^{(i)}$ does not depend on other labels $y^{(j)}$ or their training samples. Therefore, each M_y can be considered to have been drawn from a distribution ν_y . Classes “compete” only through selecting the highest score, but not in constructing the score functions. The operation of a marginal classifier is illustrated in figure 2.

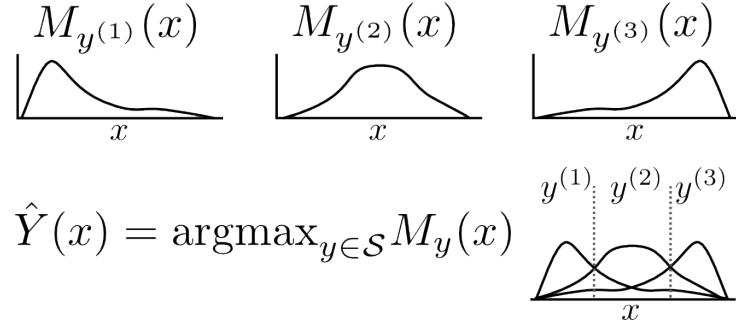


Figure 2: **Classification rule:** Top: Score functions for three classes for a one-dimensional example space. Bottom: The classification rule chooses between $y^{(1)}, y^{(2)}$ or $y^{(3)}$ by choosing the maximal score function.

The *marginal* property allows us to prove strong results about the accuracy of the classifier under i.i.d. sampling assumptions.

Comments:

1. If H is a marginal classifier then $M_{Y^{(i)}}$ is independent of $Y^{(j)}$ and $M_{Y^{(j)}}$ for $i \neq j$.
2. Estimated Bayes classifiers are primary examples of marginal classifiers. Let \hat{f}_y be a density estimate of the example distribution under label y obtained from the empirical distribution \hat{F}_y . Then, we can use the estimated density to produce the score functions:

$$m_y^{EB}(x) = \log(\hat{f}_y(x)).$$

The resulting empirical approximation for the Bayes classifier would be

$$h^{EB}(x) = \operatorname{argmax}_{y \in \mathcal{S}} (m_y^{EB}(x)).$$

3. Both the Quadratic Discriminant Analysis and the naive Bayes classifiers can be seen as specific instances of an estimated Bayes classifier ¹. For QDA, the score function is given by

$$m_y^{QDA}(x) = -(x - \mu(\hat{F}_y))^T \Sigma(\hat{F}_y)^{-1} (x - \mu(\hat{F}_y)) - \log \det(\Sigma(\hat{F}_y)),$$

where $\mu(F) = \int y dF(y)$ and $\Sigma(F) = \int (y - \mu(F))(y - \mu(F))^T dF(y)$. In Naive Bayes, the score function is

$$m_y^{NB}(x) = \sum_{j=1}^p \log \hat{f}_{y,j}(x),$$

where $\hat{f}_{y,j}$ is a density estimate for the j -th component of \hat{F}_y .

4. For some classifiers, M_y is a deterministic function of y (and therefore ν_y is degenerate). A prime example is when exists fixed or pre-trained embeddings g, \tilde{g} that map labels y and examples x into R^p . Then

$$M_y^{\text{embed}} = -\|g(y) - \tilde{g}(x)\|_2. \quad (2)$$

This describes, for example, a 1-nearest neighbor classifier.

5. There are many classifiers which do not satisfy the marginal property, such as multinomial logistic regression, multilayer neural networks, decision trees, and k-nearest neighbors.

Notational remark. Henceforth, we shall relax the assumption that the classifier $H(x)$ is based on a training set. Instead, we assume that there exist score functions $\{M_{Y^{(i)}}\}_{i=1}^k$ associated with the random label set $\{Y^{(i)}\}_{i=1}^k$, and that the score functions $M_{Y^{(i)}}$ are independent of the test set. The classifier $H(x)$ is marginal if and only if $M_{Y^{(i)}}$ are independent of both $Y^{(j)}$ and $M_{Y^{(j)}}$ for $j \neq i$.

1. QDA is the special case of the estimated Bayes classifier when \hat{f}_y is obtained as the multivariate Gaussian density with mean and covariance parameters estimated from the data. Naive Bayes is the estimated Bayes classifier when \hat{f}_y is obtained as the product of estimated componentwise marginal distributions of $p(x_i|y)$

2.2 Estimation of average accuracy

Before tackling extrapolation, it is useful to discuss a simpler task of generalizing accuracy results when the target set is *not* larger than the source set. Suppose we have test data for a classification task with k_1 classes. That is, we have a label set $\mathcal{S}_{k_1} = \{y^{(i)}\}_{i=1}^{k_1}$ and its associated set of score functions $M_{y^{(i)}}$, as well as test observations $(x_1^{(i)}, \dots, x_r^{(i)})$ for $i = 1, \dots, k_1$. What would be the predicted accuracy for a new randomly sampled set of $k_2 \leq k_1$ labels?

Note that AGA_{k_2} is the expected value of the accuracy on the new set of k_2 labels. Therefore, any unbiased estimator of AGA_{k_2} will be an unbiased predictor for the accuracy on the new set.

Let us start with the case $k_2 = k_1 = k$. For each test observation $x_j^{(i)}$, define the ranks of the candidate classes $\ell = 1, \dots, k$ by

$$R_j^{i,\ell} = \sum_{s=1}^k I\{m_{y^{(\ell)}}(x_j^{(i)}) \geq m_{y^{(s)}}(x_j^{(i)})\}.$$

The test accuracy is the fraction of observations for which the correct class also has the highest rank

$$\text{TA}_k = \frac{1}{rk} \sum_{i=1}^k \sum_{j=1}^r I\{R_j^{i,i} = k\}. \quad (3)$$

Taking expectations over both the test set and the random labels, the expected value of the test accuracy is AGA_k ; hence, TA_k provides the desired estimator.

Next, let us consider the case where $k_2 < k_1$. Consider label set \mathcal{S}_{k_2} obtained by sampling k_2 labels uniformly without replacement from \mathcal{S}_{k_1} . Since \mathcal{S}_{k_2} is unconditionally an i.i.d. sample from the population of labels π , the test accuracy of \mathcal{S}_{k_2} is an unbiased estimator of AGA_{k_2} . However, we can get a better unbiased estimate of AGA_{k_2} by averaging over all the possible subsamples $\mathcal{S}_{k_2} \subset \mathcal{S}_{k_1}$. This defines the average test accuracy over subsampled tasks, ATA_{k_2} .

Remark. Naïvely, computing ATA_{k_2} requires us to train and evaluate $\binom{k_1}{k_2}$ classification rules. However, for marginal classifiers, retraining the classifier is not necessary. Looking at the rank $R_j^{i,i}$ of the correct label i for $x_j^{(i)}$, allows us to determine how many subsets \mathcal{S}_2 will result in a correct classification. Specifically, there are $R_j^{i,i} - 1$ labels with a lower score than the correct label i . Therefore, as long as one of the classes in \mathcal{S}_2 is i , and the other $k_2 - 1$ labels are from the set of $R_j^{i,i} - 1$ labels with lower score than i , the classification of $x_j^{(i)}$ will be correct. This implies that there are $\binom{R_j^{i,i} - 1}{k_2 - 1}$ such subsets \mathcal{S}_2 where $x_j^{(i)}$ is classified correctly, and therefore the average test risk for all $\binom{k_1}{k_2}$ subsets \mathcal{S}_2 is

$$\text{ATA}_{k_2} = \frac{1}{\binom{k_1}{k_2}} \frac{1}{rk_2} \sum_{i=1}^{k_1} \sum_{j=1}^r \binom{R_j^{i,i} - 1}{k_2 - 1}. \quad (4)$$

2.3 Toy Example: Bivariate normals

Let us illustrate these ideas using a toy example. Let (Y, X) have a bivariate normal joint distribution,

$$(Y, X) \sim N \left(\begin{pmatrix} 0 \\ 0 \end{pmatrix}, \begin{pmatrix} 1 & \rho \\ \rho & 1 \end{pmatrix} \right),$$

as illustrated in figure 3(a). Therefore, for a given randomly drawn label Y , the conditional distribution of X for that label is univariate normal with mean ρY and variance $1 - \rho^2$:

$$X|Y = y \sim N(\rho y, 1 - \rho^2).$$

Supposing we draw $k = 3$ labels y_1, y_2, y_3 , the classification problem will be to assign a test instance X^* to the correct label. The test instance X^* would be drawn with equal probability from one of three conditional distributions $X|Y = y^{(i)}$, as illustrated in figure 3(b, top). The Bayes rule assigns X^* to the class with the highest density $p(x|y_i)$, as illustrated by figure 3(b, bottom): it is therefore a marginal classifier, with score function

$$M_{y^{(i)}}(x) = \log(p(x|y^{(i)})) = -\frac{(x - \rho y)^2}{2(1 - \rho^2)} + \text{const.}$$

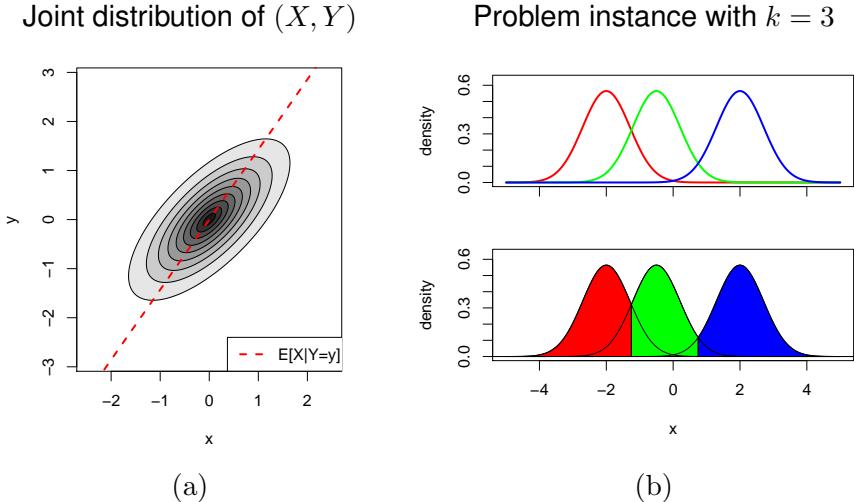


Figure 3: **Toy example:** *Left:* The joint distribution of (X, Y) is bivariate normal with correlation $\rho = 0.7$. *Right:* A typical classification problem instance from the bivariate normal model with $k = 3$ classes. (*Top*): the conditional density of X given label Y , for $Y = \{y^{(1)}, y^{(2)}, y^{(3)}\}$. (*Bottom*): the Bayes classification regions for the three classes.

For this model, the generalization accuracy of the Bayes rule for any label set $\{y^{(1)}, \dots, y^{(k)}\}$ is given by

$$\begin{aligned} \text{GA}_k(y_1, \dots, y_k) &= \frac{1}{k} \sum_{i=1}^k \Pr_{X \sim p(x|y_i)} [p(X|y_i) = \max_{j=1}^k p(X|y_j)] \\ &= \frac{1}{k} \sum_{i=1}^k \Phi \left(\frac{y^{[i+1]} - y^{[i]}}{2\sqrt{1-\rho^2}} \right) - \Phi \left(\frac{y^{[i-1]} - y^{[i]}}{2\sqrt{1-\rho^2}} \right) \end{aligned}$$

where Φ is the standard normal cdf, $y^{[1]} < \dots < y^{[k]}$ are the sorted labels, and $y^{[0]} = -\infty$ and $y^{[k+1]} = \infty$. We numerically computed $\text{GA}_k(y_1, \dots, y_k)$ for randomly drawn labels $Y_1, \dots, Y_k \stackrel{iid}{\sim} N(0, 1)$; the distributions of GA_k for $k = 2, \dots, 10$ are illustrated in figure 4. The mean of the distribution of GA_k is the k -class average risk, AGA_k . The theory presented in the next section deals with how to analyze the average risk AGA_k as a function of k .

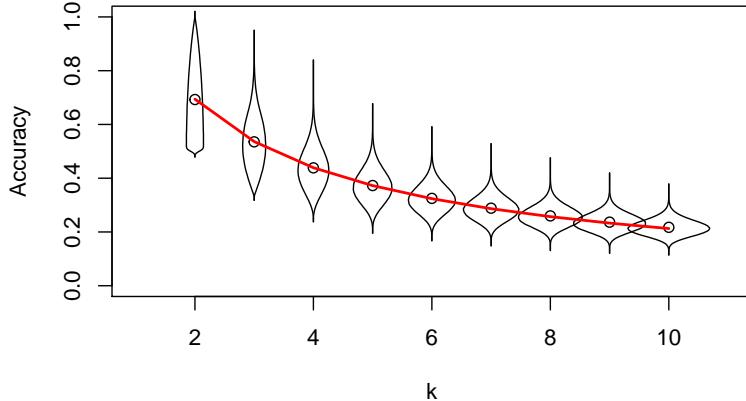


Figure 4: **Generalization accuracy for toy example:** The distribution of the generalization accuracy for $k = 2, 3, \dots, 10$ for the bivariate normal model with $\rho = 0.7$. Circles indicate the average generalization accuracy AGA_k ; the red curve is the theoretically computed average accuracy.

3. Extrapolation

The section is organized as follows. We begin by introducing an explicit formula for the average accuracy AGA_k . The formula reveals that AGA_k is determined by moments of a one-dimensional function $D(u)$. Through this formula, therefore, we can infer through subsample accuracies estimates of $D(u)$. These estimates allow us to extrapolate the average generalization accuracy to an arbitrary number of labels.

The result of our analysis is to expose the average accuracy AGA_k as the weighted average of a function $D(u)$, where $D(u)$ is independent of k , and where k only changes the weighting. The result is stated as follows.

Theorem 2 Suppose $\pi, \{F_y\}_{y \in \mathcal{Y}}$ and score functions M_y satisfy the tie-breaking condition. Then, there exists a cumulative distribution function $D(u)$ defined on the interval $[0, 1]$ such that

$$AGA_k = 1 - (k-1) \int D(u) u^{k-2} du. \quad (5)$$

The tie-breaking allows us to neglect specifying the case when margins are tied.

Definition 3 Tie-breaking condition: for all $x \in \mathcal{X}$, $M_Y(x) \neq M_{Y'}(x)$ with probability one for Y, Y' independently drawn from π .

In practice, one can simply break ties randomly, which is mathematically equivalent to adding a small amount of random noise ϵ to the function M .

3.1 Analysis of average accuracy

For the following discussion, we often consider a random label with its associated score function and example vector. Explicitly, this sampling can be written:

$$Y \sim \pi, M_Y|Y \sim \nu_Y, X|Y \sim F_Y.$$

Similarly we use $(Y', M_{Y'}, X')$ and (Y^*, M_{Y^*}, X^*) for two more triplets with independent and identical distributions. Specifically, X^* will typically note the test example, and therefore Y^* the true label and M_{Y^*} its score function.

The function D is related to a favorability function. Favorability measures the probability that the score for the example x^* is going to be maximized by the score function m_y , compared to a random competitor $M_{Y'}$. Formally, we write:

$$U_{x^*}(m_y) = \Pr[m_y(x^*) > M_{Y'}(x^*)]. \quad (6)$$

Note that for fixed example x^* , favorability is monotonically increasing in $m_y(x^*)$. If $m_y(x^*) > m_{y^\dagger}(x^*)$, then $U_{x^*}(y) > U_{x^*}(y^\dagger)$, because the event $\{m_y(x^*) > M_{Y'}(x^*)\}$ contains the event $\{m_{y^\dagger}(x^*) > M_{Y'}(x^*)\}$.

Therefore, given labels $y^{(1)}, \dots, y^{(k)}$ and test instance x^* , we can think of the classifier as choosing the label with the greatest favorability:

$$\hat{y} = \operatorname{argmax}_{y^{(i)} \in \mathcal{S}} m_{y^{(i)}}(x^*) = \operatorname{argmax}_{y^{(i)} \in \mathcal{S}} U_{x^*}(m_{y^{(i)}}).$$

Furthermore, via a conditioning argument, we see that this is still the case even when the test instance and labels are random:

$$\hat{Y} = \operatorname{argmax}_{Y^{(i)} \in \mathcal{S}} M_{Y^{(i)}}(X^*) = \operatorname{argmax}_{Y^{(i)} \in \mathcal{S}} U_{X^*}(M_{Y^{(i)}}).$$

The favorability takes values between 0 and 1, and when any of its arguments are random, it becomes a random variable with a distribution supported on $[0, 1]$. In particular, we consider the following two random variables:

- a. the *incorrect-label* favorability $U_{x^*}(M_Y)$ between a given fixed test instance x^* , and the score function of a random incorrect label M_Y , and
- b. the *correct-label* favorability $U_{X^*}(M_{Y^*})$ between a random test instance X^* , and the score function of the correct label, M_{Y^*} .

3.1.1 INCORRECT-LABEL FAVORABILITY

The incorrect-label favorability can be written explicitly as

$$U_{x^*}(M_Y) = \Pr[M_Y(x^*) > M_{Y'}(x^*) | M_Y]. \quad (7)$$

Note that M_Y and $M_{Y'}$ are identically distributed, and are both unrelated to x^* that is fixed. This leads to the following result:

Lemma 4 *Under the tie-breaking condition, the incorrect-label favorability $U_{x^*}(M_Y)$ is uniformly distributed for any $x^* \in \mathcal{X}$, and*

$$\Pr[U_{x^*}(M_Y) \leq u] = u. \quad (8)$$

Proof is in the appendix.

3.1.2 CORRECT-LABEL FAVORABILITY

The correct-label favorability is

$$U^* = U_{X^*}(M_{Y^*}) = \Pr[M_{Y^*}(X^*) > M'_{Y'}(X^*) | Y^*, M_{Y^*}, X^*]. \quad (9)$$

The distribution of U^* will depend on π , F_y and ν_y , and generally cannot be written in a closed form. However, this distribution is central to our analysis—indeed, we will see that the function D appearing in theorem 2 is defined as the cumulative distribution function of U^* .

The special case of $k = 2$ shows the relation between the distribution of U^* and the average generalization accuracy, AGA₂. In the two-class case, the average generalization accuracy is the probability that a random correct label score function gives a larger value than a random distractor:

$$\text{AGA}_2 = \Pr[M_{Y^*}(X^*) > M_{Y'}(X^*)].$$

where Y^* is the correct label, and Y' is a random incorrect label. If we condition on $Y^* = y^*$, $M_{Y^*} = m_{y^*}$ and $X^* = x^*$, we get

$$\text{AGA}_2 = \mathbf{E}[\Pr[M_{Y^*}(X^*) > M_{Y'}(X^*) | Y^*, M_{Y^*}, X^*]].$$

Here, the conditional probability inside the expectation is the correct-label favorability. Therefore,

$$\text{AGA}_2 = \mathbf{E}[U^*] = \int D(u)du,$$

where $D(u)$ is the cumulative distribution function of U^* , $D(u) = \Pr[U^* \leq u]$. Theorem 2 extends this to general k ; we now give the proof.

Proof of Theorem 2.

Without loss of generality, suppose that the true label is Y^* and the incorrect labels are $Y^{(1)}, \dots, Y^{(k-1)}$. We have

$$\text{AGA}_k = \Pr[M_{Y^*}(X^*) > \max_{i=1}^{k-1} M_{Y^{(i)}}(X^*)] = \Pr[U^* > \max_{i=1}^{k-1} U_{X^*}(M_{Y^{(i)}})]$$

recalling that $U^* = U_{X^*}(M_{Y^*})$. Now, if we condition on $X^* = x^*$, $Y^* = y^*$ and $M_{Y^*} = m_{y^*}$, then the random variable U^* becomes fixed, with value

$$u^* = U_{x^*}(m_{y^*}).$$

Therefore,

$$\begin{aligned} \text{AGA}_k &= \mathbf{E}[\Pr[U^* > \max_{i=1}^{k-1} U_{X^*}(M_{Y(i)}) | X^* = x^*, Y^* = y^*, M_{Y^*} = y^*]] \\ &= \mathbf{E}[\Pr[U^* > \max_{i=1}^{k-1} U_{X^*}(M_{Y(i)}) | X^* = x^*, U^* = u^*]] \end{aligned}$$

Now define $U_{max,k-1} = \max_{i=1}^{k-1} U_{X^*}(M_{Y(i)})$. Since by Lemma 4, $U_{X^*}(M_{Y(i)})$ are i.i.d. uniform conditional on $X^* = x^*$, we know that

$$U_{max,k-1} | X^* = x^* \sim \text{Beta}(k-1, 1). \quad (10)$$

Furthermore, $U_{max,k-1}$ is independent of U^* conditional on X^* . Therefore, the conditional probability can be computed as

$$\Pr[U^* > U_{max,k-1} | X^* = x^*, U^* = u^*] = \int_{u^*}^1 (k-1)u^{k-2} du.$$

Consequently,

$$\begin{aligned} \text{AGA}_k &= \mathbf{E}[\Pr[U^* > \max_{i=1}^{k-1} U_{x^*}(M_{Y(i)}) | X^* = x^*, U^* = u^*]] \\ &= \mathbf{E}\left[\int_0^{U^*} (k-1)u^{k-2} du | U^* = u^*\right] \\ &= \mathbf{E}\left[\int_0^1 I\{u \leq U^*\} (k-1)u^{k-2} du\right] \\ &= (k-1) \int_0^1 \Pr[U^* \geq u] u^{k-2} du. \end{aligned}$$

Or equivalently,

$$\text{AGA}_k = 1 - (k-1) \int D(u) u^{k-2} du.$$

where $D(u)$ denotes the cumulative distribution function of U^* on $[0, 1]$:

$$D(u) = \Pr[U_{X^*}(M_{Y^*}) \leq u]. \quad (11)$$

□.

Theorem 2 expresses the average accuracy as a weighted integral of the function $D(u)$. Having this theoretical result allows us to understand how the expected k -class risk scales with k in problems where all the relevant densities are known. However, applying this result in practice to estimate AGA_k requires some means of estimating the unknown function D —which we discuss in the section ?.

3.2 Favorability and average accuracy for the toy example

Recall that for the toy example from Section 2.3, the score function M_y was a non-random function of y that measures the distance between x and ρy

$$M_y(x^*) = \log(p(x^*|y)) = -\frac{(x^* - \rho y)^2}{2(1 - \rho^2)}$$

For this model, the favorability function $U_{x^*}(m_y)$ compares the distance between x^* and ρy to the distance between x^* and $\rho Y'$ for a randomly chosen distractor $Y' \sim N(0, 1)$:

$$\begin{aligned} U_{x^*}(m_y) &= \Pr[|\rho y - x^*| > |\rho Y' - x^*|] \\ &= \Phi\left(\frac{x^* + |\rho y - x^*|}{\rho}\right) - \Phi\left(\frac{x^* - |\rho y - x^*|}{\rho}\right), \end{aligned}$$

where Φ is the standard normal cumulative distribution function. Figure 5(a) illustrates the level sets of the function $U_{x^*}(m_y)$. The highest values of $U_{x^*}(m_y)$ are near the line $x^* = \rho y$ corresponding to conditional mean of $X|Y$: as one moves farther from the line, $U_{x^*}(m_y)$ decays. Note however that large values of x^* and y (with the same sign) result in larger values of $U_{x^*}(m_y)$ since it becomes unlikely for $Y' \sim N(0, 1)$ to exceed $Y = y$.

Using the formula above, we can calculate the correct-label favorability $U^* = U_{X^*}(M_{Y^*})$ and its cumulative distribution function $D(u)$. The function D is illustrated in figure 5(b) for the current example with $\rho = 0.7$. The red curve in figure 4 was computed using the formula

$$\text{AGA}_k = 1 - (k - 1) \int D(u) u^{k-2} du.$$

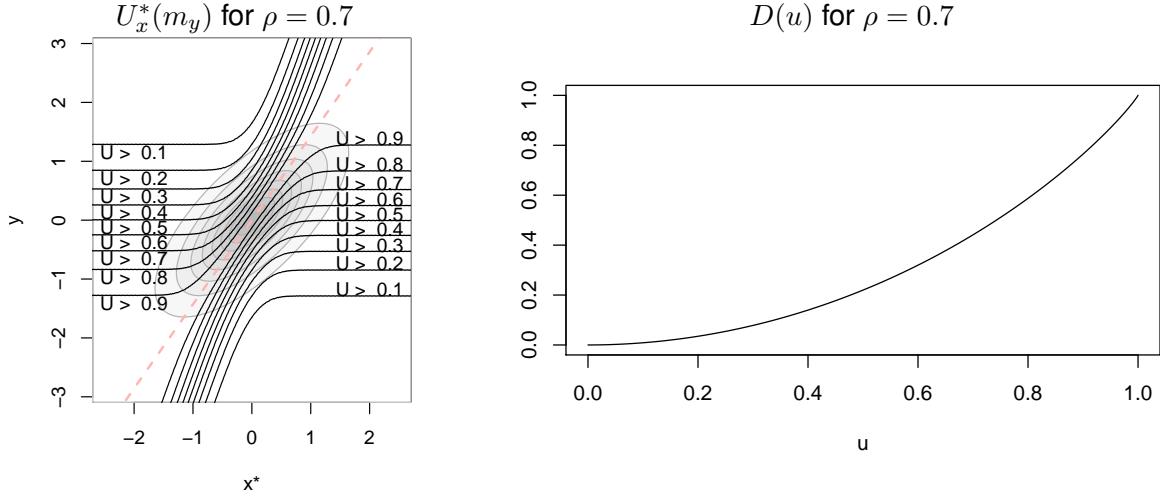


Figure 5: **Favorability for toy example:** *Left:* The level curves of the function $U_{x^*}(m_y)$ in the bivariate normal model with $\rho = 0.7$. *Right:* The function $D(u)$ gives the cumulative distribution function of the random variable $U_{X^*}(M_Y)$.

It is illuminating to consider how the average accuracy curves and the $D(u)$ functions vary as we change the parameter ρ . Higher correlations ρ lead to higher accuracy, as seen in figure 6(a), where the accuracy curves are shifted upward as ρ increases from 0.3 to 0.9. The favorability $U_{x^*}(m_y)$ tends to be higher on average as well, which leads to lower values of the cumulative distribution function—as we see in figure 6(b), where the function $D(u)$ becomes smaller as ρ increases.

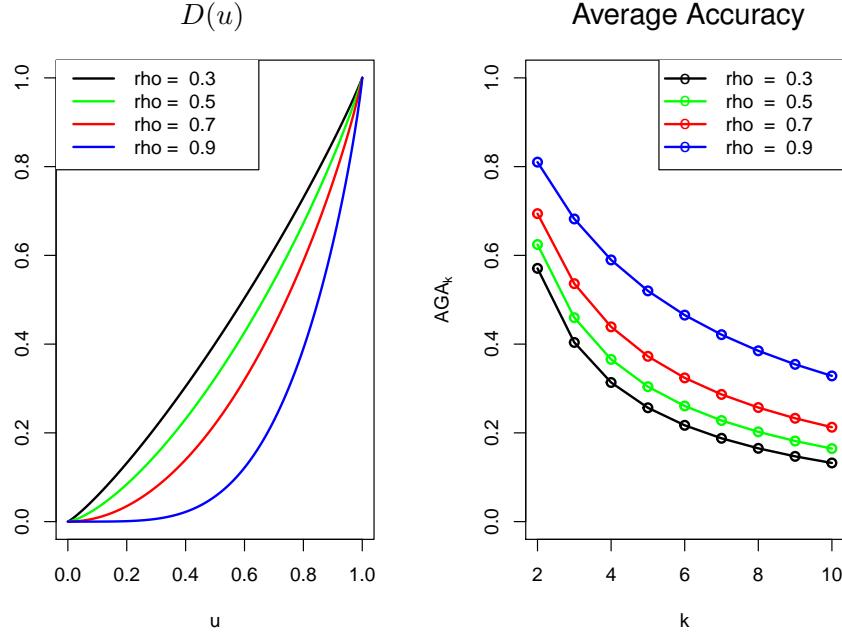


Figure 6: **Average accuracy with different ρ 's:** *Left:* The average accuracy AGA_k . *Right:* $D(u)$ function for the bivariate normal model with $\rho \in \{0.3, 0.5, 0.7, 0.9\}$.

3.3 Estimation

Next, we discuss how to use data from smaller classification tasks to extrapolate average accuracy. Assume that we have data from a k_1 -class random classification task, and would like to estimate the average accuracy AGA_{k_2} for $k_2 > k_1$ classes. Our estimation method will use the k -class average test accuracies, $\text{ATA}_2, \dots, \text{ATA}_{k_1}$ (see Eq 4), for its inputs.

The key to understanding the behavior of the average accuracy AGA_k is the function D . We adopt a linear model

$$D(u) = \sum_{\ell=1}^m \beta_\ell h_\ell(u), \quad (12)$$

where $h_\ell(u)$ are known basis functions, and β_ℓ are the linear coefficients to be estimated. Since our proposed method is based on the linearity assumption (12), we call it the *regression method* for extrapolation.

Conveniently, the AGA_k can also be expressed in terms of the β_ℓ coefficients. If we plug in the assumed linear model (12) into the identity (5), then we get

$$1 - \text{AGA}_k = (k-1) \int D(u) u^{k-2} du \quad (13)$$

$$= (k-1) \int_0^1 \sum_{\ell=1}^m \beta_\ell h_\ell(u) u^{k-2} du \quad (14)$$

$$= \sum_{\ell=1}^m \beta_\ell H_{\ell,k} \quad (15)$$

where

$$H_{\ell,k} = (k-1) \int_0^1 h_\ell(u) u^{k-2} du. \quad (16)$$

The constants $H_{\ell,k}$ are moments of the basis function h_ℓ : hence we call this method the *moment method*. Note that $H_{\ell,k}$ can be precomputed numerically for any $k \geq 2$.

Now, since the test accuracies ATA_k are unbiased estimates of AGA_k , this implies that the regression estimate

$$\hat{\beta} = \operatorname{argmin}_{\beta} \sum_{k=2}^{k_1} \left((1 - \text{ATA}_k) - \sum_{\ell=1}^m \beta_\ell H_{\ell,k} \right)^2$$

is unbiased for β . The estimate of AGA_{k_2} is similarly obtained from (15), via

$$\widehat{\text{AGA}}_{k_2} = 1 - \sum_{\ell=1}^m \hat{\beta}_\ell H_{\ell,k_2}. \quad (17)$$

3.4 Model selection

Accurate extrapolation using the regression method depends on a good fit between the linear model (12) and the true discriminability function $D(u)$. However, since the function $D(u)$ depends on the unknown joint distribution of the data, it makes sense to let the data help us choose a good basis $\{h_u\}$ from a set of candidate bases.

Extending the analogy to established regression methodologies, we consider using *cross-validation* for model selection (?). However, it is necessary to usual adjust the cross-validation procedure because unlike in the standard prediction problem, in the case of prediction extrapolation, (i) the training data (the average test accuracies) are not i.i.d., and (ii) the prediction is to be made in a particular direction (extrapolating to large k). In light of (i), the dependency of the data eliminates the motivation to split the data into a large number of random subsamples. Instead, we split the training data into two halves, the first half consisting of $\{\text{ATA}_2, \dots, \text{ATA}_{\lfloor k_1/2 \rfloor}\}$ and the second half consisting of $\{\text{ATA}_{\lfloor k_1/2 \rfloor + 1}, \dots, \text{ATA}_{k_1}\}$. Meanwhile, because of (ii), we break the usual symmetry of cross-validation, and only train on the first half of the data and only predict on the held-out point ATA_{k_1} to evaluate cross-validation accuracy, since we are only interested in how well the models *extrapolate* from small numbers of classes to a larger number of classes, and not in any other direction of prediction. Using ATA_{k_1} as the ground truth, we choose the basis that yields the closest prediction for $\widehat{\text{AGA}}_{k_1}$.

4. Simulation study

We ran simulations to check how the proposed extrapolation method performs in different settings. The results are displayed in Figure 7. We varied the number of classes k_1 in the source dataset, the difficulty of classification, and the basis functions. We generated data according to a mixture of isotropic multivariate Gaussian distributions: labels Y were sampled from $Y \sim N(0, I_{10})$, and the examples for each label sampled from $X|Y \sim N(Y, \sigma^2 I_{10})$. The noise-level parameter σ determines the difficulty of classification. Similarly to the real-data example, we consider a 1-nearest neighbor classifier, which is given a single training instance per class.

For the estimation, we use the cross-validation procedure described in section 3.4 to select the parameter h of the “radial basis”

$$h_\ell(u) = \Phi\left(\frac{\Phi^{-1}(u) - t_\ell}{h}\right).$$

where t_ℓ are a set of regularly spaced knots which are determined by h and the problem parameters. The rationale behind the radial basis is to model the density of $\Phi^{-1}(U^*)$ as a mixture of gaussians with variance h^2 . To control overfitting, the knots are separated by at least a distance of $h/2$, and the largest knots have absolute value $\Phi^{-1}(1 - \frac{1}{k_1^2})$.

Comparison to Kay

In their paper, ? (page 29 of supplementary) proposed a method for extrapolating classification accuracy to a larger number of classes. The method depends on repeated kernel-density estimation (KDE) steps. Because the method is only briefly motivated in the original text, we present it in our notation. It is perhaps worthwhile to compare this to their original presentation.

For k_1 observed classes, let $m_{y_j}(x_i)$ $1 \leq i, j \leq k_1$ be the observed score comparing feature vector of the i 'th class x_i to the label of the j 'th class y_j . The KDE method proposes to estimate the density of scores for each distractor class using a Gaussian kernel function K $\hat{f}_i(m) = \frac{1}{k_1-1} \sum_{j \neq i} K(m_{y_j}(x_j), m)$. Probability of error against a single competitor is then computed for each class separately by integrating the density above the observed true score $m_{y_i}(x_i)$, in $h_2(i) = \int_{m_{y_i}(x_i)}^\infty \hat{f}(m) dm$. The probability of accurate classification of the i 'th class against $k_2 - 1$ competitors is $h_{k_2}(i) = (1 - h(i))^{k_2-1}$. The average over the k_1 classes is the estimated generalization accuracy $\hat{A}GA_{KDE} = \frac{1}{k_1} \sum_i^{k_1} h_{k_2}(i)$.

Note that the method depends heavily on the density estimation step. If the kernel bandwidth is too small compared to the number of classes, the extrapolated accuracy will be upward biased. To see this, consider a class i that is correctly classified in the original class set. That is, $m_{y_i}(x_i) > m_{y_j}(x_i)$ for every $j \neq i$. If we use for \hat{f}_i the unsmoothed empirical density, $h_2(i)$ will be 1 and therefore $h_{k_2}(i)$ will be 1 as well. In other words, the method relies on smoothing of each class to generate a the tail density that exceeds $m_{y_i}(x_i)$, and therefore it is highly dependent on the choice of kernel bandwidth.

In the following simulations, we compare the regression method to the KDE method.

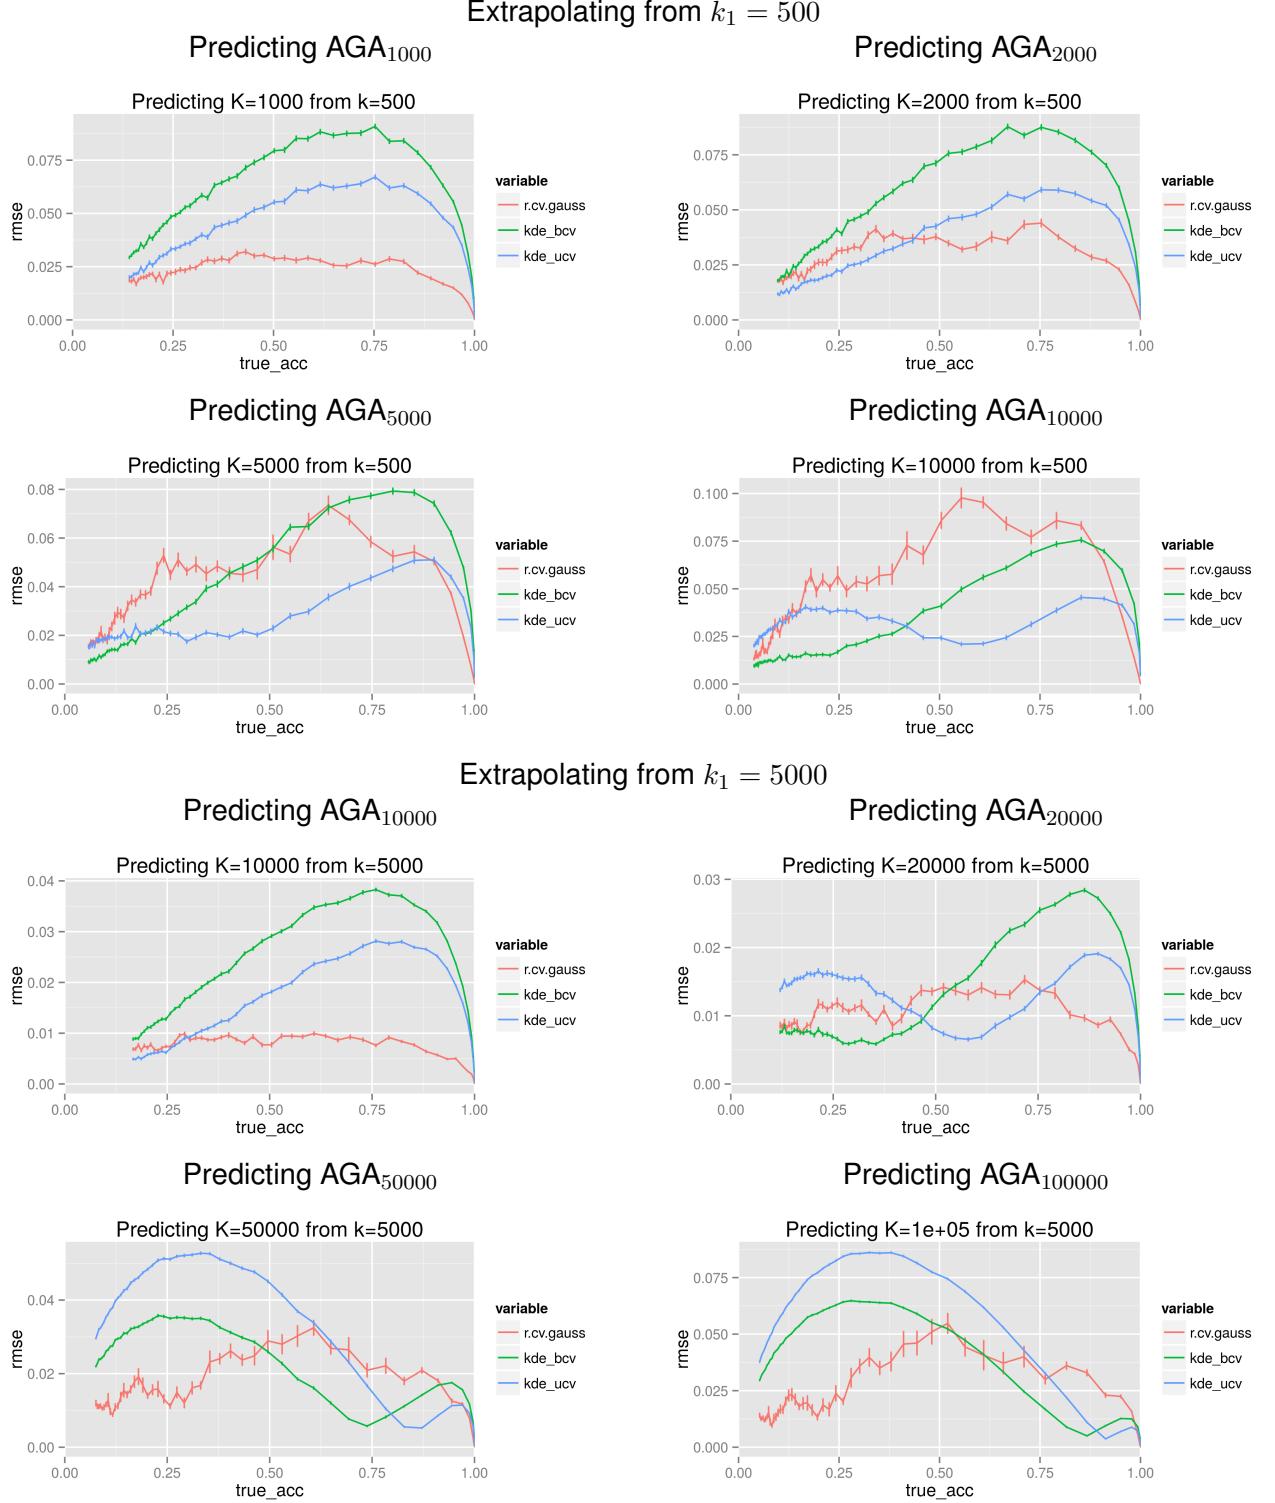


Figure 7: **Simulation results:** Simulation study consisting of multivariate Gaussian Y with nearest neighbor classifier. Comparison of cross-validated regression method with radial basis (`r.cv.gauss`), KDE-based methods with biased cross-validation (`kde_bcv`) and unbiased cross-validation (`kde_ucv`).

Label	Training			Test
$y^{(1)} = \text{Amelia}$	$x_1^{(1)} = \text{[Image]}$	$x_2^{(1)} = \text{[Image]}$	$x_3^{(1)} = \text{[Image]}$	$x_*^{(1)} = \text{[Image]}$
$y^{(2)} = \text{Jean-Pierre}$	$x_1^{(2)} = \text{[Image]}$	$x_2^{(2)} = \text{[Image]}$	$x_3^{(2)} = \text{[Image]}$	$x_*^{(2)} = \text{[Image]}$
$y^{(3)} = \text{Liza}$	$x_1^{(3)} = \text{[Image]}$	$x_2^{(3)} = \text{[Image]}$	$x_3^{(3)} = \text{[Image]}$	$x_4^{(3)} = \text{[Image]}$
$y^{(4)} = \text{Patricia}$	$x_1^{(4)} = \text{[Image]}$	$x_2^{(4)} = \text{[Image]}$	$x_3^{(4)} = \text{[Image]}$	$x_4^{(4)} = \text{[Image]}$

Figure 8: **Face recognition setup:** Examples of labels and features from the *Labeled Faces in the Wild* dataset.

5. Experimental Evaluation

We demonstrate the extrapolation of average accuracy by predicting the accuracy of a face recognition on a large set of labels from the system’s accuracy on a smaller subset.

5.1 Data

From the “Labeled Faces in the Wild” dataset (?), we selected the 1672 individuals with at least 2 face photos. We form a dataset consisting of photo-label pairs $(x_j^{(i)}, y^{(i)})$ for $i = 1, \dots, 1672$ and $j = 1, 2$ by randomly selecting 2 face photos for each individual.

5.2 Classifier

We implement a two-step face recognition system based on a precomputed neural-network based embedding followed by a one nearest neighbor classifier.

We used the OpenFace (?) embedding for feature extraction. For each photo x , a 128-dimensional feature vector $g(x)$ is obtained as follows. The computer vision library DLIB is used to detect landmarks in x , and to apply a nonlinear transformation to align x to a template. The aligned photograph is then downsampled to a 96×96 image. The downsampled image is fed into a pre-trained deep convolutional neural network to obtain the 128-dimensional feature vector $g(x)$. More details are found in (?).

The recognition system then works as follows. Suppose we want to perform facial recognition on a subset of the individuals, $I \subset \{1, \dots, 1672\}$. Then, for all $i \in I$, we load one example-label pair, into the system, $(x_1^{(i)}, y^{(i)})$. In order to identify a new photo \tilde{z}^* , we obtain the feature vector $g(x^*)$, and guess the label \hat{y} with the minimal Euclidean distance between $g(y^{(i)})$ and $g(x^*)$, which implies a score function

$$M_{y^{(i)}}(x^*) = -\|g(x_1^{(i)}) - g(x^*)\|^2.$$

The test accuracy is assessed on the unused repeat for all individuals in I . Note that the assumptions of our estimation method are met in this example because one-nearest neighbor is a marginal classifier. We note that m -nearest neighbor for $m > 1$ is not marginal.

k_1	100	200	400
CV reg	0.128	0.081	0.047
KDE UCV	0.082	0.057	0.033
KDE BCV	0.054	0.037	0.022

Table 1: RMSE on predicting TA₁₆₇₂ from \widehat{AGA}_{k_1}

5.3 Experimental Details

We treat the full data-set of 1672 as our population of labels. In each experiment, we choose a random subset of size $k_1 < 1672$, for which we observe both training and test data. From this data, we will estimate AGA _{k_2} for $k_2 = k_1 + 1, \dots, 1672$. We use $k_1 = 100, 200, 400, 800$, with $B = 300$ repeats for each subset size.

For the selected subset of size k_1 , we can estimate the test accuracy at every $k \leq k_1$, getting the vector $(ATA_2, \dots, ATA_{k_1})$. Specifically, we use a linear spline basis,

$$h_\ell(u) = \left[u - \frac{\ell}{m+1} \right]_+$$

for $\ell = 1, \dots, m$. Here we take $m = 10000$. We fit the β coefficient vector using non-negative least squares:

$$\hat{\beta} = \operatorname{argmin}_{\beta: \beta_\ell \geq 0} \sum_{k=2}^{k_1} \left((1 - ATA_k) - \sum_{\ell=1}^m \beta_\ell H_{\ell,k} \right)^2$$

The non-negativity constraint on the coefficients β , combined with the linear spline basis, ensures that $D(u)$ is a monotonic and convex function on $[0, 1]$.

Based on the β coefficients, we can compute the prediction for the full dataset \hat{AGA}_{1672} . We compare the prediction to the observed accuracy on full dataset TA₁₆₇₂, which approximates the ground truth.

5.4 Results

The extrapolation results can be seen in Figure ??.

As can be seen, both the accuracy as well as the variances decrease rapidly as k_1 increases. In general, for $k_1 > 400$ the paths of the different extrapolation curves are not very different. The root-mean-square errors between at $k_2 = 1672$ can be seen in Table ??.

6. Discussion

In this work, we suggest treating the class set in a classification task as random, in order to extrapolate classification performance on a small task to the expected performance on a larger unobserved task. We show that average generalized accuracy decreases with increased class-set size like the $(k-1)$ th moment of a distribution function. Furthermore, we introduce an algorithm for estimating this underlying distribution, that allows efficient computation of higher order moments. There are many choices and simplifying assumptions used in the description of the method. In this discussion, we discuss these decisions and map some alternative models or strategies for future work.

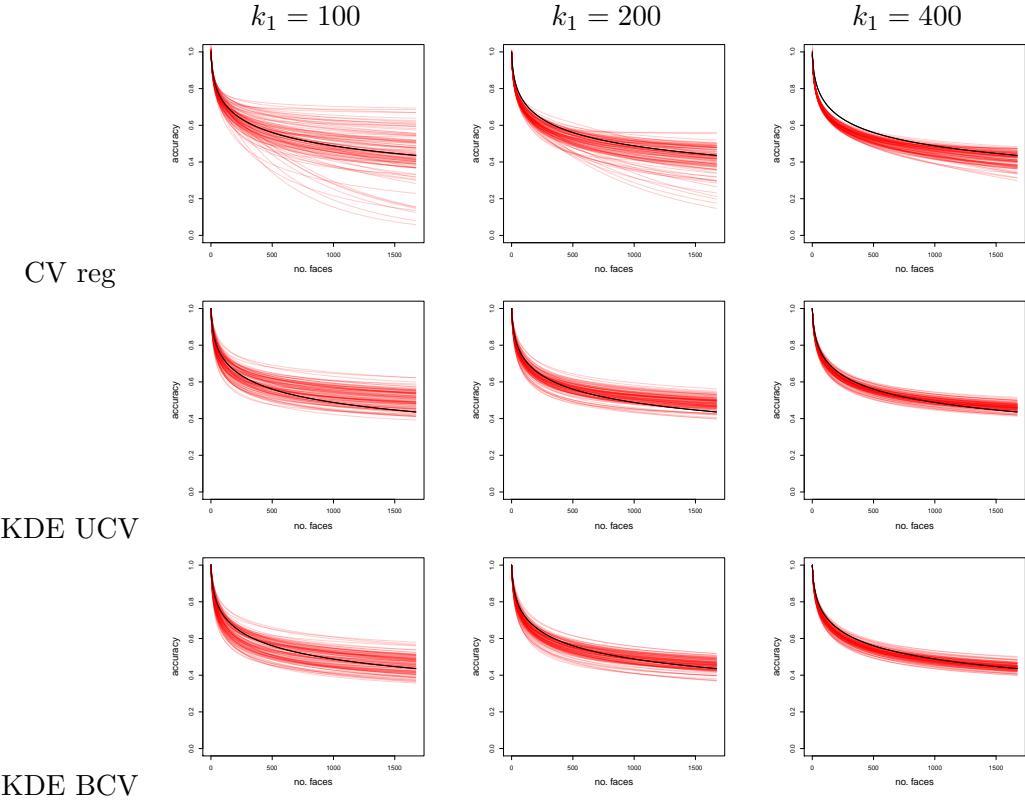


Figure 9: **Comparison of KDE and CV regression methods:** The plots show predicted accuracies using a different source dataset size k_1 . Each red curve represents the estimated accuracies using a single subsample. The black curve shows the true average accuracy.

COMPARISON TO KAY ET AL.

The extrapolation method of ? can be described in our framework as follows. Let F_x be the cumulative distribution function of $M_{Y'}(x)$ for a random label $Y' \sim \pi$. For each test instance $x_j^{(i)}$, let $\hat{F}_{x_j^{(i)}}(m_{y^{(i)}}(x_j^{(i)}))$ be an estimate of $F_{x_j^{(i)}}(m_{y^{(i)}}(x_j^{(i)}))$. The particular estimation method recommended by ? is to estimate the density $f_{x_j^{(i)}}$ by using kernel-density estimation with a Gaussian kernel and a bandwidth chosen via pseudolikelihood cross-validation (?); however, our criticism is not specific to the use of a particular estimator for \hat{F}_x . Extrapolate using the formula

$$\widehat{\text{AGA}}_k = \frac{1}{k_1 r} \sum_{i=1}^k \sum_{j=1}^r \hat{F}_{x_j^{(i)}}(m_{y^{(i)}}(x_j^{(i)}))^{k-1}$$

While no justification is given for the method in ?, one possible justification is the fact that

$$\text{AGA}_k = \mathbf{E}[F_X(M_Y(X))^{k-1}].$$

Therefore, the method can give good extrapolations when the estimated probabilities $\hat{F}_{x_j^{(i)}}(m_{y^{(i)}}(x_j^{(i)}))$ are close to the true probabilities $F_{x_j^{(i)}}(m_{y^{(i)}}(x_j^{(i)}))$. However, the method ignores the bias introduced by exponentiation. That is, even if \hat{p} is an unbiased estimator of p , \hat{p}^k may not be a very good estimate of p^k , since

$$p^k = \mathbf{E}[\hat{p}]^k \neq \mathbf{E}[\hat{p}^k].$$

unless \hat{p} is a degenerate random variable (constant). Otherwise, for large k , \hat{p}^k may be an extremely biased estimate of p . Our proposed method avoids this source of bias by estimating the $(k-1)$ st moment of $D(u)$ directly.

MARGINAL CLASSIFIERS

One limitation of our analysis of average accuracy is that it applies only to marginal classifiers. Theoretically, it may be possible to extend the analysis to certain non-marginal classifiers, for instance, by showing that in the large- k limit such classifiers become “asymptotically” marginal, in some sense. Furthermore, there is no obstacle in testing the extrapolation method to see how well it would recover accuracy curves for non-marginal classifiers.

SAMPLING

Our analysis is currently restricted to randomized classification problems with i.i.d. sampling of classes. Extension to other sampling mechanisms, such as cluster sampling, may be possible if one can work out how the dependence between classes translates into dependence between the favorabilities $U_{X^*}(m_{Y^{(k)}})$.

More broadly, the assumption that the labels in \mathcal{S}_k are a random sample from a distribution π may be inappropriate. Many natural classification problems arise from hierarchically partitioning a space of instances into a set of labels. Therefore, rather than modeling \mathcal{S}_k as a random sample, it may be more suitable to model it as a random hierarchical partition

of \mathcal{Y} (for instance, arising from an optional Pólya tree process, ?). Finally, note that we assume no knowledge about the new class-set except for its size. Better accuracy might be achieved if some partial information is known.

ARBITRARY COST FUNCTIONS

In the current paper, we only discussed extrapolating the classification accuracy—or equivalently, the risk for the zero-one cost function. However, it is possible to extend our analysis to risk functions with arbitrary cost functions, which is the subject of forthcoming work.

PREDICTING THE GENERALIZATION ACCURACY

In this work, our focus was on estimating the average generalization accuracy. However, rather than being interested in the average accuracy for a new label set, one might be interested in predicting the generalization accuracy on a particular problem. When the source task and target tasks are independent, then the average generalization accuracy is also Bayes estimate which minimizes mean-squared prediction error. However, it may be known that there is overlap between the labels or data used in the source task or target task. Conditioning on this information may yield a more accurate prediction. However, we leave this problem to future work.

CONFIDENCE AND PREDICTION INTERVALS

In many of the applications discussed in the introduction, it would be useful to construct either confidence intervals for the average generalization accuracy AGA_k , or prediction intervals for the generalization accuracy, GA_k . The key to constructing such intervals is to understand the variability properties of the inputs to our estimation procedure, the average test accuracies ATA_k . We discuss the issue of constructing confidence and prediction intervals in forthcoming work.

OTHER TRANSFER LEARNING SETUPS

In our analysis, we also limited the training set sizes to be the same in both the source and target tasks. It would be very nice to be able to relax this assumption, since in most practical applications, the training set sizes are varied within label sets as well as between tasks. The idea of extrapolating from learning curves (?) may be one way to adjust for varying training set sizes.

Many other aspects of transfer learning could also be considered in conjunction with the issue of transferring from one label set to another, such as transfer to a different domain, or transfer to a target task without training data (?).

Acknowledgments

We thank Jonathan Taylor, Trevor Hastie, John Duchi, Steve Mussmann, Qingyun Sun, and Robert Tibshirani for useful discussion. CZ is supported by an NSF graduate research fellowship, and would also like to thank the European Research Council under the ERC grant agreement n°[PSARPS-294519] for travel support.

References

- Felix Abramovich and Marianna Pensky. Feature selection and classification of high-dimensional normal vectors with possibly large number of classes. *arXiv preprint arXiv:1506.01567*, 2015.
- Brandon Amos, Bartosz Ludwiczuk, and Mahadev Satyanarayanan. Openface: A general-purpose face recognition library with mobile applications. Technical report, CMU-CS-16-118, CMU School of Computer Science, 2016.
- Ricardo Cao, Antonio Cuevas, and Wenceslao González Manteiga. A comparative study of several smoothing methods in density estimation. *Computational Statistics & Data Analysis*, 17(2):153–176, 1994.
- Corinna Cortes, Lawrence D Jackel, Sara A Solla, Vladimir Vapnik, and John S Denker. Learning curves: Asymptotic values and rate of convergence. In *Advances in Neural Information Processing Systems*, pages 327–334, 1994.
- Koby Crammer and Yoram Singer. On the algorithmic implementation of multiclass kernel-based vector machines. *Journal of machine learning research*, 2(Dec):265–292, 2001.
- Justin Davis, Marianna Pensky, and William Crampton. Bayesian feature selection for classification with possibly large number of classes. *Journal of Statistical Planning and Inference*, 141(9):3256–3266, 2011.
- Jia Deng, Alexander C Berg, Kai Li, and Li Fei-Fei. What does classifying more than 10,000 image categories tell us? In *European conference on computer vision*, pages 71–84. Springer, 2010.
- Jeff Donahue, Yangqing Jia, Oriol Vinyals, Judy Hoffman, Ning Zhang, Eric Tzeng, and Trevor Darrell. Decaf: A deep convolutional activation feature for generic visual recognition. In *International conference on machine learning*, pages 647–655, 2014.
- Pinar Duygulu, Kobus Barnard, Joao FG de Freitas, and David A Forsyth. Object recognition as machine translation: Learning a lexicon for a fixed image vocabulary. In *European conference on computer vision*, pages 97–112. Springer, 2002.
- Gregory Griffin, Alex Holub, and Pietro Perona. Caltech-256 object category dataset. 2007.
- Maya R Gupta, Samy Bengio, and Jason Weston. Training highly multiclass classifiers. *Journal of Machine Learning Research*, 15(1):1461–1492, 2014.
- Trevor Hastie, Robert Tibshirani, and Jerome Friedman. *The Elements of Statistical Learning*, volume 1. Springer, 2 edition, 2009. ISBN 9780387848570. doi: 10.1007/b94608. URL <http://www.springerlink.com/index/10.1007/b94608>.
- Gary B. Huang, Manu Ramesh, Tamara Berg, and Erik Learned-Miller. Labeled faces in the wild: A database for studying face recognition in unconstrained environments. Technical Report 07-49, University of Massachusetts, Amherst, October 2007.

- Kendrick N Kay, Thomas Naselaris, Ryan J Prenger, and Jack L Gallant. Identifying natural images from human brain activity. *Nature*, 452(March):352–355, 2008. ISSN 0028-0836. doi: 10.1038/nature06713.
- Yoonkyung Lee, Yi Lin, and Grace Wahba. Multicategory support vector machines: Theory and application to the classification of microarray data and satellite radiance data. *Journal of the American Statistical Association*, 99(465):67–81, 2004.
- Maxime Oquab, Leon Bottou, Ivan Laptev, and Josef Sivic. Learning and transferring mid-level image representations using convolutional neural networks. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 1717–1724, 2014.
- Rui Pan, Hansheng Wang, and Runze Li. Ultrahigh-dimensional multiclass linear discriminant analysis by pairwise sure independence screening. *Journal of the American Statistical Association*, 111(513):169–179, 2016.
- Sinno Jialin Pan and Qiang Yang. A survey on transfer learning. *IEEE Transactions on knowledge and data engineering*, 22(10):1345–1359, 2010.
- C. E. Shannon. A Mathematical Theory of Communication. *Bell System Technical Journal*, 27(3):379–423, 1948. ISSN 00058580. doi: 10.1002/j.1538-7305.1948.tb01338.x. URL <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=6773024>.
- Ali Sharif Razavian, Hossein Azizpour, Josephine Sullivan, and Stefan Carlsson. Cnn features off-the-shelf: an astounding baseline for recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition workshops*, pages 806–813, 2014.
- Efstathios Stamatatos, Walter Daelemans, Ben Verhoeven, Patrick Juola, Aurelio López-López, Martin Potthast, and Benno Stein. Overview of the author identification task at pan 2014. In *CLEF (Working Notes)*, pages 877–897, 2014.
- Roberto Togneri and Daniel Pulella. An overview of speaker identification: Accuracy and robustness issues. *IEEE Circuits and Systems Magazine*, 11(2):23–61, 2011.
- Jason Weston, Chris Watkins, et al. Support vector machines for multi-class pattern recognition. In *ESANN*, volume 99, pages 219–224, 1999.
- Wing H Wong, Li Ma, et al. Optional polyá tree and bayesian inference. *The Annals of Statistics*, 38(3):1433–1459, 2010.