

Операционные системы

Редактор Emacs

Бондаренко София Николаевна

2026-04-10

Цели и задачи работы

Процесс выполнения лабораторной работы

Выводы по проделанной работе

1. Цели и задачи работы

Познакомиться с операционной системой Linux. Получить практические навыки работы с редактором Emacs.

1 Изучить возможности редактора Emacs

2. Процесс выполнения лабораторной работы

1. Откроем Emacs.

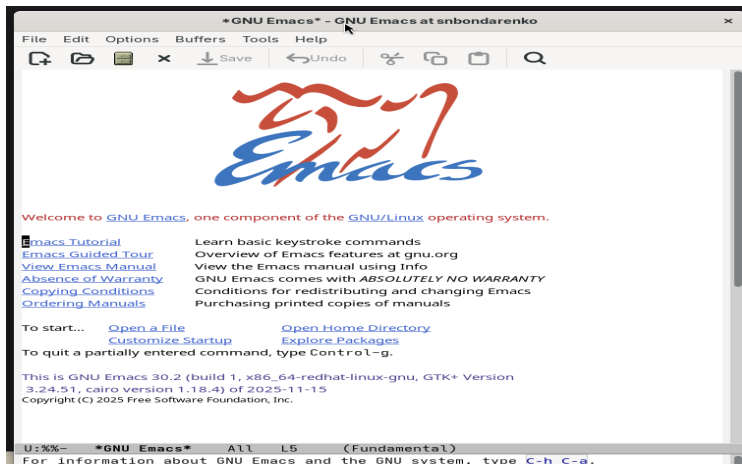


Рисунок 1: Запуск Emacs

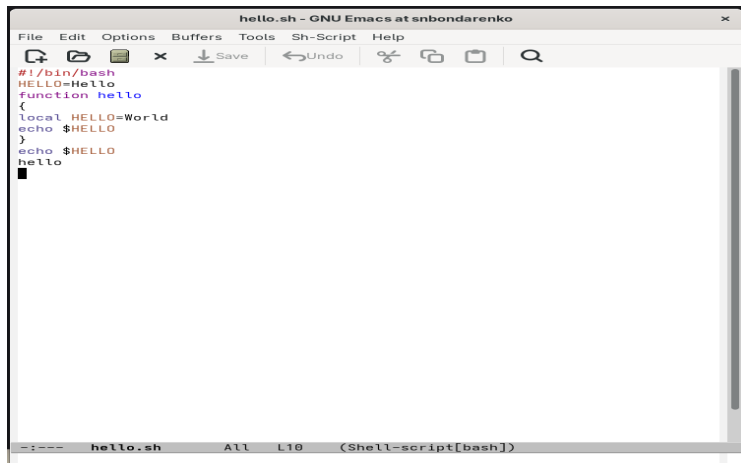


Рисунок 2: Новый файл

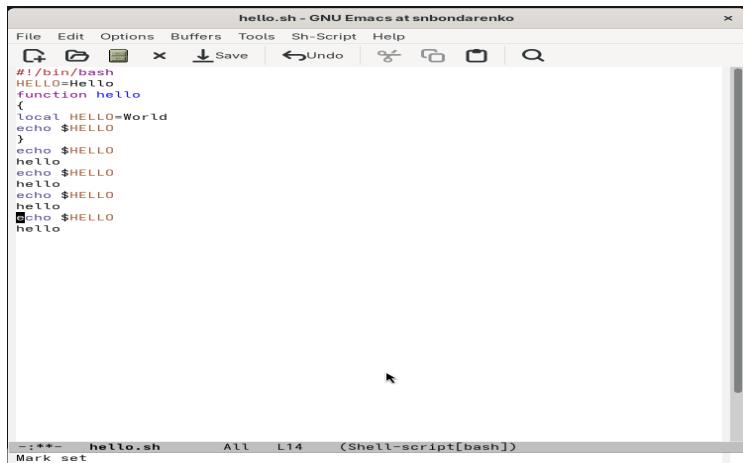


Рисунок 3: Операция вставка


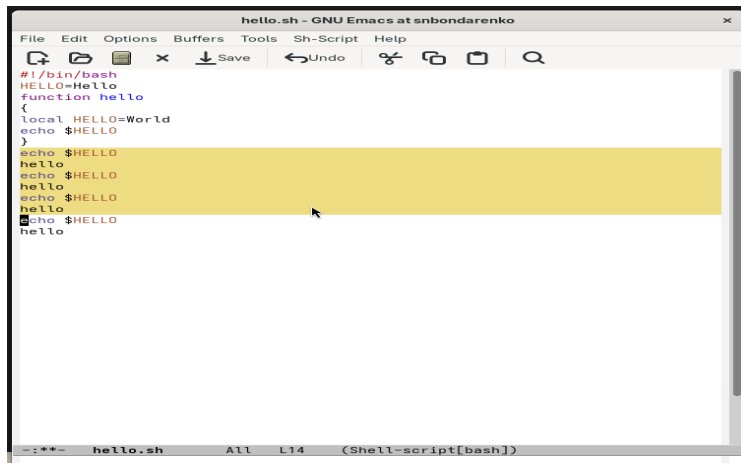



Рисунок 4: Выделение блока

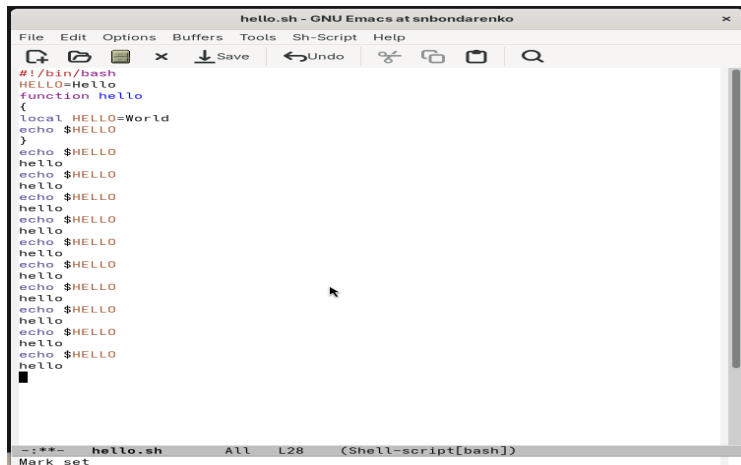

```
#!/bin/bash
HELLO=Hello
function hello
{
  local HELLO=World
  echo $HELLO
}
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
```


GNU Emacs status bar: -:*-- hello.sh All L28 (Shell-script[bash]) Mark set

Рисунок 5: Копирование блока

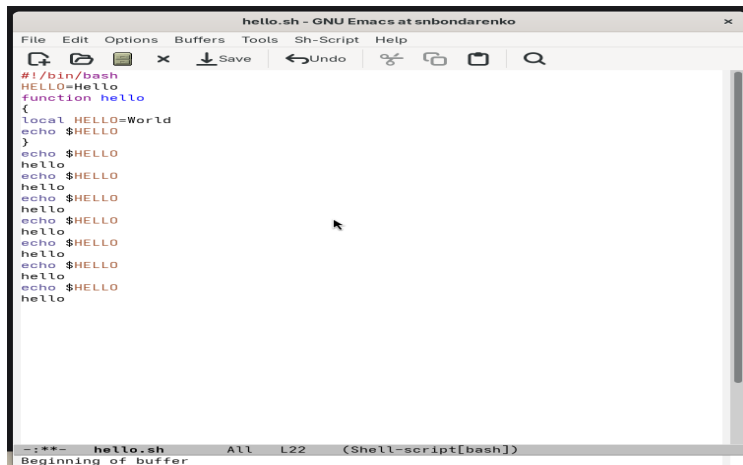

```
hello.sh - GNU Emacs at snbondarenko
File Edit Options Buffers Tools Sh-Script Help
[Icons: Open, Save, Undo, Copy, Paste, Find]
#!/bin/bash
HELLO=Hello
function hello
{
  local HELLO=World
  echo $HELLO
}
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
-:***- hello.sh All L22 (Shell-script[bash])
Beginning of buffer
```


Рисунок 6: Удаление блока

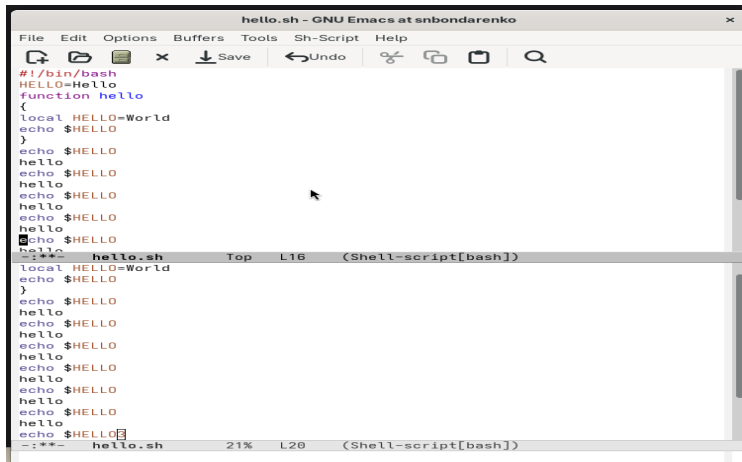

The image shows a GNU Emacs window titled "hello.sh - GNU Emacs at snbondarenko". The window has a menu bar with "File", "Edit", "Options", "Buffers", "Tools", "Sh-Script", and "Help". Below the menu bar is a toolbar with icons for file operations and editing. The main editing area is split horizontally into two panes. The top pane displays the content of the "hello.sh" script, which is a bash script that defines a "hello" function and calls it multiple times. The bottom pane shows the script being executed in a shell, with the output of the "echo" commands visible. The status bar at the bottom of the window indicates the current buffer is "hello.sh", the cursor is at line 20, and the file is 21% open.

```
#!/bin/bash
HELLO=Hello
function hello
{
  local HELLO=World
  echo $HELLO
}
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
```

Рисунок 7: Горизонтальное разделение

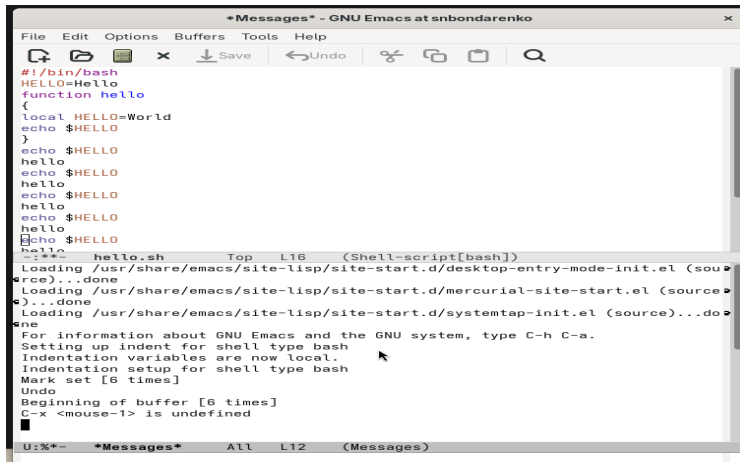

The screenshot shows the GNU Emacs Messages window. The title bar reads "+Messages* - GNU Emacs at snbondarenko". The menu bar includes File, Edit, Options, Buffers, Tools, and Help. The toolbar contains icons for file operations and editing. The main text area displays the following content:

```
#!/bin/bash
HELLO=Hello
function hello
{
  local HELLO=World
  echo $HELLO
}
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
--:**-- hello.sh Top L16 (Shell-script[bash])
Loading /usr/share/emacs/site-lisp/site-start.d/desktop-entry-mode-init.el (source)...done
Loading /usr/share/emacs/site-lisp/site-start.d/mercurial-site-start.el (source)...done
Loading /usr/share/emacs/site-lisp/site-start.d/systemtap-init.el (source)...done
For information about GNU Emacs and the GNU system, type C-h C-a.
Setting up indent for shell type bash
Indentation variables are now local.
Indentation setup for shell type bash
Mark set [6 times]
Undo
Beginning of buffer [6 times]
C-x <mouse-1> is undefined
```

The status bar at the bottom shows "U:%*~ +Messages* All L12 (Messages)".

Рисунок 8: Переключение буфера

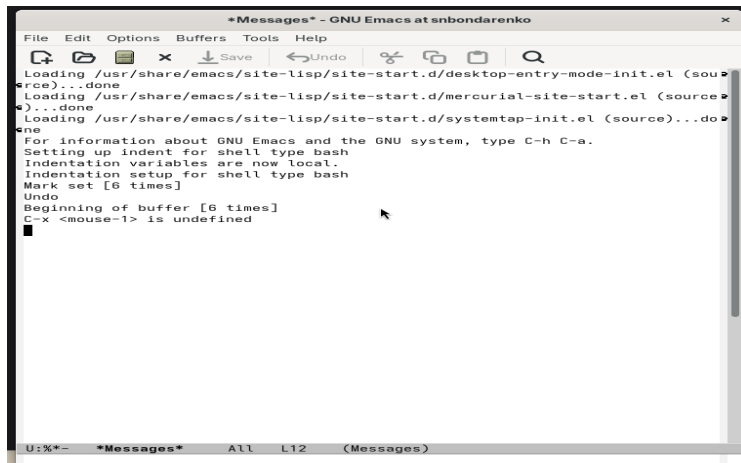


Рисунок 9: Закроем буфер

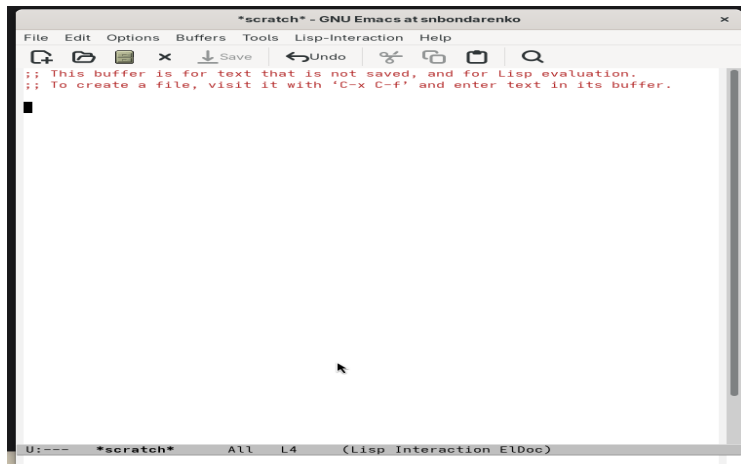


Рисунок 10: Переключение буфера

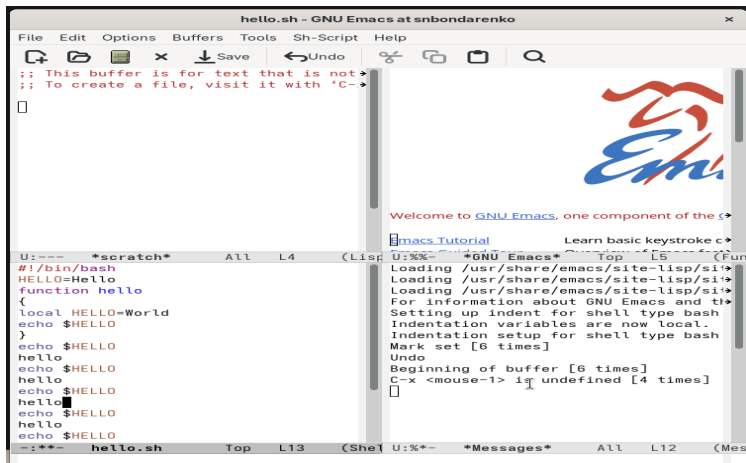


Рисунок 11: Четыре буфера

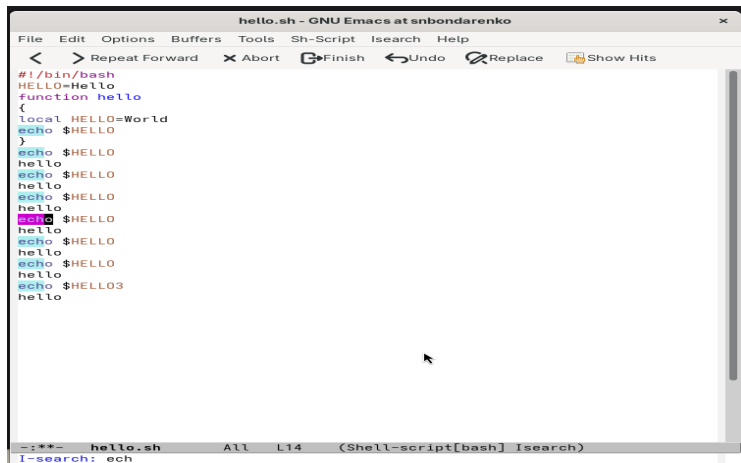


Рисунок 12: Режим поиска

3. Выводы по проделанной работе

В данной работе мы познакомились с еще одним редактором операционной системой Linux. Получили практические навыки работы с редактором Emacs.