PROJECT MANAGEMENT PORTAL (PMP)

A Mini-Project Report

Submitted for partial fulfillment of the requirement for the award of the degree of

Master of Science in Information Technology

Submitted by

SNEGA V (A22MIT21)

Under the Guidance of

Mr. Z. John Bernard MCA., M.Phil.,

Assistant Professor

(Post Graduate Department of Computer Applications)



PG DEPARTMENT OF COMPUTER APPLICATIONS ST. JOSEPH'S COLLEGE OF ARTS AND SCIENCE (AUTONOMOUS) AFFILIATED TO ANNAMALAI UNIVERSITY, CHIDAMBARAM CUDDALORE - 607 001

NOVEMBER – 2023

CERTIFICATE

This is to certify that the Mini-Project entitled

PROJECT MANAGEMENT PORTAL(PMP)

Being submitted to

ST. JOSEPH'S COLLEGE OF ARTS AND SCIENCE (AUTONOMOUS),

(Affiliated to Annamalai university – Chidambaram)

Submitted By

SNEGA V(A22MIT21)

For the partial Fulfillment for the award of degree of

MASTER OF SCIENCE (INFORMATION TECHNOLOGY)

Is a Bonafide record of work carried out by her, Under my guidance and supervision.

INTERNAL GUIDE	HEAD OF THE DEPARTMENT
Submitted for the viva-voce examination on _	
Examiners:	
1	

ACKNOWLEDGEMENT

First and foremost, I thank God, the Almighty, for the showering his kindness and blessings to complete this project successfully.

I extend my sincere gratitude to respected **Rev. Fr. Dr. M. Swaminathan,** Secretary and **Dr. M. Arumai Selvam,** Principal of St. Joseph's College of Arts & science(Autonomous) for providing such a Good congenial environment to enlighten my knowledge.

I extend my hearty gratitude to **Dr. A. John Pradeep,** Head of the PG Department of Computer Applications for the moral support and encouragement during the project.

I extend my warm gratitude to my guide **Mr. Z. John Bernard**, Assistant professor of PG Department of Computer Applications for the able guidance during the project.

At the Outset I take Pleasure to extend my sincere gratitude to all my teacher who had taken Pains to shape and model me in all my endeavors. I bound to express my sincere and hearty gratitude to my dear parents for their financial and material support which helped me to make this project a successful one. Last but not the Least I place deepest sense of gratitude to all my friends who has supported me to complete this project more successfully.

SNEGA V

CONTENT

S.NO	DESCRIPTION	PAGE NO
1	ABSTRACT	1
2	PROJECT DESCRIPTION	2
3	HARDWARE AND SOFTWARE REQUIREMENT	3
4	SOFTWARE DESCRIPTION	4
5	SOURCE CODE	9
6	OUTPUT SCREEN	30
7	CONCLUSION	34
8	REFERENCES	35

ABSTRACT

The Project Management Portal is a web-based platform tailored to the unique needs of the faculties in an educational setting within the institution. It aims to faster collaboration, enhance time management, and improve project outcomes for college students. This portal is also very easy to analyze, to download the project description and to verify the details of the students by the faculties. This portal is built using a combination of PHP, HTML, CSS and MYSQL to provide an intuitive and user-friendly interface for the admin and the end-users. By using PHP for server-side scripting, HTML, CSS for the front-end and MYSQL for back-end, this project management portal ensures a dynamic and responsive user experience. This Project Management Portal is an essential tool for educational institutions, promoting project based learning and effective project coordination among students and faculties.

PROJECT DESCRIPTION

PROJECT DEFINITION:

The Project Management Portal (PMP) is a web-based platform tailored to the unique needs of the faculties in an educational setting within the institution. It aims to faster collaboration, enhance time management, and improve project outcomes for college students.

MODULES:

The project "PROJECT MANAGEMENT PORTAL (PMP)" deals with the following modules:

- > Splash Screen
- Signup Page
- Login Page
- ➤ Dashboard Page (Admin, Faculty)
- > Projects
- Maintenance

HOME PAGE:

It is the first page of a website that visitors see when they arrive at the site.

ADMIN PAGE:

It is designed to provide administrators with a convenient and easy-to-use interface for managing the various aspects of event, such as registration, adding projects and viewing etc.

ADD ADMIN PAGE:

It typically include fields to collect basic contact information such as name, email and other related details.

MAINTENANCE PAGE:

It shows a types of projects available and it's information.

HARDWARE AND SOFTWARE REQUIREMENTS:

_HARDWARE REQUIREMENTS

The hardware requirements are the hardware, which is essential for software to run on a particular system.

➤ Hard Disk : 32 GB

➤ RAM : 4 GB

➤ Processor : Intel Pentium, Intel core, Ryzen

SOFTWARE REQUIREMENTS

The Software Requirements deal with the analysis of the software, operating system and tools that are essential for the project.

➤ Operating system : WINDOWS

➤ Language : ANDROID & SQLITE

SOFTWARE DESCRIPTION

HTML

HTML (Hyper Text Markup Language) is the standard markup language used to create web pages. It is a combination of Hyper Text and Markup Language and is used to display information in a structured way. HTML is written in the form of tags, which are enclosed in angle brackets. HTML tags provide the structure of the web page and tell the web browser how to display the content. HTML consists of a series of elements, which are used to define the structure and content of a web page. These elements include headings, paragraphs, lists, images, videos, and tables. HTML tags can also be used to create links, forms, and other interactive elements. HTML is a key element of web development, as it provides the structure and content of a website. It is used to create visually appealing websites, as well as to ensure that the website is accessible and works properly across different browsers and devices. HTML is a major part of web development, and it is important to have a basic understanding of it in order to create a website that is both aesthetically pleasing and functional.

HTML is used to create webpages, along with CSS and JavaScript. CSS is used to give webpages their style and structure, while JavaScript is used to make webpages interactive. HTML is the foundation of all webpages, and it is used to define the structure of the page, add content, and link to other webpages. HTML is an essential part of web development, and it is used by web developers to create websites, applications, and more. It is a powerful language that is easy to learn and use, and it is constantly evolving to meet the needs of the web.

PHP

PHP is a widely-used open source scripting language that is especially suited for web development and can be embedded into HTML. It is used to create dynamic webpages, and is one of the most popular scripting languages on the web. PHP has a wide range of features and capabilities, including access control, object-oriented programming, database integration, and communication with other web-based systems. It also supports a range of databases, including MySQL, Oracle, and PostgreSQL. One of the main advantages of PHP is its scalability, meaning it can be used to create large, complex websites that can grow with your business.

It is also highly portable, meaning it can be used on a variety of platforms, including Windows, Linux, and Mac. PHP is also very secure and regularly updated, which is essential for any website. It also has a large community of developers and resources available, making it easy to find help and support when needed. Overall, PHP is a powerful, versatile, and secure scripting language that is well-suited for web development. From small websites to large applications, PHP is an excellent choice for creating dynamic, engaging websites

JAVASCRIPT

JavaScript is a scripting language that is most commonly used to create interactive websites and web applications. It is the language of the web, and can be used to add dynamic elements to a web page. It is a popular language for both front-end and back-end development, and can be used to create both client-side and server-side applications. JavaScript is an object-oriented programming language. It is based on the ECMAScript specification. It is a lightweight and interpreted language, which means that it can be run directly in a web browser without any additional software.

JavaScript is a scripting language, so it can be used to create dynamic webpages and applications. JavaScript is used to create interactive websites and web applications. It can be used to add animations and effects to webpages, as well as to create games and applications. It can also be used to create user interfaces, as it has a wide range of built-in objects, functions, and methods. It is also used to connect webpages to databases and to create APIs. JavaScript is widely used because it is easy to learn and use. It is an interpreted language, which means that it can run directly in a web browser without needing to be compiled. It is also open-source and free, so it can be used by anyone. JavaScript is also supported by all major web browsers, which makes it a popular choice for web development.

MDBOOTSTRAP

MDB design system, called Material Minimal, is an improved version of the classic Material Design. On the one hand, Material Minimal appreciates and uses the standard created by Google, and on the other hand improves it, giving it lightness, subtlety and elegance.

MDBootstrap is a powerful UI toolkit for building mobile-friendly and responsive websites. It is based on the popular Bootstrap 4 framework and includes components for creating beautiful and responsive websites. It provides a comprehensive set of features, components, and plugins to help developers quickly create fully-functional websites. It includes components for creating user interfaces, navigation, grids, forms, tables, and many other elements. It also includes multiple present themes, customization options, and a wide selection of plugins. It also offers a wide range of third-party integrations, including WordPress, Shopify, and more. It is easy to use and can help developers quickly create modern and responsive websites. Its components are designed to work together seamlessly, and its plugins are designed to make complex web development processes easier. It is also constantly being updated with new features and components, so developers can always stay up to date.

MYSQL

MySQL is a relational database management system based on the Structured Query Language, which is the popular language for accessing and managing the records in the database. MySQL is open-source and free software under the GNU license. It is supported by **Oracle Company**.

What is database?

It is very important to understand the database before learning MySQL. A database is an application that stores the organized collection of records. It can be accessed and manage by the user very easily. It allows us to organize data into tables, rows, columns, and indexes to find the relevant information very quickly. Each database contains distinct API for performing database operations such as creating, managing, accessing, and searching the data it stores. Today, many databases available like MySQL, Sybase, oracle, Mongo DB, SQL Server etc. In this section, we are going to focus on MySQL mainly.

MySQL is currently the most popular database management system software used for managing the relational database. It is open-source database software, which is supported by Oracle Company. It is fast, scalable, and easy to use database management system in comparison with Microsoft SQL Server and Oracle Database. It is commonly used in conjunction with PHP scripts for creating powerful and dynamic server-side or web-based enterprise applications.

MySQL is a Relational Database Management System (RDBMS) software that provides many things, which are as follows:

- o It allows us to implement database operations on tables, rows, columns, and indexes.
- o It defines the database relationship in the form of tables (collection of rows and columns), also known as relations.
- o It provides the Referential Integrity between rows or columns of various tables.
- o It allows us to updates the table indexes automatically.
- It uses many SQL queries and combines useful information from multiple tables for the end-users.

History of MySQL

The project of MySQL was started in 1979 when MySQL's inventor **Michael Widenius** developed an in-house database tool called **UNIREG** for managing databases. After that, UNIREG has been rewritten in several different languages and extended to handle big databases. After some time, Michael Widenius contacted **David Hughes**, the author of SQL, to see if Hughes would be interested in connecting MySQL to UNIREG's B+ ISAM handler to provide indexing to MySQL. That's the way MySQL came into existence.

MYSQL Features

MySQL is a relational database management system (RDBMS) based on the SQL (Structured Query Language) queries. It is one of the most popular languages for accessing and managing the records in the table. MySQL is open-source and free software under the GNU license. Oracle Company supports it.

Relational Database Management System (RDBMS)

MySQL is a relational database management system. This database language is based on the SQL queries to access and manage the records of the table.

Easy to use

MySQL is easy to use. We have to get only the basic knowledge of SQL. We can build and interact with MySQL by using only a few simple SQL statements.

It is secure

MySQL consists of a solid data security layer that protects sensitive data from intruders. Also, passwords are encrypted in MySQL.

Client/ Server Architecture

MySQL follows the working of a client/server architecture. There is a database server (MySQL) and arbitrarily many clients (application programs), which communicate with the server; that is, they can query data, save changes, etc.

Free to download

MySQL is free to use so that we can download it from MySQL official website without any cost.

It is scalable

MySQL supports multi-threading that makes it easily scalable. It can handle almost any amount of data, up to as much as 50 million rows or more. The default file size limit is about 4 GB. However, we can increase this number to a theoretical limit of 8 TB of data.

Speed

MySQL is considered one of the very fast database languages, backed by a large number of the benchmark test.

High Flexibility

MySQL supports a large number of embedded applications, which makes MySQL very flexible.

Compatible on many operating systems

MySQL is compatible to run on many operating systems, like Novell NetWare, Windows* Linux*, many varieties of UNIX* (such as Sun* Solaris*, AIX, and DEC* UNIX), OS/2, FreeBSD*, and others. MySQL also provides a facility that the clients can run on the same computer as the server or on another computer (communication via a local network or the Internet).

Allows roll-back

MySQL allows transactions to be rolled back, commit, and crash recovery.

Memory efficiency

Its efficiency is high because it has a very low memory leakage problem.

High Performance

MySQL is faster, more reliable, and cheaper because of its unique storage engine architecture. It provides very high-performance results in comparison to other databases without losing an essential functionality of the software. It has fast loading utilities because of the different cache memory.

High Productivity

MySQL uses Triggers, Stored procedures, and views that allow the developer to give higher productivity.

SOURCE CODE

Index.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Online Event Registration</title>
  <link rel="stylesheet" href="css/style.css">
   <!--feedback-->
   link
                 rel='stylesheet'
                                         href='https://cdnjs.cloudflare.com/ajax/libs/twitter-
bootstrap/4.5.0/css/bootstrap.min.css'>
  link
href="https://fonts.googleapis.com/css2?family=Poppins:wght@400;500;600;700;800&displ
ay=swap"rel="stylesheet" />
  link
href="https://fonts.googleapis.com/css2?family=Monoton&display=swap"rel="stylesheet" />
  link
                                                                           rel="stylesheet"
href="https://fonts.googleapis.com/css2?family=Anton&display=swap">
  link
                  rel='stylesheet'
                                           href='https://cdnjs.cloudflare.com/ajax/libs/font-
awesome/5.10.0/css/all.min.css'>
  link
             href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/6.0.0/css/all.min.css"
rel="stylesheet"/>
                  href="https://cdnjs.cloudflare.com/ajax/libs/mdb-ui-kit/6.0.0/mdb.min.css"
  link
rel="stylesheet"/>
              type="text/javascript"
                                         src="https://cdnjs.cloudflare.com/ajax/libs/mdb-ui-
  <script
kit/6.0.0/mdb.min.js"></script>
  <style>
```

```
#feedback-form-wrapper #floating-icon > button {
  position: fixed;
  right: 0;
  top: 50%;
  transform: rotate(-90deg) translate(50%, -50%);
   transform-origin: right;
}
#feedback-form-wrapper .rating-input-wrapper input[type="radio"] {
display: none;
}
#feedback-form-wrapper .rating-input-wrapper input[type="radio"] ~ span {
cursor: pointer;
}
#feedback-form-wrapper .rating-input-wrapper input[type="radio"]:checked ~ span {
background-color: #4261dc;
color: #fff;
#feedback-form-wrapper .rating-labels > label{
font-size: 14px;
  color: #777;
}
.btn.btn-primary {
font-family: "Quicksand", sans-serif;
font-weight: bold;
height: 2.5rem;
line-height: 2.5rem;
padding: 0 3rem;
border: 0;
border-radius: 3rem;
background-image: linear-gradient(131deg, #ffd340, #ff923c, #ff923c, #ff923c);
background-size: 300% 100%;
```

```
transition: all 0.3s ease-in-out;
 }
 .btn.btn-primary:hover:enabled {
  box-shadow: 0 0.5em 0.5em -0.4em #ff923cba;
  background-size: 100% 100%;
  transform: translateY(-0.15em);
 }
 ul li:hover ul.dropdown-menu{
    font-size:1.2rem;
    display: block;
    background: hsl(206, 6%, 78%);
    color: white;
 }
 </style>
</head>
<body>
  <nav class="navbar navbar-expand-lg navbar-dark bg-dark sticky-top">
    <div class="container-fluid">
     <button class="navbar-toggler" type="button" data-mdb-toggle="collapse" data-mdb-
target="#navbarCenteredExample"
                                       aria-controls="navbarCenteredExample"
                                                                                     aria-
expanded="false" aria-label="Toggle navigation">
       <i class="fas fa-bars"></i>
     </button>
  <!-- <a class="navbar-brand me-2" href="https://mdbgo.com/">
                src="https://mdbcdn.b-cdn.net/img/logo/mdb-transaprent-noshadows.webp"
height="16" alt="MDB Logo" loading="lazy" style="margin-top: -1px;"/>
  </a> -->
```

```
<div
              class="collapse
                                navbar-collapse
                                                  justify-content-center"
id="navbarCenteredExample" style="font-family: poppins; font-size: 1.3rem;">
     class="nav-link
                               active
                                         px-lg-4"
                                                    aria-current="page"
       <a
href="index.html">Home</a>
      class="nav-link
                           dropdown-toggle
                                          px-lg-4
                                                   active"
                                                            href="#"
id="navbarDropdown" data-mdb-toggle="dropdown" aria-expanded="false">
       Techxtra
       </a>
       <
        <a class="dropdown-item" href="pptregister.html">Paper Presentation</a>
       <
        <a class="dropdown-item" href="coderegister.html">Alhomora</a>
       <
        <a class="dropdown-item" href="quizregister.html">Mind Fizz</a>
       <
        <a class="dropdown-item" href="webregister.html">Web Crawler</a>
       class="nav-link
                            dropdown-toggle
                                            px-lg-4
                                                    active"
id="navbarDropdown" role="button" data-mdb-toggle="dropdown" aria-expanded="false">
```

```
</a>
      >
        <a class="dropdown-item" href="musique.html">Musique</a>
       <
        <a class="dropdown-item" href="charadesregister.html">Dumb Charades</a>
       <1i>>
        <a class="dropdown-item" href="couplingregister.html">Word Coupling</a>
       <
        <a class="dropdown-item" href="adsregister.html">Ad-Craze</a>
       class="nav-item">
      <a class="nav-link active px-lg-4" href="contactus.html">contact us</a>
      class="nav-link
                            dropdown-toggle
                                          px-lg-4
                                                  active"
id="navbarDropdown" role="button" data-mdb-toggle="dropdown" aria-expanded="false">
       Event details
      </a>
      >
        <a class="dropdown-item" href="techxtra_details.html">Technical</a>
```

Dhamaka

```
\langle li \rangle
           <a class="dropdown-item" href="dhamaka_details.html">Non-Technical</a>
          </div>
    </div>
   </nav>
   <!-- background:linear-gradient(120deg, #d4fc79 0%, #96e6a1 100%); -->
  <div class="container-fluid" style="height: 110vh; width: 100%; background-image:</pre>
url(image/survivors_v01_5120x2880.png);
                       font-family: Monoton; text-transform: uppercase;">
    <h1>&nbsp;</h1>
    <h1 class="display-1 text-center" style="font-size: 100px; color: black; font-weight:
500;">Techxtra</h1>
    <h1 class="display-3 text-center" style="font-size: 112px; color: black; font-weight: 550;
line-height: 0.7;">&</h1>
    <h1 class="display-1 text-center" style="font-size: 100px; color: black; font-weight:
500;">Dhamaka'22</h1>
    <h4>&nbsp;</h4>
    <h4 class="display-4 text-center" style="font-size: 40px; font-weight: 400; color:
#FF4533; font-family: Anton;">18 & 19 Oct,2022</h1>
      <h1>&nbsp;</h1>
      <h2>&nbsp;</h2>
    <div class="text-center">
      <a href="event.html"> <button type="button" class="btn" style="background:
#FF4533; font-family: Anton;
         padding: 14px 35px; border: 1px solid transparent; text-align: center; color: #fff;
transition: 0.3s:
```

```
cursor: pointer; letter-spacing: 2px; text-transform: capitalize; font-size: 20px; font-
weight: 500;"
          data-mdb-ripple-color="dark">Register here</button>
          </a>
     </div>
  </div>
  <div class="container-fluid" style="height: 320vh; width: 100%; position: relative;</pre>
background-color: rgb(0, 0, 0);">
     <h1>&nbsp;</h1>
    <a href="ch3"><h3</a> class="text-center display-3 text-white" style="font-family: Anton; font-weight:
400;">Technical & Samp; Non-Technical </h3>
     <a href="ch3"><h3</a> class="text-center display-3 text-white" style="font-family: Anton; font-weight:
400;">Program Details</h3>
      <div class="d-flex justify-content-center">
       <div class="wrapper">
        <div class="timeline">
          <dl class="timeline--entry">
           <dt class="timeline--entrytitle">Paper Presentation</dt>
           <dd class="timeline--entrydetail">12 Feb 2020</dd>
          </dl>
          <dl class="timeline--entry">
           <dt class="timeline--entrytitle">Code Blaster</dt>
           <dd class="timeline--entrydetail"> 12 Feb 2020</dd>
          </dl>
          <dl class="timeline--entry">
           <dt class="timeline--entrytitle">Mind Fizz</dt>
           <dd class="timeline--entrydetail">12 Feb 2020</dd>
          </dl>
          <dl class="timeline--entry">
           <dt class="timeline--entrytitle">Web Crawler</dt>
           <dd class="timeline--entrydetail">12 Feb 2020</dd>
```

```
<dl class="timeline--entry">
          <dt class="timeline--entrytitle">Musique</dt>
          <dd class="timeline--entrydetail">13 Feb 2020</dd>
         </dl>
         <dl class="timeline--entry">
          <dt class="timeline--entrytitle">Dumb Charades</dt>
          <dd class="timeline--entrydetail">13 Feb 2020</dd>
         </dl>
         <dl class="timeline--entry">
          <dt class="timeline--entrytitle">Word Coupling</dt>
          <dd class="timeline--entrydetail">13 Feb 2020</dd>
         </dl>
         <dl class="timeline--entry">
          <dt class="timeline--entrytitle">Ad-Craze</dt>
          <dd class="timeline--entrydetail">13 Feb 2020</dd>
         </dl>
        </div>
       </div>
      </div>
  </div>
  <!--feedback-->
  <div id="feedback-form-wrapper">
   <div id="floating-icon">
    <button style="font-size: 1rem;" type="button" class="btn btn-primary btn-sm rounded-
0" data-toggle="modal" data-target="#exampleModal">
      Feedback
     </button>
   </div>
```

</dl>

```
<div id="feedback-form-modal">
    <div
              class="modal
                                fade"
                                          id="exampleModal"
                                                                  tabindex="-1"
                                                                                     aria-
labelledby="exampleModalLabel" aria-hidden="true">
     <div class="modal-dialog">
       <div class="modal-content">
        <div class="modal-header">
         <h5 class="modal-title" id="exampleModalLabel">Feedback Form</h5>
         <button type="button" class="close" data-dismiss="modal" aria-label="Close">
          <span aria-hidden="true">&times;</span>
         </button>
        </div>
        <div class="modal-body">
         <form>
          <div class="form-group">
           <label for="exampleFormControlTextarea1">How would
                                                                                      this
                                                                         vou like
event?</label>
           <div class="rating-input-wrapper d-flex justify-content-between mt-2">
             <label><input type="radio" name="rating" /><span class="border rounded px-3</pre>
py-2">1</span></label>
             <label><input type="radio" name="rating" /><span class="border rounded px-3</pre>
py-2">2</span></label>
             <label><input type="radio" name="rating" /><span class="border rounded px-3</pre>
py-2">3</span></label>
             <label><input type="radio" name="rating" /><span class="border rounded px-3</pre>
py-2">4</span></label>
             <label><input type="radio" name="rating" /><span class="border rounded px-3</pre>
py-2">5</span></label>
             <label><input type="radio" name="rating" /><span class="border rounded px-3</pre>
py-2">6</span></label>
             <label><input type="radio" name="rating" /><span class="border rounded px-3</pre>
py-2">7</span></label>
             <label><input type="radio" name="rating" /><span class="border rounded px-3</pre>
py-2">8</span></label>
```

```
<label><input type="radio" name="rating" /><span class="border rounded px-3</pre>
py-2">9</span></label>
             <label><input type="radio" name="rating" /><span class="border rounded px-3</pre>
py-2">10</span></label>
            </div>
            <div class="rating-labels d-flex justify-content-between mt-1">
             <label>Very unlikely</label>
             <label>Very likely</label>
            </div>
          </div>
          <div class="form-group">
            <label for="input-two">Would you like to say something?</label>
            <textarea class="form-control" id="input-two" rows="3"></textarea>
          </div>
         </form>
        </div>
        <div class="modal-footer">
         <button
                         type="button"
                                              class="btn
                                                                btn-secondary"
                                                                                      data-
dismiss="modal">Close</button>
         <button type="button" class="btn btn-primary">Submit</button>
        </div>
       </div>
      </div>
    </div>
   </div>
  </div>
   <script src='https://cdnjs.cloudflare.com/ajax/libs/jquery/3.6.0/jquery.min.js'></script>
                                           src='https://cdnjs.cloudflare.com/ajax/libs/twitter-
bootstrap/4.5.0/js/bootstrap.min.js'></script>
  <!--end-->
```

```
<div class="container-fluid" style="height: 70vh; width: 100%; position: relative;</pre>
background-color: rgb(0, 0, 0);">
   <div class="d-flex justify-content-center">
    <h2 style="font-family: Anton; position: relative; margin-top: 50px;">Conducted
by</h2>
   </div>
   <div class="d-flex justify-content-center">
    <img src="image/stybitz.png" style="margin-top: 50px; margin-bottom: 50px;" alt=""</pre>
width="300px" height="150px">
   </div>
   <hr class="hr"/>
   <div class="d-flex justify-content-center">
    >
     Copyright ©<script>document.write(new Date().getFullYear());</script> All
rights reserved | karthi_rt
    </div>
  </div>
  <!--feedback-->
  <script src='https://cdnjs.cloudflare.com/ajax/libs/jquery/3.6.0/jquery.min.js'></script>
  <script
                                          src='https://cdnjs.cloudflare.com/ajax/libs/twitter-
bootstrap/4.5.0/js/bootstrap.min.js'></script>
</body>
</html>
```

Admin.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Admin login page</title>
  k rel='stylesheet' href='https://use.fontawesome.com/releases/v5.2.0/css/all.css'>
  link
                                                                           rel='stylesheet'
href='https://use.fontawesome.com/releases/v5.2.0/css/fontawesome.css'>
  <link rel="stylesheet" href="css/style1.css">
  <!--mdboostrap links-->
             href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/6.0.0/css/all.min.css"
  link
rel="stylesheet"/>
  link
href="https://fonts.googleapis.com/css?family=Roboto:300,400,500,700&display=swap"
rel="stylesheet"/>
                  href="https://cdnjs.cloudflare.com/ajax/libs/mdb-ui-kit/6.0.1/mdb.min.css"
  link
rel="stylesheet"/>
              type="text/javascript"
                                        src="https://cdnjs.cloudflare.com/ajax/libs/mdb-ui-
  <script
kit/6.0.1/mdb.min.js"></script>
</head>
<body>
  <nav class="navbar navbar-expand-lg navbar-dark bg-dark sticky-top">
    <div class="container-fluid">
     <button class="navbar-toggler" type="button" data-mdb-toggle="collapse" data-mdb-
target="#navbarCenteredExample"
                                        aria-controls="navbarCenteredExample"
                                                                                     aria-
expanded="false" aria-label="Toggle navigation">
       <i class="fas fa-bars"></i>
     </button>
     <div
                   class="collapse
                                           navbar-collapse
                                                                    justify-content-center"
id="navbarCenteredExample" style="font-family: poppins; font-size: larger;">
```

```
class="nav-link
                            active
                                     px-lg-4"
                                                aria-current="page"
      <a
href="index.html">Home</a>
     <a class="nav-link dropdown-toggle px-lg-4 active" href="techxtra_details.html"</p>
id="navbarDropdown" role="button" data-mdb-toggle="dropdown" aria-expanded="false">
       Techxtra
      </a>
      <
        <a class="dropdown-item" href="pptregister.html">Paper Presentation</a>
       <1i>>
        <a class="dropdown-item" href="coderegister.html">Alhomora</a>
       <
        <a class="dropdown-item" href="quizregister.html">Mind Fizz</a>
       <
        <a class="dropdown-item" href="webregister.html">Web Crawler</a>
```


Dhamaka

```
</a>
  <
    <a class="dropdown-item" href="musique.html">Musique</a>
   <
    <a class="dropdown-item" href="charadesregister.html">Dumb Charades</a>
   <
    <a class="dropdown-item" href="couplingregister.html">Word Coupling</a>
   <
    <a class="dropdown-item" href="adsregister.html">Ad-Craze</a>
   cli class="nav-item">
  <a class="nav-link active px-lg-4" href="contactus.html">contact us</a>
 cli class="nav-item">
  <a class="nav-link active px-lg-4" href="feedback.html">Feedback</a>
 </div>
<div class="d-flex">
```

```
<a class="navbar-brand me-2" href="index.html">
        <i class="fa fa-home" aria-hidden="true" height="22" style="margin-top: -
1px;"></i>
        <!--
                    <img
                                 src="https://mdbcdn.b-cdn.net/img/logo/mdb-transaprent-
noshadows.webp" height="16" alt="MDB Logo" loading="lazy" style="margin-top: -1px;"/>
       </a>
     </div>
    </div>
   </nav>
  <div class="container">
    <div class="screen">
       <div class="screencontent">
        <h1 style="margin-top: 50px; margin-left: 20px; font-weight: 800; font-family:
poppins;">Admin</h1>
        <form class="login">
           <div class="loginfield">
              <i class="loginicon fas fa-user"></i>
              <input type="text" class="logininput" placeholder="User name / Email">
           </div>
           <div class="loginfield">
              <i class="loginicon fas fa-lock"></i>
              <input type="password" class="logininput" placeholder="Password">
           </div>
           <button class="button loginsubmit">
              <span class="buttontext">Log In Now</span>
              <i class="buttonicon fas fa-chevron-right"></i>
           </button>
         </form>
         <div class="social-login">
```

```
<div class="social-icons">
             <a href="#" class="social-loginicon fab fa-instagram"></a>
             <a href="#" class="social-loginicon fab fa-facebook"></a>
             <a href="#" class="social-loginicon fab fa-twitter"></a>
           </div>
         </div>
      </div>
      <div class="screenbackground">
         <span class="screenbackgroundshape screenbackgroundshape4"></span>
         <span class="screenbackgroundshape screenbackgroundshape3"></span>
         <span class="screenbackgroundshape screenbackgroundshape2"></span>
         <span class="screenbackgroundshape screenbackgroundshape1"></span>
      </div>
    </div>
  </div>
  <hr class="hr"/>
  <div class="d-flex justify-content-center">
   >
     ©
                                    Copyright  <script>document.write(new
Date().getFullYear());</script> All rights reserved | karthi_rt
   </div>
</body>
</html>
Contactus.html
<!DOCTYPE html>
```

<h3>log in via</h3>

```
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta http-equiv="X-UA-Compatible" content="IE=edge">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Contact us</title>
  <!--feedback-->
  link
                 rel='stylesheet'
                                         href='https://cdnjs.cloudflare.com/ajax/libs/twitter-
bootstrap/4.5.0/css/bootstrap.min.css'>
                                                                           rel="stylesheet"
  link
href="https://cdnjs.cloudflare.com/ajax/libs/normalize/5.0.0/normalize.min.css">
                                                                            rel='stylesheet'
href='https://stackpath.bootstrapcdn.com/bootstrap/4.3.1/css/bootstrap.min.css'>
                                                                            rel='stylesheet'
href='https://fonts.googleapis.com/css2?family=Pacifico&family=Quicksand&displ
ay=swap'>
  <link rel="stylesheet" href="css/style4.css">
  link
href="https://fonts.googleapis.com/css2?family=Poppins:wght@400;500;600;700;800&displ
ay=swap"rel="stylesheet" />
  link
                                            href='https://cdnjs.cloudflare.com/ajax/libs/font-
                  rel='stylesheet'
awesome/5.10.0/css/all.min.css'>
  link
             href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/6.0.0/css/all.min.css"
rel="stylesheet"/>
                  href="https://cdnjs.cloudflare.com/ajax/libs/mdb-ui-kit/6.0.0/mdb.min.css"
  link
rel="stylesheet"/>
              type="text/javascript"
                                         src="https://cdnjs.cloudflare.com/ajax/libs/mdb-ui-
  <script
kit/6.0.0/mdb.min.js"></script>
 <style>
  #feedback-form-wrapper #floating-icon > button {
```

```
position: fixed;
   right: 0;
   top: 50%;
   transform: rotate(-90deg) translate(50%, -50%);
   transform-origin: right;
 }
 #feedback-form-wrapper .rating-input-wrapper input[type="radio"] {
 display: none;
 #feedback-form-wrapper .rating-input-wrapper input[type="radio"] ~ span {
 cursor: pointer;
 #feedback-form-wrapper .rating-input-wrapper input[type="radio"]:checked ~ span {
 background-color: #4261dc;
 color: #fff;
 #feedback-form-wrapper .rating-labels > label{
 font-size: 14px;
   color: #777;
 }
 ul li:hover ul.dropdown-menu{
   font-size:1.2rem;
   display: block;
   background: hsl(206, 6%, 78%);
   color: white;
}
ul li:hover ul.dropdown-menu{
   font-size:1.2rem;
   display: block;
   background: hsl(206, 6%, 78%);
```

```
color: white;
}
</style>
</head>
<body>
 <nav class="navbar navbar-expand-lg navbar-dark bg-dark sticky-top">
   <div class="container-fluid">
    <button class="navbar-toggler" type="button" data-mdb-toggle="collapse" data-mdb-
target="#navbarCenteredExample"
                                aria-controls="navbarCenteredExample"
                                                                     aria-
expanded="false" aria-label="Toggle navigation">
     <i class="fas fa-bars"></i>
    </button>
    <div
               class="collapse
                                   navbar-collapse
                                                      justify-content-center"
id="navbarCenteredExample" style="font-family: poppins; font-size: larger;">
     class="nav-link
                                 active
                                            px-lg-4"
                                                         aria-current="page"
       <a
href="index.html">Home</a>
      class="nav-link dropdown-toggle px-lg-4 active" href="event.html"
id="navbarDropdown" role="button" data-mdb-toggle="dropdown" aria-expanded="false">
        Techxtra
       </a>
```

```
<a class="dropdown-item" href="pptregister.html">Paper Presentation</a>
        <
         <a class="dropdown-item" href="coderegister.html">Alhomora</a>
        >
         <a class="dropdown-item" href="quizregister.html">Mind Fizz</a>
        <
         <a class="dropdown-item" href="webregister.html">Web Crawler</a>
        class="nav-link dropdown-toggle px-lg-4 active" href="event.html"
id="navbarDropdown" role="button" data-mdb-toggle="dropdown" aria-expanded="false">
        Dhamaka
       </a>
       <
         <a class="dropdown-item" href="musique.html">Musique</a>
        <
         <a class="dropdown-item" href="charadesregister.html">Dumb Charades</a>
        >
         <a class="dropdown-item" href="couplingregister.html">Word Coupling</a>
```

<

```
<
         <a class="dropdown-item" href="adsregister.html">Ad-Craze</a>
        class="nav-item">
       <a class="nav-link active px-lg-4" href="contactus.html">contact us</a>
      class="nav-link
                              dropdown-toggle
                                              px-lg-4
                                                       active"
id="navbarDropdown" role="button" data-mdb-toggle="dropdown" aria-expanded="false">
        Event details
       </a>
       <
         <a class="dropdown-item" href="techxtra_details.html">Technical</a>
        <
         <a class="dropdown-item" href="dhamaka_details.html">Non-Technical</a>
        </div>
   </div>
  </nav>
<div class="container d-flex justify-content-center align-items-center">
   <form>
     <h1 class="title text-center mb-4">Talk to Us</h1>
```

```
<!-- Name -->
         <div class="form-group position-relative">
           <label for="formName" class="d-block">
              <i class="icon" data-feather="user"></i>
           </label>
           <input type="text" id="formName" class="form-control form-control-lg thick"</pre>
placeholder="Name">
         </div>
         <!-- E-mail -->
         <div class="form-group position-relative">
           <label for="formEmail" class="d-block">
              <i class="icon" data-feather="hash"></i>
           </label>
           <input type="text" id="formEmail" class="form-control form-control-lg thick"</pre>
placeholder="Roll Number">
         </div>
         <!-- Message -->
         <div class="form-group message">
           <textarea id="formMessage" class="form-control form-control-lg" rows="7"
placeholder="Message"></textarea>
         </div>
         <!-- Submit btn -->
         <div class="text-center">
                      type="submit"
                                       class="btn
                                                     btn-primary" tabIndex="-1">Send
           <button
message</button>
         </div>
    </form>
  </div>
```

```
<!--feedback-->
  <div id="feedback-form-wrapper">
    <div id="floating-icon">
     <button style="font-size: 1rem;" type="button" class="btn btn-primary btn-sm rounded-
0" data-toggle="modal" data-target="#exampleModal">
       Feedback
     </button>
    </div>
    <div id="feedback-form-modal">
     <div
              class="modal
                                fade"
                                          id="exampleModal"
                                                                  tabindex="-1"
                                                                                    aria-
labelledby="exampleModalLabel" aria-hidden="true">
       <div class="modal-dialog">
        <div class="modal-content">
         <div class="modal-header">
          <h5 class="modal-title" id="exampleModalLabel">Feedback Form</h5>
          <button type="button" class="close" data-dismiss="modal" aria-label="Close">
           <span aria-hidden="true">&times;</span>
          </button>
         </div>
         <div class="modal-body">
          <form>
           <div class="form-group">
             <label for="exampleFormControlTextarea1">How would you like this
event?</label>
             <div class="rating-input-wrapper d-flex justify-content-between mt-2">
              <label><input type="radio" name="rating" /><span class="border rounded px-</pre>
3 py-2">1</span></label>
              <label><input type="radio" name="rating" /><span class="border rounded px-</pre>
3 py-2">2</span></label>
              <label><input type="radio" name="rating" /><span class="border rounded px-</pre>
3 py-2">3</span></label>
              <label><input type="radio" name="rating" /><span class="border rounded px-</pre>
3 py-2">4</span></label>
```

```
<label><input type="radio" name="rating" /><span class="border rounded px-</pre>
3 py-2">5</span></label>
              <label><input type="radio" name="rating" /><span class="border rounded px-</pre>
3 py-2">6</span></label>
              <label><input type="radio" name="rating" /><span class="border rounded px-</pre>
3 py-2">7</span></label>
              <label><input type="radio" name="rating" /><span class="border rounded px-</pre>
3 py-2">8</span></label>
              <label><input type="radio" name="rating" /><span class="border rounded px-</pre>
3 py-2">9</span></label>
              <label><input type="radio" name="rating" /><span class="border rounded px-</pre>
3 py-2">10</span></label>
             </div>
             <div class="rating-labels d-flex justify-content-between mt-1">
              <label>Very unlikely</label>
              <label>Very likely</label>
             </div>
            </div>
            <!-- <div class="form-group">
             <label for="input-one">What made you leave us so early?</label>
             <input type="text" class="form-control" id="input-one" placeholder="">
            </div> -->
            <div class="form-group">
             <label for="input-two">Would you like to say something?</label>
             <textarea class="form-control" id="input-two" rows="3"></textarea>
            </div>
          </form>
         </div>
         <div class="modal-footer">
                         type="button"
                                              class="btn
                                                                btn-secondary"
          <but
                                                                                      data-
dismiss="modal">Close</button>
          <button type="button" class="btn btn-primary">Submit</button>
         </div>
```

```
</div>
       </div>
      </div>
    </div>
   </div>
    <script src='https://cdnjs.cloudflare.com/ajax/libs/jquery/3.6.0/jquery.min.js'></script>
   <script
                                           src='https://cdnjs.cloudflare.com/ajax/libs/twitter-
bootstrap/4.5.0/js/bootstrap.min.js'></script>
  <hr class="hr"/>
  <div class="d-flex justify-content-center">
   >
    Copyright ©<script>document.write(new Date().getFullYear());</script> All rights
reserved | karthi_rt
   </div>
  <script src='https://unpkg.com/feather-icons'></script>
  <script>
    "use strict";
    feather.replace();
  </script>
  <!--feedback-->
  <script src='https://cdnjs.cloudflare.com/ajax/libs/jquery/3.6.0/jquery.min.js'></script>
  <script
                                           src='https://cdnjs.cloudflare.com/ajax/libs/twitter-
bootstrap/4.5.0/js/bootstrap.min.js'></script>
</body>
</html>
```


Style3.css

```
@import
url("https://fonts.googleapis.com/css2?family=Poppins:wght@400;500;600;700;800&display
=swap");
.section_our_solution .row {
  align-items: center;
 }
body{
 width: 100%;
}
h1,h3{
  font-family: 'poppins';
}
 .our_solution_category {
  display: flex;
  flex-direction: row;
  flex-wrap: wrap;
 }
 .our_solution_category .solution_cards_box {
  display: flex;
  flex-direction: column;
  justify-content: center;
 }
 .solution_cards_box .solution_card {
  flex: 0 50%;
  background: #fff;
  box-shadow: 0 2px 4px 0 rgba(136, 144, 195, 0.2),
   0 5px 15px 0 rgba(37, 44, 97, 0.15);
  border-radius: 15px;
  margin: 8px;
  padding: 10px 15px;
  position: relative;
```


```
z-index: 1;
 overflow: hidden;
 min-height: 265px;
 transition: 0.7s;
}
.solution_cards_box .solution_card:hover {
 background: #309df0;
 color: #fff;
 transform: scale(1.1);
 z-index: 9;
}
.solution_cards_box .solution_card:hover::before {
 background: rgb(85 108 214 / 10%);
.solution_cards_box .solution_card:hover .solu_title h3,
.solution_cards_box .solution_card:hover .solu_description p {
 color: #fff;
.solution_cards_box .solution_card:before {
 content: "";
 position: absolute;
 background: rgb(85 108 214 / 5%);
 width: 170px;
 height: 400px;
 z-index: -1;
 transform: rotate(42deg);
 right: -56px;
 top: -23px;
 border-radius: 35px;
}
.solution_cards_box .solution_card:hover .solu_description button {
```


```
background: #fff !important;
 color: #309df0;
}
.solution_card .so_top_icon {
.solution_card .solu_title h3 {
 color: #212121;
 font-size: 1.3rem;
 margin-top: 13px;
 margin-bottom: 13px;
}
.solution_card .solu_description p {
 font-size: 15px;
 margin-bottom: 15px;
.solution_card .solu_description button {
 border: 0;
 border-radius: 15px;
 background: linear-gradient(
  140deg,
  #42c3ca 0%,
  #42c3ca 50%,
  #42c3cac7 75%
 ) !important;
 color: #fff;
 font-weight: 500;
 font-size: 1rem;
 padding: 5px;
```


OUTPUT SCREEN

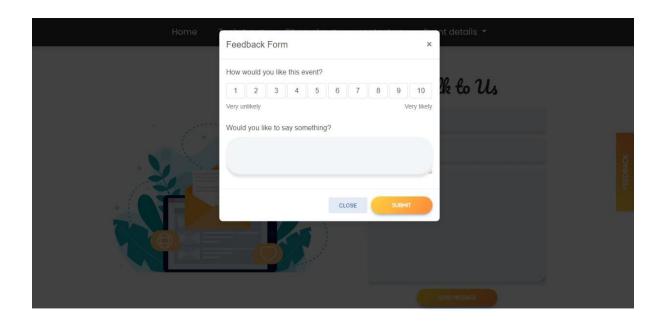


Copyright ©2022 All rights reserved | karthi_rt

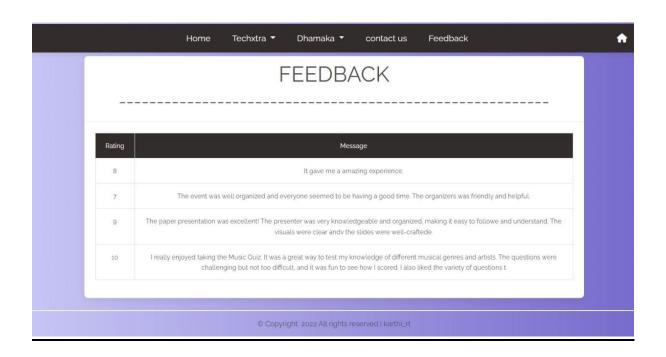

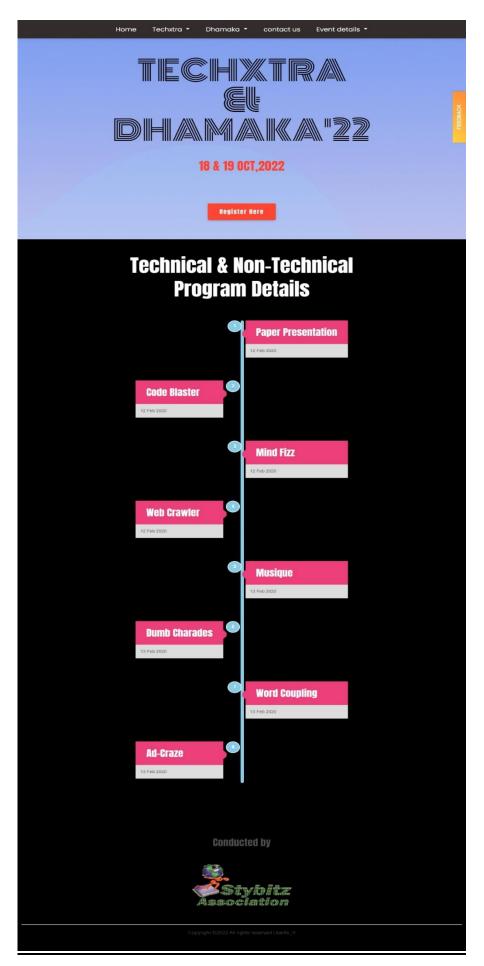


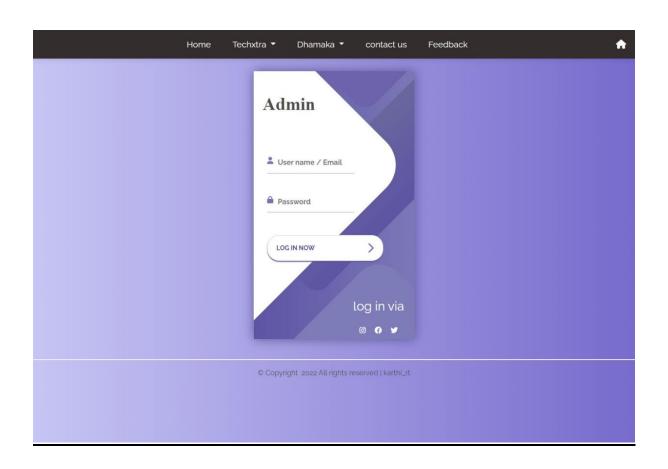

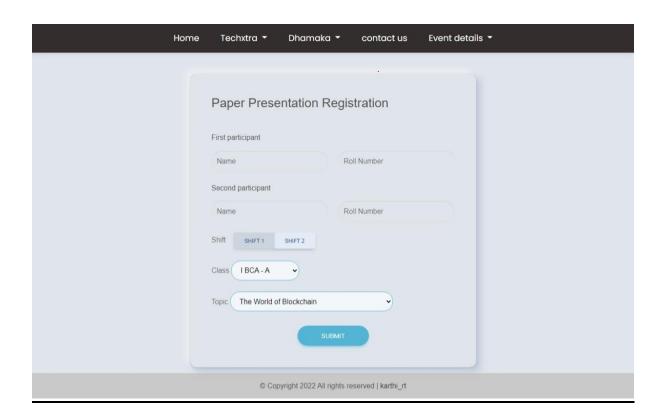




TECHXTRA EVENTS



© Copyright 2022 All rights reserved | karthi_rt

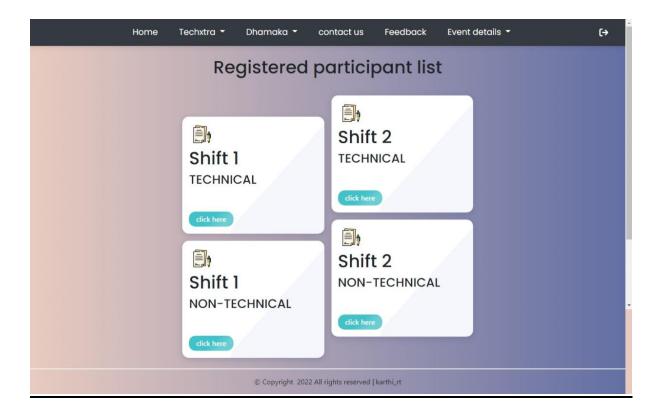

TECHNICAL EVENTS







Event details *



DHAMAKA EVENTS









© Copyright 2022 All rights reserved | karthi_rt

CONCLUSION

The Project Management Portal (PMP) stands as a pivotal solution designed to revolutionize the way projects are conceived, executed and managed. Through a combination of innovative web technologies, robust functionality, and an intuitive user interface, this portal offers a comprehensive approach to project management in various contexts, be it for business, or other organizations.

REFERENCES

- > https://www.javatpoint.com/html-tutorial
- https://www.geeksforgeeks.org/css/
- https://www.w3schools.com/js
- https://mdbootstrap.com/