Day - 79

Step - 1: Create 2 Sub-net and 2 VM in you Resource

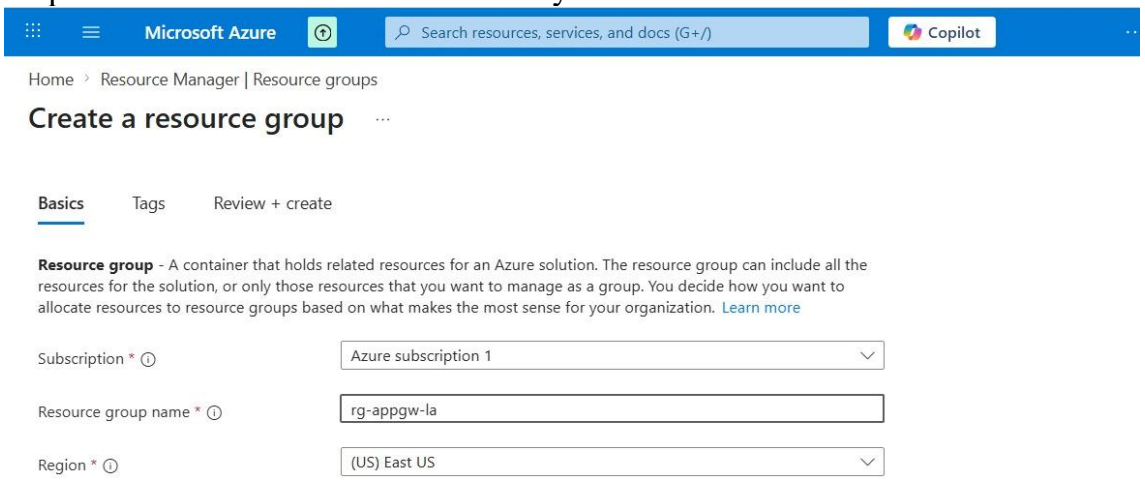

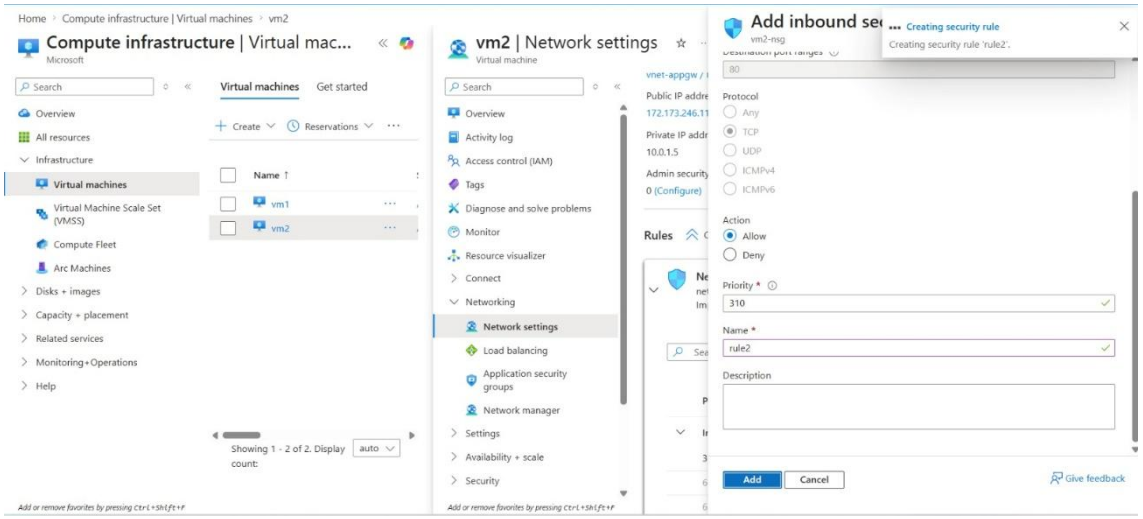

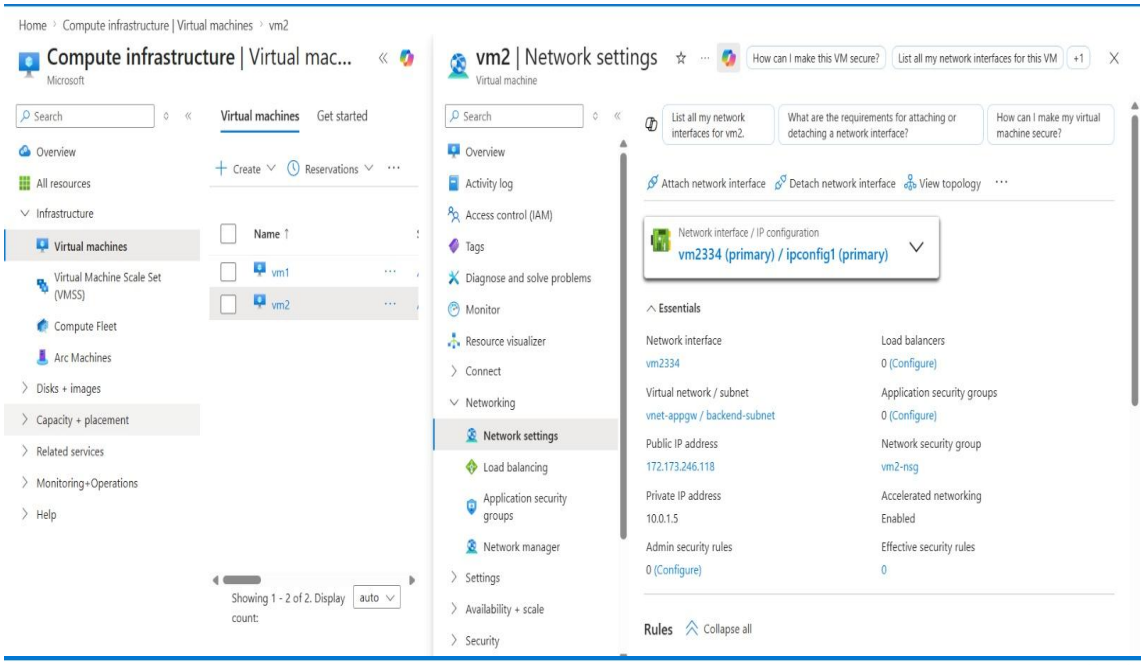

Edit subnet

Select an address space and configure your subnet. You can customize a default subnet or select from subnet templates if you plan to add select services later. Learn more

Subnet ID	/subscriptions/d370e960-de75-4930-83e1-49a0dbed96d3/resourceGroups/rg-appgw-lab/...
Subnet purpose	Default
Name *	appgw-subnet

IPv4

Include an IPv4 address space	Address prefix '10.0.0.0/24' cannot be updated because the subnet is in use.
IPv4 address space *	10.0.0.0/16
Starting address *	10.0.0.0
Size	/24
Subnet address range	10.0.0.0 - 10.0.0.255

IPv6

Include an IPv6 address space	This virtual network has no IPv6 address ranges.

Private subnet

Private subnets enhance security by not providing default outbound access. To enable outbound connectivity for virtual machines to access the internet, it is necessary to explicitly grant outbound access. A NAT gateway is the recommended way to provide outbound connectivity

Edit subnet

Select an address space and configure your subnet. You can customize a default subnet or select from subnet templates if you plan to add select services later. Learn more

Subnet ID	/subscriptions/d370e960-de75-4930-83e1-49a0dbed96d3/resourceGroups/rg-appgw-lab/...
Subnet purpose	Default
Name *	backend-subnet

IPv4

Include an IPv4 address space	Address prefix '10.0.1.0/24' cannot be updated because the subnet is in use.
IPv4 address space *	10.0.0.0/16
Starting address *	10.0.1.0
Size	/24
Subnet address range	10.0.1.0 - 10.0.1.255

IPv6

Include an IPv6 address space	This virtual network has no IPv6 address ranges.

Private subnet

Private subnets enhance security by not providing default outbound access. To enable outbound connectivity for virtual machines to access the internet, it is necessary to explicitly grant outbound access. A NAT gateway is the recommended way to provide outbound connectivity

Create | Manage view | Refresh | Export to CSV | ··· | Group by none

Filter for any field...

Subscription equals **all** | Resource Group equals **all** | Location equals **all** | Add filter

Name ↑	Resource Group	Location	Subscription
vnet-appgw	rg-appgw-lab	East US	Azure subscripti...

Showing 1 - 1 of 1. Display count: auto

Give feedback

Step - 2: Connect Your VM using SSH

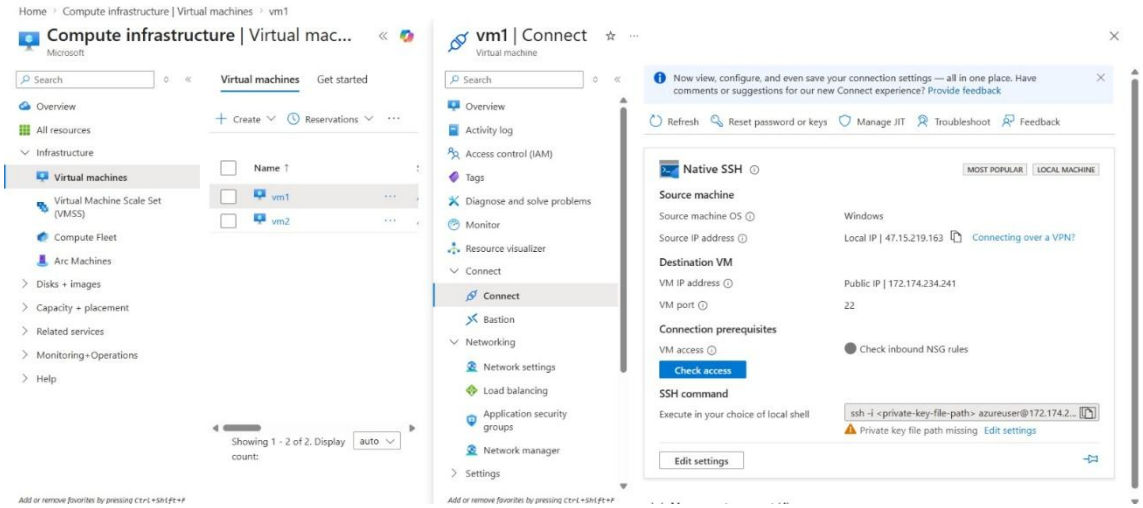

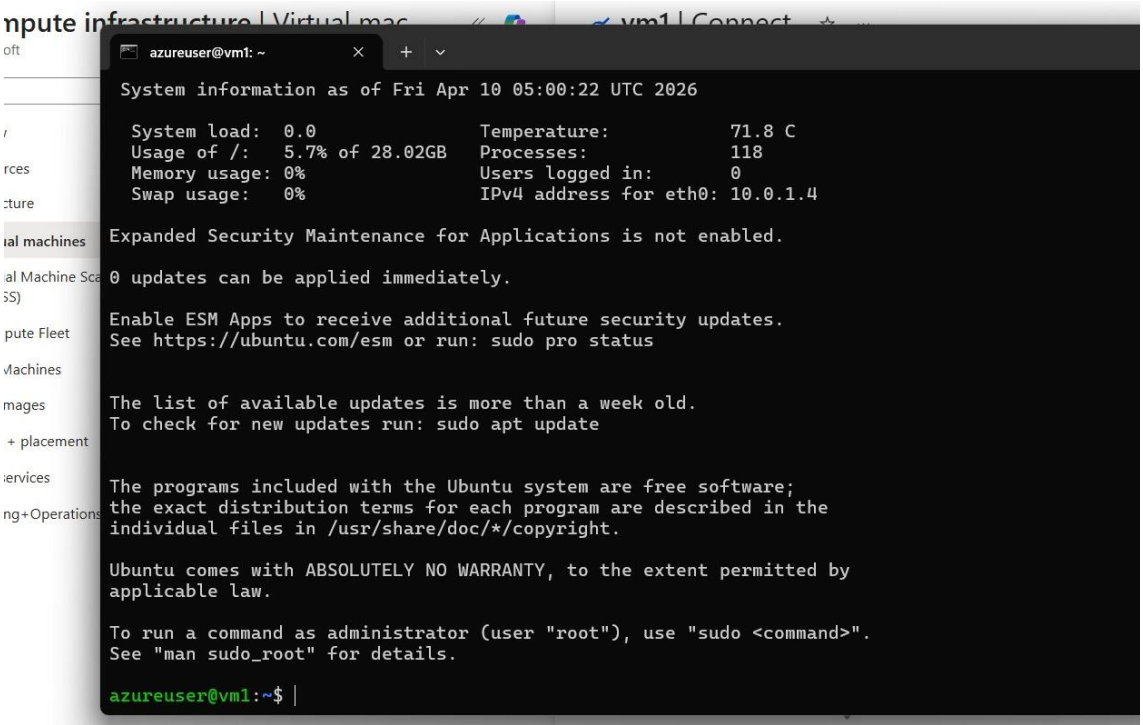

Step - 3: Create Application Gateway

Create application gateway ...

Validation passed

Enable autoscaling	Enabled
Minimum instance count	1
Maximum instance count	5
Availability zone	Zones 1, 2, 3
HTTP2	Enabled
FIPS (Federal Information Processing Standard) mode 140-2	Disabled
Virtual network	vnet-appgw
Subnet	appgw-subnet (10.0.0.0/24)

Frontends

Public IPv4 address name	appgw-pip
SKU	Standard
Assignment	Static
Availability zone	ZoneRedundant

Tags

None

Home > Load balancing and content delivery | Application gateways

Create application gateway ...

Validation passed

✓ Basics ✓ Frontends ✓ Backends ✓ Configuration ✓ Tags 6 Review + create

Basics

Subscription	Azure subscription 1
Resource group	rg-appgw-lab
Name	appgw-demo
Region	East US
Tier	Standard_v2
Enable autoscaling	Enabled
Minimum instance count	1
Maximum instance count	5
Availability zone	Zones 1, 2, 3
HTTP2	Enabled
FIPS (Federal Information Processing Standard) mode 140-2	Disabled
Virtual network	vnet-appgw
Subnet	appgw-subnet (10.0.0.0/24)

Microsoft Azure | Search resources, services, and docs (G+/) | Copilot

Home > Load balancing and content delivery | Azure Front Door

Create a Front Door profile

Microsoft Azure

AFD configuration updates take up to 20 minutes to take effect. Back to Back changes may take up to 40 minutes. More details in Azure Front Door Frequently Asked Questions (FAQ).

*Basics | Tags | Review + create

Azure Front Door is a modern application delivery network platform providing a secure, scalable CDN, dynamic site acceleration, and global HTTP(s) load balancing for your global web applications. Learn more

Project details

Select the subscription to manage deployed resources and costs. Use resource groups like folders to organize and manage all your resources.

Subscription * : Azure subscription 1

Resource group * : rg-appgw-lab

Create new

Resource group location : East US

Changes you make on this tab may affect any configuration you've done on other tabs. Review all options prior to creating the application gateway.

✓ Basics | ✓ Frontends | ✓ Backends | ✓ Configuration | ✓ Tags | 6 Review + create

A backend pool is a collection of resources to which your application gateway can send traffic. A backend pool can contain virtual machines, virtual machine scale sets, app services, IP addresses, or fully qualified domain names (FQDN).

Add a backend pool

Backend pool	Targets
backend-pool	

Create application gateway

Changes you make on this tab may affect any configuration you've done on other tabs. Review all options prior to creating the application gateway.

✓ Basics | ✓ Frontends | ✓ Backends | ✓ Configuration | ✓ Tags | 6 Review + create

Traffic enters the application gateway via its frontend IP address(es). An application gateway can use a public IP address, private IP address, or one of each type.

Frontend IP address type : (•) Public ( ) Private ( ) Both

Public IPv4 address * : (New) appgw-pip

Add new

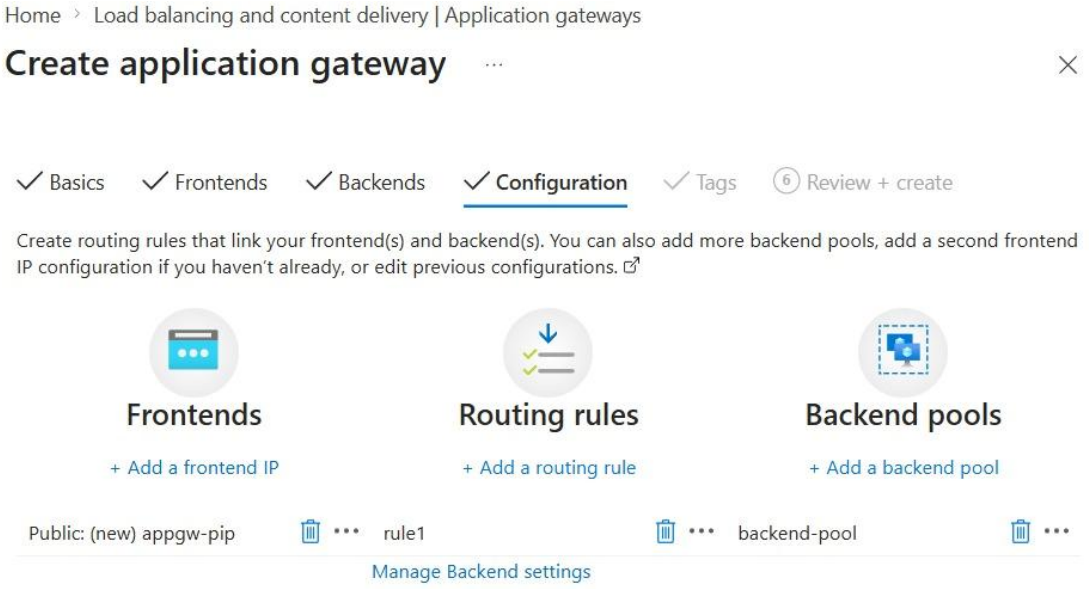
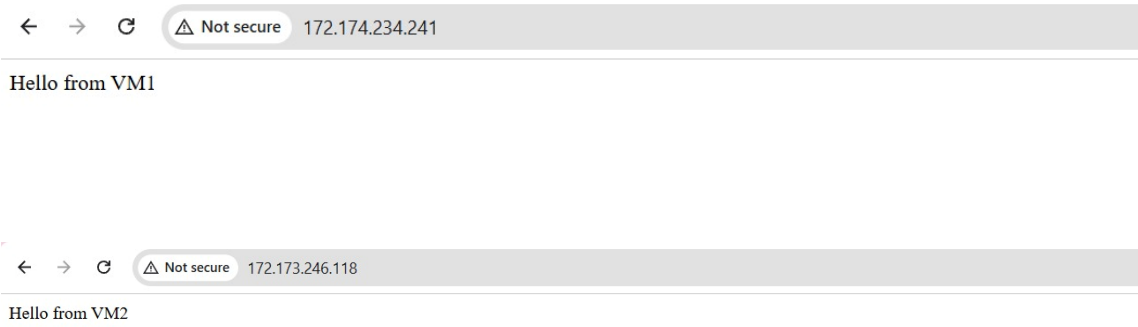
Step - 4: You can Access the data in HTML using same Public IP