

1.Create a table called Restaurant with columns: id, name, location, and cuisine. Apply NOT NULL constraint to name and location, and make id the PRIMARY KEY.

```
CREATE TABLE Restaurant (
   id INT PRIMARY KEY,
   name VARCHAR(100) NOT NULL,
   location VARCHAR(100) NOT NULL,
   cuisine VARCHAR(50)
);
```

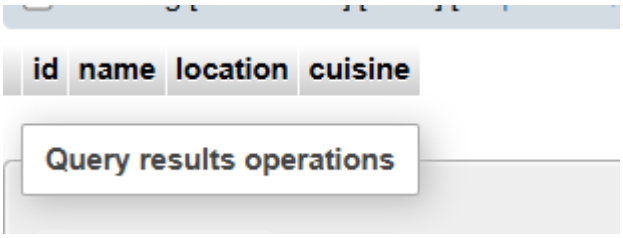

2. Create a table called FoodOrder with columns: order_id, restaurant_id, user_id, and order_total. Set order_id as PRIMARY KEY, and add a FOREIGN KEY constraint on restaurant_id referencing Restaurant(id).


```
CREATE TABLE FoodOrder (
   order_id INT PRIMARY KEY,
   restaurant_id INT,
   user_id INT,
   order_total DECIMAL(10,2),
   FOREIGN KEY (restaurant_id) REFERENCES Restaurant(id)
);
```

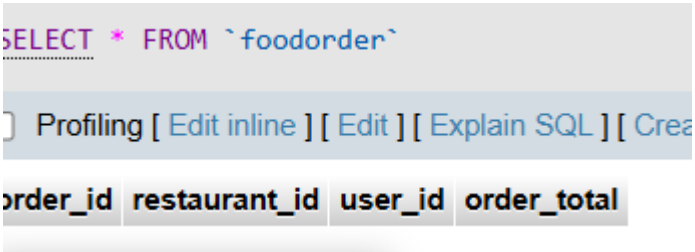

3. Insert 6 rows into a table called SpotifyUser with columns: user_id, username, email, and subscription_type. Ensure that username is UNIQUE and email is NOT NULL.

Hint: Use the UNIQUE and NOT NULL constraints when creating the table.


```
CREATE TABLE SpotifyUser (
   user_id INT PRIMARY KEY,
   username VARCHAR(50) UNIQUE,
   email VARCHAR(100) NOT NULL,
   subscription_type VARCHAR(30)
);
```

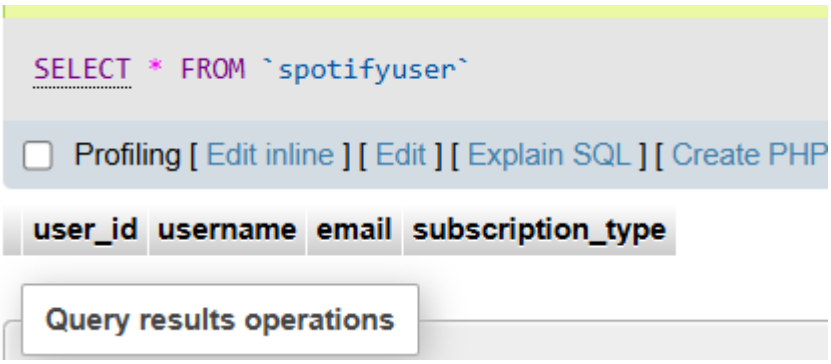

4. Create a VIEW named TopSpendersView that shows usernames and order_total from a FoodOrder table where order_total is greater than 1000.

```
CREATE VIEW TopSpendersView AS
SELECT user_id, order_total
FROM FoodOrder
WHERE order_total > 1000;

SELECT * FROM TopSpendersView;
```

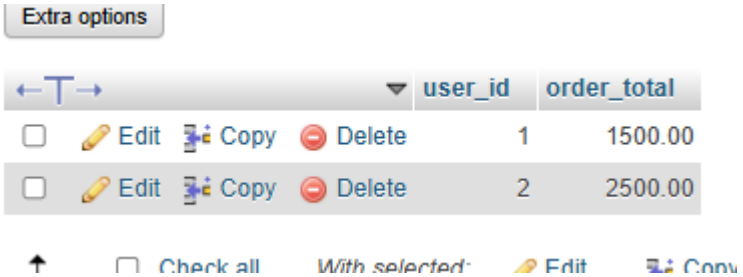

5. Write a SQL query to list all users from the TopSpendersView who have spent more than 2000, sorted by order_total descending.

Constraint: Only use the TopSpendersView for your query, not the original FoodOrder table.

SELECT * FROM TopSpendersView1 WHERE order_total > 2000 ORDER BY order_total DESC;

