

# Basic Graph Intro

Code ▾

Hide

```
# loading ggplot2
library(ggplot2)

facebookData <- read.delim('/home/atrides/Desktop/Applied-Statistics-with-R-master/statistics_with_R/04_Exploring_Data_with_Graphs/FacebookNarcissism.dat')
head(facebookData)
```

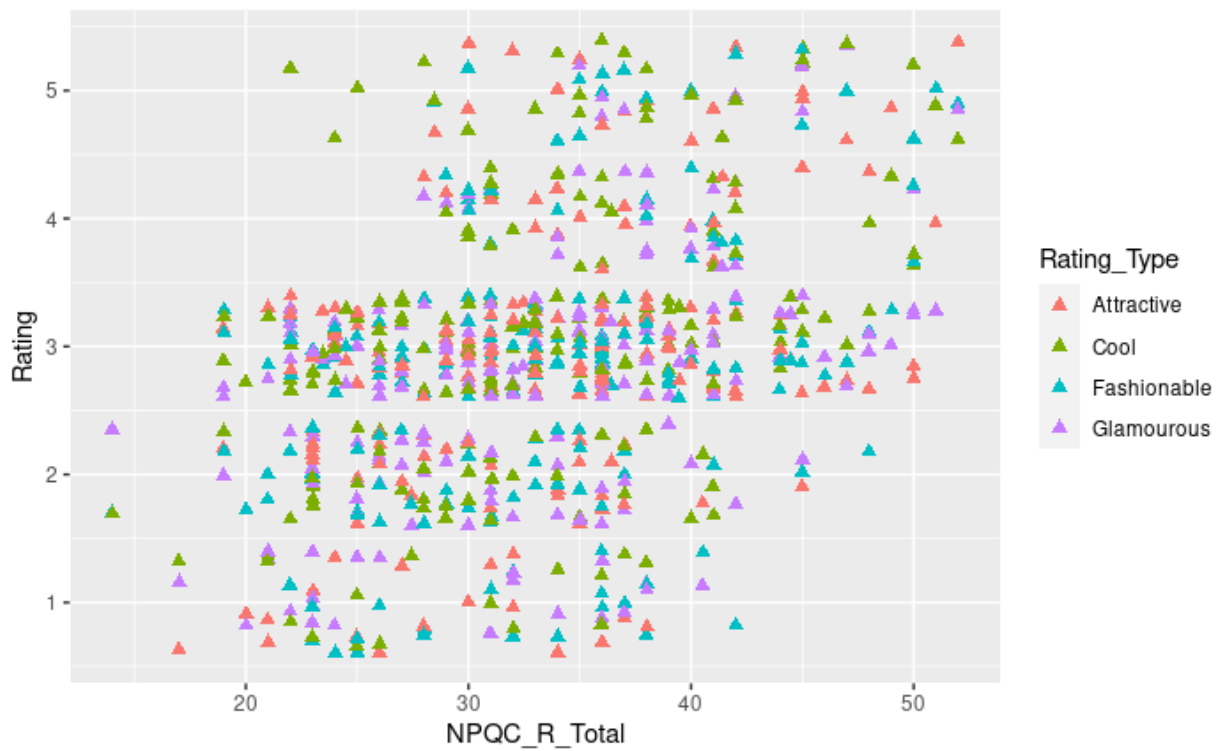
	<b>id</b> <int>	<b>NPQC_R_Total</b> <dbl>	<b>Rating_Type</b> <chr>	<b>Rating</b> <int>
1	1	31	Attractive	2
2	1	31	Fashionable	2
3	1	31	Glamorous	2
4	1	31	Cool	2
5	2	37	Attractive	2
6	2	37	Fashionable	2
6 rows				

Hide

```
# initiatingplot object
graph <- ggplot(facebookData, aes(NPQC_R_Total,Rating))
```

Hide

```
# adding geoms
graph+geom_point(shape=17, size=2,aes(color=Rating_Type),position = 'jitter')
'
```

[Hide](#)

```
graph + geom_point(aes(shape = Rating_Type,color=Rating_Type), position = "jitter")
```

