

# Class 10: Comparative analysis of structures

Natalie Ogg A91030809

We need some packages for today's class" bio3d and msa.

```
library(bio3d)
```

The `msa` package is from BioConductor. These packages focus on genomics work and are managed by the `BiocManager` package.

`install.packages("BiocManager")` then: `BiocManager::install("msa")`

```
library(bio3d)
```

```
aa <- get.seq("1ake_A")
```

Warning in `get.seq("1ake_A")`: Removing existing file: `seqs.fasta`

Fetching... Please wait. Done.

```
aa
```

```
1 . . . . 60
pdb|1AKE|A MRIILLGAPGAGKGTQAQFIMEKYGIPQISTGDMLRAAVKSGSELGKQAKDIMDAGKLV
1 . . . . 60
61 . . . . 120
pdb|1AKE|A DELVIALVKERIAQEDCRNGFLLDGFPRTPQADAMKEAGINVVDYVLEFDVPDELIVDRI
61 . . . . 120
121 . . . . 180
pdb|1AKE|A VGRRVHAPSGRVYHVKNPPKVEGKDDVTGEELTTRKDDQEETVRKRLVEYHQMTAPLIG
121 . . . . 180
```

```

      181          .          .          .      214
pdb|1AKE|A  YYSKEAEAGNTKYAKVDGTPVAEVRADLEKILG
      181          .          .          .      214

```

Call:

```
read.fasta(file = outfile)
```

Class:

```
fasta
```

Alignment dimensions:

```
1 sequence rows; 214 position columns (214 non-gap, 0 gap)
```

```
+ attr: id, ali, call
```

**Q10. Which of the packages above is found only on BioConductor and not CRAN?**

msa

**Q11. Which of the above packages is not found on BioConductor or CRAN?:**

devtools

**Q12. True or False? Functions from the devtools package can be used to install packages from GitHub and BitBucket?**

TRUE

**Q13. How many amino acids are in this sequence, i.e. how long is this sequence?**

214

Now I can search the PDB database for related sequences:

```
#b <- blast.pdb(aa)
```

```
#hits <- plot(b)
```

```
#attributes(b)
#head(b$hit.tbl)
```

```
#hits$pdb.id
```

```
hits <- NULL
```

```
hits$pdb.id <- c('1AKE_A','6S36_A','6RZE_A','3HPR_A','1E4V_A','5EJE_A','1E4Y_A','3X2S_A',
```

Side-note: Let's annotate these structure (aka, find out what they are, which species they're from, info about the experiments involved, etc.)

For this, we use `pdb.annotate()`

```
anno <- pdb.annotate(hits$pdb.id)
attributes(anno)
```

```
$names
```

```
[1] "structureId"      "chainId"          "macromoleculeType"
[4] "chainLength"     "experimentalTechnique" "resolution"
[7] "scopDomain"      "pfam"             "ligandId"
[10] "ligandName"      "source"           "structureTitle"
[13] "citation"        "rObserved"        "rFree"
[16] "rWork"          "spaceGroup"
```

```
$class
```

```
[1] "data.frame"
```

```
$row.names
```

```
[1] "1AKE_A" "6S36_A" "6RZE_A" "3HPR_A" "1E4V_A" "5EJE_A" "1E4Y_A" "3X2S_A"
[9] "6HAP_A" "6HAM_A" "4K46_A" "3GMT_A" "4PZL_A"
```

```
head(anno)
```

	structureId	chainId	macromoleculeType	chainLength	experimentalTechnique
1AKE_A	1AKE	A	Protein	214	X-ray
6S36_A	6S36	A	Protein	214	X-ray
6RZE_A	6RZE	A	Protein	214	X-ray
3HPR_A	3HPR	A	Protein	214	X-ray
1E4V_A	1E4V	A	Protein	214	X-ray
5EJE_A	5EJE	A	Protein	214	X-ray

	resolution	scopDomain	pfam	ligandId
1AKE_A	2.00	Adenylate kinase	Adenylate kinase (ADK)	AP5
6S36_A	1.60	<NA> Adenylate kinase	(ADK) CL (3),NA,MG (2)	
6RZE_A	1.69	<NA> Adenylate kinase	(ADK) NA (3),CL (2)	
3HPR_A	2.00	<NA> Adenylate kinase	(ADK)	AP5
1E4V_A	1.85	Adenylate kinase	Adenylate kinase (ADK)	AP5
5EJE_A	1.90	<NA> Adenylate kinase	(ADK)	AP5,CO

	ligandName
1AKE_A	BIS(ADENOSINE)-5'-PENTAPHOSPHATE
6S36_A	CHLORIDE ION (3),SODIUM ION,MAGNESIUM ION (2)
6RZE_A	SODIUM ION (3),CHLORIDE ION (2)
3HPR_A	BIS(ADENOSINE)-5'-PENTAPHOSPHATE
1E4V_A	BIS(ADENOSINE)-5'-PENTAPHOSPHATE
5EJE_A	BIS(ADENOSINE)-5'-PENTAPHOSPHATE,COBALT (II) ION

	source
1AKE_A	Escherichia coli
6S36_A	Escherichia coli
6RZE_A	Escherichia coli
3HPR_A	Escherichia coli K-12
1E4V_A	Escherichia coli
5EJE_A	Escherichia coli 0139:H28 str. E24377A

1AKE\_A STRUCTURE OF THE COMPLEX BETWEEN ADENYLATE KINASE FROM ESCHERICHIA COLI AND THE INHIBIT

6S36\_A

6RZE\_A

3HPR\_A

1E4V\_A

5EJE\_A

Cryst

	citation	rObserved	rFree
1AKE_A	Muller, C.W., et al. J Mol Biol (1992)	0.1960	NA
6S36_A	Rogne, P., et al. Biochemistry (2019)	0.1632	0.2356
6RZE_A	Rogne, P., et al. Biochemistry (2019)	0.1865	0.2350
3HPR_A	Schrank, T.P., et al. Proc Natl Acad Sci U S A (2009)	0.2100	0.2432
1E4V_A	Muller, C.W., et al. Proteins (1993)	0.1960	NA
5EJE_A	Kovermann, M., et al. Proc Natl Acad Sci U S A (2017)	0.1889	0.2358

	rWork	spaceGroup
1AKE_A	0.1960	P 21 2 21
6S36_A	0.1594	C 1 2 1
6RZE_A	0.1819	C 1 2 1
3HPR_A	0.2062	P 21 21 2
1E4V_A	0.1960	P 21 2 21
5EJE_A	0.1863	P 21 2 21

Now we can download all these related structures for further analysis with the `get.pdb()` function.

```
# Download related PDB files
files <- get.pdb(hits$ pdb.id, path="pdbs", split=TRUE, gzip=TRUE)
```

```
Warning in get.pdb(hits$ pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/1AKE.pdb.gz exists. Skipping download
```

```
Warning in get.pdb(hits$ pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/6S36.pdb.gz exists. Skipping download
```

```
Warning in get.pdb(hits$ pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/6RZE.pdb.gz exists. Skipping download
```

```
Warning in get.pdb(hits$ pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/3HPR.pdb.gz exists. Skipping download
```

```
Warning in get.pdb(hits$ pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/1E4V.pdb.gz exists. Skipping download
```

```
Warning in get.pdb(hits$ pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/5EJE.pdb.gz exists. Skipping download
```

```
Warning in get.pdb(hits$ pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/1E4Y.pdb.gz exists. Skipping download
```

```
Warning in get.pdb(hits$ pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/3X2S.pdb.gz exists. Skipping download
```


```
Warning in get.pdb(hits$ pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/6HAP.pdb.gz exists. Skipping download
```

```
Warning in get.pdb(hits$ pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/6HAM.pdb.gz exists. Skipping download
```

```
Warning in get.pdb(hits$ pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):
pdbs/4K46.pdb.gz exists. Skipping download
```

Warning in get.pdb(hits\$ pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):  
pdbs/3GMT.pdb.gz exists. Skipping download

Warning in get.pdb(hits\$ pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):  
pdbs/4PZL.pdb.gz exists. Skipping download

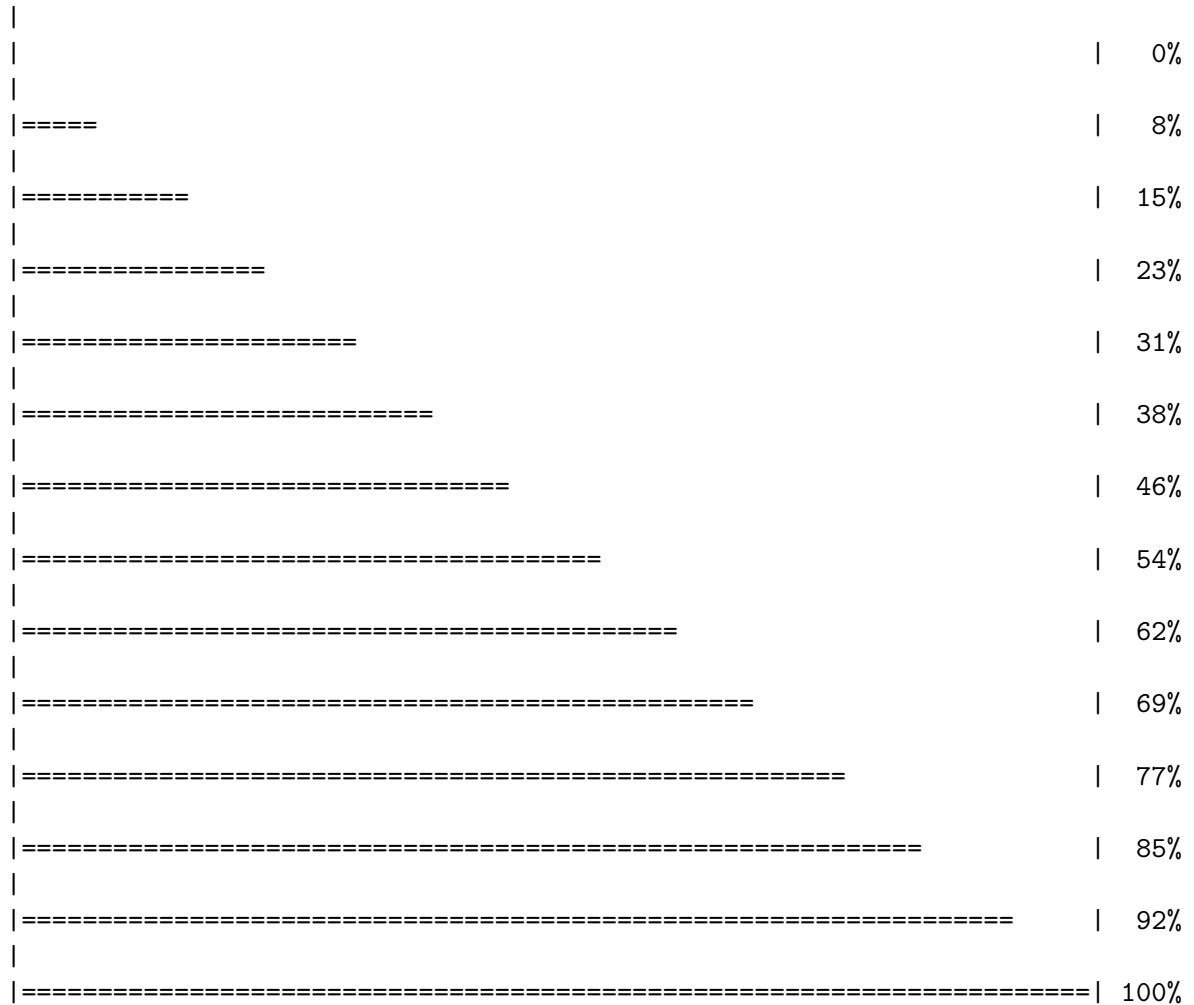

Now we can...

## Align and Superpose structures

Next we will use the `pdbaln()` function to align and also optionally fit (i.e. superpose) the identified PDB structures.

```
# Align related PDBs
pdbs <- pdbaln(files, fit = TRUE, exefile="msa")
```

Reading PDB files:

```
pdbs/split_chain/1AKE_A.pdb
pdbs/split_chain/6S36_A.pdb
pdbs/split_chain/6RZE_A.pdb
pdbs/split_chain/3HPR_A.pdb
pdbs/split_chain/1E4V_A.pdb
pdbs/split_chain/5EJE_A.pdb
pdbs/split_chain/1E4Y_A.pdb
pdbs/split_chain/3X2S_A.pdb
pdbs/split_chain/6HAP_A.pdb
pdbs/split_chain/6HAM_A.pdb
pdbs/split_chain/4K46_A.pdb
pdbs/split_chain/3GMT_A.pdb
pdbs/split_chain/4PZL_A.pdb
  PDB has ALT records, taking A only, rm.alt=TRUE
.   PDB has ALT records, taking A only, rm.alt=TRUE
.   PDB has ALT records, taking A only, rm.alt=TRUE
.   PDB has ALT records, taking A only, rm.alt=TRUE
..  PDB has ALT records, taking A only, rm.alt=TRUE
.... PDB has ALT records, taking A only, rm.alt=TRUE
.   PDB has ALT records, taking A only, rm.alt=TRUE
...
```

Extracting sequences

```
pdb/seq: 1   name: pdbs/split_chain/1AKE_A.pdb
  PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 2   name: pdbs/split_chain/6S36_A.pdb
  PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 3   name: pdbs/split_chain/6RZE_A.pdb
  PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 4   name: pdbs/split_chain/3HPR_A.pdb
  PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 5   name: pdbs/split_chain/1E4V_A.pdb
```

```

pdb/seq: 6   name: pdbh/split_chain/5EJE_A.pdb
      PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 7   name: pdbh/split_chain/1E4Y_A.pdb
pdb/seq: 8   name: pdbh/split_chain/3X2S_A.pdb
pdb/seq: 9   name: pdbh/split_chain/6HAP_A.pdb
pdb/seq: 10  name: pdbh/split_chain/6HAM_A.pdb
      PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 11  name: pdbh/split_chain/4K46_A.pdb
      PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 12  name: pdbh/split_chain/3GMT_A.pdb
pdb/seq: 13  name: pdbh/split_chain/4PZL_A.pdb

```

## pdbh

```

1                                     .               .               .               40
[Truncated_Name:1] 1AKE_A.pdb      -----MRIILLGAPGAGKGTQAQFIMEKYGIPQIS
[Truncated_Name:2] 6S36_A.pdb      -----MRIILLGAPGAGKGTQAQFIMEKYGIPQIS
[Truncated_Name:3] 6RZE_A.pdb      -----MRIILLGAPGAGKGTQAQFIMEKYGIPQIS
[Truncated_Name:4] 3HPR_A.pdb      -----MRIILLGAPGAGKGTQAQFIMEKYGIPQIS
[Truncated_Name:5] 1E4V_A.pdb      -----MRIILLGAPVAGKGTQAQFIMEKYGIPQIS
[Truncated_Name:6] 5EJE_A.pdb      -----MRIILLGAPGAGKGTQAQFIMEKYGIPQIS
[Truncated_Name:7] 1E4Y_A.pdb      -----MRIILLGALVAGKGTQAQFIMEKYGIPQIS
[Truncated_Name:8] 3X2S_A.pdb      -----MRIILLGAPGAGKGTQAQFIMEKYGIPQIS
[Truncated_Name:9] 6HAP_A.pdb      -----MRIILLGAPGAGKGTQAQFIMEKYGIPQIS
[Truncated_Name:10] 6HAM_A.pdb     -----MRIILLGAPGAGKGTQAQFIMEKYGIPQIS
[Truncated_Name:11] 4K46_A.pdb     -----MRIILLGAPGAGKGTQAQFIMAKFGIPQIS
[Truncated_Name:12] 3GMT_A.pdb     -----MRLILLGAPGAGKGTQANFIKEKFGIPQIS
[Truncated_Name:13] 4PZL_A.pdb     TENLYFQSNAMRIILLGAPGAGKGTQAKIIEQKYNIAHIS
                                     **~*****  *****  *  *~*  **
1                                     .               .               .               40

41                                     .               .               .               80
[Truncated_Name:1] 1AKE_A.pdb      TGDMLRAAVKSGSELGKQAKDIMDAGKLVTDDELVIALVKE
[Truncated_Name:2] 6S36_A.pdb      TGDMLRAAVKSGSELGKQAKDIMDAGKLVTDDELVIALVKE
[Truncated_Name:3] 6RZE_A.pdb      TGDMLRAAVKSGSELGKQAKDIMDAGKLVTDDELVIALVKE
[Truncated_Name:4] 3HPR_A.pdb      TGDMLRAAVKSGSELGKQAKDIMDAGKLVTDDELVIALVKE
[Truncated_Name:5] 1E4V_A.pdb      TGDMLRAAVKSGSELGKQAKDIMDAGKLVTDDELVIALVKE
[Truncated_Name:6] 5EJE_A.pdb      TGDMLRAAVKSGSELGKQAKDIMDACKLVTDDELVIALVKE
[Truncated_Name:7] 1E4Y_A.pdb      TGDMLRAAVKSGSELGKQAKDIMDAGKLVTDDELVIALVKE
[Truncated_Name:8] 3X2S_A.pdb      TGDMLRAAVKSGSELGKQAKDIMDCGKLVTDDELVIALVKE
[Truncated_Name:9] 6HAP_A.pdb      TGDMLRAAVKSGSELGKQAKDIMDAGKLVTDDELVIALVRE

```



[Truncated_Name:10] 6HAM_A.pdb	TGDMLRAAIKSGSELGKQAKDIMDAGKLVTDDEIIIALVKE
[Truncated_Name:11] 4K46_A.pdb	TGDMLRAAIKAGTELGKQAKSVIDAGQLVSDDIILGLVKE
[Truncated_Name:12] 3GMT_A.pdb	TGDMLRAAVKAGTPLGVEAKTYMDEGKLVPSDLIIGLVKE
[Truncated_Name:13] 4PZL_A.pdb	TGDMIRETIKSGSALGQELKKVLDAGELVSDEFIIVKIVKD
	****~* ~* *~ ** * ~* ** * ^^ ~*^^
	41 . . . 80
	81 . . . 120
[Truncated_Name:1] 1AKE_A.pdb	RIAQEDCRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD
[Truncated_Name:2] 6S36_A.pdb	RIAQEDCRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD
[Truncated_Name:3] 6RZE_A.pdb	RIAQEDCRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD
[Truncated_Name:4] 3HPR_A.pdb	RIAQEDCRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD
[Truncated_Name:5] 1E4V_A.pdb	RIAQEDCRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD
[Truncated_Name:6] 5EJE_A.pdb	RIAQEDCRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD
[Truncated_Name:7] 1E4Y_A.pdb	RIAQEDCRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD
[Truncated_Name:8] 3X2S_A.pdb	RIAQEDSRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD
[Truncated_Name:9] 6HAP_A.pdb	RICQEDSRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD
[Truncated_Name:10] 6HAM_A.pdb	RICQEDSRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD
[Truncated_Name:11] 4K46_A.pdb	RIAQDDCAKGFLDGFPR TIPQADGLKEVGVVVDYVIEFD
[Truncated_Name:12] 3GMT_A.pdb	RLKEADCANGYLFDFPR TIPQADAMKEAGVAIDYVLEID
[Truncated_Name:13] 4PZL_A.pdb	RISKNCNNGFLLDGVPR TIPQAQELDKLGVNIDYIVEVD
	*~ * *~* ** ***** ** ^ ~*~**~* *
	81 . . . 120
	121 . . . 160
[Truncated_Name:1] 1AKE_A.pdb	VPDELIVDRIVGRRVHAPSGRVYHV KFNPPKVEGKDDVTG
[Truncated_Name:2] 6S36_A.pdb	VPDELIVDKIVGRRVHAPSGRVYHV KFNPPKVEGKDDVTG
[Truncated_Name:3] 6RZE_A.pdb	VPDELIVDAIVGRRVHAPSGRVYHV KFNPPKVEGKDDVTG
[Truncated_Name:4] 3HPR_A.pdb	VPDELIVDRIVGRRVHAPSGRVYHV KFNPPKVEGKDDGTG
[Truncated_Name:5] 1E4V_A.pdb	VPDELIVDRIVGRRVHAPSGRVYHV KFNPPKVEGKDDVTG
[Truncated_Name:6] 5EJE_A.pdb	VPDELIVDRIVGRRVHAPSGRVYHV KFNPPKVEGKDDVTG
[Truncated_Name:7] 1E4Y_A.pdb	VPDELIVDRIVGRRVHAPSGRVYHV KFNPPKVEGKDDVTG
[Truncated_Name:8] 3X2S_A.pdb	VPDELIVDRIVGRRVHAPSGRVYHV KFNPPKVEGKDDVTG
[Truncated_Name:9] 6HAP_A.pdb	VPDELIVDRIVGRRVHAPSGRVYHV KFNPPKVEGKDDVTG
[Truncated_Name:10] 6HAM_A.pdb	VPDELIVDRIVGRRVHAPSGRVYHV KFNPPKVEGKDDVTG
[Truncated_Name:11] 4K46_A.pdb	VADSVIVERMAGRRHLASGR TYHNVNPPKVEGKDDVTG
[Truncated_Name:12] 3GMT_A.pdb	VPFSEIIERMSGRRTHPASGR TYHV KFNPPKVEGKDDVTG
[Truncated_Name:13] 4PZL_A.pdb	VADNLLIERITGRRIHPASGR TYHTKFNPPKVADKDDVTG
	* ^^^ ^ *** * *** * ^***** *** **
	121 . . . 160
	161 . . . 200
[Truncated_Name:1] 1AKE_A.pdb	EELTTRKDDQEETVRKRLVEYHQMTAPLIGYYSKEAEAGN

```

[Truncated_Name:2] 6S36_A.pdb      EELTTRKDDQEETVRKRLVEYHQM TAPLIGYYSKEAEAGN
[Truncated_Name:3] 6RZE_A.pdb      EELTTRKDDQEETVRKRLVEYHQM TAPLIGYYSKEAEAGN
[Truncated_Name:4] 3HPR_A.pdb      EELTTRKDDQEETVRKRLVEYHQM TAPLIGYYSKEAEAGN
[Truncated_Name:5] 1E4V_A.pdb      EELTTRKDDQEETVRKRLVEYHQM TAPLIGYYSKEAEAGN
[Truncated_Name:6] 5EJE_A.pdb      EELTTRKDDQEECVRKRLVEYHQM TAPLIGYYSKEAEAGN
[Truncated_Name:7] 1E4Y_A.pdb      EELTTRKDDQEETVRKRLVEYHQM TAPLIGYYSKEAEAGN
[Truncated_Name:8] 3X2S_A.pdb      EELTTRKDDQEETVRKRLCEYHQM TAPLIGYYSKEAEAGN
[Truncated_Name:9] 6HAP_A.pdb      EELTTRKDDQEETVRKRLVEYHQM TAPLIGYYSKEAEAGN
[Truncated_Name:10] 6HAM_A.pdb     EELTTRKDDQEETVRKRLVEYHQM TAPLIGYYSKEAEAGN
[Truncated_Name:11] 4K46_A.pdb     EDLVIREDDKEETVLARLGVYHNQ TAPLIAYYGKEAEAGN
[Truncated_Name:12] 3GMT_A.pdb     EPLVQRDDDKKEETVKKRLDVYEA QTKPLITYYGDWARRGA
[Truncated_Name:13] 4PZL_A.pdb     EPLITRTDDNEDTVKQRLSVYHAQ TAKLIDFYRNFSSNTNT
                                     * * * * * ^ * * * * * ^ *
161                               .                               200

201                               .                               227
[Truncated_Name:1] 1AKE_A.pdb      T--KYAKVDGTKPVAEVRADLEKILG-
[Truncated_Name:2] 6S36_A.pdb      T--KYAKVDGTKPVAEVRADLEKILG-
[Truncated_Name:3] 6RZE_A.pdb      T--KYAKVDGTKPVAEVRADLEKILG-
[Truncated_Name:4] 3HPR_A.pdb      T--KYAKVDGTKPVAEVRADLEKILG-
[Truncated_Name:5] 1E4V_A.pdb      T--KYAKVDGTKPVAEVRADLEKILG-
[Truncated_Name:6] 5EJE_A.pdb      T--KYAKVDGTKPVAEVRADLEKILG-
[Truncated_Name:7] 1E4Y_A.pdb      T--KYAKVDGTKPVAEVRADLEKILG-
[Truncated_Name:8] 3X2S_A.pdb      T--KYAKVDGTKPVAEVRADLEKILG-
[Truncated_Name:9] 6HAP_A.pdb      T--KYAKVDGTKPVCEVRADLEKILG-
[Truncated_Name:10] 6HAM_A.pdb     T--KYAKVDGTKPVCEVRADLEKILG-
[Truncated_Name:11] 4K46_A.pdb     T--QYLKFDGTKA VA EVSAELEKALA-
[Truncated_Name:12] 3GMT_A.pdb     E-----NGLKAPA-----YRKISG-
[Truncated_Name:13] 4PZL_A.pdb     KIPKYIKINGDQAVEKVSQDIFDQLNK
                                     *
201                               .                               227

```

Call:

```
pdbaln(files = files, fit = TRUE, exefile = "msa")
```

Class:

```
pdbs, fasta
```


Alignment dimensions:

```
13 sequence rows; 227 position columns (204 non-gap, 23 gap)
```

```
+ attr: xyz, resno, b, chain, id, ali, resid, sse, call
```

## Principal Component Analysis

```
pc.xray <- pca(pdbx)
plot(pc.xray)
```

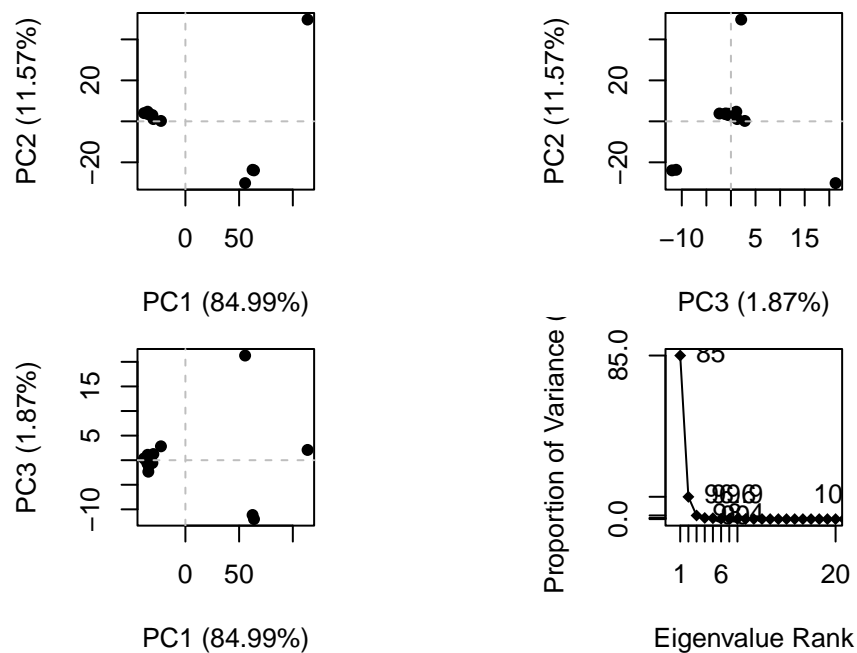

(One PC captured 85.3%, two 96%, etc.)

```
# Visualize first principal component
pc1 <- mktrj(pc.xray, pc=1, file="pc_1.pdb")
pc1
```

```
Total Frames#: 34
Total XYZs#: 612, (Atoms#: 204)
```

```
[1] 26.787 52.261 40.414 <...> 15.653 53.622 42.018 [20808]
```

```
+ attr: Matrix DIM = 34 x 612
```

## Class 11: AlphaFold2 protein visualization and analysis

### HIV Pr Monomer



### HIV Pr Dimer

#### Custom analysis of resulting models

```
results_dir <- "new_dimer_23119_0"  
# File names for all PDB models  
pdb_files <- list.files(path=results_dir,  
                        pattern="*.pdb",  
                        full.names = TRUE)  
  
pdb_files
```

```
[1] "new_dimer_23119_0/new_dimer_23119_0_unrelaxed_rank_001_alphafold2_multimer_v3_model_1_s  
[2] "new_dimer_23119_0/new_dimer_23119_0_unrelaxed_rank_002_alphafold2_multimer_v3_model_5_s  
[3] "new_dimer_23119_0/new_dimer_23119_0_unrelaxed_rank_003_alphafold2_multimer_v3_model_4_s
```

```
[4] "new_dimer_23119_0/new_dimer_23119_0_unrelaxed_rank_004_alphafold2_multimer_v3_model_2_s
[5] "new_dimer_23119_0/new_dimer_23119_0_unrelaxed_rank_005_alphafold2_multimer_v3_model_3_s
```

```
library(bio3d)

# Read all data from Models
# and superpose/fit coords

pdbs <- pdbaln(pdb_files, fit=TRUE, exefile="msa")
```

Reading PDB files:

```
new_dimer_23119_0/new_dimer_23119_0_unrelaxed_rank_001_alphafold2_multimer_v3_model_1_seed_0
new_dimer_23119_0/new_dimer_23119_0_unrelaxed_rank_002_alphafold2_multimer_v3_model_5_seed_0
new_dimer_23119_0/new_dimer_23119_0_unrelaxed_rank_003_alphafold2_multimer_v3_model_4_seed_0
new_dimer_23119_0/new_dimer_23119_0_unrelaxed_rank_004_alphafold2_multimer_v3_model_2_seed_0
new_dimer_23119_0/new_dimer_23119_0_unrelaxed_rank_005_alphafold2_multimer_v3_model_3_seed_0
.....
```

Extracting sequences

```
pdb/seq: 1   name: new_dimer_23119_0/new_dimer_23119_0_unrelaxed_rank_001_alphafold2_multimer
pdb/seq: 2   name: new_dimer_23119_0/new_dimer_23119_0_unrelaxed_rank_002_alphafold2_multimer
pdb/seq: 3   name: new_dimer_23119_0/new_dimer_23119_0_unrelaxed_rank_003_alphafold2_multimer
pdb/seq: 4   name: new_dimer_23119_0/new_dimer_23119_0_unrelaxed_rank_004_alphafold2_multimer
pdb/seq: 5   name: new_dimer_23119_0/new_dimer_23119_0_unrelaxed_rank_005_alphafold2_multimer
```

```
pdbs
```

```

1                               .                               .                               .                               .                               50
[Truncated_Name:1]new_dimer_  PQITLWQRPLVTIKIGGQLKEALLDTGADDTVLEEMSLPGRWKPKMIGGI
[Truncated_Name:2]new_dimer_  PQITLWQRPLVTIKIGGQLKEALLDTGADDTVLEEMSLPGRWKPKMIGGI
[Truncated_Name:3]new_dimer_  PQITLWQRPLVTIKIGGQLKEALLDTGADDTVLEEMSLPGRWKPKMIGGI
[Truncated_Name:4]new_dimer_  PQITLWQRPLVTIKIGGQLKEALLDTGADDTVLEEMSLPGRWKPKMIGGI
[Truncated_Name:5]new_dimer_  PQITLWQRPLVTIKIGGQLKEALLDTGADDTVLEEMSLPGRWKPKMIGGI
*****
1                               .                               .                               .                               .                               50

51                               .                               .                               .                               .                               100
[Truncated_Name:1]new_dimer_  GGFIKVRQYDQILIEICGHKAIGTVLVGPTPVNIIGRNLLTQIGCTLNFP
[Truncated_Name:2]new_dimer_  GGFIKVRQYDQILIEICGHKAIGTVLVGPTPVNIIGRNLLTQIGCTLNFP
```

```

[Truncated_Name:3]new_dimer_  GGFIKVRQYDQILIEICGHKAIGTVLVGPTPVNIIGRNLLTQIGCTLNFP
[Truncated_Name:4]new_dimer_  GGFIKVRQYDQILIEICGHKAIGTVLVGPTPVNIIGRNLLTQIGCTLNFP
[Truncated_Name:5]new_dimer_  GGFIKVRQYDQILIEICGHKAIGTVLVGPTPVNIIGRNLLTQIGCTLNFP
*****
51          .          .          .          .          100

101          .          .          .          .          150
[Truncated_Name:1]new_dimer_  QITLWQRPLVTIKIGGQLKEALLDTGADDTVLEEMSLPGRWPKPMIGGIG
[Truncated_Name:2]new_dimer_  QITLWQRPLVTIKIGGQLKEALLDTGADDTVLEEMSLPGRWPKPMIGGIG
[Truncated_Name:3]new_dimer_  QITLWQRPLVTIKIGGQLKEALLDTGADDTVLEEMSLPGRWPKPMIGGIG
[Truncated_Name:4]new_dimer_  QITLWQRPLVTIKIGGQLKEALLDTGADDTVLEEMSLPGRWPKPMIGGIG
[Truncated_Name:5]new_dimer_  QITLWQRPLVTIKIGGQLKEALLDTGADDTVLEEMSLPGRWPKPMIGGIG
*****
101          .          .          .          .          150

151          .          .          .          .          198
[Truncated_Name:1]new_dimer_  GFIKVRQYDQILIEICGHKAIGTVLVGPTPVNIIGRNLLTQIGCTLNF
[Truncated_Name:2]new_dimer_  GFIKVRQYDQILIEICGHKAIGTVLVGPTPVNIIGRNLLTQIGCTLNF
[Truncated_Name:3]new_dimer_  GFIKVRQYDQILIEICGHKAIGTVLVGPTPVNIIGRNLLTQIGCTLNF
[Truncated_Name:4]new_dimer_  GFIKVRQYDQILIEICGHKAIGTVLVGPTPVNIIGRNLLTQIGCTLNF
[Truncated_Name:5]new_dimer_  GFIKVRQYDQILIEICGHKAIGTVLVGPTPVNIIGRNLLTQIGCTLNF
*****
151          .          .          .          .          198

```

Call:

```
pdbaln(files = pdb_files, fit = TRUE, exefile = "msa")
```

Class:

```
pdbs, fasta
```

Alignment dimensions:

```
5 sequence rows; 198 position columns (198 non-gap, 0 gap)
```

```
+ attr: xyz, resno, b, chain, id, ali, resid, sse, call
```

```
rd <- rmsd(pdb)
```


Warning in rmsd(pdb): No indices provided, using the 198 non NA positions

```
range(rd)
```

```
[1] 0.000 20.431
```

```
library(pheatmap)


colnames(rd) <- paste0("m",1:5)
rownames(rd) <- paste0("m",1:5)
pheatmap(rd)
```

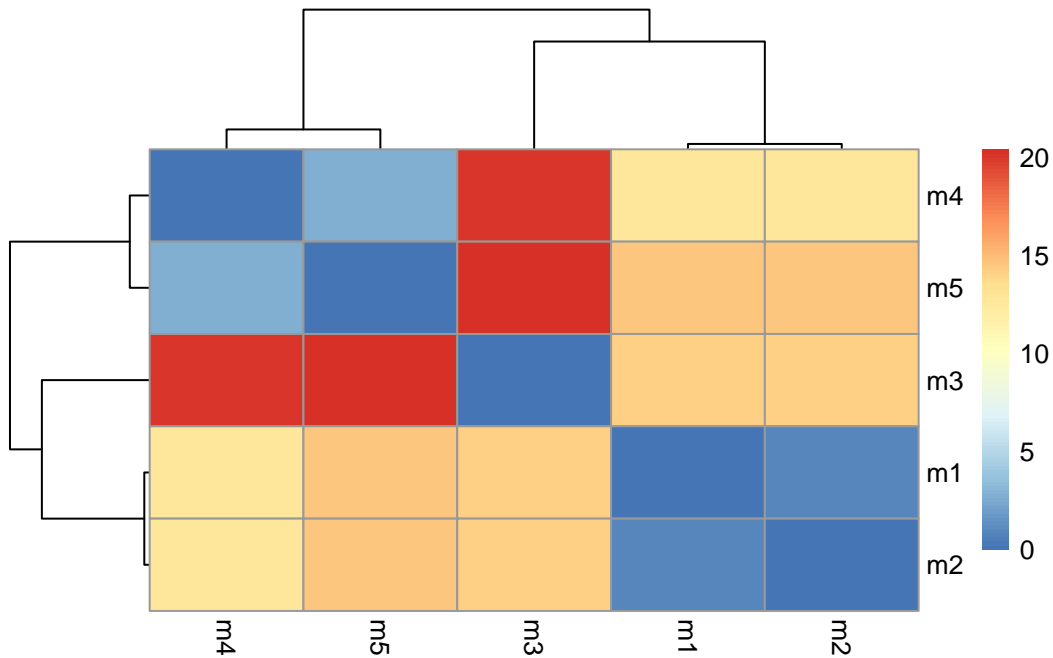

```
# Read a reference PDB structure
pdb <- read.pdb("1hsg")
```

Note: Accessing on-line PDB file

```
plotb3(pdb$b, typ="l", lwd=2, sse=pdb)
points(pdb$b[2,], typ="l", col="red")
points(pdb$b[3,], typ="l", col="blue")
points(pdb$b[4,], typ="l", col="darkgreen")
points(pdb$b[5,], typ="l", col="orange")
abline(v=100, col="gray")
```

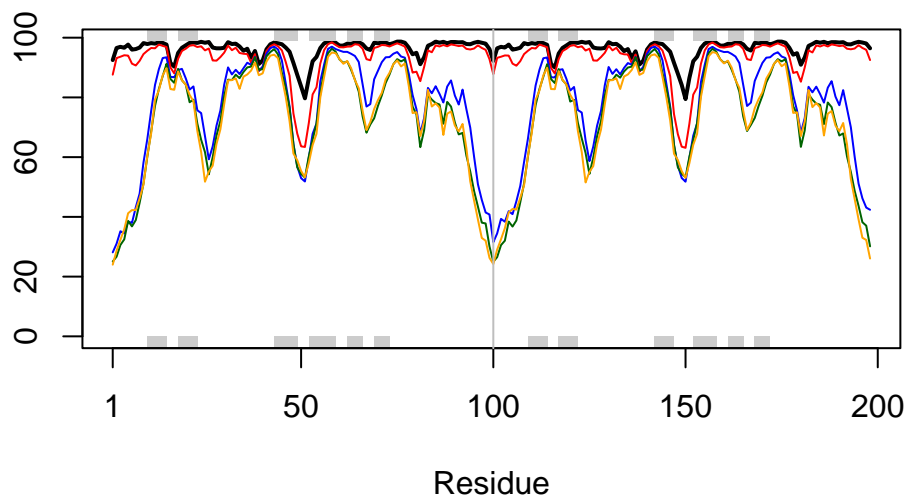

```
core <- core.find(pdb)
```

```
core size 197 of 198 vol = 6154.839
core size 196 of 198 vol = 5399.676
core size 195 of 198 vol = 5074.795
core size 194 of 198 vol = 4802.518
core size 193 of 198 vol = 4520.256
core size 192 of 198 vol = 4305.362
core size 191 of 198 vol = 4089.792
core size 190 of 198 vol = 3886.145
core size 189 of 198 vol = 3758.321
core size 188 of 198 vol = 3620.18
core size 187 of 198 vol = 3496.698
core size 186 of 198 vol = 3389.985
core size 185 of 198 vol = 3320.114
core size 184 of 198 vol = 3258.683
core size 183 of 198 vol = 3208.591
core size 182 of 198 vol = 3156.736
core size 181 of 198 vol = 3141.668
core size 180 of 198 vol = 3136.574
core size 179 of 198 vol = 3155.52
core size 178 of 198 vol = 3185.362
```



core size 177 of 198	vol = 3204.487
core size 176 of 198	vol = 3211.978
core size 175 of 198	vol = 3234.993
core size 174 of 198	vol = 3244.062
core size 173 of 198	vol = 3237.845
core size 172 of 198	vol = 3218.77
core size 171 of 198	vol = 3180.743
core size 170 of 198	vol = 3130.369
core size 169 of 198	vol = 3067.881
core size 168 of 198	vol = 2989.546
core size 167 of 198	vol = 2928.272
core size 166 of 198	vol = 2851.193
core size 165 of 198	vol = 2780.877
core size 164 of 198	vol = 2708.433
core size 163 of 198	vol = 2636.516
core size 162 of 198	vol = 2563.25
core size 161 of 198	vol = 2478.024
core size 160 of 198	vol = 2404.793
core size 159 of 198	vol = 2330.997
core size 158 of 198	vol = 2250.477
core size 157 of 198	vol = 2159.432
core size 156 of 198	vol = 2070.759
core size 155 of 198	vol = 1983.579
core size 154 of 198	vol = 1917.913
core size 153 of 198	vol = 1842.556
core size 152 of 198	vol = 1775.398
core size 151 of 198	vol = 1695.133
core size 150 of 198	vol = 1632.173
core size 149 of 198	vol = 1570.391
core size 148 of 198	vol = 1497.238
core size 147 of 198	vol = 1434.802
core size 146 of 198	vol = 1367.706
core size 145 of 198	vol = 1302.596
core size 144 of 198	vol = 1251.985
core size 143 of 198	vol = 1207.976
core size 142 of 198	vol = 1167.112
core size 141 of 198	vol = 1118.27
core size 140 of 198	vol = 1081.664
core size 139 of 198	vol = 1029.75
core size 138 of 198	vol = 981.766
core size 137 of 198	vol = 944.446
core size 136 of 198	vol = 899.224
core size 135 of 198	vol = 859.402

core size 134 of 198 vol = 814.694  
core size 133 of 198 vol = 771.862  
core size 132 of 198 vol = 733.807  
core size 131 of 198 vol = 702.053  
core size 130 of 198 vol = 658.757  
core size 129 of 198 vol = 622.574  
core size 128 of 198 vol = 578.29  
core size 127 of 198 vol = 543.07  
core size 126 of 198 vol = 510.934  
core size 125 of 198 vol = 481.595  
core size 124 of 198 vol = 464.672  
core size 123 of 198 vol = 451.721  
core size 122 of 198 vol = 430.417  
core size 121 of 198 vol = 409.141  
core size 120 of 198 vol = 378.942  
core size 119 of 198 vol = 348.325  
core size 118 of 198 vol = 324.738  
core size 117 of 198 vol = 312.394  
core size 116 of 198 vol = 300.89  
core size 115 of 198 vol = 279.976  
core size 114 of 198 vol = 263.434  
core size 113 of 198 vol = 250.263  
core size 112 of 198 vol = 229.592  
core size 111 of 198 vol = 209.929  
core size 110 of 198 vol = 196.379  
core size 109 of 198 vol = 180.628  
core size 108 of 198 vol = 167.088  
core size 107 of 198 vol = 155.875  
core size 106 of 198 vol = 142.595  
core size 105 of 198 vol = 128.924  
core size 104 of 198 vol = 114.054  
core size 103 of 198 vol = 100.936  
core size 102 of 198 vol = 90.431  
core size 101 of 198 vol = 81.972  
core size 100 of 198 vol = 74.017  
core size 99 of 198 vol = 66.855  
core size 98 of 198 vol = 59.525  
core size 97 of 198 vol = 52.263  
core size 96 of 198 vol = 43.699  
core size 95 of 198 vol = 35.813  
core size 94 of 198 vol = 28.888  
core size 93 of 198 vol = 20.692  
core size 92 of 198 vol = 14.975

```
core size 91 of 198 vol = 9.146
core size 90 of 198 vol = 5.232
core size 89 of 198 vol = 3.53
core size 88 of 198 vol = 2.657
core size 87 of 198 vol = 1.998
core size 86 of 198 vol = 1.333
core size 85 of 198 vol = 1.141
core size 84 of 198 vol = 1.012
core size 83 of 198 vol = 0.891
core size 82 of 198 vol = 0.749
core size 81 of 198 vol = 0.618
core size 80 of 198 vol = 0.538
core size 79 of 198 vol = 0.479
FINISHED: Min vol ( 0.5 ) reached
```


```
core.inds <- print(core, vol=0.5)
```


```
# 80 positions (cumulative volume <= 0.5 Angstrom^3)
  start end length
1    10  25     16
2    27  48     22
3    53  94     42
```

```
xyz <- pdbfit(pdb, core.inds, outpath="corefit_structures")
```

HIV Pr Dimer

(First image has more superposition)

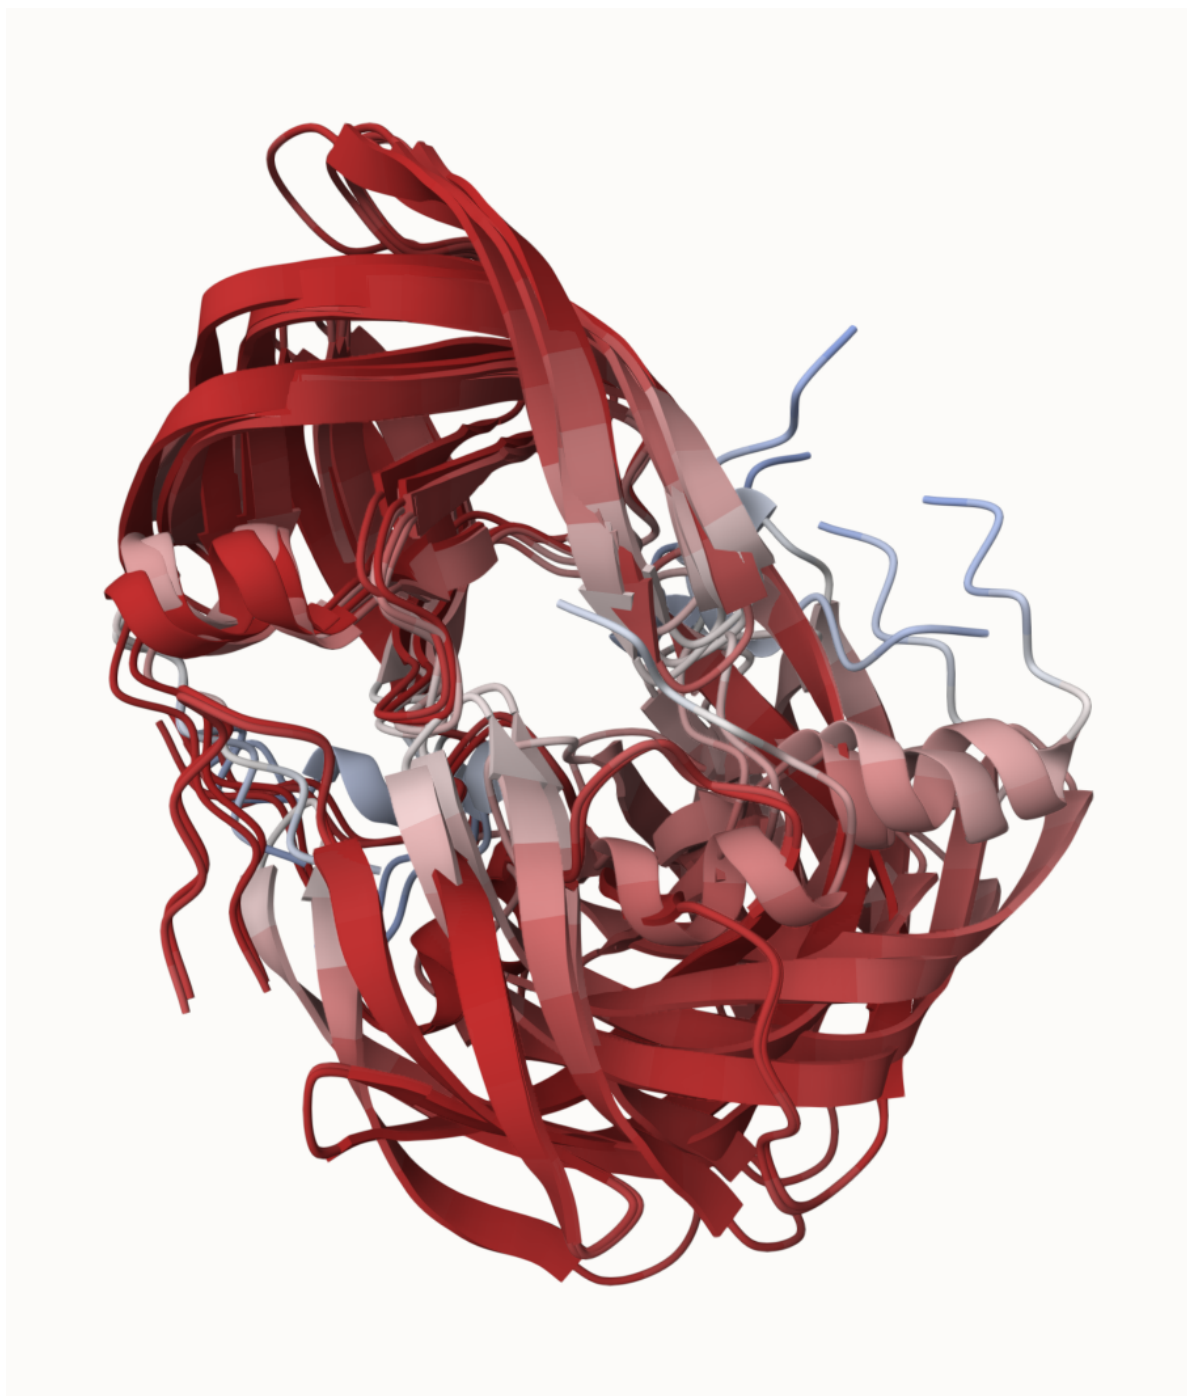


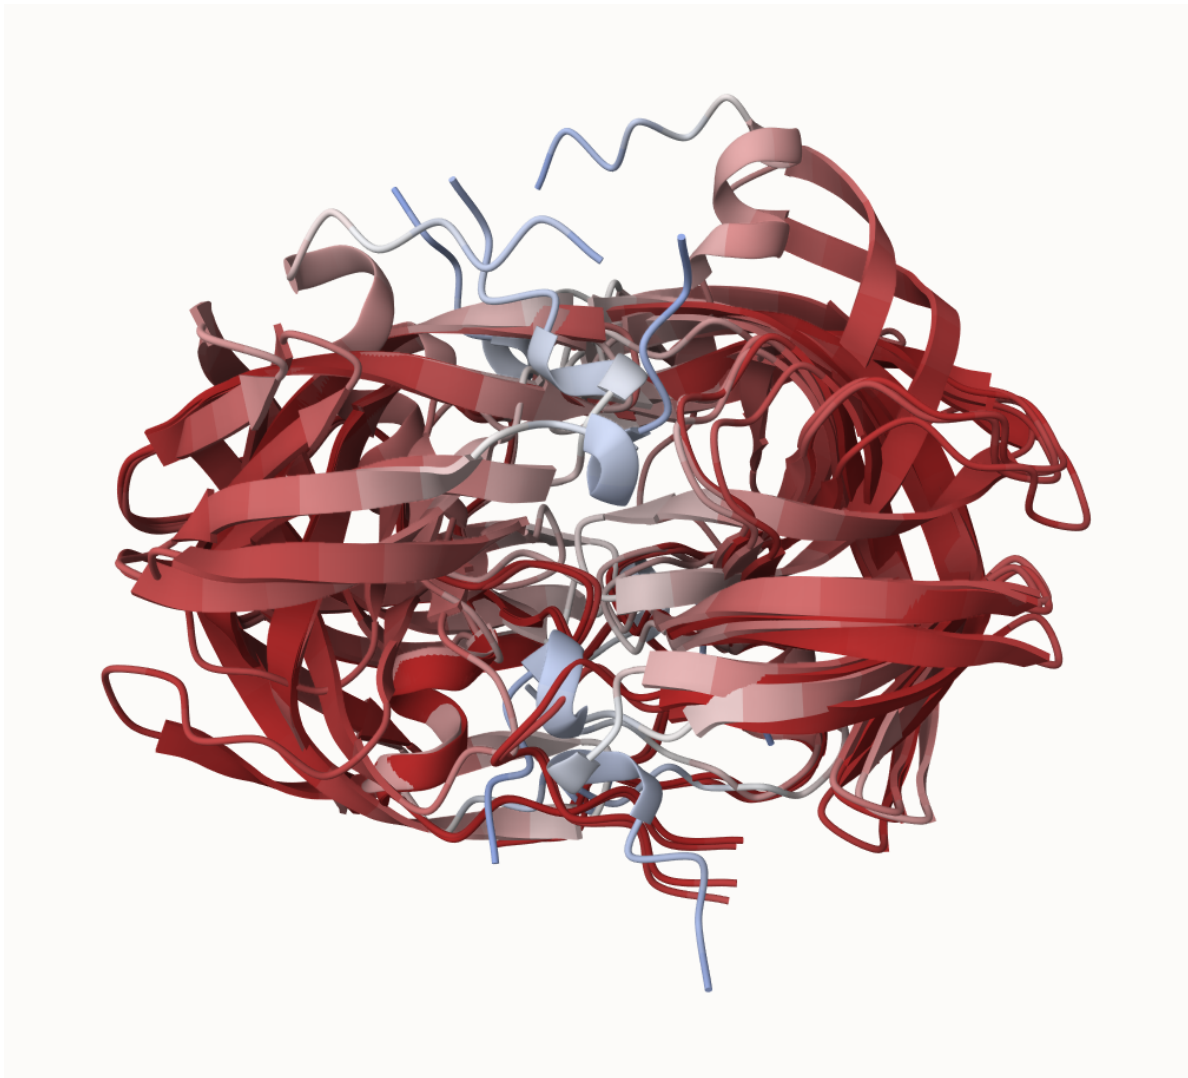

```
rd <- rmsd(xyz)
```


Warning in rmsd(xyz): No indices provided, using the 198 non NA positions

```
# Change the names for easy reference  
colnames(rd) <- paste0("m",1:5)  
rownames(rd) <- paste0("m",1:5)  
pheatmap(rd)
```

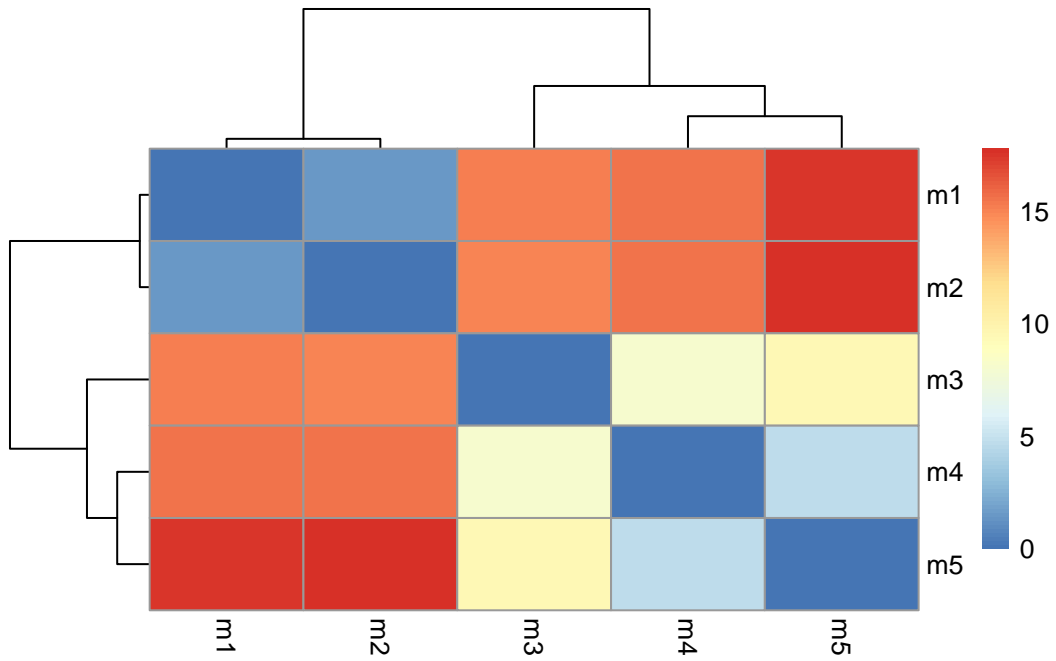

```
rf <- rmsf(xyz)

plotb3(rf, sse=pdb)
abline(v=100, col="gray", ylab="RMSF")
```

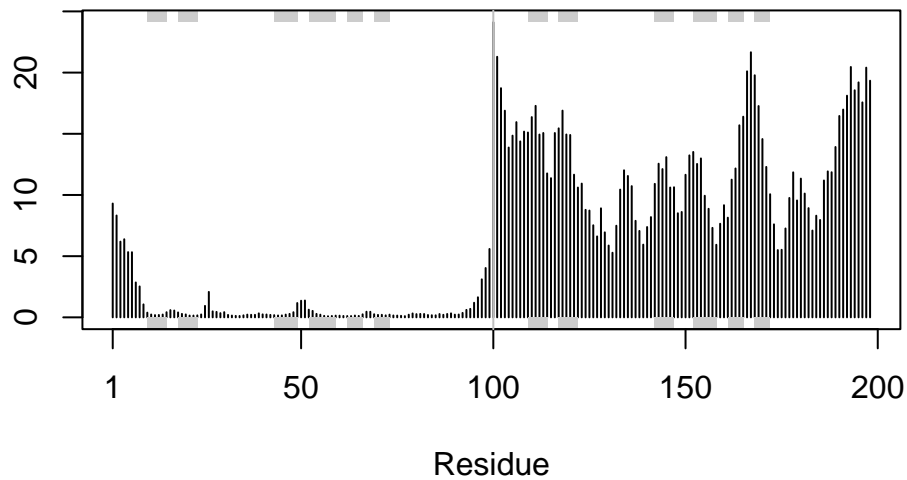

## Predicted Alignment Error for domains

```
library(jsonlite)

# Listing of all PAE JSON files
pae_files <- list.files(path=results_dir,
                        pattern=".*model.*\\.json",
                        full.names = TRUE)
```

Here's an example using the first and fifth files:

```
pae1 <- read_json(pae_files[1],simplifyVector = TRUE)
pae5 <- read_json(pae_files[5],simplifyVector = TRUE)

attributes(pae1)
```

```
$names
[1] "plddt"  "max_pae" "pae"     "ptm"     "iptm"
```

```
# Per-residue pLDDT scores
# same as B-factor of PDB..
head(pae1$plddt)
```

```
[1] 92.50 96.56 96.94 96.62 97.69 96.00
```

Now we pull the max PAE values for each:

```
pae1$max_pae
```

```
[1] 15.54688
```

```
pae5$max_pae
```


```
[1] 29.29688
```

Lower is better, so model 1 is better than 5.


Now we plot:

```
plot.dmat(pae1$pae,
          xlab="Residue Position (i)",
          ylab="Residue Position (j)")
```




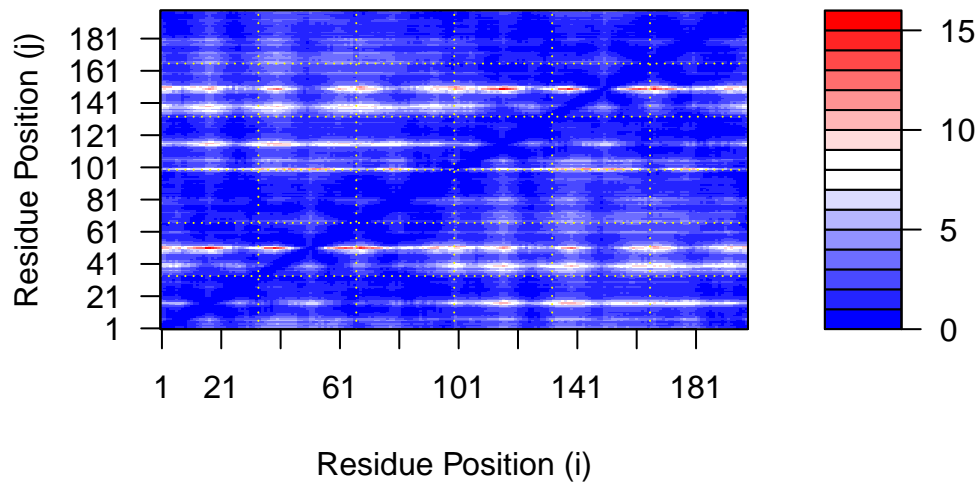

```
plot.dmat(pae5$pae,
          xlab="Residue Position (i)",
          ylab="Residue Position (j)",
          grid.col = "black",
          zlim=c(0,30))
```

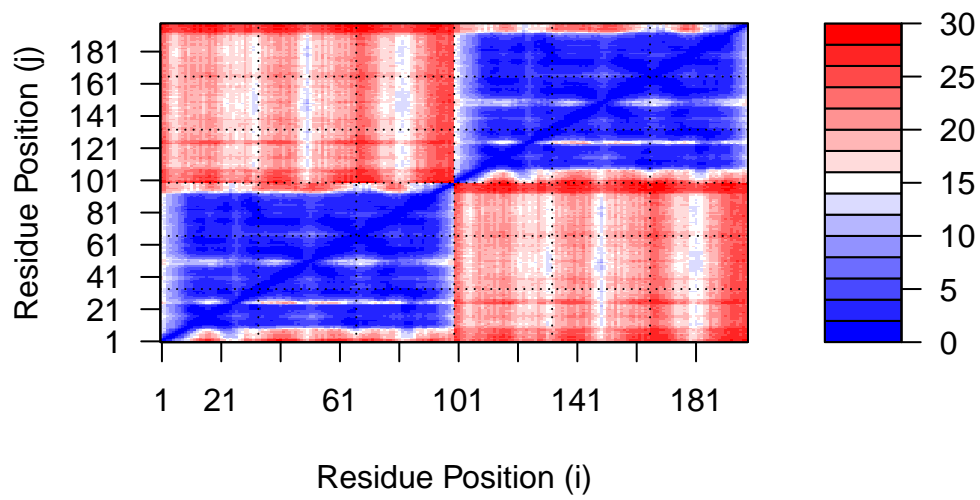

```
plot.dmat(pae1$pae,
          xlab="Residue Position (i)",
          ylab="Residue Position (j)",
          grid.col = "black",
          zlim=c(0,30))
```

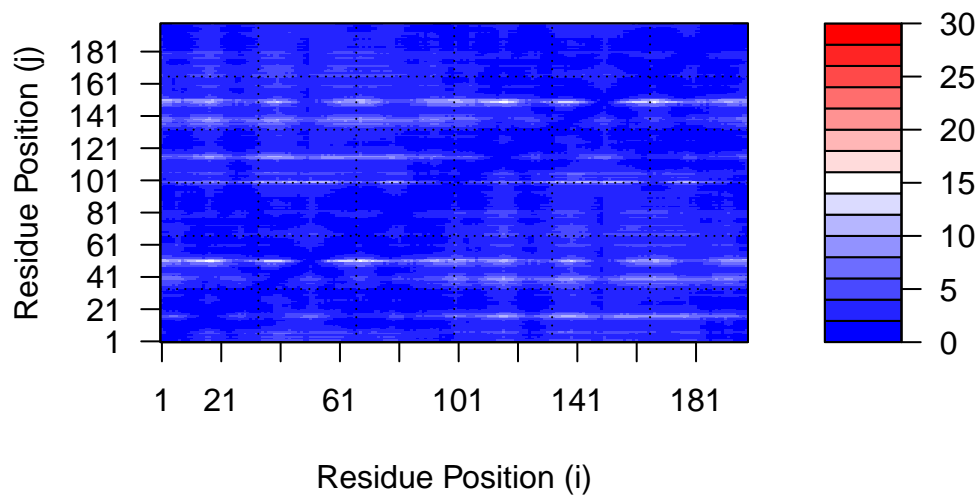

## Residue conservation from alignment file

```
aln_file <- list.files(path=results_dir,
                      pattern=".a3m$",
                      full.names = TRUE)
aln_file
```

```
[1] "new_dimer_23119_0/new_dimer_23119_0.a3m"
```

```
aln <- read.fasta(aln_file[1], to.upper = TRUE)
```

```
[1] " ** Duplicated sequence id's: 101 **"
```


```
[2] " ** Duplicated sequence id's: 101 **"
```

Number of sequences:

```
dim(aln$ali)
```

```
[1] 5378 132
```

```
sim <- conserv(aln)
plotb3(sim[1:99], sse=trim.pdb(pdb, chain="A"))
```

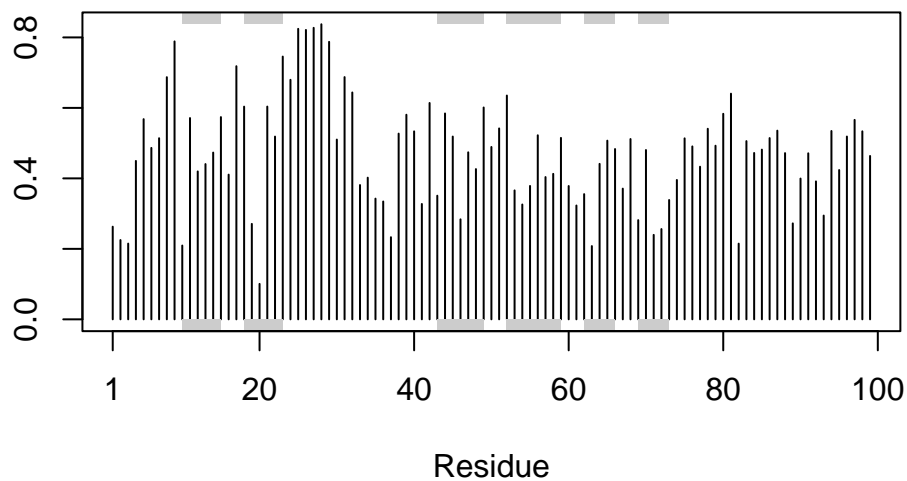

```
con <- consensus(aln, cutoff = 0.9)
con$seq
```

```
[1] "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-"
[19] "-" "-" "-" "-" "-" "-" "D" "T" "G" "A" "-" "-" "-" "-" "-" "-" "-"
[37] "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-"
[55] "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-"
[73] "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-"
[91] "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-"
[109] "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-" "-"
[127] "-" "-" "-" "-" "-" "-"
```

The D, T, G, A are conserved active site residues.

```
m1.pdb <- read.pdb(pdb_files[1])
occ <- vec2resno(c(sim[1:99], sim[1:99]), m1.pdb$atom$resno)
write.pdb(m1.pdb, o=occ, file="m1_conserv.pdb")
```

In this image, conserved areas are in darker purple:

