1 / 8


Values and offsets are different.

Follow selected values into their storage positions.

> The strip wraps for display; storage order continues.

x: chosen row-major storage

Large labels: values · small labels: element offsets

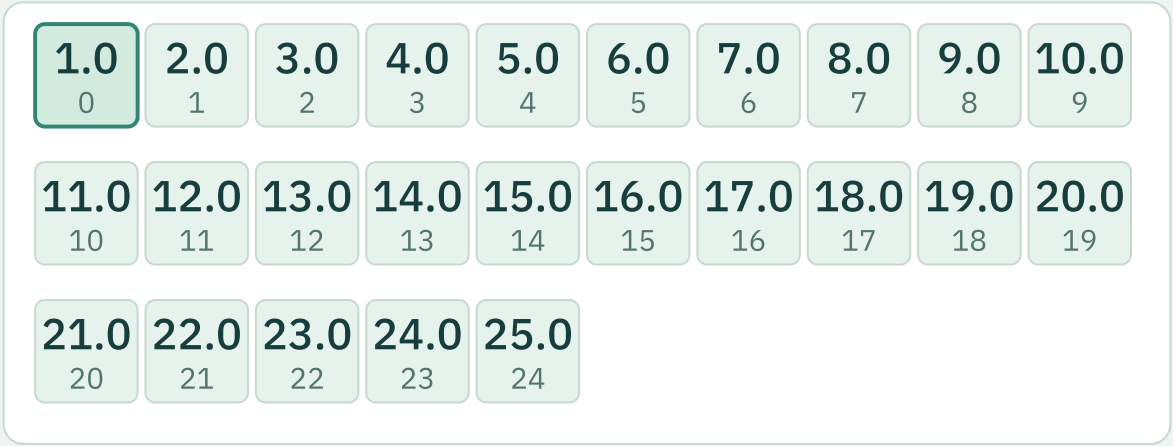

Read left to right; wrapped lines continue the same array.

Value 1.0 is at element offset 0

25 FP32 values × 4 bytes = 100 bytes


Copyright © 2026 Christopher Snow

2 / 8

A row uses consecutive positions.

The row view shares the original storage.

> A view uses existing values without moving them.

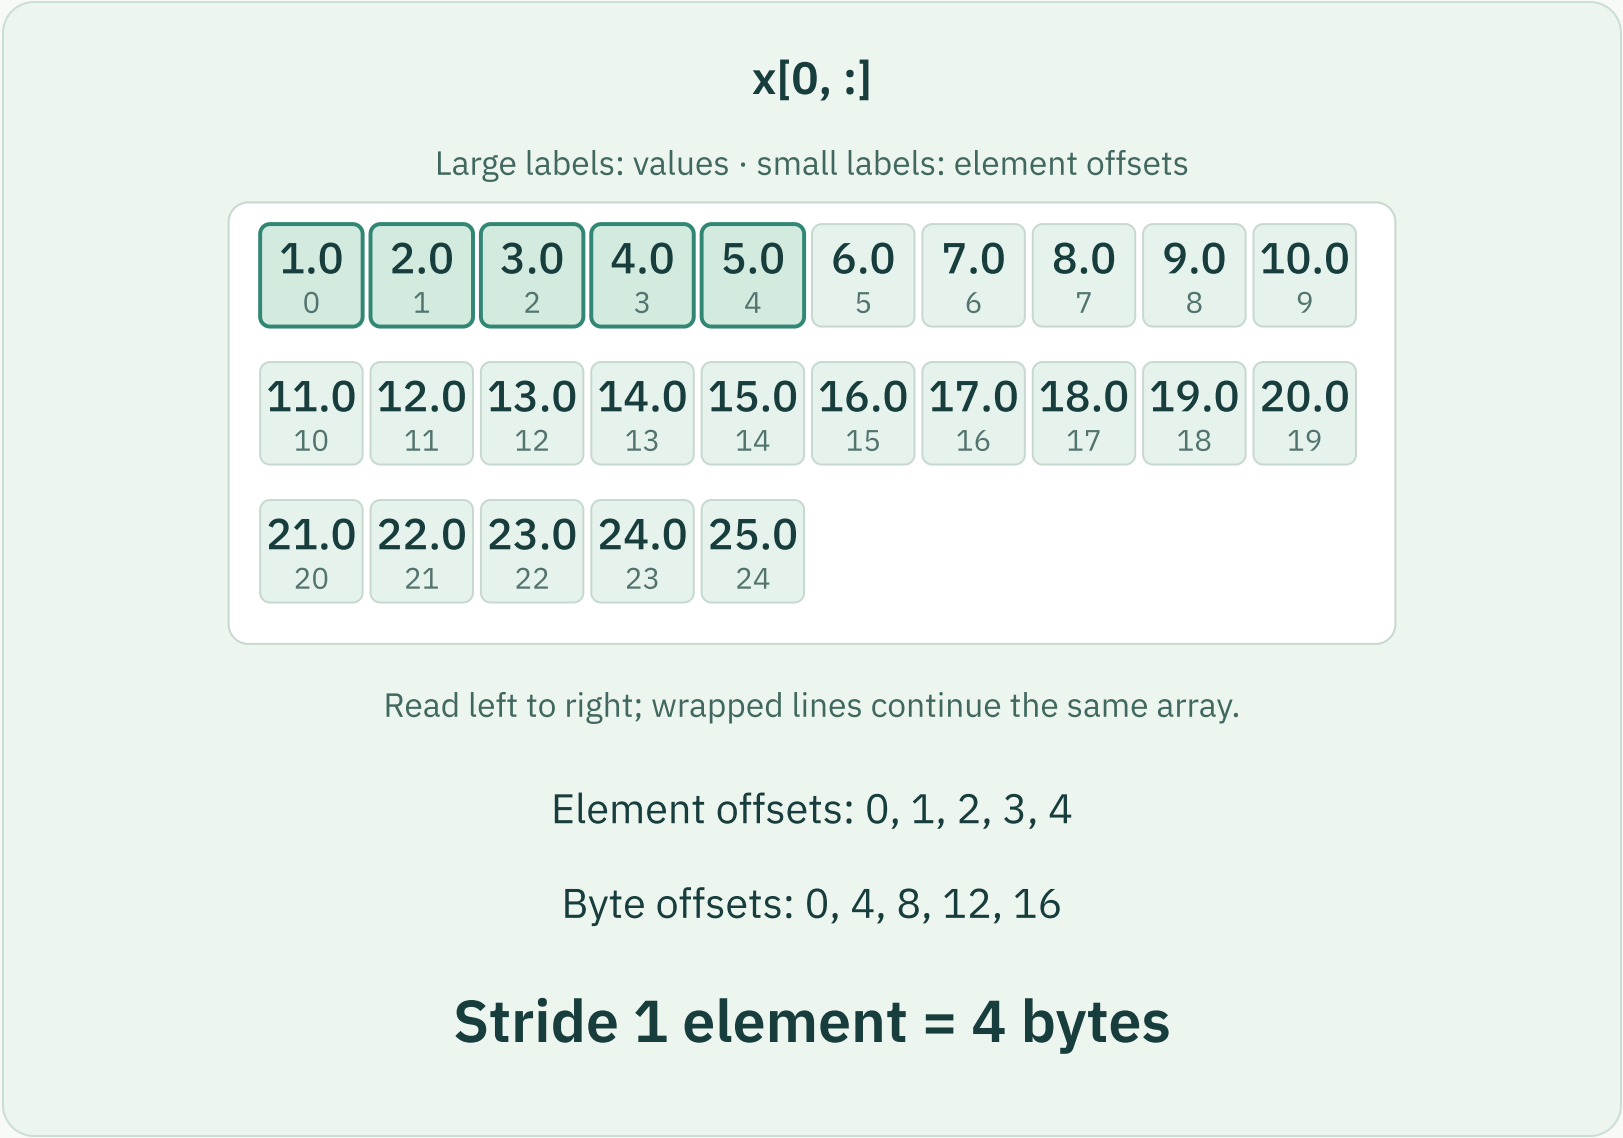

Copyright © 2026 Christopher Snow

3 / 8

A column keeps the gaps.

Each next selected value is five element positions away.

> Selecting a column preserves the original positions.

x[:, 0]

Large labels: values · small labels: element offsets

1.0 0	2.0 1	3.0 2	4.0 3	5.0 4	6.0 5	7.0 6	8.0 7	9.0 8	10.0 9
11.0 10	12.0 11	13.0 12	14.0 13	15.0 14	16.0 15	17.0 16	18.0 17	19.0 18	20.0 19
21.0 20	22.0 21	23.0 22	24.0 23	25.0 24					

Read left to right; wrapped lines continue the same array.

Element offsets: 0, 5, 10, 15, 20

Byte offsets: 0, 20, 40, 60, 80

Stride 5 elements = 20 bytes

Copyright © 2026 Christopher Snow

4 / 8

Change the start, keep the stride.

Column one starts one element into the same storage.

> The starting offset and the stride are different quantities.

x[:, 1]

Large labels: values · small labels: element offsets

1.0 0	2.0 1	3.0 2	4.0 3	5.0 4	6.0 5	7.0 6	8.0 7	9.0 8	10.0 9
11.0 10	12.0 11	13.0 12	14.0 13	15.0 14	16.0 15	17.0 16	18.0 17	19.0 18	20.0 19
21.0 20	22.0 21	23.0 22	24.0 23	25.0 24					

Read left to right; wrapped lines continue the same array.

Element offsets: 1, 6, 11, 16, 21

Byte offsets: 4, 24, 44, 64, 84

Stride 5 elements = 20 bytes


Copyright © 2026 Christopher Snow

5 / 8

Make a packed copy.

Same selected values. New consecutive positions.

> This column needs new storage to become contiguous.

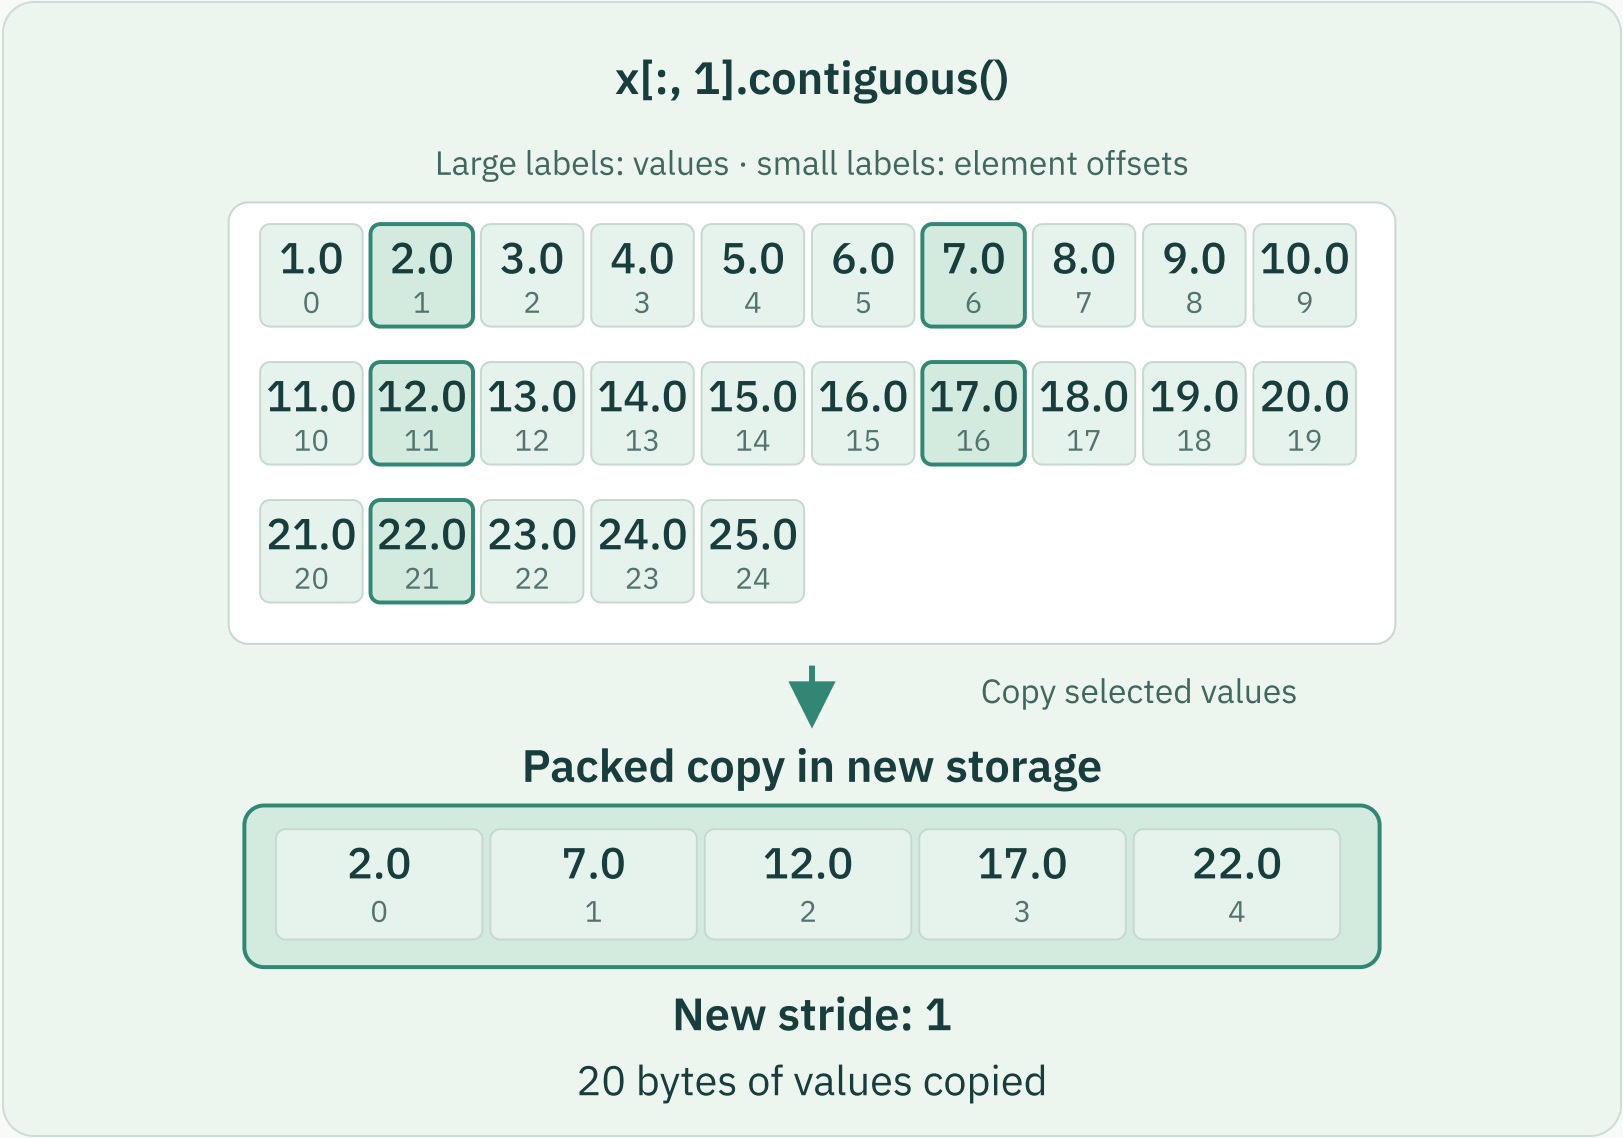

Copyright © 2026 Christopher Snow

6 / 8

A contiguous view can share storage.

Consecutive values do not always need another copy.

> Contiguous describes value order, not storage ownership.

x[1, :].contiguous()

Large labels: values · small labels: element offsets



Read left to right; wrapped lines continue the same array.

Stride 1 · same x storage

contiguous() can return this row without copying.

0 bytes of values copied


Copyright © 2026 Christopher Snow

7 / 8

Pause: pack a different column.

Column three. Same four-byte value format.

> Pause before checking the new copy’s positions.

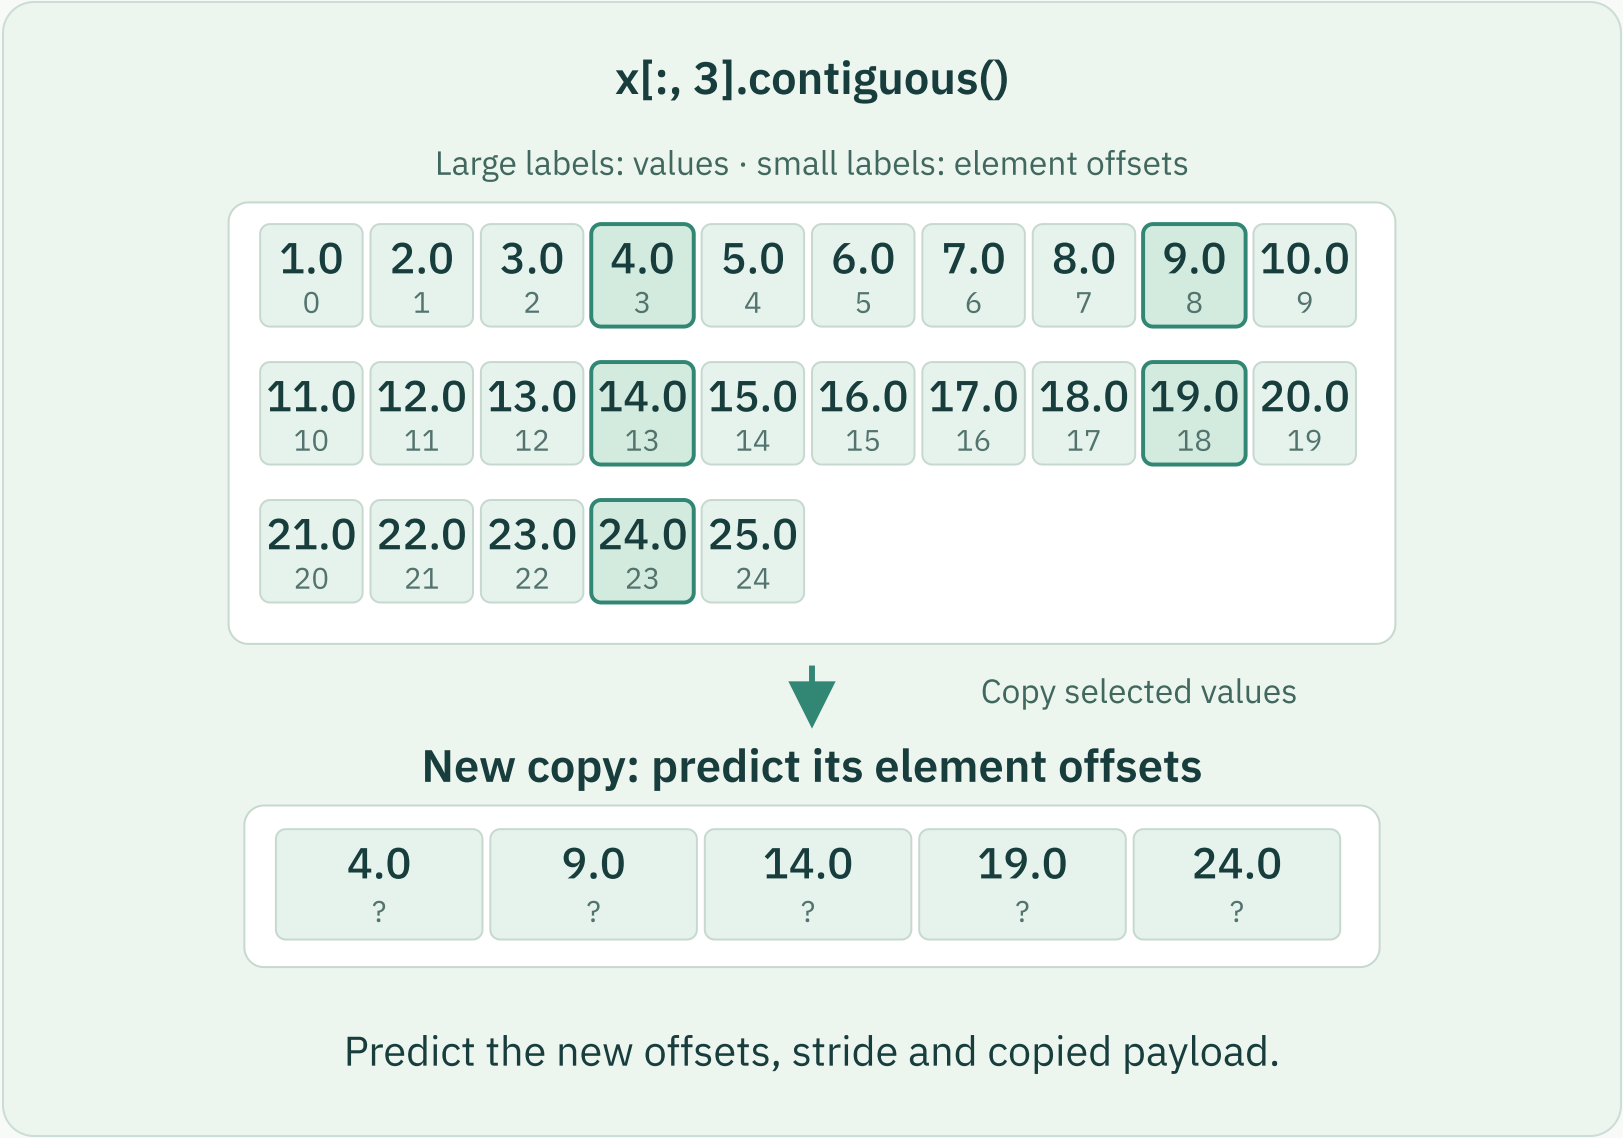

Predict the new offsets, stride and copied payload.


Copyright © 2026 Christopher Snow

8 / 8

New offsets belong to new storage.

The original tensor keeps its values and positions.

> Return to Chapter 4 and explain the view/copy distinction.

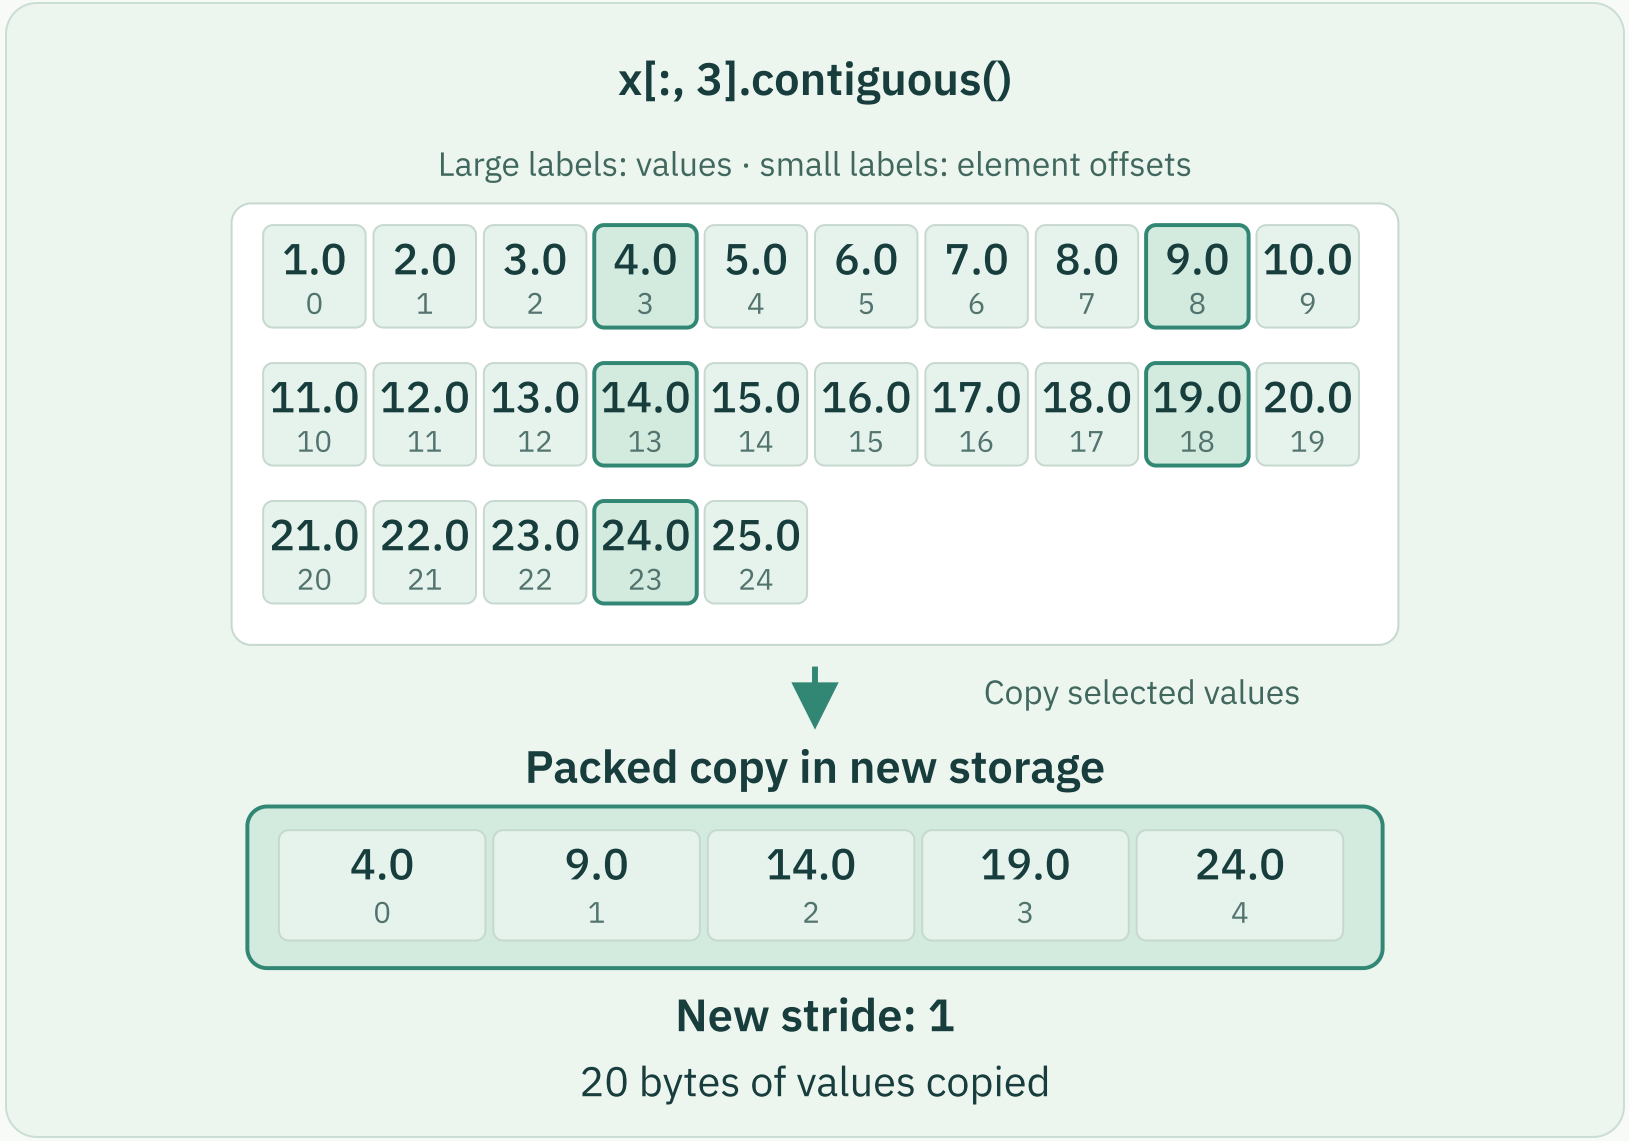

Copyright © 2026 Christopher Snow