
1 / 8

Start with CPU memory.

Follow the same values across the CPU and GPU boundary.

> Storage holds tensor values; it is separate from the processor.

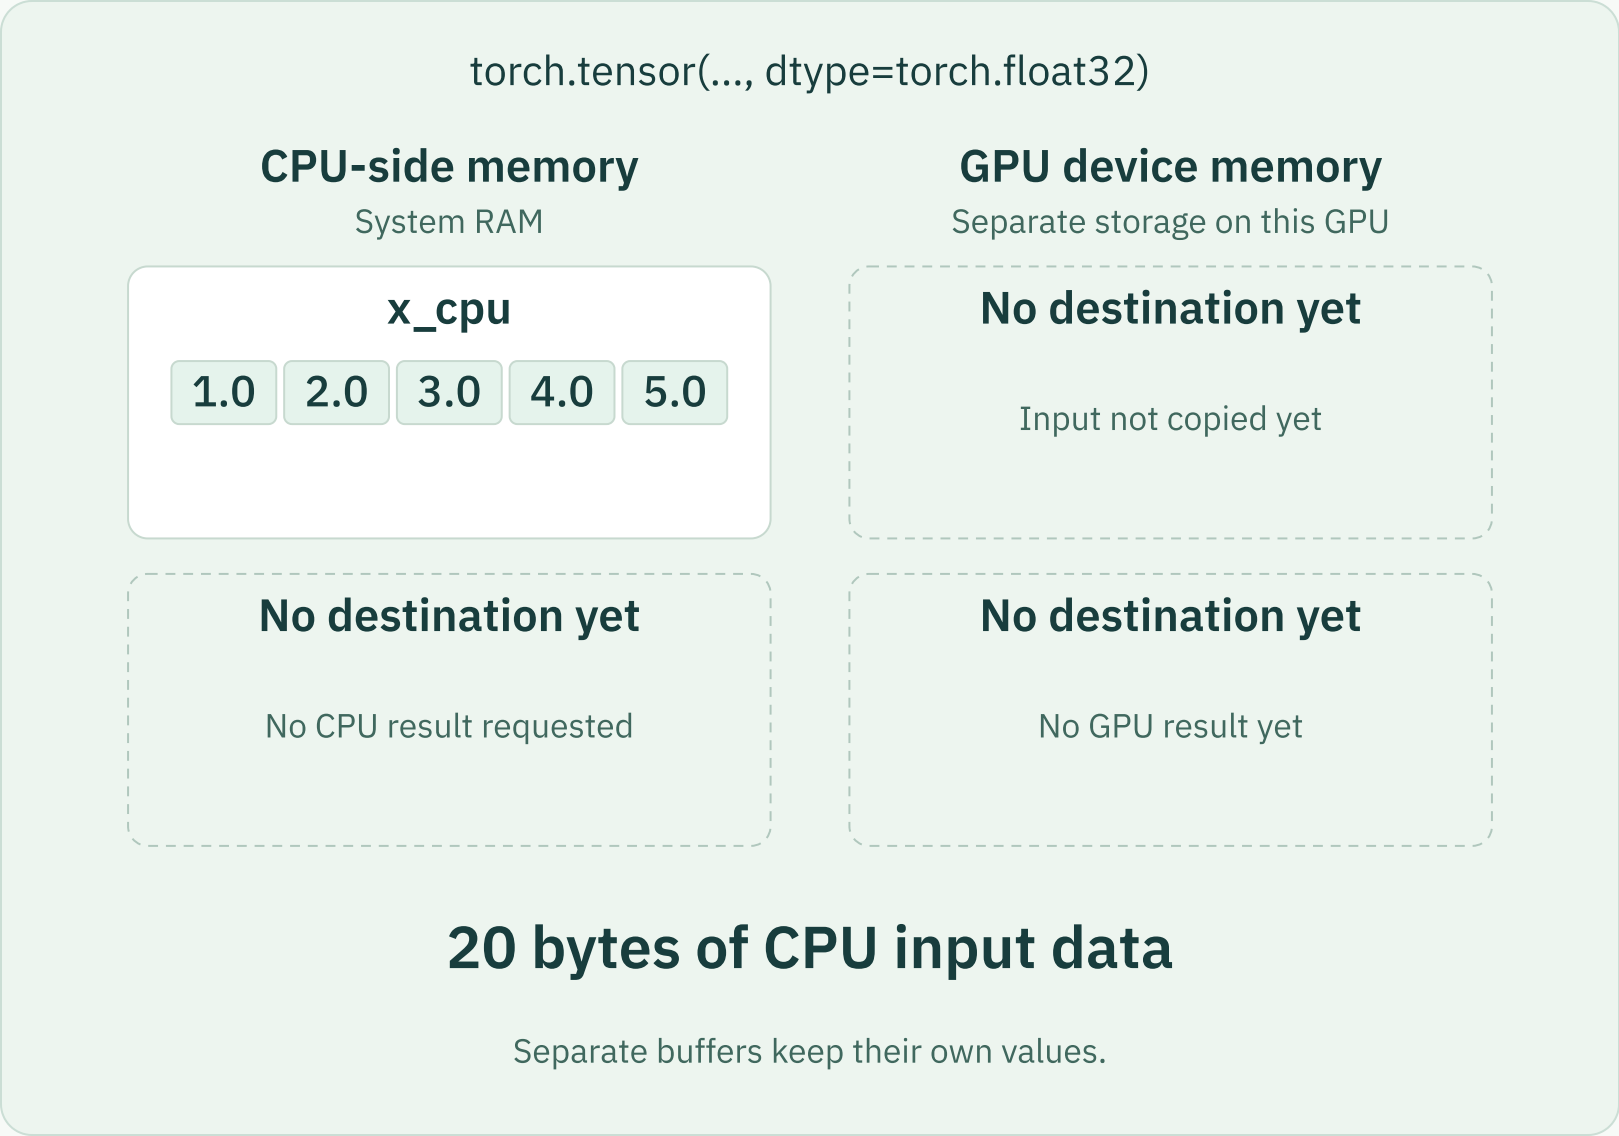


Copyright © 2026 Christopher Snow

2 / 8

Copy the inputs to GPU memory.

A new tensor keeps the same input values.

> PyTorch manages destination storage and the transfer.

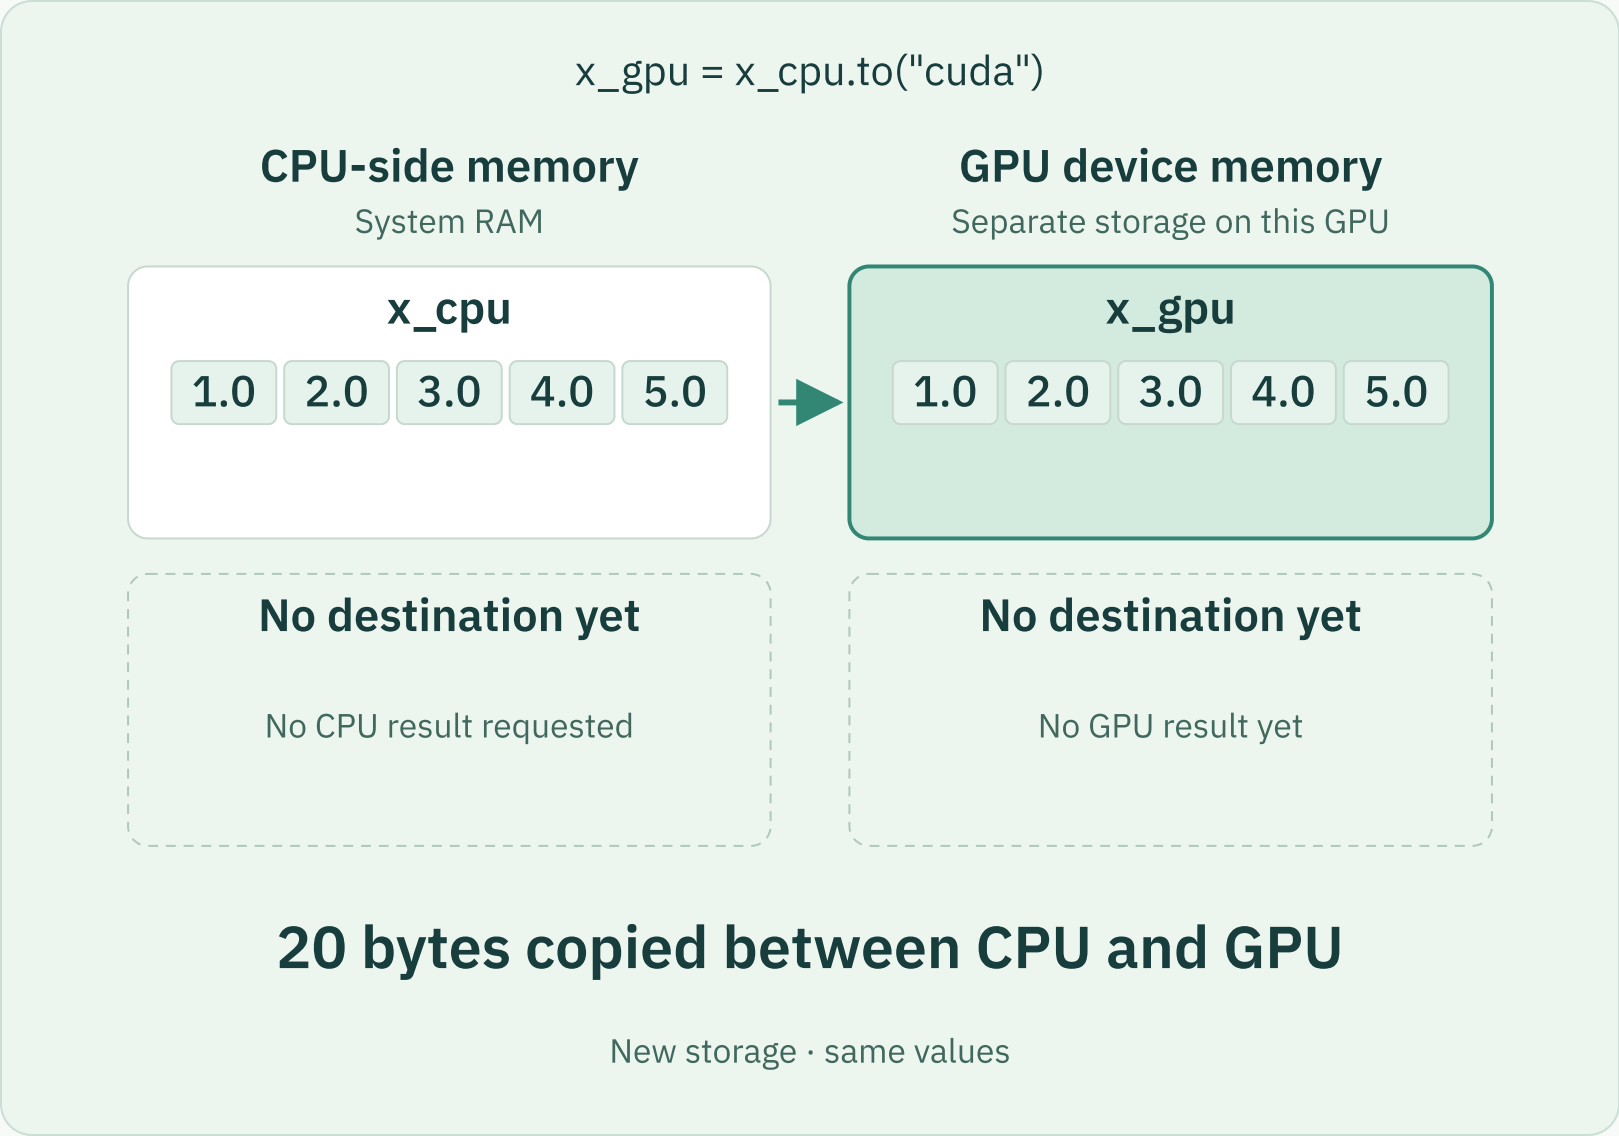


Copyright © 2026 Christopher Snow

3 / 8

Calculate where the tensor lives.

The result stays on the GPU.

> New GPU result; original input unchanged.

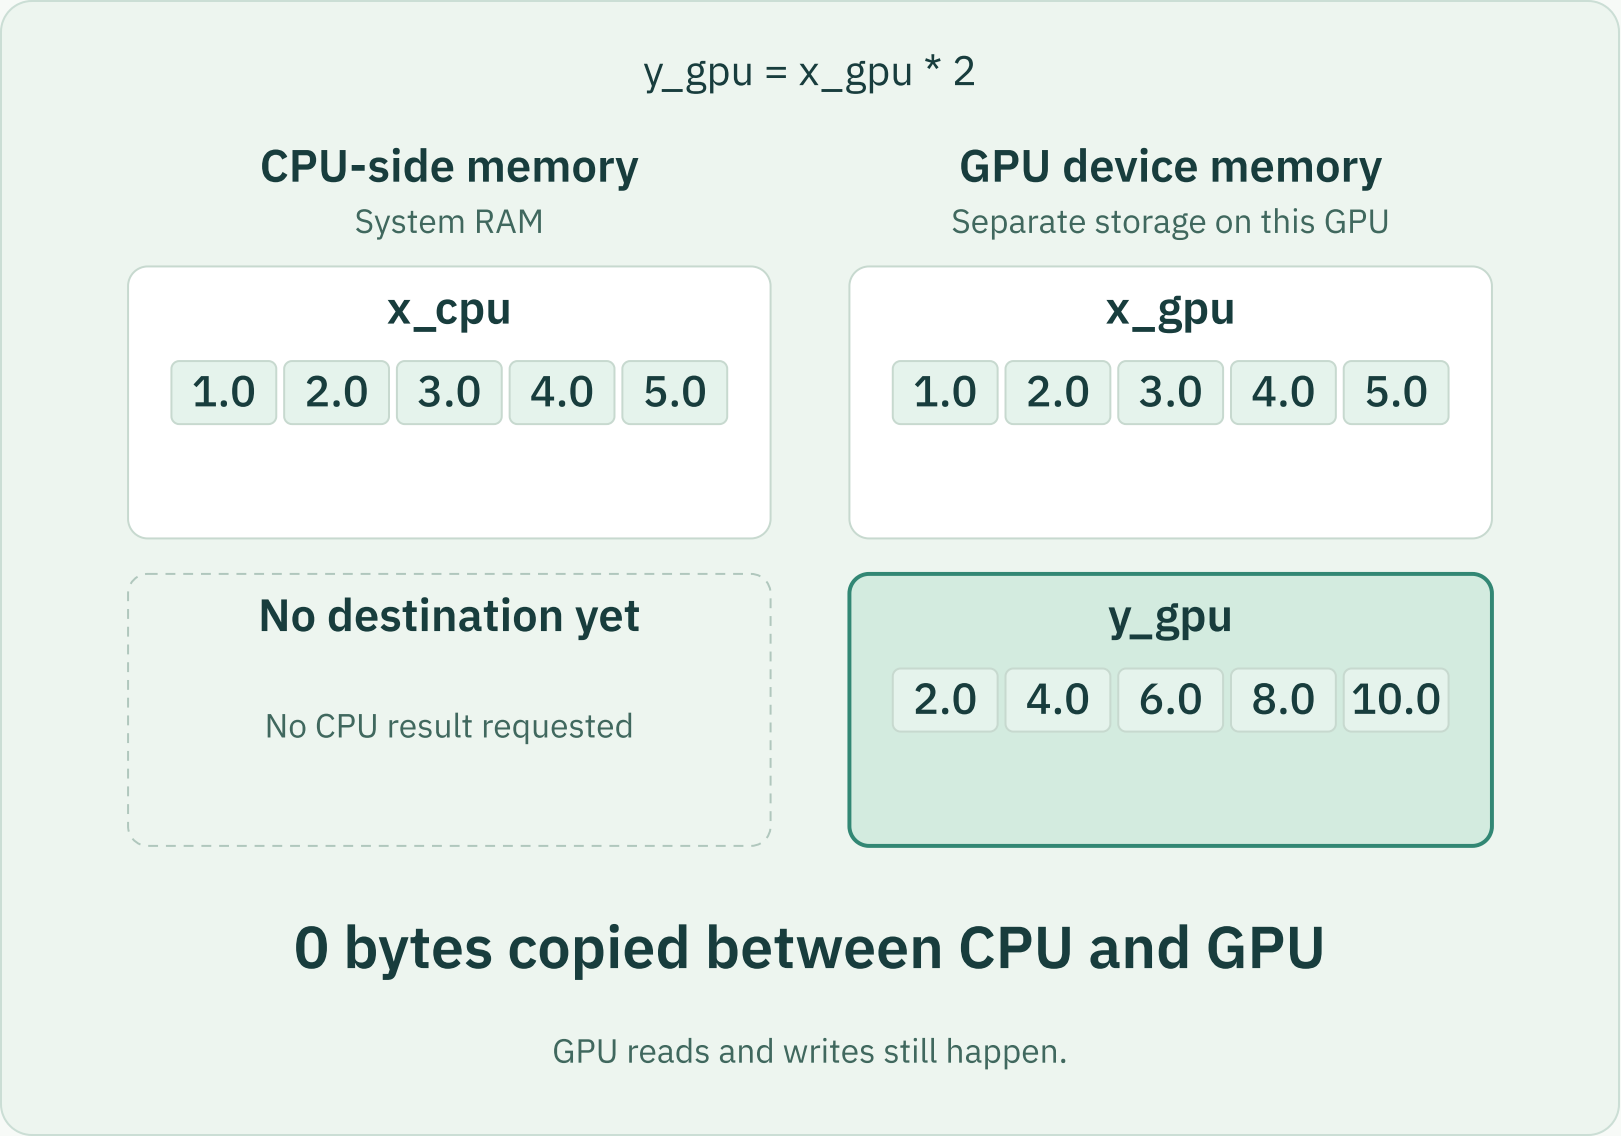


Copyright © 2026 Christopher Snow

4 / 8

Request the result on the CPU.

Copying back is a separate operation.

> Copying preserves the source tensor.

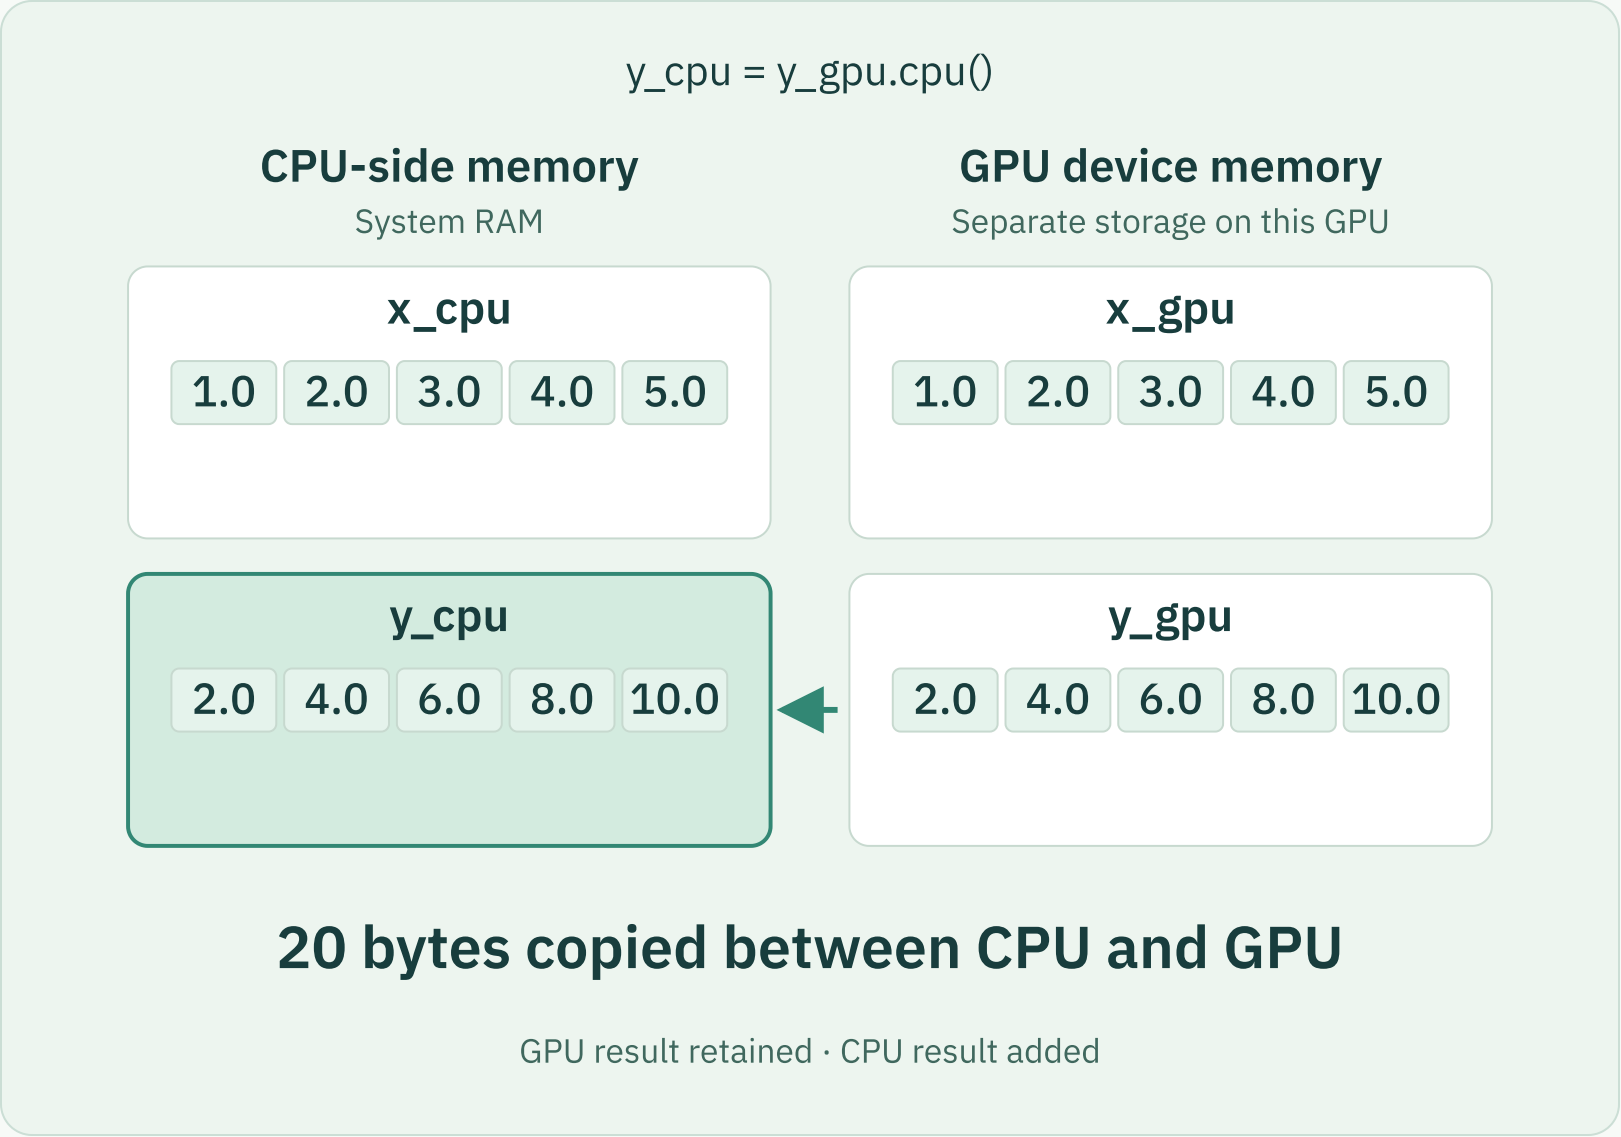

Copyright © 2026 Christopher Snow

5 / 8

Count transfers separately.

Copy in, calculate, then copy out.

> Count CPU/GPU copies separately from GPU memory activity.

FIVE FP32 VALUES · FOUR BYTES EACH

Copy CPU → GPU	20 bytes
Multiply on the GPU	0 bytes
Copy GPU → CPU	20 bytes

40 bytes copied between devices

Payload only · no transfer-time prediction


Copyright © 2026 Christopher Snow

6 / 8

Keep related calculations together.

A GPU result can feed another GPU calculation.

> Copy the tensor needed by the CPU-side consumer.

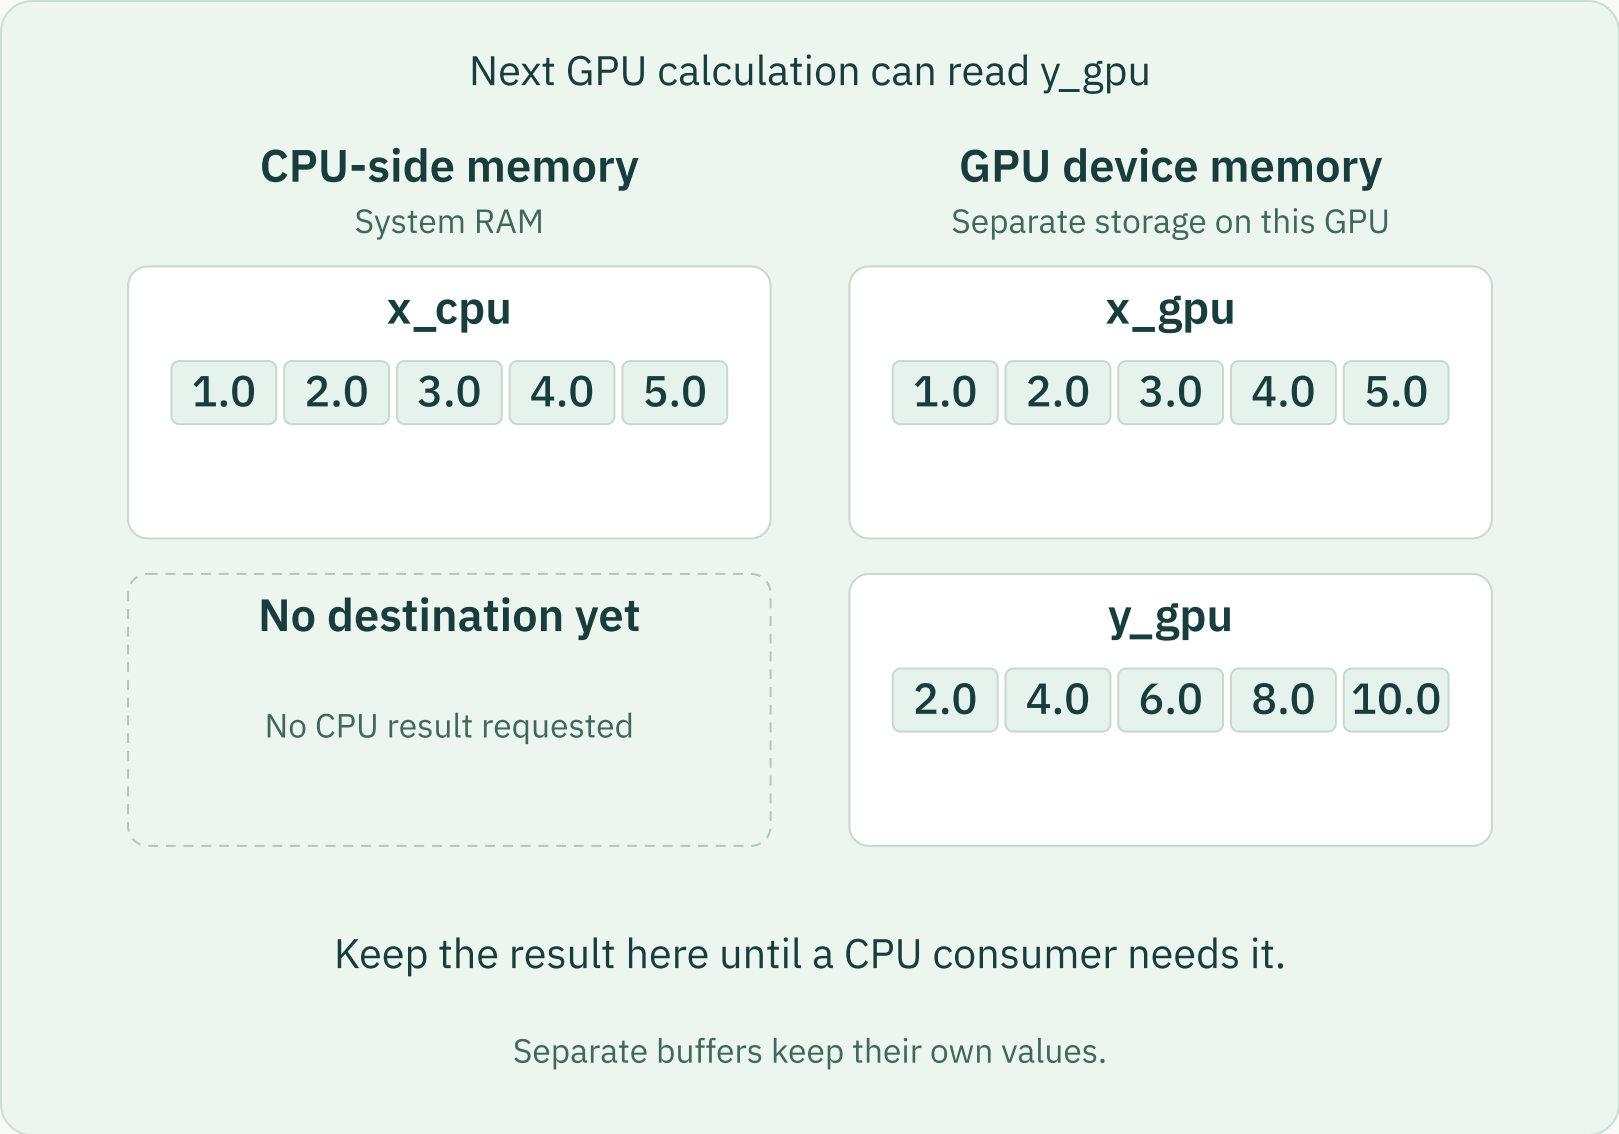


Copyright © 2026 Christopher Snow

7 / 8

Pause: copy eight results.

Eight inputs. Multiply by three on the GPU.

> Pause before revealing the CPU result.

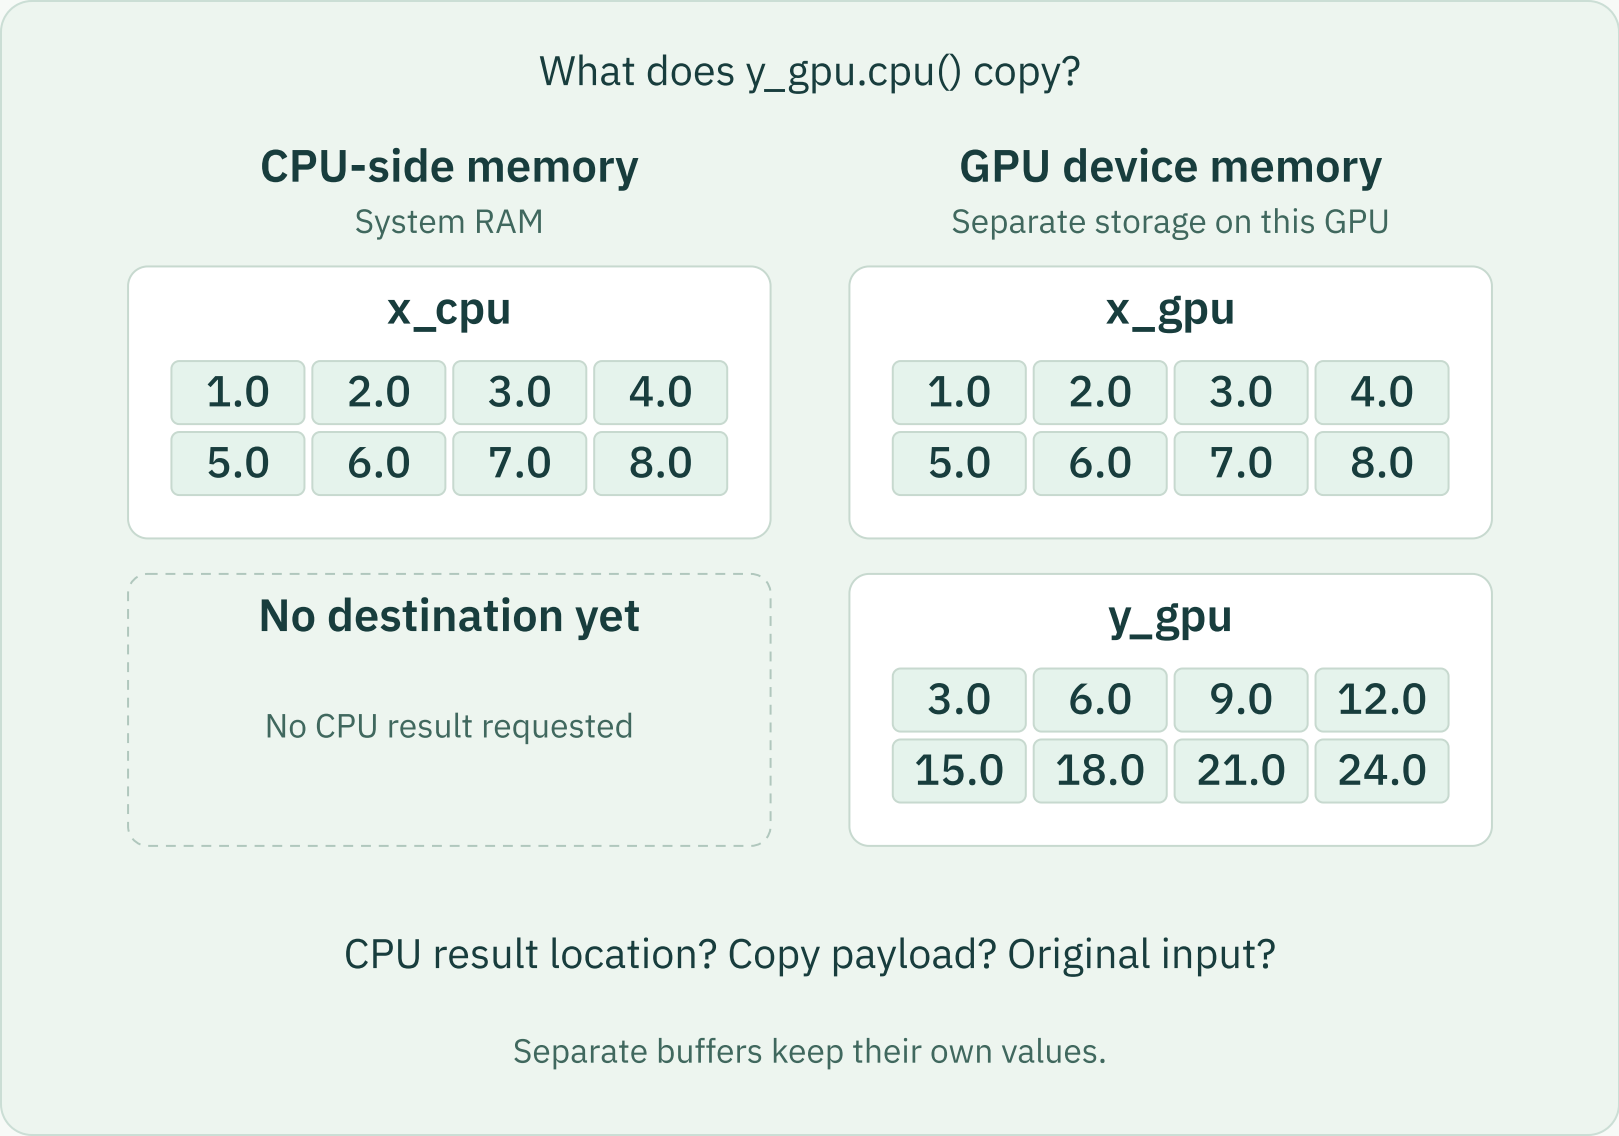


Copyright © 2026 Christopher Snow

8 / 8

A copy preserves the values.

New storage, with the GPU result's numbers.

> Return to Chapter 2 and vary the input count or multiplier.

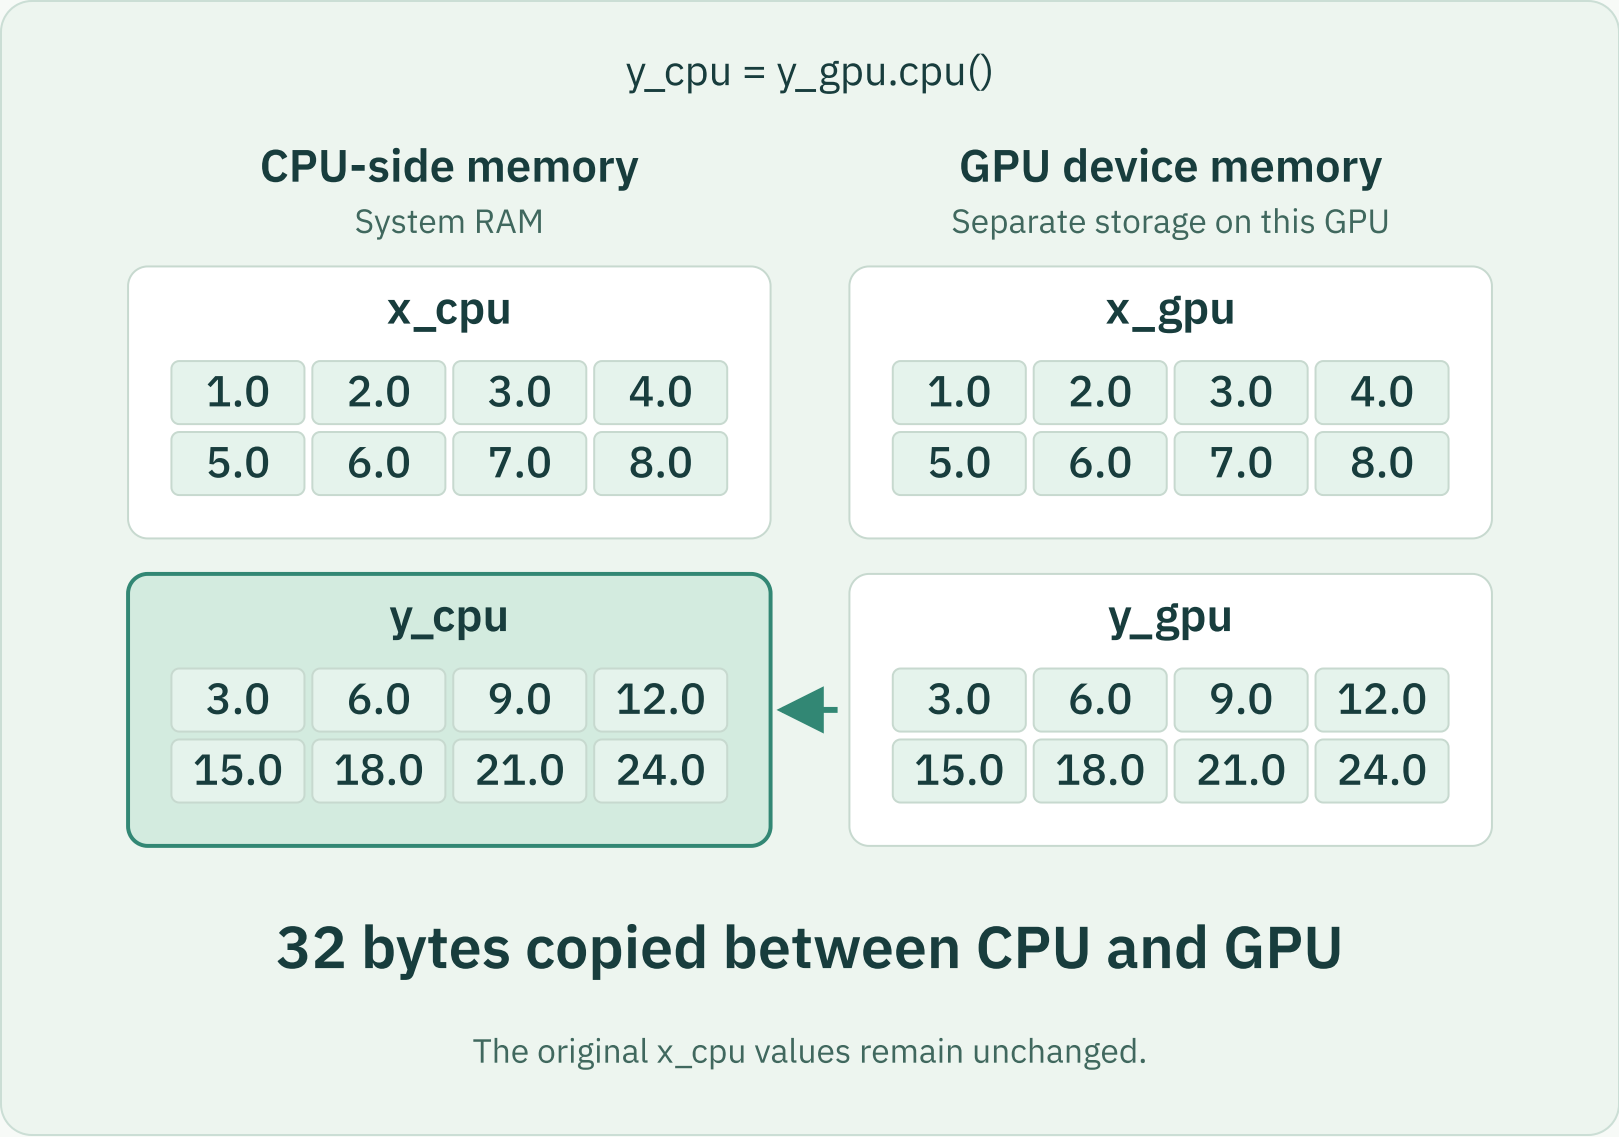

Copyright © 2026 Christopher Snow