
1 / 6

A slot has two handoffs.

Copy before consumption; finish consumption before reuse.

> Synthetic durations and two reusable slots · no GPU timing or speedup claim

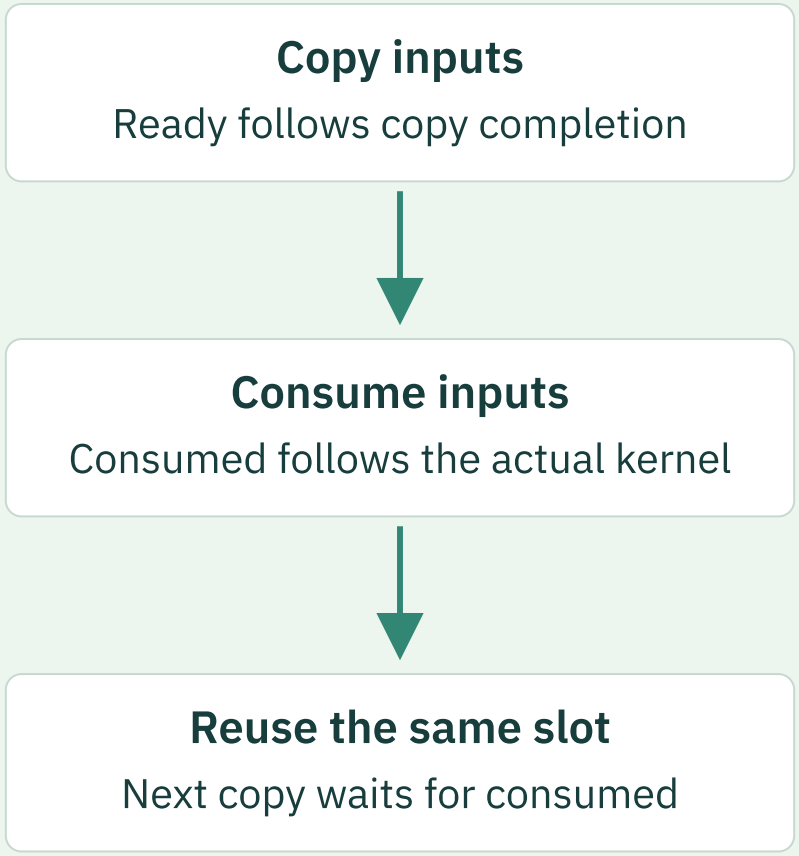

References keep storage allocated; dependencies order its use


Copyright © 2026 Christopher Snow

2 / 6

Declare the synthetic budget first.

Four chunks: one copy engine, one compute queue, two slots.

> Synthetic durations and two reusable slots · no GPU timing or speedup claim

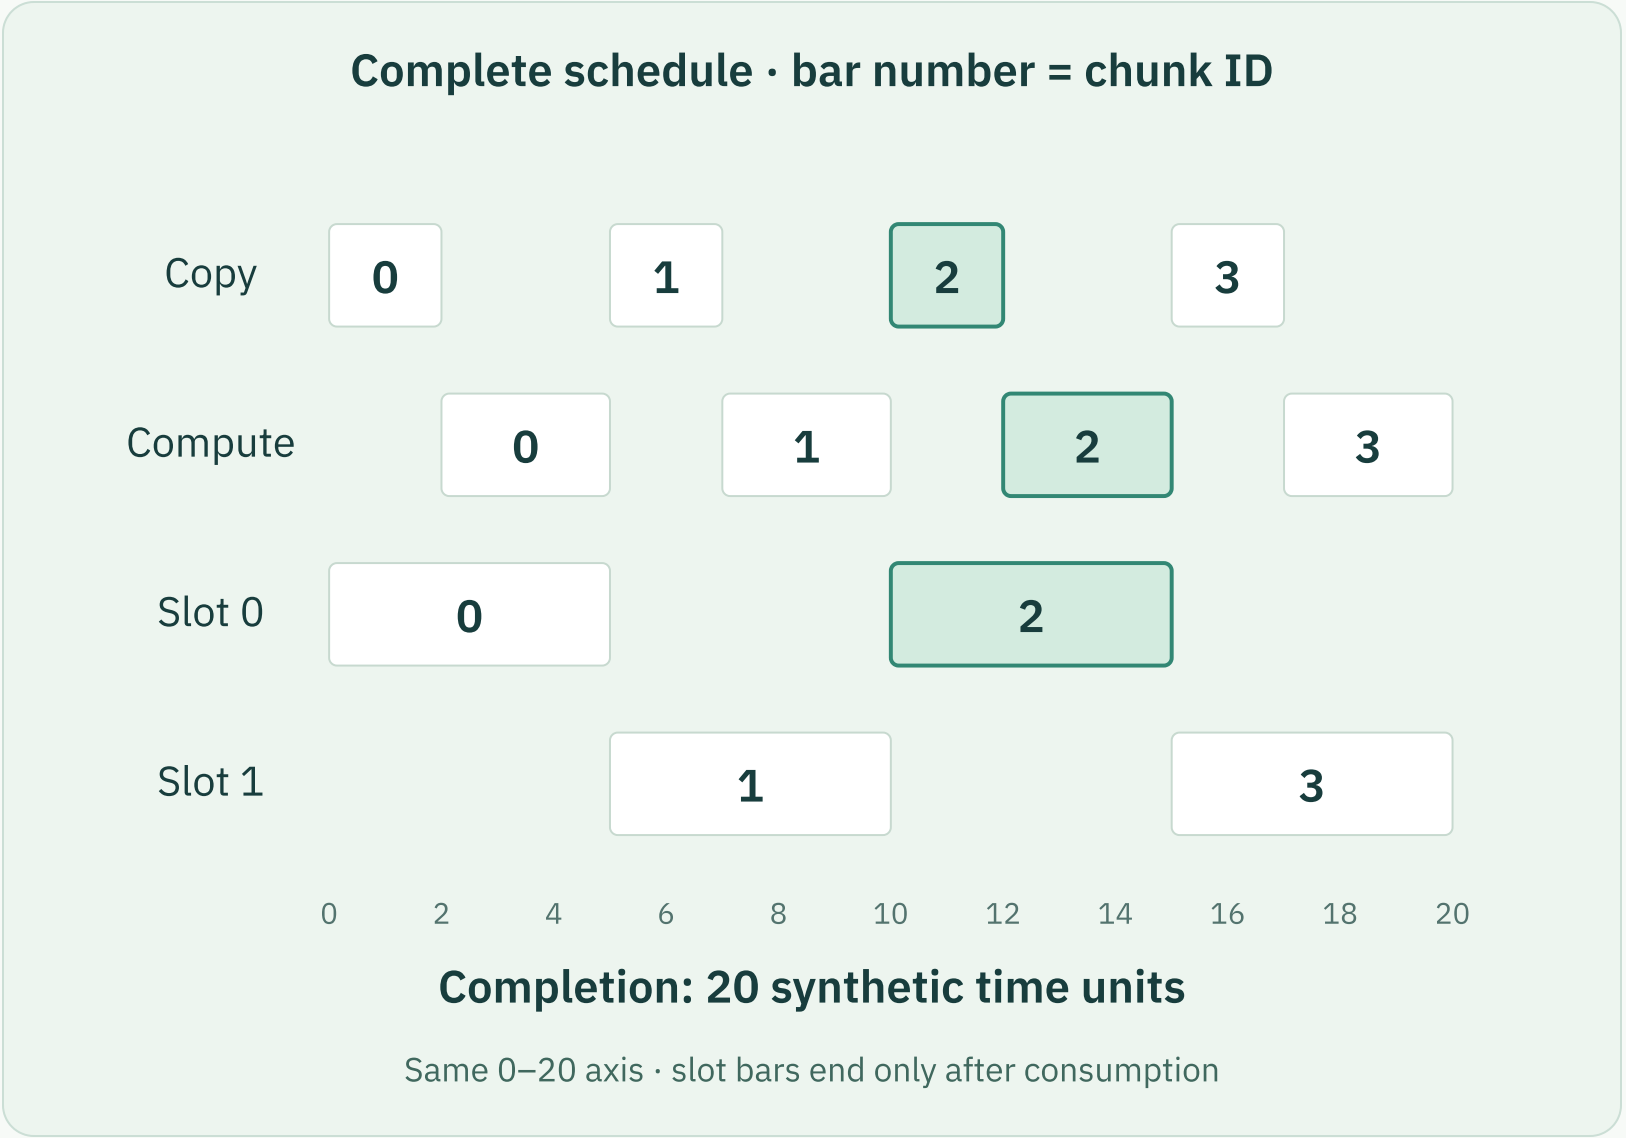


Copyright © 2026 Christopher Snow

3 / 6

Overlap different engines safely.

The same four chunks finish at model unit 14.

> Synthetic durations and two reusable slots · no GPU timing or speedup claim

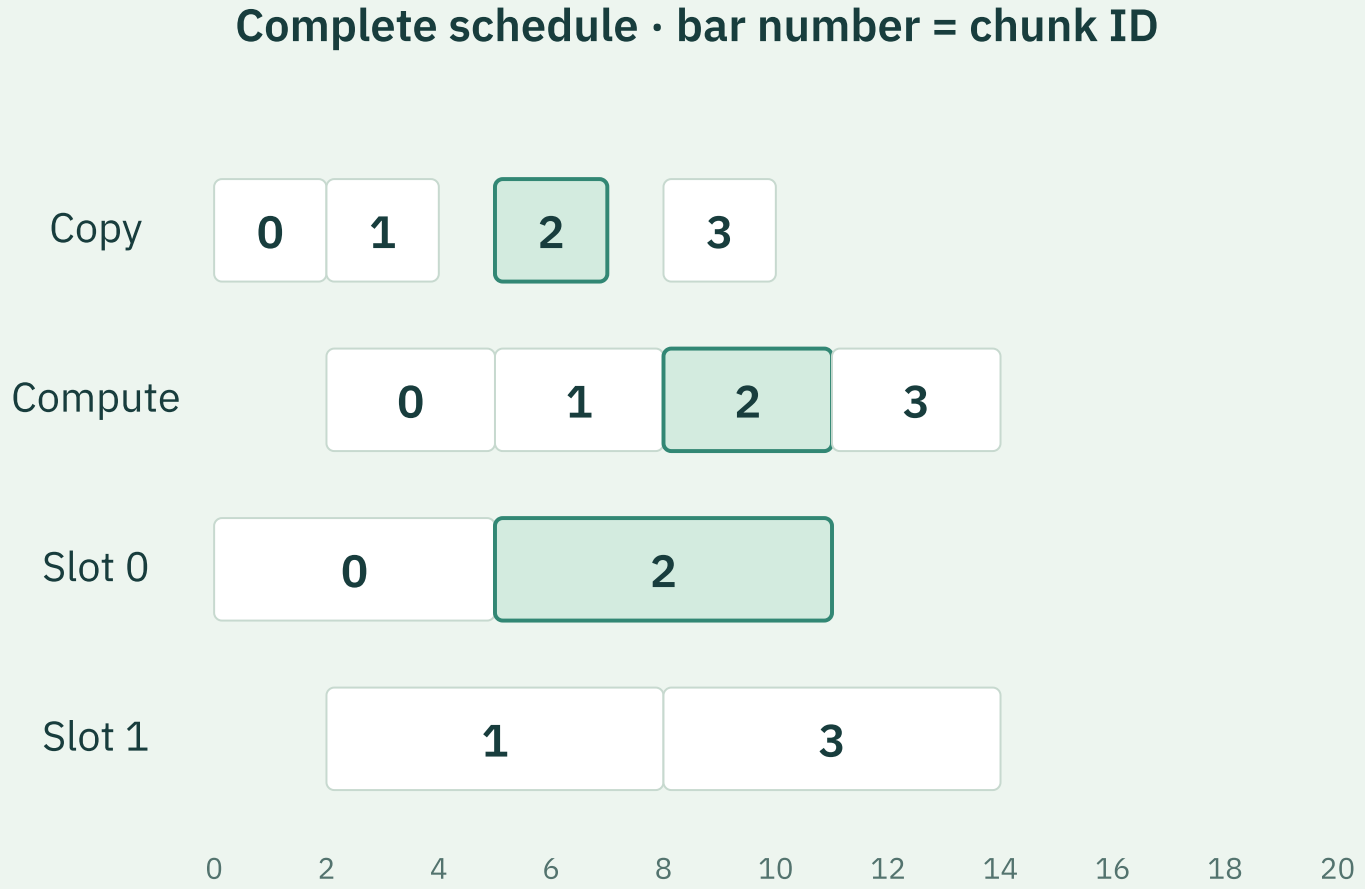

Copyright © 2026 Christopher Snow

4 / 6

Ready and consumed answer different questions.

Chunk 2 waits for slot 0, then for its compute opportunity.

> Synthetic durations and two reusable slots · no GPU timing or speedup claim



Copyright © 2026 Christopher Snow

5 / 6

Pause: make copies take longer.

Keep four chunks and overlap; change only copy duration to 4.

> Synthetic durations and two reusable slots · no GPU timing or speedup claim

4 chunks
Two slots

Copy: 4
Time units

Compute: 3
Time units

Completion total: ?

Engine setting the pace: ?

Chunk 2 copy start: ?

Allow overlap · preserve ready and consumed dependencies


Copyright © 2026 Christopher Snow

6 / 6

The copy engine now sets the pace.

The model finishes at unit 19; slot reuse remains ordered.

> Synthetic durations and two reusable slots · no GPU timing or speedup claim

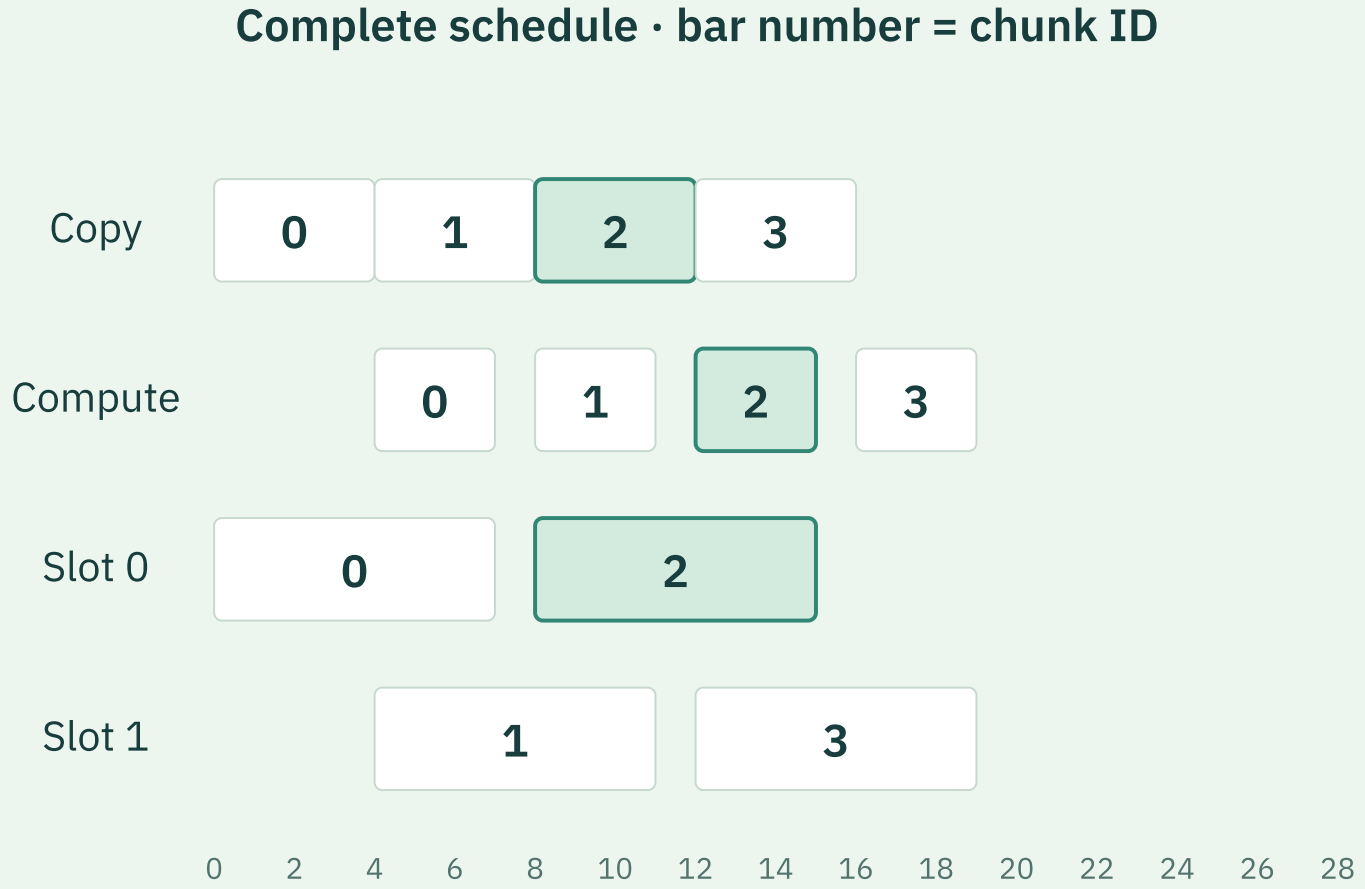

Copyright © 2026 Christopher Snow