

MFG-DRV-F01P · v0.8 MANUFACTURING DRAWING


TOP X-Y



FRONT X-Z



SIDE Y-Z

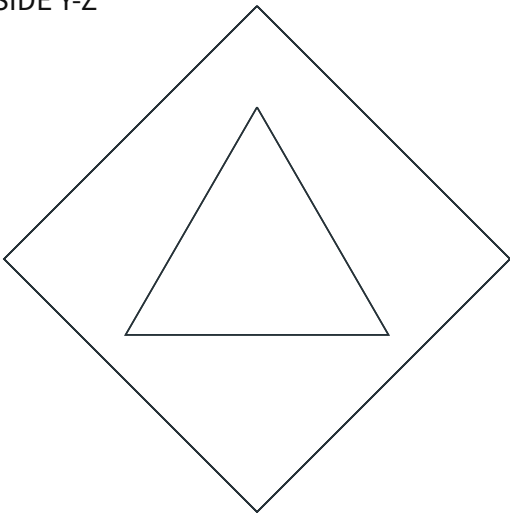

Drawing MFG-DRV-F01P | Part DRV-F01P — Replaceable waisted shear pin coupon | Qty 6

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit df59fd138780f538a5fa62dad6e2770b49bf4d94

Material: C360/CuZn39Pb3 brass | Process/finish: turn waist to released digital baseline; optional coupon correlation may refine later

Overall: X 36.000 × Y 3.000 × Z 3.000 mm | general tolerance ISO 2768-m unless noted

Critical: Ø3 x36 blank; starting waist Ø1.8 x4; target 10.35 N.m motor-side; one-shot BROKEN state; optional empirical calibration is not a design-release gate

GD&T/datums: A=shaft bore axis; B=stack face; C=key/dowel angular datum; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; CMM centre distance; blue-check backlash/contact; verify keyed torque path

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Release: PASS — physical validation NOT_RUN; procurement and machining USER_APPROVAL_REQUIRED.