

FreeSQL 사용법

빅데이터 핀테크

Prof. Sang-Won Lee

TA Kyong-Shik Lee

What is Oracle FreeSQL?

- <https://freesql.com/>
- 별도의 설치 없이 브라우저에서 바로 쓰는 무료 SQL 실습 환경
- Oracle이 제공하는 실제 Oracle Database에서 SQL과 PL/SQL 실행
- 실습 시연, 실행 가능한 스크립트 공유에 적합
- 운영 환경이나 오래 걸리는 작업에는 부적합
- 샘플 스키마 기본 제공 (HR, SCOTT, SH, CO 등 9종)
- 데이터베이스 버전 선택가능 (26ai, 19c)
- 테이블을 만들거나 수정하려면 Oracle 계정 로그인 필요

What is Oracle FreeSQL?

The screenshot shows the Oracle FreeSQL web interface. The top navigation bar includes the 'FreeSQL' logo, 'Worksheet' and 'Library' tabs, a user profile '23ai', and links for 'Connect with Java', 'Help and Feedback', and 'Sign Out'. The left sidebar contains a 'Navigator' section with 'My Schema' and 'Tables' dropdowns, a 'Search objects' input, and a 'Refresh' button. The main workspace is divided into two primary areas: a top 'SQL Worksheet' editor and a bottom 'Query result' panel. The 'SQL Worksheet' editor has a red box around its toolbar containing a 'Run Current Statement' button (a single play icon) and a 'Run Script' button (a double play icon). The 'Query result' panel has tabs for 'Query result', 'Script output', 'DBMS output', 'Explain Plan', and 'SQL history'. The 'Query result' tab is active, showing a 'Download' button and a red box containing descriptive text. The right sidebar features a 'Library' section with 'Community', 'My Content', 'My Favorites', and 'Recently' tabs, a search bar, and two featured items: a 'Tutorial' titled 'SQL Macros - Creating parameteris...' and a 'Script' titled 'How to Make Reusable SQL Pattern...'. Both items show their creation date and execution statistics.

Run Current Statement (▶): Executes only the SQL statement at the cursor

Run Script (▶▶): Executes the entire script in the worksheet

SQL Worksheet: The main editor where you write and edit SQL queries

Navigator: Shows your schema objects that you created

Query Result: Displays the output of your executed query (result rows, messages, and execution status)

What is Oracle FreeSQL?

예시 화면

The screenshot displays the Oracle FreeSQL web interface. The top navigation bar includes the 'FreeSQL' logo, 'Worksheet' and 'Library' tabs, a '23ai' dropdown, a 'Connect to the Database' button, and links for 'Help and Feedback' and 'Sign Out'.

On the left, the 'Navigator' pane shows a tree structure with 'My Schema' and 'Tables'. A search bar labeled 'Search objects' is present, and the 'DEPT' table is listed under the 'Tables' section.

The main workspace is titled '[SQL Worksheet]*'. It contains a SQL editor with the following code:

```
1 CREATE TABLE DEPT (  
2   DEPTNO NUMBER(2) CONSTRAINT PK_DEPT PRIMARY KEY,  
3   DNAME VARCHAR2(14),  
4   LOC VARCHAR2(13)  
5 );
```

Below the editor, the 'Script output' tab is active, showing the execution results:

```
SQL> CREATE TABLE DEPT (  
      DEPTNO NUMBER(2) CONSTRAINT PK_DEPT PRIMARY KEY,  
      DNAME VARCHAR2(14),  
      LOC VARCHAR2(13)...  
Show more...
```

Below the output, a message states 'Table DEPT created.' and the execution time is shown as 'Elapsed: 00:00:00.025'.

How to create Scott Schema ([깃허브 1/scott.md](#) 파일 참고)

1. DEPT table 생성

The screenshot displays the Oracle FreeSQL web interface. At the top, the title bar shows "[SQL Worksheet]*" with a dropdown menu and a red circle '2' around the execute button (a right-pointing triangle). Below the title bar, the SQL editor contains a red circle '1' next to the first line of the SQL script. The script is as follows:

```
1 CREATE TABLE DEPT (  
2   DEPTNO NUMBER(2) CONSTRAINT PK_DEPT PRIMARY KEY,  
3   DNAME VARCHAR2(14),  
4   LOC VARCHAR2(13)  
5 );
```

Below the editor, there are tabs for "Query result", "Script output", "DBMS output", "Explain Plan", and "SQL history". The "Script output" tab is selected. It shows the execution of the SQL script, including the command, the table definition, and the confirmation message "Table DEPT created." along with the elapsed time "Elapsed: 00:00:00.019".

How to create Scott Schema ([깃허브 1/scott.md](#) 파일 참고)

2. EMP table 생성


```
[ SQL Worksheet ]* ▶ ≡ 🔗 📄 ≡ Aa 🗑️ 📌 🔍
```

```
1 CREATE TABLE EMP (  
2   ... EMPNO NUMBER(4) CONSTRAINT PK_EMP PRIMARY KEY,  
3   ... ENAME VARCHAR2(10),  
4   ... JOB VARCHAR2(9),  
5   ... MGR NUMBER(4),  
6   ... HIREDATE DATE,  
7   ... SAL NUMBER(7,2),  
8   ... COMM NUMBER(7,2),  
9   ... DEPTNO NUMBER(2) CONSTRAINT FK_DEPTNO REFERENCES DEPT  
10 );
```

Query result **Script output** DBMS output Explain Plan SQL history

How to create Scott Schema ([깃허브](#) 1/scott.md 파일 참고)

3. BONUS table 생성

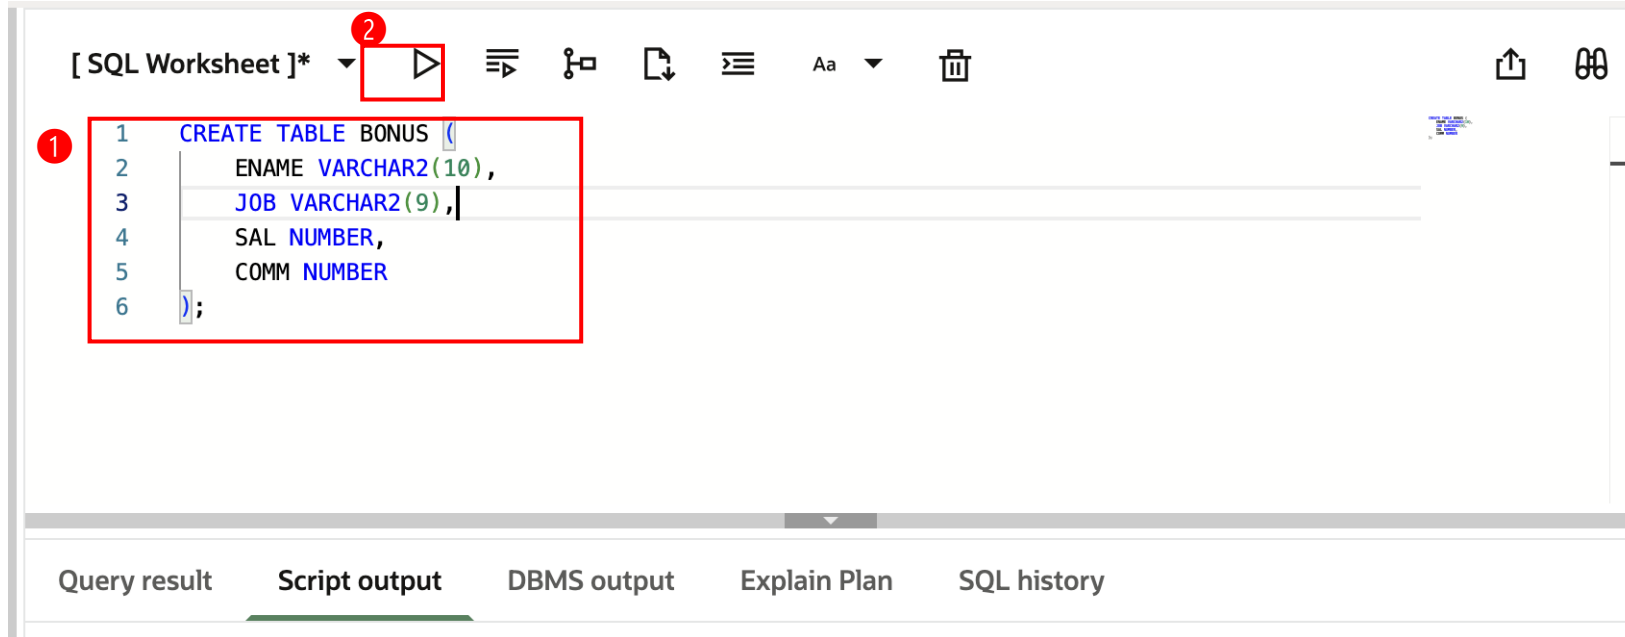

How to create Scott Schema ([깃허브 1/scott.md](#) 파일 참고)

4. SALGRADE table 생성

The screenshot shows the FreeSQL SQL Worksheet interface. The main editor area contains the following SQL code:

```
1 CREATE TABLE SALGRADE (  
2   ... GRADE NUMBER,  
3   ... LOSAL NUMBER,  
4   ... HISAL NUMBER  
5 );
```

The code is highlighted with a red box, and a red circle with the number 1 is next to the first line. A red circle with the number 2 is next to the execute button (a green play icon) in the top toolbar.

At the bottom of the interface, there are tabs for "Query result", "Script output", "DBMS output", "Explain Plan", and "SQL history".

The screenshot shows the FreeSQL Navigator panel. The top bar has tabs for "FreeSQL", ">_ Worksheet", and "SQL Tutorials". The main area is divided into "Navigator" and "Files" sections. The "Navigator" section shows a tree view with "My Schema" and "Tables". Below the tree is a search bar labeled "Search objects" and a refresh button. The "Files" section shows a list of tables: BONUS, DEPT, EMP, and SALGRADE. A red text annotation is present next to the list:

1 ~ 4번 수행 후 왼쪽 navigator에
다음과 같이 테이블 4개가 보이면 성공

How to create Scott Schema ([깃허브 1/scott.md](#) 파일 참고)

5. DEPT 테이블 데이터 삽입

The screenshot displays the Oracle FreeSQL web interface. At the top, a toolbar contains a red circle with the number '2' next to a play button icon. Below the toolbar, a red circle with the number '1' is next to a block of four SQL INSERT statements. The statements are: 1. INSERT INTO DEPT VALUES (10, 'ACCOUNTING', 'NEW YORK'); 2. INSERT INTO DEPT VALUES (20, 'RESEARCH', 'DALLAS'); 3. INSERT INTO DEPT VALUES (30, 'SALES', 'CHICAGO'); 4. INSERT INTO DEPT VALUES (40, 'OPERATIONS', 'BOSTON');. Below the script editor, there are tabs for 'Query result', 'Script output', 'DBMS output', 'Explain Plan', and 'SQL history'. The 'Script output' tab is selected. It shows the execution of the second statement: 'SQL> INSERT INTO DEPT VALUES (20, 'RESEARCH', 'DALLAS')'. Below this, it states '1 row inserted.' and 'Elapsed: 00:00:00.002'.

```
[ SQL Worksheet ]* 2      Aa   
```

1

```
1 INSERT INTO DEPT VALUES (10, 'ACCOUNTING', 'NEW YORK');
2 INSERT INTO DEPT VALUES (20, 'RESEARCH', 'DALLAS');
3 INSERT INTO DEPT VALUES (30, 'SALES', 'CHICAGO');
4 INSERT INTO DEPT VALUES (40, 'OPERATIONS', 'BOSTON');
```

Query result **Script output** DBMS output Explain Plan SQL history

SQL> INSERT INTO DEPT VALUES (20, 'RESEARCH', 'DALLAS')

1 row inserted.

Elapsed: 00:00:00.002

How to create Scott Schema ([깃허브](#) 1/scott.md 파일 참고)


6. EMP 테이블 데이터 삽입

```
[ SQL Worksheet ]* 2
1 INSERT INTO EMP VALUES (7369, 'SMITH', 'CLERK', 7902, to_date('17-12-1980', 'dd-mm-yyyy'), 800, NULL, 20);
2 INSERT INTO EMP VALUES (7499, 'ALLEN', 'SALESMAN', 7698, to_date('20-2-1981', 'dd-mm-yyyy'), 1600, 300, 30);
3 INSERT INTO EMP VALUES (7521, 'WARD', 'SALESMAN', 7698, to_date('22-2-1981', 'dd-mm-yyyy'), 1250, 500, 30);
4 INSERT INTO EMP VALUES (7566, 'JONES', 'MANAGER', 7839, to_date('2-4-1981', 'dd-mm-yyyy'), 2975, NULL, 20);
5 INSERT INTO EMP VALUES (7654, 'MARTIN', 'SALESMAN', 7698, to_date('28-9-1981', 'dd-mm-yyyy'), 1250, 1400, 30);
6 INSERT INTO EMP VALUES (7698, 'BLAKE', 'MANAGER', 7839, to_date('1-5-1981', 'dd-mm-yyyy'), 2850, NULL, 30);
7 INSERT INTO EMP VALUES (7782, 'CLARK', 'MANAGER', 7839, to_date('9-6-1981', 'dd-mm-yyyy'), 2450, NULL, 10);
8 INSERT INTO EMP VALUES (7788, 'SCOTT', 'ANALYST', 7566, to_date('13-JUL-87')-85, 3000, NULL, 20);
9 INSERT INTO EMP VALUES (7839, 'KING', 'PRESIDENT', NULL, to_date('17-11-1981', 'dd-mm-yyyy'), 5000, NULL, 10);
10 INSERT INTO EMP VALUES (7844, 'TURNER', 'SALESMAN', 7698, to_date('8-9-1981', 'dd-mm-yyyy'), 1500, 0, 30);
11 INSERT INTO EMP VALUES (7876, 'ADAMS', 'CLERK', 7788, to_date('13-JUL-87')-51, 1100, NULL, 20);
12 INSERT INTO EMP VALUES (7900, 'JAMES', 'CLERK', 7698, to_date('3-12-1981', 'dd-mm-yyyy'), 950, NULL, 30);
13 INSERT INTO EMP VALUES (7902, 'FORD', 'ANALYST', 7566, to_date('3-12-1981', 'dd-mm-yyyy'), 3000, NULL, 20);
14 INSERT INTO EMP VALUES (7934, 'MILLER', 'CLERK', 7782, to_date('23-1-1982', 'dd-mm-yyyy'), 1300, NULL, 10);
```

Query result Script output DBMS output Explain Plan SQL history

How to create Scott Schema ([깃허브](#) 1/scott.md 파일 참고)

7. SALGRADE 테이블 데이터 삽입

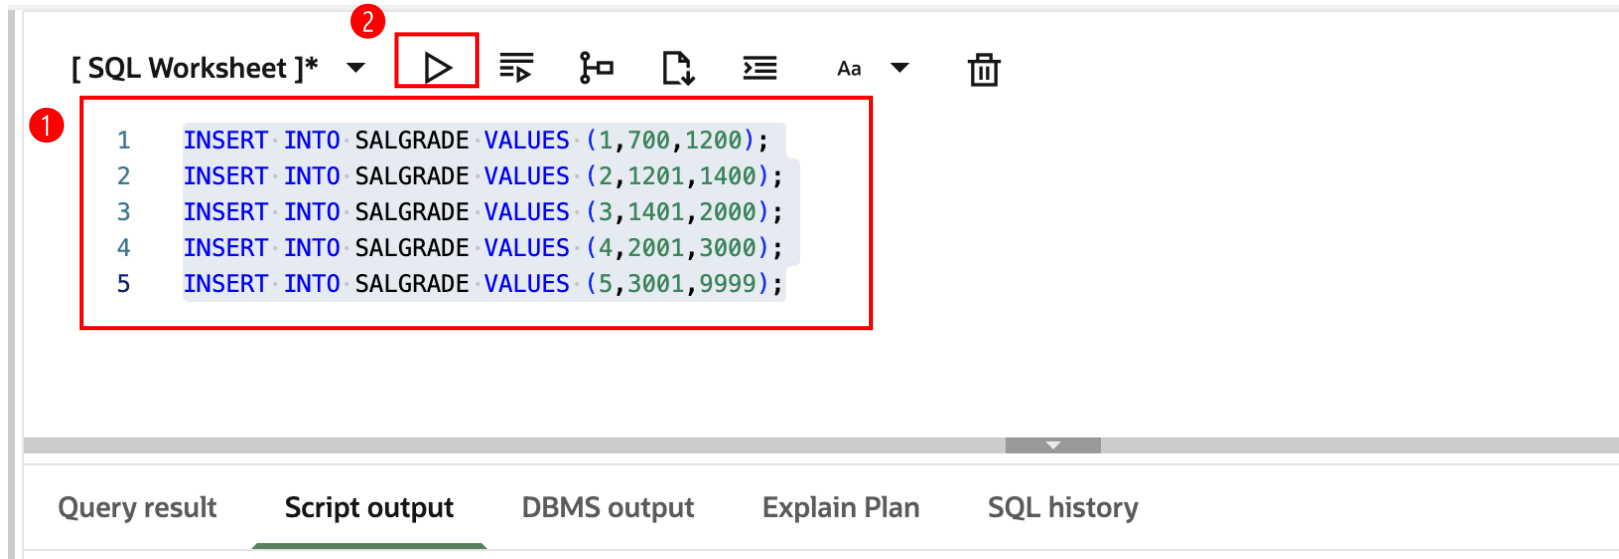

How to create Scott Schema ([깃허브 1/scott.md](#) 파일 참고)

8. 확인 (SELECT 절)

[SQL Worksheet]* 2 ▶ ≡ 🔗 📄 ≡ Aa ▼ 🗑️

1 1 SELECT * FROM DEPT;|

Query result Script output DBMS output Explain Plan SQL history

🗑️ ⓘ Download ▼ Execution time: 0.147 seconds

	DEPTNO	DNAME	LOC
1	10	ACCOUNTING	NEW YORK
2	20	RESEARCH	DALLAS
3	30	SALES	CHICAGO
4	40	OPERATIONS	BOSTON

다른 테이블도 확인해보기
(FROM 뒤의 테이블 이름만 변경하면 됨)

```
SELECT * FROM EMP;  
SELECT * FROM SALGRADE;
```

How to create Scott Schema ([깃허브 1/scott.md](#) 파일 참고)

유의사항

- 데이터베이스를 처음 상태로 되돌리고 싶을 때

- 실습 중 데이터를 많이 고쳐서 원래대로 돌리고 싶다면, 테이블을 삭제한 뒤 1-8번 과정을 다시 실행합니다.

```
DROP TABLE IF EXISTS EMP;
```

```
DROP TABLE IF EXISTS BONUS;
```

```
DROP TABLE IF EXISTS SALGRADE;
```

```
DROP TABLE IF EXISTS DEPT;
```

- 실습을 시작할 때마다 테이블 확인하기

- 세션이 끊기거나 시간이 지나면 테이블이 사라져 있을 수 있습니다.
- 실습 시작 전에 아래 문장으로 먼저 확인하고, 오류가 나면 1-8번 과정을 다시 실행합니다.