



SOA Software Platform 6.1 Installation Guide for Windows and UNIX Platforms

Trademarks

SOA Software and the SOA Software logo are either trademarks or registered trademarks of SOA Software, Inc. Other product names, logos, designs, titles, words or phrases mentioned within this guide may be trademarks, service marks or trade names of SOA Software, Inc. or other third parties and may be registered in the U.S. or other jurisdictions.

Copyright

©2001-2012 SOA Software, Inc. All rights reserved. No material in this manual may be copied, reproduced, republished, uploaded, posted, transmitted, distributed or converted to any electronic or machine-readable form in whole or in part without prior written approval from SOA Software, Inc.

Table of Contents

SOA SOFTWARE PLATFORM 6.1 INSTALLATION GUIDE FOR WINDOWS AND UNIX PLATFORMS.....	I
Preface	8
Before You Begin	8
System Requirements.....	9
Installation Directory	10
Installation Directory Folder Descriptions	10
SOA Software Platform Program Group	13
In This Guide	13
Customer Support	14
Chapter 1: Installing and Configuring SOA Software Platform	15
Overview	15
Manually Installing Schemas.....	15
SOA Software Platform Setup Files.....	15
Step 1: Install SOA Software Platform.....	16
Install SOA Software Platform (GUI)	16
Install SOA Software Platform (Console)	21
Install SOA Software Platform (Silent)	24
Step 2: Install SOA Software Platform Updates.....	26
Step 3: Configure Standalone Container Instance	27
Configure Standalone Container Instance (GUI)	27
Configure Standalone Container Instance (Silent).....	33
Step 4: Launch SOA Software Administration Console.....	35
Step 5: Install Policy Manager Features	37
Step 6: Configure Policy Manager Features	40
Configure Policy Manager Console/Web Services.....	40
Configure PKI Keys (Policy Manager Console/Web Services)	41
Configure Database Options (Policy Manager Console/Web Services).....	43
Configure Policy Manager Administrator Credentials (Policy Manager Console/Web Services).....	56
Completing the Configuration (Policy Manager Console/Web Services)	58
Step 7: Perform SOA Software Administration Console Login (Policy Manager Console/Web Services).....	58
Step 8: Launch Policy Manager Management Console.....	59
Chapter 2: Installing Updates to Existing SOA Software Platform Installation	60
Confirm Installed Updates	60
Manually Installing Schemas.....	60
Update Existing SOA Software Platform 6.1 Installation (Manual).....	60
Update Existing SOA Software Platform 6.1 Installation (Silent Update)	68
Rollback Update	72
Chapter 3: Installing and Configuring Network Director.....	76

Overview	76
Step 1: Configure Network Director Container Instance	76
Configure Network Director Container Instance (GUI).....	76
Configure Network Director Container Instance (Silent Configuration)	82
Step 2: Launch SOA Software Administration Console.....	84
Step 3: Install Feature (SOA Software Network Director)	85
Step 4: Configure Network Director	88
Configure WS-MetaDataExchange Options (Network Director)	88
Manage PKI Keys (Network Director)	90
Completing the Configuration (Network Director).....	92
Perform SOA Software Administration Console Login (Network Director)	93
Step 5: Register Network Director Container	94
Chapter 4: SOA Software Administration Console	100
Overview	100
Admin Console Organization	100
Available Features.....	100
Installed Features	101
Configuration	102
Repository	103
System.....	108
Appendix A: Start / Stop / Restart Container Instance.....	110
Start / Stop Container Instance.....	110
Restart Container Instance.....	110
Appendix B: Database Drivers.....	112
Appendix C: Uninstalling SOA Software Platform.....	113
Overview	113
Backup Procedures.....	113
Uninstall SOA Software Platform (GUI).....	113
Uninstall SOA Software Platform (Console).....	116

Table of Figures

Figure 1: SOA Software Platform Installation Directory— <i>Complete Installation</i>	10
Figure 1-1: Enter License Key— <i>GUI Install</i>	16
Figure 1-2: Introduction— <i>GUI Install</i>	17
Figure 1-3: SOA Software License— <i>GUI Install</i>	17
Figure 1-4: System Requirements— <i>GUI Install</i>	18
Figure 1-5: Choose Install Folder— <i>GUI Install</i>	18
Figure 1-6: Choose Shortcut Folder— <i>GUI Install</i>	19
Figure 1-7: Pre-Installation Summary— <i>GUI Install</i>	19
Figure 1-8: Installing— <i>Progress Indicator</i>	20
Figure 1-9: Install Complete— <i>GUI Install</i>	20
Figure 1-10 Enter License Key— <i>Console Install</i>	21
Figure 1-11: Introduction— <i>Console Install</i>	22
Figure 1-12: License Agreement— <i>Console Install</i>	22
Figure 1-13: System Requirements— <i>Console Install</i>	23
Figure 1-14: Choose Install Folder— <i>Console Install</i>	23
Figure 1-15: Welcome to Configure Container Instance— <i>Standalone Deployment</i>	28
Figure 1-16: Instance Name— <i>Standalone Deployment</i>	29
Figure 1-17: Default Admin User— <i>Standalone Deployment</i>	30
Figure 1-18: Instance Configuration Options— <i>Standalone Deployment</i>	30
Figure 1-19: Default HTTP Listener— <i>Standalone Deployment</i>	31
Figure 1-20: Instance Setup— <i>Standalone Deployment</i>	32
Figure 1-21: Instance Configuration Summary— <i>Standalone Deployment</i>	33
Figure 1-22: SOA Software Administration Console— <i>Login</i>	36
Figure 1-23: SOA Software Administration Console— <i>Available Features Tab</i>	36
Figure 1-24: Policy Manager Console/Web Services Installation— <i>Available Features Tab</i>	37
Figure 1-25: Policy Manager Console/Web Services Installation — <i>Install Feature – Resolve Phase</i>	38
Figure 1-26: Policy Manager Console/Web Services Installation— <i>Install Feature – Feature Resolution Report</i>	38
Figure 1-27: Policy Manager Console/Web Services Installation— <i>Install Feature – Install In Progress</i>	39
Figure 1-28: Policy Manager Console/Web Services Installation— <i>Install Feature – Installation Complete</i>	39
Figure 1-29: Manage PKI Keys Wizard (<i>Select Key Management Option</i>)— <i>Policy Manager Console/Web Services</i>	41
Figure 1-30: Manage PKI Keys Wizard (Generate PKI Keys & X.509 Certificate)— <i>Policy Manager Console/Web Services</i>	42
Figure 1-31: Manage PKI Keys Wizard (Summary)— <i>Policy Manager Console/Web Services</i>	43
Figure 1-32: Configure Database Options Wizard (Select Database Option—Create new database)— <i>Policy Manager Console/Web Services</i>	44
Figure 1-33: Configure Database Options Wizard (Select Database Option—Use existing database)— <i>Policy Manager Console/Web Services</i>	44
Figure 1-34: Specify Database Options (MS SQL Server #1)— <i>Policy Manager Console/Web Services</i>	46
Figure 1-35: Specify Database Options (MS SQL Server #2)— <i>Policy Manager Console/Web Services</i>	46
Figure 1-36: Specify Database Options (MySQL Server #1)— <i>Policy Manager Console/Web Services</i>	47

Figure 1-37: Specify Database Options (MySQL Server #2)— <i>Policy Manager Console/Web Services</i>	48
Figure 1-38: Specify Database Options (Oracle SID #1)— <i>Policy Manager Console/Web Services</i>	49
Figure 1-39: Specify Database Options (Oracle SID #2)— <i>Policy Manager Console/Web Services</i>	49
Figure 1-40: Specify Database Options (Oracle Service Name #1)— <i>Policy Manager Console/Web Services</i>	51
Figure 1-41: Specify Database Options (Oracle Service Name #2)— <i>Policy Manager Console/Web Services</i>	51
Figure 1-42: Specify Database Options (DB2 #1)— <i>Policy Manager Console/Web Services</i>	53
Figure 1-43: Specify Database Options (DB2 #2)— <i>Policy Manager Console/Web Services</i>	53
Figure 1-44: Configure Database Options Summary	54
Figure 1-45: Manage Schemas Wizard (Install Schemas)— <i>Policy Manager Console/Web Services</i>	55
Figure 1-46: Manage Schemas Wizard (Install Schemas Summary)— <i>Policy Manager Console/Web Services</i>	56
Figure 1-47: Define Policy Manager Administration Credentials— <i>Policy Manager Console/Web Services</i>	57
Figure 1-48: Define Policy Manager Administration Credentials (Credentials Summary)— <i>Policy Manager Console/Web Services</i>	57
Figure 1-49: Complete Configuration— <i>Policy Manager Console/Web Services</i>	58
Figure 1-50: SOA Software Administration Console— <i>Login Screen</i>	59
** 59	
Figure 2-1: Configure Container Instance Wizard— <i>Welcome to Configure Container Instance</i>	62
Figure 2-2: Configure Container Instance Wizard— <i>Instance Name</i>	63
Figure 2-3: Instance Already Exists— <i>Update</i>	64
Figure 2-4: Configure Container Instance Wizard— <i>Instance Configuration Summary (Complete Update)</i>	64
Figure 2-5: Configure Container Instance Wizard— <i>Update Complete</i>	65
Figure 2-6: SOA Software Administration Console— <i>Login</i>	66
Figure 2-7: SOA Software Administration Console— <i>Available Features Tab</i>	67
Figure 2-8: SOA Software Administration Console— <i>Login</i>	70
Figure 2-9: SOA Software Administration Console— <i>Available Features Tab</i>	71
Figure 2-10: Configure Container Instance Wizard— <i>Welcome to Configure Container Instance</i>	72
Figure 2-11: Configure Container Instance Wizard— <i>Instance Name</i>	73
Figure 2-12: Instance Already Exists— <i>Rollback</i>	74
Figure 2-13: Configure Container Instance Wizard— <i>Instance Configuration Summary (Rollback in Progress)</i>	74
Figure 2-14: Configure Container Instance Wizard— <i>Rollback Complete</i>	75
Figure 3-1: Welcome to Configure Container Instance	77
Figure 3-2: Instance Name— <i>Standalone Deployment</i>	77
Figure 3-3: Default Admin User— <i>Standalone Deployment</i>	78
Figure 3-4: Instance Configuration Options— <i>Standalone Deployment</i>	79
Figure 3-5: Default HTTP Listener— <i>Standalone Deployment</i>	79
Figure 3-6: Instance Setup— <i>Standalone Deployment</i>	80
Figure 3-7: Instance Configuration Summary— <i>Standalone Deployment</i>	81
Figure 3-8: SOA Software Administration Console— <i>Login</i>	84
Figure 3-9: SOA Software Network Director Installation— <i>Available Features Tab</i>	85
Figure 3-10: SOA Software Network Director Installation— <i>Install Feature – Resolve Phase</i>	86

Figure 3-11: SOA Software Network Director Installation— <i>Install Feature – Feature Resolution Report</i>	86
Figure 3-12: SOA Software Network Director Installation— <i>Install Feature – Install In Progress</i>	87
Figure 3-13: SOA Software Network Director Installation— <i>Install Feature – Installation Complete</i>	87
Figure 3-14: Configure WS-MetadataExchange Options Wizard (WS-MetaDataExchange Options)— <i>Network Director</i>	89
Figure 3-15: Configure WS-MetadataExchange Options Wizard (WS-MetaDataExchange Options Summary)— <i>Network Director</i>	90
Figure 3-16: Manage PKI Keys Wizard (Select Key Management Option)— <i>Network Director</i>	91
Figure 3-17: Manage PKI Keys Wizard (Generate PKI Keys & X.509 Certificate)— <i>Network Director</i>	92
Figure 3-18: Manage PKI Keys Wizard Summary— <i>Network Director</i>	92
Figure 3-19: Complete Configuration— <i>Network Director</i>	93
Figure 3-20: SOA Software Administration Console— <i>Login (Admin Console)</i>	94
Figure 3-21: Register Network Director— <i>Add Container Wizard (Select Container Type)</i>	95
Figure 3-22: Register Network Director— <i>Add Container Wizard (Specify Metadata Import Options)</i>	96
Figure 3-23: Register Network Director— <i>Add Container Wizard (Specify Metadata Import Options – Metadata Path selected)</i>	96
Figure 3-24: Register Network Director— <i>Add Container Wizard (X.509 Certificate Not Trusted)</i>	97
Figure 3-25: Register Network Director— <i>Add Container Wizard (Specify Container Details)</i>	98
Figure 3-26: Register Network Director— <i>Add Container Wizard (Completion Summary)</i>	98
Figure 3-27: Register Network Director— <i>Container Details</i>	99
Figure 3-28: Register Network Director— <i>Hosted Services Summary</i>	99
Figure 4-1: SOA Software Administration Console— <i>Available Features</i>	101
Figure 4-2: SOA Software Administration Console— <i>Installed Features</i>	102
Figure 4-3: SOA Software Administration Console— <i>Configure</i>	103
Figure 4-4: Admin Console— <i>Repository (Add Repository)</i>	104
Figure 4-5: Admin Console— <i>Search for Updates Button</i>	105
Figure 4-6: Admin Console— <i>Searching for Updates</i>	105
Figure 4-7: Admin Console— <i>Installed Features (Updates Found)</i>	106
Figure 4-8: Admin Console— <i>Installed Features (Updating)</i>	106
Figure 4-9: Admin Console— <i>Installed Features (Bundle Filter)</i>	107
Figure 4-10: Admin Console— <i>Rollback Changes Button</i>	107
Figure 4-11: Admin Console— <i>Installed Features (Rollback Changes)</i>	108
Figure 4-12: Admin Console— <i>Installed Features (Restart System after Rollback Message)</i>	108
Figure 4-13: SOA Software Administration Console— <i>System</i>	109
Figure A-1: SOA Software Administration Console— <i>System</i>	111
Figure C-1: Start Uninstall— <i>GUI</i>	114
Figure C-2: Cancel Installation— <i>Uninstall Not Complete Message</i>	114
Figure C-3: Uninstall Warning Message	115
Figure C-4: Uninstalling SOA Software Platform— <i>GUI</i>	115
Figure C-5: Uninstall Complete— <i>GUI</i>	116
Figure C-6: Start Uninstall— <i>Console</i>	117
Figure C-7: Uninstalling SOA Software Platform— <i>Console</i>	117

Preface

This guide provides instructions for installing the SOA Software Platform 6.1 GA, SOA Software Platform Updates, configuring a Container Instance, installing Policy Manager Features using the SOA Software Administration Console, and performing administration tasks.

Installing and configuring SOA Software Platform 6.1 and installing Policy Manager Features are the primary focus of this guide. Additional chapters are provided on installing the Network Director, SOA Software Administration Console functionality, and Appendix chapters covering container startup, database drivers, and the SOA Software Platform 6.1. uninstall process.

SOA Software Platform 6.1 is installed using a platform-specific setup file that loads the "SOA Software Platform Installation Wizard." The configuration process is performed using the "Configure Container Instance Wizard" and the "SOA Software Administration Console."

BEFORE YOU BEGIN

The SOA Software Platform 6.1 installation process includes the following mandatory pre-installation steps for *new* and *upgrade* installations:

SOA Software Platform Pre-installation Requirements

SOA Software Platform Installation Scenario	Pre-installation Requirements
New Installation	<ul style="list-style-type: none"> ○ First Installation—If you are installing the SOA Software Platform 6.1 release (with Policy Manager 6.1 features) and no previous Service Manager installations exist, there are no pre-installation requirements. ○ New Installation without Upgrading—If you are installing a new SOA Software Platform release, you have a previous Service Manager release installed, but will <i>not</i> be using it or migrating configuration data from it to the new release, perform the following mandatory steps prior to installing the new Service Manager version: <ol style="list-style-type: none"> 1. Quit previous Service Manager application version. 2. Stop all Service Manager-related Windows Services and Service Manager Subsystems. 3. Uninstall Service Manager Windows Services from previous Service Manager versions. Refer to "Chapter 1: Installing and Configuring SOA Software Platform" for complete instructions on performing the SOA Software Platform and Policy Manager feature installation process.
Policy Manager 6.0 to Policy Manager 6.1 Upgrade	If you currently have Policy Manager 6.0 and would like to upgrade to Policy Manager 6.1, refer to the "Policy Manager 6.0 to 6.1 Upgrade Technical Note." You can download the guide from the SOA Software Customer Support website (https://support.soa.com/support).
Service Manager 5.2 to Policy Manager 6.1 Upgrade	If you currently have Service Manager 5.2 and would like to upgrade to Policy Manager 6.1, refer to the "Service Manager 5.2 Upgrade Guide for Windows and UNIX Platforms Guide." You can download the guide from the SOA Software Customer Support website (https://support.soa.com/support).

SYSTEM REQUIREMENTS

The following table lists the minimum system requirements for running the SOA Software Platform on *Windows* and *UNIX* platforms.

Component Name	Requirement	
SOA Software Platform Host	<u>Hardware</u> Single CPU, 2Ghz, 2GB RAM	
	<u>Operating System</u>	
	<i>Windows</i>	Windows XP with Service pack 1 Windows 2003 with Service pack 1 Windows 2008 Windows 7
	<i>Linux</i>	Red Hat Enterprise Linux 4.0
	<i>Solaris</i>	Solaris 10, 11
	<i>IBM AIX</i>	AIX 5.2 and 5.3
Client Browser for accessing UI of SOA Software Platform Features.	IE 7.0, 8.0 Mozilla Firefox 3.6 and above Google Chrome v17 and above	
Database Management Systems	Oracle 10, 11g (SID, Service Name)—Requires database driver <i>ojdbc5.jar</i> , version 11.2.0.1.0. Microsoft SQL Server 2005—Database driver included with SOA Software Platform. IBM DB2 Universal Database V9.7—Requires DB2 Universal JDBC Driver (e.g., <i>db2jcc.jar</i>) for your specific DB2 installation. MySQL 5.1—Requires database driver <i>mysql-connector-java-5.0.8-bin.jar</i> , version 5.0.8.	
	Note: After installing the SOA Software Platform and running the "Configure Container Instance Wizard," the database driver .jar file must be dropped into the "/deploy" directory of the container instance that requires the driver (e.g., sm60/instances/<instance name>/deploy) prior to running the database configuration task via the "SOA Software Administration Console."	
	Note: The database will usually not reside on the computer that is hosting the SOA Software Platform.	
Database Sizing Guidelines	<ul style="list-style-type: none"> The base install, with configuration data, consumes an initial 10MB of space. Each detailed transaction log consumes approximately 500 bytes of database storage space. Typically, however, only 5% of transactions are logged in this manner. This means that 25KB of database storage space will be consumed for every 1000 transactions. At the transaction rate used in the test – 	

Component Name	Requirement
	<p>1250TPS – the database storage space was consumed at the rate of 112MB per hour.</p> <ul style="list-style-type: none"> Assume an average recorded message size of 10KB. Typically, however, only 1% of transactions are logged in this manner. Alerts, performance data and SLA Rollup data add up to approximately 1KB per 100 transactions.
Memory Configuration	The default maximum heap size for all SOA Software Containers (i.e., Java processes) is 1024MB.
Documentation	A subset of the SOA Software Platform product documentation is published in Portable Document Format (PDF) and requires Acrobat Reader 6.0 or above.

INSTALLATION DIRECTORY

The following figure shows the directory structure of a SOA Software Platform installation:

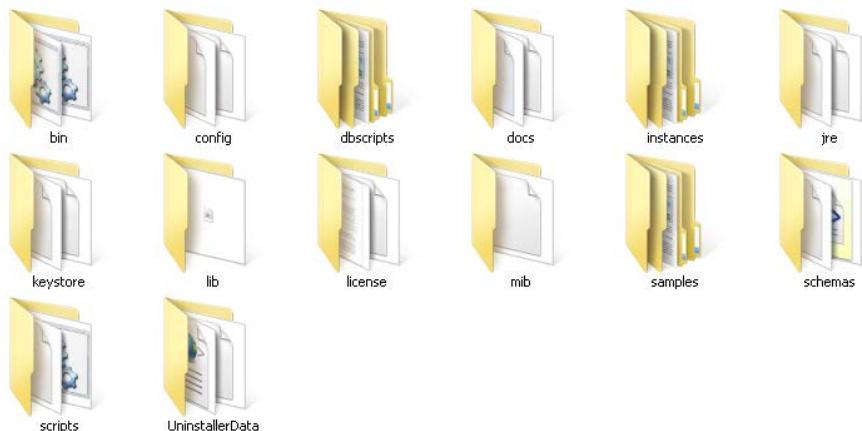


Figure I: SOA Software Platform Installation Directory—Complete Installation

Installation Directory Folder Descriptions

The SOA Software Platform Installation Wizard uses a default installation directory \SOA Software. The recommended directory structure organization is to add a new "Release Directory" under \SOA Software for each SOA Software Platform release. Using this model, an installation directory structure for the SOA Software Platform 6.1 release could be \SOA Software\SM61. This directory structure approach facilitates that product upgrade and maintenance process.

The SOA Software Platform installation includes the following directory folders:

SOA Software Platform Installation Directory Folder Descriptions

Installation Directory Folder	Description
\bin	The \bin folder includes the SOA Software Platform shell and batch scripts. This includes Start /Stop scripts for all the SOA Software Platform processes, scripts used to register and un-register Windows services, and scripts for launching the SOA Software Platform administration and configuration wizards. This folder also includes a script run the SOA Software Platform product as a unique Cron job.
\config	The \config folder includes SOA Software Platform properties files. These property files are reserved for system use.
\dbscripts	The \dbscripts folder includes all the database scripts required for loading SOA Software Platform data and schemas including new installation, upgrade installation, automated database schema creation, or manual schema loading.
\docs	The \docs folder includes the SOA Software Platform Installation and Programming documentation in Portable Document Format (PDF), and Release Notes in HTML format. A subfolder \docs\Users_Guide includes a copy of the Policy Manager Online Help. The launch page for the online help is "welcome_to_service_manager.htm".
\instances	<p>The \instances folder is a runtime created folder. Each time a new container instance is created a new folder is created using the assigned container name.</p> <p>A container instance folder also includes three sub-folders.</p> <ul style="list-style-type: none"> ○ The Logs folder stores log files that are automatically generated when a SOA Software Platform function is operating. The logging process records the actions performed for each SOA Software Platform function and stores the information in the log file. Log files can be archived for historical record based on your requirements. ○ The deploy folder includes properties files (com.soa.config.cfg and com.soa.log.cfg) that include SOA Software Platform default configuration settings. These files are used to push default configuration information to the Administration Console and are typically for one-time use only. These properties pushed to the Administration Console can be updated via the "Configuration" tab. Bundles and other .cfg files can also be added to the \deploy folder and will be published to the Administration Console. These properties can also be updated via the "Configuration" tab. ○ The cache folder stores OSGI bundles for installed features.
\jre	The \jre folder is a Java runtime folder that is automatically created during a SOA Software Platform product installation. The Java version packaged with SOA Software Platform and installed into the \jre folder is version 1.5.0_21.

SOA Software Platform Installation Directory Folder Descriptions

Installation Directory Folder	Description
\keystore	The \keystore folder includes the following sample keystore files: <ul style="list-style-type: none"> ○ Keystore-default.jks—A keystore default file that contains ten self-signed certificates. This sample file is provided for users who would like to use the HTTPS functionality or Authentication with certificate functionality. ○ Keystore-empty.jks—An empty keystore that is saved in JKS format. It can be used to load any certificate for import into SOA Software Platform. ○ Readme.txt—A text file that includes descriptions for each sample key file and password information.
\lib	The \lib folder includes the jar files that are required for runtime of SOA Software Platform processes, and war files that support the SOA and 5.2 Legacy Container types.
\license	The \license folder includes a SOA Software Platform Third Party Dependencies document (<i>ThirdPartyLicenseAgreements.pdf</i>) that provides license information for the third party products utilized in the SOA Software Platform product implementation.
\mib	The \mib folder includes the "Management Information Base (mib)" file for SOA Software Platform that stores alerts raised in a SOA Software Platform deployment. The mib file is used to integrate Network Management Systems with SOA Software Platform. The mib file is registered with Network Management Systems to enable the receipt of alerts from SOA Software Platform. After the integration is complete, alerts raised in the SOA Software Platform can be viewed via Network Management Systems.
\schemas	The \schemas folder includes cached schema documents that are used in the Schema Validation Component.
\UninstallerData	The \Uninstaller folder stores key SOA Software Platform data required for the successful operation of the SOA Software Platform Uninstall process. <i>Note: This folder is for system use ONLY. Deleting or modifying this folder is not supported and will compromise the SOA Software Platform Uninstall process.</i>
<installation_name>.log	The <installation_name>.log file is created when a SOA Software Platform product installation occurs and includes time stamp information related to the installation.

SOA SOFTWARE PLATFORM PROGRAM GROUP

The SOA Software Platform Program Group for a complete installation includes the following menu options:

Menu Option	SOA Software Platform Function	Action
Configure Container Instance		Launches the "Configure Container Instance Wizard."
Documentation (Guides are in PDF format)	<i>Installation</i>	SOA Software Platform Installation Guide
	<i>Programming Guides</i>	Policy Manager 6.1 Message Handler Programming Guide Policy Manager 6.1 Delegate for Apache Axis Technical Note Policy Manager 6.1 Custom Actions Technical Note
	<i>Users Guide</i>	Policy Manager 6.1 Online Help
	<i>View Release Notes</i>	SOA Software Platform Release Notes

IN THIS GUIDE

This guide includes the following chapters:

- Chapter 1, "Installing and Configuring SOA Software Platform" provides instructions on how to install the SOA Software Platform application, apply updates, configure a container instance using the "Configure Container Instance Wizard," and install and configure SOA Software Platform features using the SOA Software Administration Console.
- Chapter 2: "Installing Updates to Existing SOA Software Platform Installation" provides instructions on how to install updates to the SOA Software Platform 6.1 GA Release.
- Chapter 3, "Installing and Configuring Network Director" provides instructions on how to configure a Network Director container, install and configure the "SOA Software Network Director" feature using the using the SOA Software Administration Console, and configure the Network Director Container Instance using the Policy Manager Management Console.
- Chapter 4, "SOA Software Administration Console" provides a functional overview of the SOA Software Administration Console.
- Appendix A, "Start / Stop / Restart Container Instance" provides instructions on how to start, stop, and restart a container instance.
- Appendix B, "Database Drivers" provides a list of required database drivers for database types supported by the SOA Software Platform.
- Appendix C, "Uninstalling SOA Software Platform" provides instructions on how to uninstall the SOA Software Platform software installation.

CUSTOMER SUPPORT

SOA Software offers a variety of support services to our customers. The following options are available:

Support Options:	
Email (direct)	support@soa.com
Phone	1-866 SOA-9876 (1-866-762-9876)
Email (Web)	The "Support" section of the SOA Software website (www.soa.com) provides an option for emailing product related inquiries to our support team.
Support Site	SOA Software Customer Support website (https://support.soa.com/support)
Documentation Updates	Updates to product documentation are issued on a periodic basis and are available by submitting an email request to support@soa.com .

Chapter 1: Installing and Configuring SOA Software Platform

OVERVIEW

SOA Software Platform 6.1 provides software releases for *Windows* and *UNIX* platforms. This chapter provides instructions on how to install the SOA Software Platform 6.1 application, apply updates, configure a Standalone Container Instance using the "Configure Container Instance Wizard," and install and configure Policy Manager Features using the SOA Software Administration Console.

GUI, Console, and Silent instructions are provided for the SOA Software Platform installation process, and GUI and Silent instructions are provided for the configuration process. Select the installation approach that best suits your requirements.

MANUALLY INSTALLING SCHEMAS

If you have a requirement to manually install the SOA Software Platform schemas, contact SOA Software Customer Support prior to beginning this installation to obtain a series of schema installation scripts and additional instructions.

SOA SOFTWARE PLATFORM SETUP FILES

The following table shows the platform options for the SOA Software Platform 6.1 setup executable. Refer to www.support.soa.com in the Downloads > Policy Manager > PM61 section.

Note: Installation setup files must be copied to the local directory prior to launch.

Platform	Setup File Name	Launch GUI	Launch Console
Windows	Windows-pm-6.1.xxxx-setup.exe	Windows-pm-6.1.xxxx-setup.exe	Windows-pm-6.1.xxxx-setup.exe -i console
Linux	Windows-pm-6.1.xxxx-setup.bin	sh Windows-pm-6.1.xxxx-setup.bin	sh Windows-pm-6.1.xxxx-setup.bin -i console
Solaris	Windows-pm-6.1.xxxx-setup.bin	sh Windows-pm-6.1.xxxx-setup.bin	sh Windows-pm-6.1.xxxx-setup.bin -i console
AIX	Windows-pm-6.1.xxxx-setup.bin	sh Windows-pm-6.1.xxxx-setup.bin	sh Windows-pm-6.1.xxxx-setup.bin -i console

STEP 1: INSTALL SOA SOFTWARE PLATFORM


This section provides a walkthrough for installing the SOA Software Platform. Select one of the following installation methods:

- Install SOA Software Platform (GUI)
- Install SOA Software Platform (Console)
- Install SOA Software Platform (Silent)



Install SOA Software Platform (GUI)

This section provides instructions for performing a *GUI* installation of the SOA Software Platform application using the "SOA Software Platform Installation Wizard." In order to begin installation of the SOA Software Platform, you must have administrator privileges on your computer.

To Install SOA Software Platform (GUI)

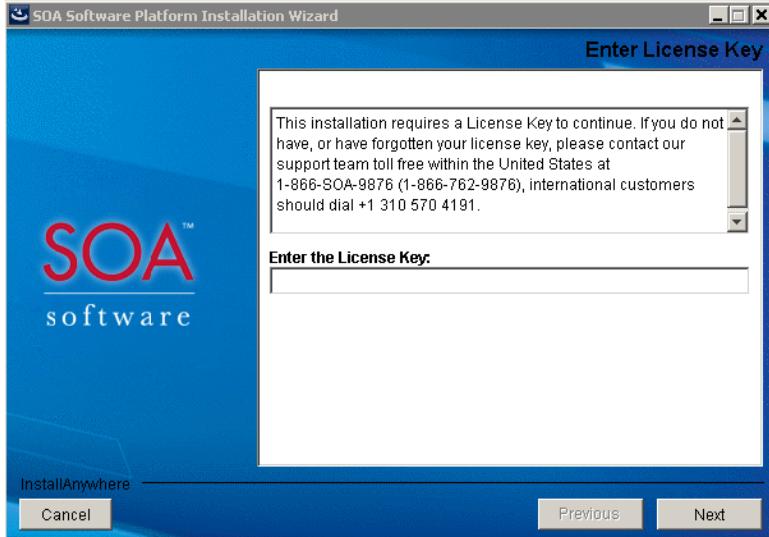Step	Procedure
1.	<p>Launch the SOA Software Platform installation setup file (Windows-pm-6.1.xxxx-setup.exe). The installation files will begin to extract. When this process is complete, the "Enter License Key" screen displays.</p> 
2.	<p>Enter the license key that was supplied to you and click Next. The "Introduction" screen displays.</p> <hr/> <p>Note: If you do not have a license key, contact SOA Software Customer Service department. You can find the contact information at the beginning of this</p>

To Install SOA Software Platform (GUI)

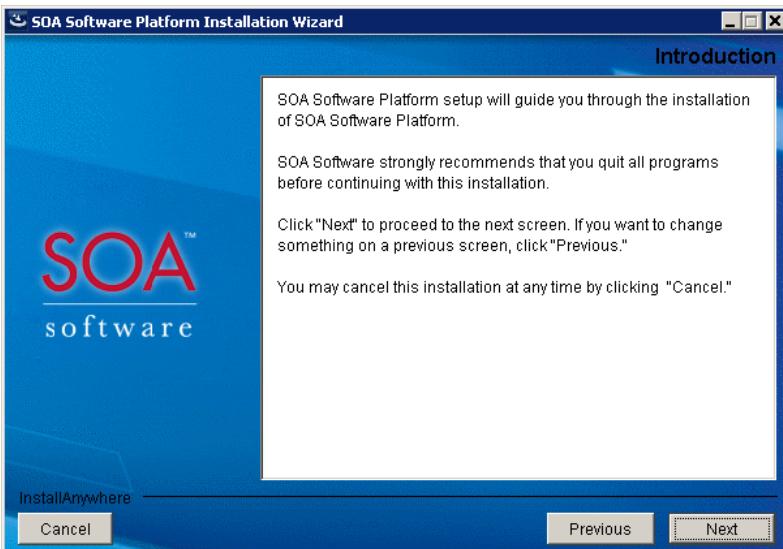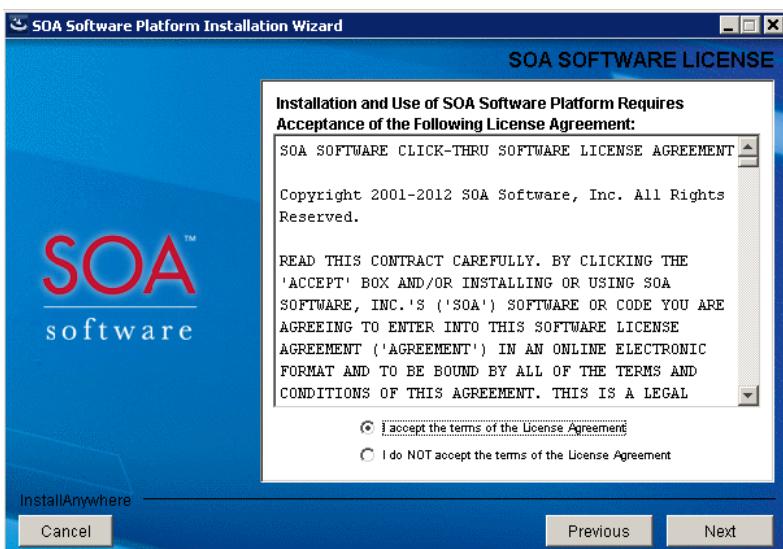	<p>guide.</p> <hr/>  <p>The screenshot shows the 'SOA Software Platform Installation Wizard' window. The title bar says 'SOA Software Platform Installation Wizard'. The main area is titled 'Introduction'. It contains text: 'SOA Software Platform setup will guide you through the installation of SOA Software Platform.', 'SOA Software strongly recommends that you quit all programs before continuing with this installation.', 'Click "Next" to proceed to the next screen. If you want to change something on a previous screen, click "Previous."', and 'You may cancel this installation at any time by clicking "Cancel."'. At the bottom left is the 'InstallAnywhere' logo, and at the bottom right are 'Cancel', 'Previous', and 'Next' buttons.</p>
Figure 1-2: Introduction—GUI Install	
3.	<p>Click Next. The "SOA Software License" screen displays.</p>  <p>The screenshot shows the 'SOA Software Platform Installation Wizard' window. The title bar says 'SOA Software Platform Installation Wizard'. The main area is titled 'SOA SOFTWARE LICENSE'. It contains a large text box with the 'SOA SOFTWARE CLICK-THRU SOFTWARE LICENSE AGREEMENT'. Below it is a copyright notice: 'Copyright 2001-2012 SOA Software, Inc. All Rights Reserved.' Underneath is a detailed description of the license terms. At the bottom of the text box are two radio buttons: '<input checked="" type="radio"/> I accept the terms of the License Agreement' and '<input type="radio"/> I do NOT accept the terms of the License Agreement'. At the bottom left is the 'InstallAnywhere' logo, and at the bottom right are 'Cancel', 'Previous', and 'Next' buttons.</p>
Figure 1-3: SOA Software License—GUI Install	
4.	<p>If you agree to the license terms, click the "I accept" option and Next. The "System Requirements" screen displays.</p>

To Install SOA Software Platform (GUI)

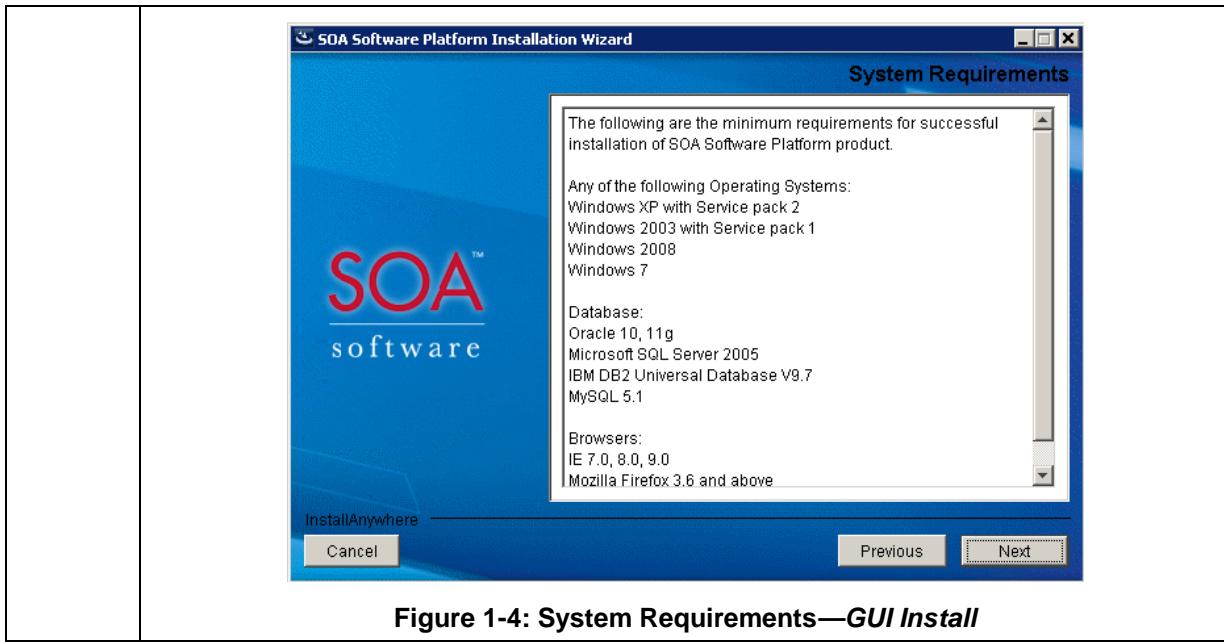


Figure 1-4: System Requirements—GUI Install

5. To perform a complete installation, accept the default and click **Next**. The "Choose Install Folder" screen displays.

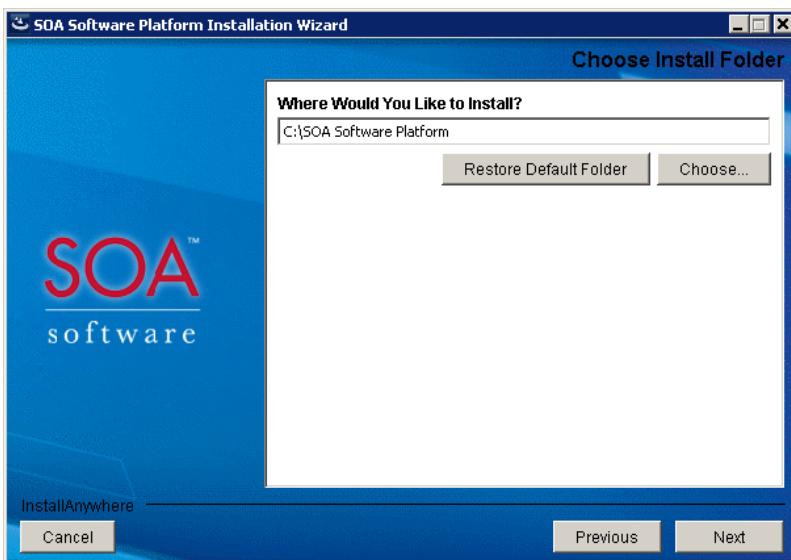


Figure 1-5: Choose Install Folder—GUI Install

6. To install in the default folder, click **Next**. Otherwise, click **Choose**, select an installation folder, and then click **Next**. The "Choose Shortcut Folder" screen displays.

Note: The "Choose Shortcut Folder" contains a number of shortcuts that you will use often when configuring and launching the SOA Software Platform.

To Install SOA Software Platform (GUI)

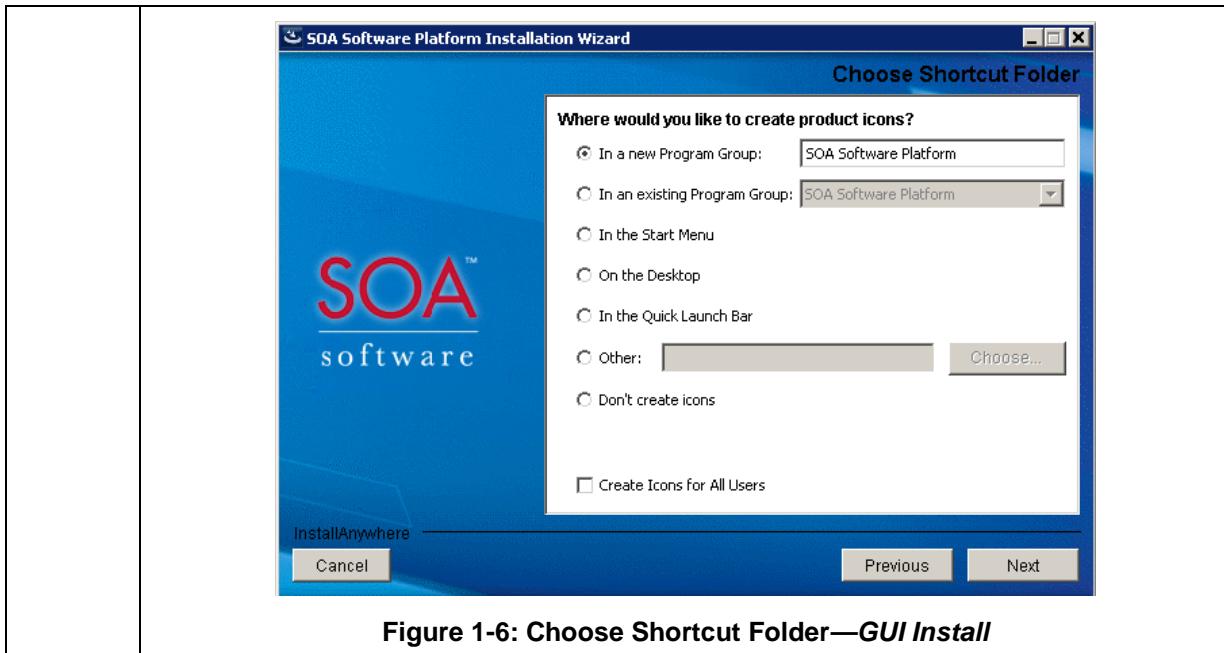


Figure 1-6: Choose Shortcut Folder—GUI Install

7. Select where you would like the installer to create shortcut icons and then click **Next**. The "Pre-Installation Summary" screen displays.

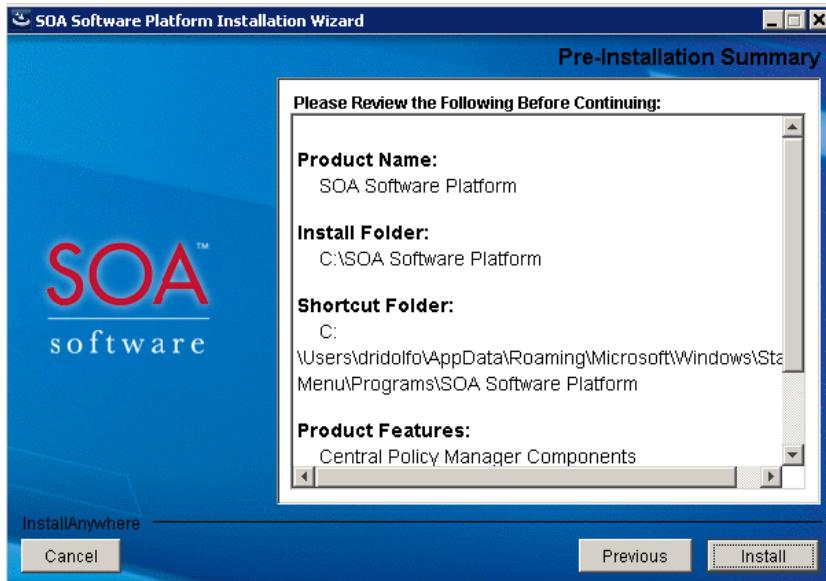


Figure 1-7: Pre-Installation Summary—GUI Install

8. Review your choices. If you wish to make any changes, click **Previous** and work your way back to the correct screen. When you are ready, click **Install**. The "Installing SOA Software Platform" screen displays and shows a progress indicator representing the state of the installation.

To Install SOA Software Platform (GUI)

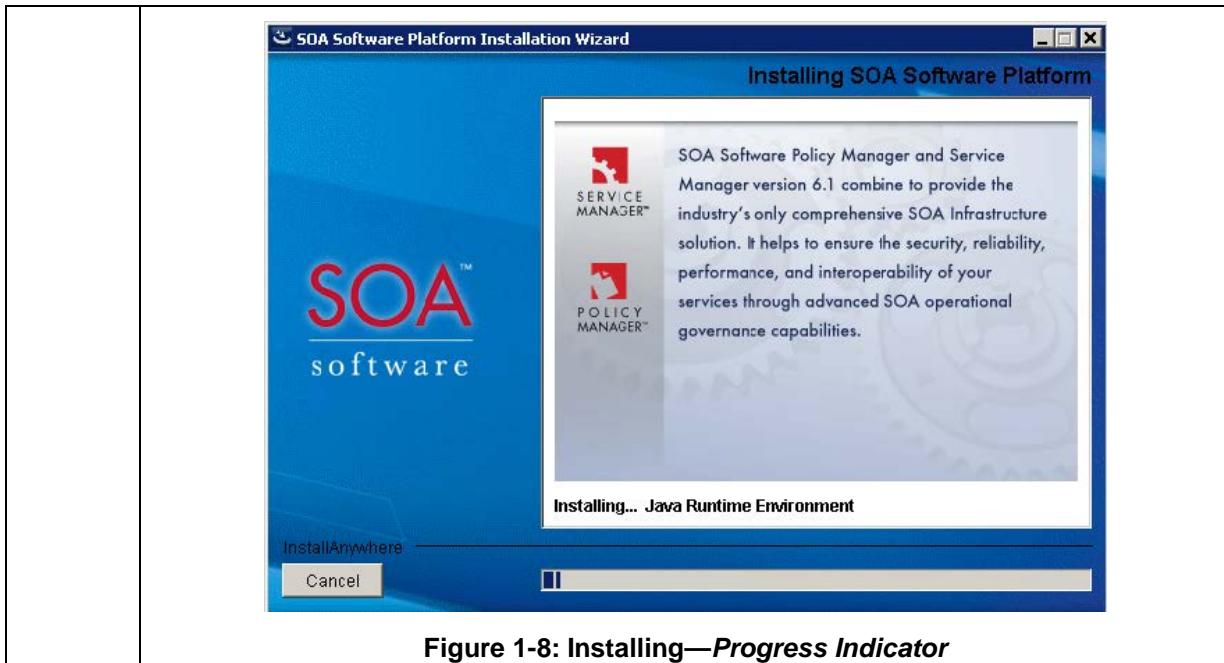


Figure 1-8: Installing—Progress Indicator

9. When the installation is complete, the "Install Complete" screen displays and the "Would you like to continue with configuration of the SOA container?" option is presented. The default selection is "No."

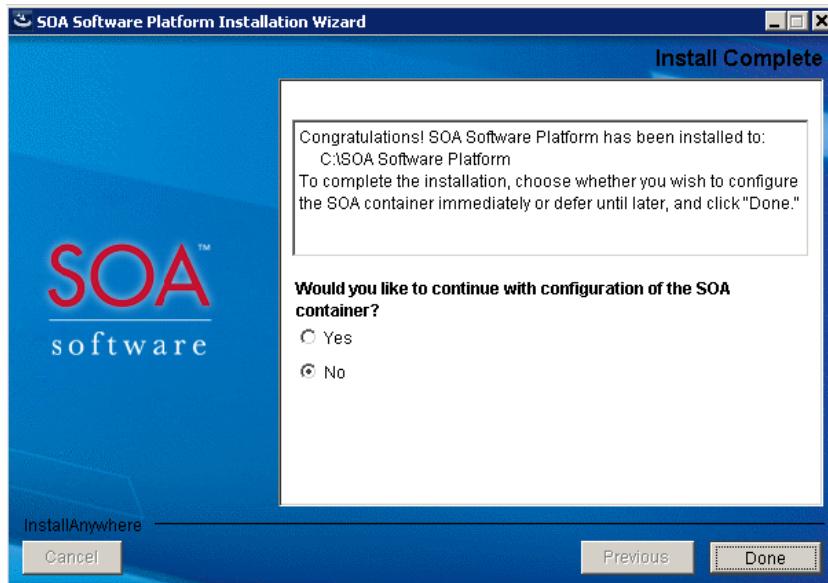


Figure 1-9: Install Complete—GUI Install

10. Select **No** and click **Done**. This completes the SOA Software Platform installation process.

Install SOA Software Platform (Console)

This section provides instructions for performing a *console* installation of the SOA Software Platform application for UNIX platforms. In order to begin installation of the SOA Software Platform, you must have administrator privileges on your computer.

To Install SOA Software Platform (Console)

Step	Procedure
1.	<p>Copy the <code>Linux-pm-6.1.xxxx-setup.bin</code> or <code>Solaris-pm-6.1.xxxx-setup.bin</code> file to a folder on your local machine.</p>
2.	<p>Launch:</p> <p><code>Linux-pm-6.1.xxxx-setup.bin</code> by typing "<code>sh Linux-pm-6.1.xxxx-setup.bin -i console</code>"</p> <p>or</p> <p><code>Solaris-pm-6.1.xxxx-setup.bin</code> by typing "<code>sh Solaris-pm-6.1.xxxx-setup.bin -i console</code>".</p> <p>The installation files will begin to extract. When this process is complete, the "Enter License Key" screen displays.</p> <div style="border: 1px solid black; padding: 10px;"> <pre>[root@INLVM02 software]# sh Linux-pm-6.1.1470-setup.bin -i console Preparing to install... Extracting the JRE from the installer archive... Unpacking the JRE... Extracting the installation resources from the installer archive... Configuring the installer for this system's environment... Launching installer... ===== SOA Software Platform (created with InstallAnywhere) ----- Preparing CONSOLE Mode Installation... ===== Enter License Key ----- This installation requires a License Key to continue. If you do not have, or have forgotten your license key, please contact our support team toll free within the United States at 1-866-SOA-9876 (1-866-762-9876), international customers should dial +1 310 570 4191. Enter the License Key::*</pre> </div>
3.	<p>Enter the License Key that was supplied to you. Press Enter. The "Introduction" screen displays.</p> <hr/> <p>Note: If you do not have a license key, contact SOA Software Customer Service department. You can find the contact information at the beginning of this guide.</p> <hr/>

To Install SOA Software Platform (Console)

	<p>This installation requires a License Key to continue. If you do not have, or have forgotten your license key, please contact our support team toll free within the United States at 1-866-SOA-9876 (1-866-762-9876), international customers should dial +1 310 570 4191.</p> <p>Enter the License Key:*****</p> <p>=====</p> <p>Introduction</p> <p>-----</p> <p>SOA Software Platform setup will guide you through the installation of SOA Software Platform.</p> <p>Press <ENTER> to continue with installation. You may cancel this installation at any time by entering "quit" for any question.</p> <p>PRESS <ENTER> TO CONTINUE: █</p>
4.	<p>Press Enter. The License Agreement screen displays</p> <p>=====</p> <p>SOA SOFTWARE LICENSE</p> <p>-----</p> <p>Installation and Use of SOA Software Platform Requires Acceptance of the Following License Agreement:</p> <p>SOA SOFTWARE CLICK-THRU SOFTWARE LICENSE AGREEMENT Copyright 2001-2012 SOA Software, Inc. All Rights Reserved.</p> <p>READ THIS CONTRACT CAREFULLY. BY CLICKING THE 'ACCEPT' BOX AND/OR INSTALLING OR USING SOA SOFTWARE, INC.'S ('SOA') SOFTWARE OR CODE YOU ARE AGREEING TO ENTER INTO THIS SOFTWARE LICENSE AGREEMENT ('AGREEMENT') IN AN ONLINE ELECTRONIC FORMAT AND TO BE BOUND BY ALL OF THE TERMS AND CONDITIONS OF THIS AGREEMENT. THIS IS A LEGAL AGREEMENT BETWEEN SOA AND YOU, THE END USER, ('LICENSEE') FOR THE LICENSE OF A LIMITED RIGHT TO USE THE SOFTWARE, TOGETHER WITH THE ACCOMPANYING DOCUMENTATION AS SET FORTH HEREIN. SOA DOES NOT AUTHORIZE THE DOWNLOADING, INSTALLATION OR USE OF THE SOFTWARE UNTIL LICENSEE HAS AGREED TO BE BOUND BY THE TERMS OF THIS AGREEMENT BY CLICKING ON THE 'I ACCEPT THE TERMS OF THE LICENSE AGREEMENT' RADIO BUTTON BELOW.</p> <p>1. Limited Right to Use</p> <p>(a) Subject to the additional licensing terms contained in the License Agreement Addendum - Licensed Products Exhibit which accompanies the Software (the 'Licensed Product Exhibit'), SOA grants Licensee a limited, non-exclusive, non-transferable, non-sublicenseable license to install and use solely for Licensee's internal business purposes, the machine readable object code version of the software ('Software') and its accompanying documentation ('Documentation') defined in the Licensed Product Exhibit.</p> <p>PRESS <ENTER> TO CONTINUE: █</p>

Figure 1-11: Introduction—Console Install

To Install SOA Software Platform (Console)

	<p>READ THIS CONTRACT CAREFULLY. BY ACCEPTING THIS AGREEMENT AND/OR INSTALLING OR USING ANY SOFTWARE YOU ARE AGREEING TO ENTER INTO THIS AGREEMENT IN AN ONLINE ELECTRONIC FORMAT AND TO BE BOUND BY ALL OF THE TERMS AND CONDITIONS OF THIS AGREEMENT.</p> <p>INTO THIS AGREEMENT IN AN ONLINE ELECTRONIC FORMAT AND TO BE BOUND BY ALL OF THE TERMS AND CONDITIONS OF THIS AGREEMENT.</p> <p>DO YOU ACCEPT THE TERMS OF THIS LICENSE AGREEMENT? (Y/N): Y</p> <p>=====</p> <p>System Requirements</p> <p>-----</p> <p>The following are the minimum requirements for successful installation of SOA Software Platform product.</p> <p>Any of the following Operating Systems: Red Hat Enterprise Linux 4.0 Solaris 10</p> <p>Database: Oracle 10, 11g Microsoft SQL Server 2005 IBM DB2 Universal Database V9.7 MySQL 5.1</p> <p>Browsers: IE 7.0 and above Mozilla Firefox 3.6 and above Google Chrome v17 and above</p> <p>PRESS <ENTER> TO CONTINUE: []</p>
5.	<p>Figure 1-13: System Requirements—Console Install</p> <p>Review the System Requirements, press Enter. The "Choose Install Folder" screen displays. To install in the default folder, press Y. Otherwise, enter N, specify the new installation folder and press Enter.</p> <p>=====</p> <p>Choose Install Folder</p> <p>-----</p> <p>Where Would You Like to Install?</p> <p>Default Install Folder: /opt/PMDP</p> <p>ENTER AN ABSOLUTE PATH, OR PRESS <ENTER> TO ACCEPT THE DEFAULT : /opt/PMInstalls</p> <p>INSTALL FOLDER IS: /opt/PMInstalls IS THIS CORRECT? (Y/N): Y</p>
6.	<p>Figure 1-14: Choose Install Folder—Console Install</p> <p>Review your choices. When you are ready, press Enter. The install process begins. When the installation is complete, the command prompt displays.</p> <p>This completes the SOA Software Platform installation process.</p> <p>If you have SOA Software Platform updates to install, see "Step 2: Install SOA Software Platform Updates." If updates are not required, skip to "Step 3: Configure Standalone Container Instance."</p>

Install SOA Software Platform (Silent)

This section provides instructions for performing a *silent* installation of the SOA Software Platform 6.1 application for Windows and UNIX platforms. In order to begin installation of SOA Software Platform, you must have administrator privileges on your computer.

A silent installation is an automatic process that installs the SOA Software Platform application from start to finish without any user interaction. The silent installation properties file (`installer.properties`) must be configured prior to running the silent install. Configurable options include specifying a target installation directory, install set, and input options to be executed at the end of the installation. After configuring the property file, the SOA Software Platform application can be deployed onto multiple computers in a scripted, non-interactive manner.

Note: Silent upgrades are not supported.

To generate an `installer.properties` file, you must first perform a standard SOA Software Platform installation using your platform-specific "setup" file. After the SOA Software Platform installation is completion, a platform-specific `installer.properties` file will be saved in the directory where you launched the SOA Software Platform "setup" file. This file is configured with the setting specified in the "SOA Software Platform Installation Wizard" and can be customized based on your requirements.

To Configure Silent Install Properties File (`installer.properties`)

Step	Procedure
1.	<p>Prior to executing a SOA Software Platform silent installation, the "installer.properties" file must be configured to meet your requirements. The initial "installer.properties" file that was generated as a result of you installing SOA Software Platform using the "SOA Software Platform Installation Wizard" setup file will be populated with the default settings used for your initial installation.</p> <pre> Thu May 17 12:09:40 IST 2012 # Replay feature output # # ----- # This file was built by the Replay feature of InstallAnywhere. # It contains variables that were set by Panels, Consoles or Custom # Code.# # # Enter License Key # # ----- # This option displays the license key that was specified during # the initial application installation. Note that the # "INDEX_OF_MATCHING_PASSWORD" option setting should always be "2." # USER_SUPPLIED_PASSWORD= INDEX_OF_MATCHING_PASSWORD=2 # </pre>

To Configure Silent Install Properties File (installer.properties)

	<pre> # Choose Install Folder # ----- # This option is used to specify the target installation # directory path. # USER_INSTALL_DIR=C:\\Program Files\\SOA SOFTWARE # # # Choose Shortcut Folder # ----- # This option is used to specify the path to be used for the # the "Windows" Program Group shortcut. # USER_SHORTCUTS=C:\\Documents and Settings\\Administrator\\Start Menu\\Programs\\ # # # Install Complete # ----- # The USER_INPUT_RESULT_8 option controls whether the "Configure # Container Instance Wizard" launches automatically after the # silent installation is complete. # # #Install Complete #----- USER_INPUT_RESULT_8=1 USER_INPUT_RESULT_13=0 </pre>
2.	<p>After you perform an initial installation of the SOA Software Platform, an installer.properties file is stored in the directory where the application setup file is stored. Save a copy of this base file. It will serve as a template for each custom configuration.</p> <p>The next step is to customize the installer.properties file (one instance per application type you will be launching a silent install for).</p> <ol style="list-style-type: none"> 1) Review and update the base silent install parameters (Enter License Key, Choose Install Folder, Chose Shortcut Folder, and Install Complete). 2) Add the "INSTALLER_UI" parameter. This parameter configures the installation method as "silent." <p>INSTALLER_UI=silent</p>
3.	<p>After you have completed your customizations, save the installer.properties file. To run the silent installation, refer to the "To Perform a Silent Install" procedure.</p>

To Perform a Silent Install

Step	Procedure
1.	Copy the setup file for your platform to a folder on your local machine:

To Perform a Silent Install

	<ul style="list-style-type: none"> • Windows-pm-6.1.xxxx-setup.exe • Linux-pm-6.1.xxxx-setup.bin • Solaris-pm-6.1.xxxx-setup.bin
2.	<p>To launch the SOA Software Platform silent installer, type the following:</p> <p>Windows:</p> <pre>Windows-pm-6.1.xxxx-setup.exe -f c:\ <setup directory location>\installer.properties</pre> <p>UNIX:</p> <pre>./ Linux-pm-6.1.xxxx-setup.bin -f /export/home/username/<setup directory location>\installer.properties</pre> <p>or</p> <pre>./ Solaris-pm-6.1.xxxx-setup.bin -f /export/home/username/<setup directory location>\installer.properties</pre> <p><i>Note: The INSTALLER_UI switch in the installer.properties file must be set to "silent" (INSTALLER_UI=silent) prior to launching the installer.properties setup.</i></p> <p>When the installation process is complete, the system returns to the operating system prompt. An install log (<installation name>.log) is stored in the \sm60 directory.</p>
3.	<p>This completes the SOA Software Platform installation process.</p> <p>If you have SOA Software Platform updates to install, see "Step 2: Install SOA Software Platform Updates." If updates are not required, skip to "Step 3: Configure Standalone Container Instance."</p>

STEP 2: INSTALL SOA SOFTWARE PLATFORM UPDATES

SOA Software periodically issues updates for the SOA Software Platform. Update files can be downloaded from the SOA Software Customer Support site. Refer to www.support.soa.com in the Downloads > Policy Manager > PM61 > Updates section.

SOA Software Platform update files must be copied to the SOA Software Platform Release Directory (c:\sm60). Each update file must be extracted in version number order (earliest version first) prior to configuring a container instance.

To Install SOA Software Platform Updates

Step	Procedure
1.	Log onto the SOA Software Customer Support site (www.support.soa.com) and download the SOA Software Platform updates (Downloads > Policy Manager > PM61

To Install SOA Software Platform Updates

	> Updates). Copy the updates to the SOA Software Platform 6.1 Release Directory (\sm60).
2.	Extract the update files in version number order (earliest version first) to the SOA Software Platform 6.1 Release Directory (\sm60). When the "Confirm file replace" dialog displays, click Yes to All . The automated zip file then updates a series of files in the \bin, \config, \docs, \instances, and \lib folders in the SOA Software Platform Release Directory (\sm60).
3.	After applying updates, delete the /sm60/instances/configurator/cache directory if it exists.
4.	After the automated zip file completes its processing, the next step is to configure a Container Instance. Refer to the "Configuring Standalone Container Instance" section.
5.	NOTE: <ul style="list-style-type: none"> • New Installation: If this is a <i>new</i> installation and you have not yet created an SOA Container, skip directly to "Step 3: Configure Standalone Container Instance." • Existing Installation: If this is an <i>existing</i> installation and you have applied updates, refer to "Chapter 2: Installing Updates to Existing SOA Software Platform Installation," complete the procedure, and then continue to "Step 4: Launch SOA Software Administration Console" in this chapter and complete the remaining installation and configuration steps.

STEP 3: CONFIGURE STANDALONE CONTAINER INSTANCE

This section provides instructions for using the "Configure Container Instance Wizard" to configure a Standalone Container Instance. The container configuration process creates a basic container configuration with a minimum set of OSGI bundles, sets the SOA Software Platform Default properties, and sets the SOA Software Platform Default Repository. Select one of the following configuration methods:

- Configure Standalone Container Instance (GUI)
- Configure Standalone Container Instance (Silent)

Configure Standalone Container Instance (GUI)

The following procedure uses the "Configure Container Instance Wizard" to create a Standalone Container Instance.

To Configure a Container Instance—Standalone Deployment

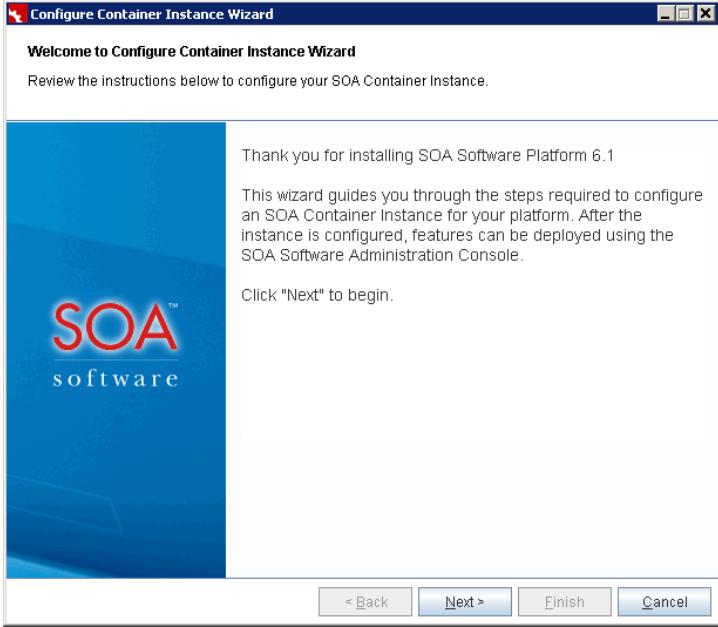
Step	Procedure
1.	<p>1. Navigate to the SOA Software Platform release directory <code>c:\sm60\bin</code> and enter: <code>startup configurator</code></p> <p>The "Welcome to Configure Container Instance Wizard" screen displays. Review the information and click Next to continue.</p>  <p>The screenshot shows the 'Configure Container Instance Wizard' window. The title bar says 'Configure Container Instance Wizard'. The main area has a blue background with the 'SOA software' logo. The text reads: 'Welcome to Configure Container Instance Wizard' and 'Review the instructions below to configure your SOA Container Instance.' To the right, it says 'Thank you for installing SOA Software Platform 6.1' and describes the wizard's purpose. Below that, it says 'Click "Next" to begin.' At the bottom are buttons for '< Back', 'Next >', 'Finish', and 'Cancel'.</p>
2.	<p>2. The "Instance Name" screen displays. Here you specify the name of the container instance. The instance name should be unique and easily identifiable (e.g., Atmosphere). The instance name will display in the browser tab of the SOA Software Administration Console. Enter your container instance name and click Next to continue.</p>

Figure 1-15: Welcome to Configure Container Instance—Standalone Deployment

To Configure a Container Instance—Standalone Deployment

	<p>Figure 1-16: Instance Name—Standalone Deployment</p>
3.	<p>The "Default Admin User" screen displays. Define the "Username" and "Password" credentials of the administrator that will be using the SOA Software Administration Console.</p> <p>The "Password" field includes a default password that can be used to log into the SOA Software Administration Console. The "Hide Password" checkbox allows you to display the password as encrypted or unencrypted. To view the default password, uncheck the "Hide Password" checkbox. Use the default password to log into the SOA Software Administration Console, or enter a new password. After entering the credential information, click Next to continue.</p>

To Configure a Container Instance—Standalone Deployment

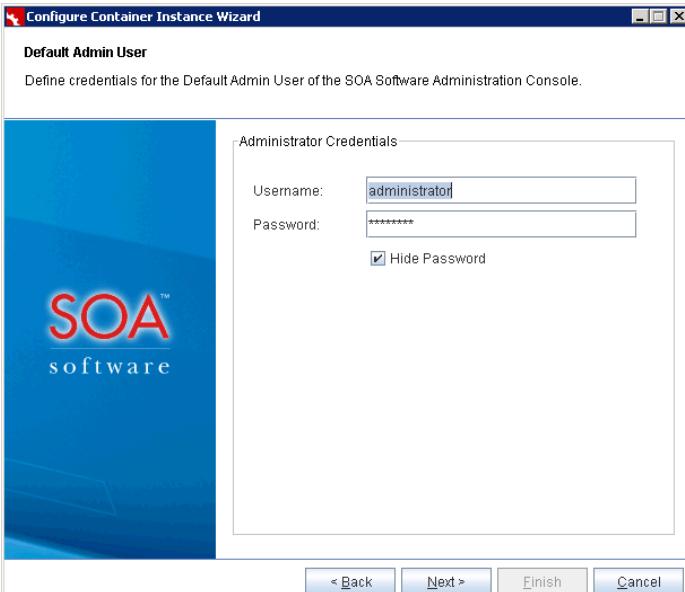
	 <p>The screenshot shows the "Configure Container Instance Wizard" window titled "Default Admin User". It displays the instruction: "Define credentials for the Default Admin User of the SOA Software Administration Console." On the right, there is a section titled "Administrator Credentials" with fields for "Username" (set to "administrator") and "Password" (represented by a series of asterisks). A checkbox labeled "Hide Password" is checked. At the bottom are buttons for "< Back", "Next >", "Finish", and "Cancel".</p>
--	---

Figure 1-17: Default Admin User—Standalone Deployment

4. The "Instance Configuration Options" screen displays. Here you will select the container deployment option.

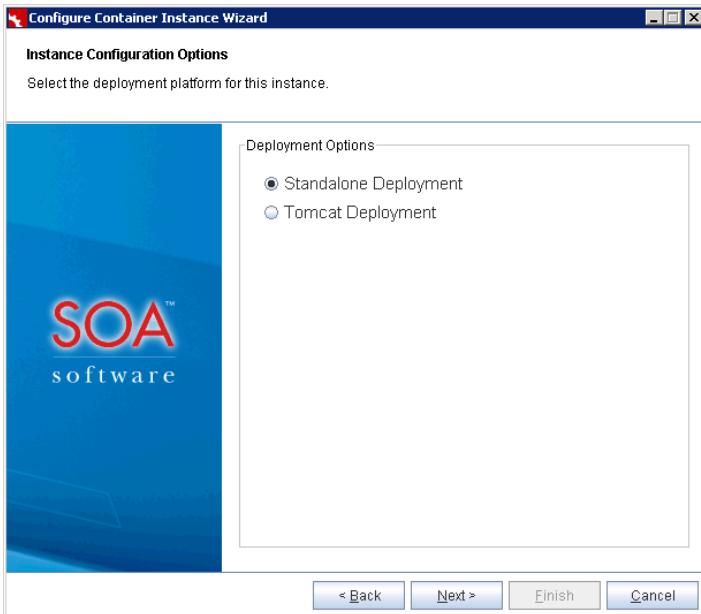


Figure 1-18: Instance Configuration Options—Standalone Deployment

5. Select "Standalone Deployment." The "Default HTTP Listener" screen displays. Set the default HTTP Port and Host IP Address for this instance. This listener configuration will be used as the SOA Software Administration Console address.

To Configure a Container Instance—Standalone Deployment



Figure 1-19: Default HTTP Listener—Standalone Deployment

Default HTTP Listener

- Port—Represents the default HTTP Port.

Host IP Address:

- Bind to all interfaces—if you select this option, the listener binds to the 0.0.0.0 address. "localhost" or any other valid IP for the machine can be used to connect to the client/browser.
- Bind to a specific interface—if you select this option, the selected host name is used to connect to the client/browser.

The Default HTTP Listener information is used to compose the SOA Software Administration Console URL as follows:

`http://<hostname>:<port>/admin/`

Note: The trailing forward slash is required in the Admin Console URL (i.e., admin/).

6.	<p>Click Next to continue. The "Instance Startup" screen displays. Three instance startup options are provided.</p> <ul style="list-style-type: none"> • Start Standalone Process—Runs the "startup <instance>" command line script located in the <code>sm60\bin</code> directory. • Install as Windows Service—Installs the instance as a Windows Service. The Instance can be managed via the "Services" dialog in the Windows Program Group (Control Panel/Administrative Tools/Services). • Do Not Start Instance—Configures the instance but does not start it. Instance can be started manually after the configuration is complete by executing the "startup <instance>" command line script in the <code>sm60\bin</code> directory.
----	--

To Configure a Container Instance—Standalone Deployment


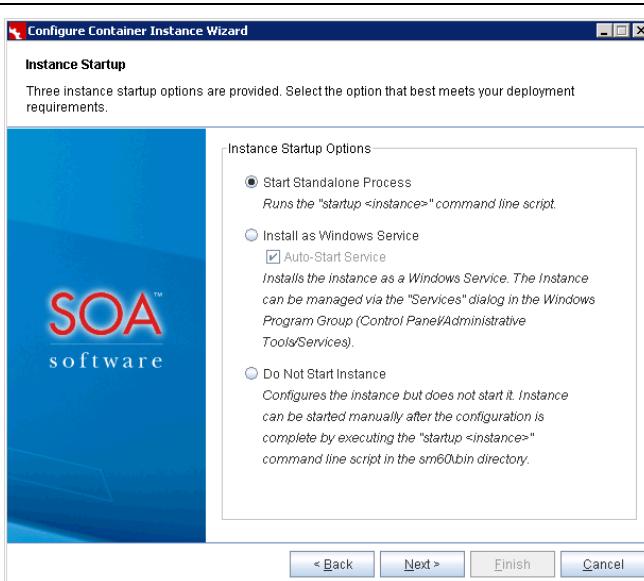


Figure 1-20: Instance Setup—Standalone Deployment

Click the radio button of the startup option you would like to use for the current container instance, and click **Next** to continue.

Note: The "Instance Startup" screen does not display on UNIX systems because a manual startup is required. Container Startup instructions are provided later in this procedure

7. The "Summary" screen displays. Review the summary information. To confirm, click **Finish**.

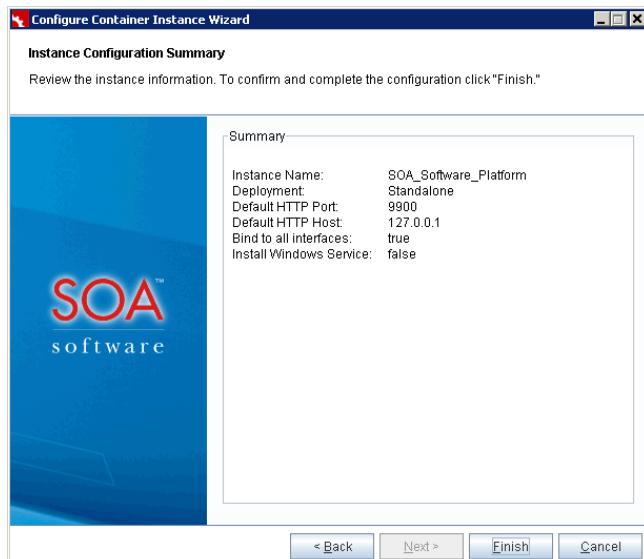

To Configure a Container Instance—Standalone Deployment

	<p>Figure 1-21: Instance Configuration Summary—Standalone Deployment</p> <p>This completes the container configuration process.</p>
8.	<p>If you selected the "Do Not Start Instance" option, the following methods can be used to start a container instance:</p> <p><u>Start Process in Windows</u> Start—Navigate to sm60\bin and type startup <instance name></p> <p><u>Start Process as Windows Service</u> Launch Program Group (Settings /Control Panel/Administrative Tools/Services)</p> <p>Select SM 6.0 - <Container Instance> - Note that the instance name is displayed as the Container Key.</p> <p><u>Start Process in UNIX</u> Start—Navigate to sm60/bin and type startup.sh <instance name></p> <p><u>Start Process in UNIX (Background)</u> Start—Navigate to sm60/bin and type startup.sh <instance name> -bg</p>
9.	<p>Perform the following prerequisite steps before launching the SOA Software Administration Console:</p> <ul style="list-style-type: none"> • <u>Deploy Database Driver</u>—Before performing the database configuration in the SOA Software Administration Console, verify that a database driver for the database used with the current SOA Container configuration is deployed to the c:\sm60\instances\<container instance>\deploy folder. If a database driver is not deployed, copy the database driver to the \deploy directory. Refer to "Appendix B: Database Drivers" for a list of supported database drivers. • <u>Clear Browser Cache</u>—Before launching the SOA Software Administration Console, clear the browser cache. This is necessary to ensure that user interface changes included in the SOA Software Platform update(s) display properly. • <u>Manually Installing Feature Schemas</u>—If you have a requirement to manually install the feature schemas, contact SOA Software Customer Support prior to beginning this installation to obtain a series of schema installation scripts and additional instructions.
10.	<p>If the "Launch Admin Console" checkbox is selected on the "Launch Admin Console" screen, the SOA Software Administration Console will launch automatically. If you selected "Do Not Start Instance," refer to the "Step 4: Launch SOA Software Administration Console" section for instructions.</p>

Configure Standalone Container Instance (Silent)

This section provides instructions on how to configure an automated configuration properties file that is used to create a new SOA Software Platform Container Instance.

To Configure a Container Instance (Silent Configuration)

Step	Procedure
1.	<p>The "Configure Container Instance Wizard" can be set up to run in an automated mode (i.e., silent). This is done by defining a properties file and pre-defining a set of property values to be used by the "Configure Container Instance Wizard" to automatically configure a Container instance.</p> <ol style="list-style-type: none"> 1. Define a properties file (e.g., myprops.properties) 2. Add the following default content: <pre>container.instance.name=instancename credential.username = administrator credential.password = password default.host=localhost default.port=9900</pre> <p>Base Properties</p> <p>The following properties are used for Standalone Deployments.</p> <p>container.instance.name—Name of the Container. credential.username—Username for logging into the SOA Software Administration Console. credential.password—Password for logging into the SOA Software Administration Console. default.host—Host for the Container Instance. default.port—Port for the Container Instance.</p> <p>Running Silent Configuration</p> <p>The "Configure Container Instance Wizard (Silent Configuration)" properties file for a Standalone configuration accepts the following system properties which together are used to perform a silent configuration:</p> <ol style="list-style-type: none"> 1. silent (If True, silent configuration will be performed) 2. properties (location on filesystem of property file to be used for configuration) <p>Windows:</p> <pre>\sm60\bin>startup.bat configurator "-Dsilent=true" "-Dproperties=C:/<property file directory>/myprops.properties"</pre> <p>UNIX</p> <pre>\sm60\bin>startup.sh configurator -Dsilent=true -Dproperties=/export/home/username/<property file directory>\myprops.properties</pre>
2.	<p>Perform the following prerequisite steps before launching the SOA Software Administration Console:</p> <ul style="list-style-type: none"> • Deploy Database Driver—Before performing the database configuration in the SOA Software Administration Console, verify that a database driver for the database used with the current SOA Container configuration is deployed to the c:\sm60\instances\<container instance>\deploy folder. If a database driver is not

To Configure a Container Instance (Silent Configuration)

	<p>deployed, copy the database driver to the \deploy directory. Refer to "Appendix B: Database Drivers" for a list of supported database drivers.</p> <ul style="list-style-type: none"> • <u>Clear Browser Cache</u>—Before launching the SOA Software Administration Console, clear the browser cache. This is necessary to ensure that user interface changes included in the SOA Software Platform update(s) display properly. • <u>Manually Installing Policy Manager Schemas</u>—If you have a requirement to manually install the SOA Software Platform schemas, contact SOA Software Customer Support prior to beginning this installation to obtain a series of schema installation scripts and additional instructions.
3.	<p>Start the container instance. The following methods can be used to start a container instance.</p> <p><u>Start / Stop Process in Windows</u></p> <p>Start—Navigate to sm60\bin and type startup <instance name></p> <p><u>Start Process as Windows Service</u></p> <p>Launch Program Group (Settings /Control Panel/Administrative Tools/Services)</p> <p>Select SM 6.0 – <Container Instance> - Note that the instance name is displayed as the Container Key.</p> <p><u>Start / Stop Process in UNIX</u></p> <p>Start—Navigate to sm60/bin and type startup.sh <instance name></p> <p><u>Start / Stop Process in UNIX (Background)</u></p> <p>Start—Navigate to sm60/bin and type startup.sh <</p> <p>—Navigate to sm60/bin and type shutdown.sh</p> <p><i>Refer to Appendix A: Start / Stop / Restart Container Instance for a complete list of container start/stop instructions.</i></p>
4.	The next step is to launch the SOA Software Administration Console. Refer to the "Step 4: Launch SOA Software Administration Console" section.

STEP 4: LAUNCH SOA SOFTWARE ADMINISTRATION CONSOLE**To Launch the SOA Software Administration Console**

Step	Procedure
1.	<p>After successfully starting the container instance, deploying the database driver, and clearing the browser cache, launch the "SOA Software Administration Console" for the updated SOA Container Instance:</p> <p>Enter: <a href="http://<hostname>:<port>/admin">http://<hostname>:<port>/admin</p>

To Launch the SOA Software Administration Console

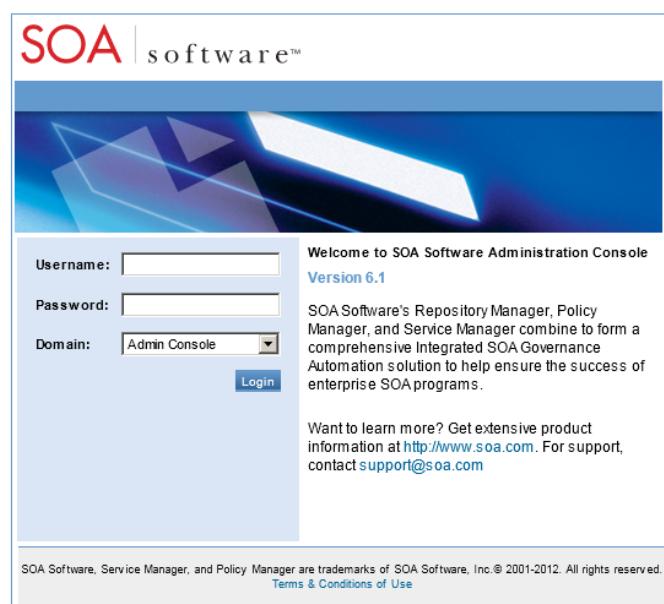


Figure 1-22: SOA Software Administration Console—Login

2. Select the "Admin Console" domain, enter the "Username" and "Password," and click **Login**. The SOA Software Administration Console launches and displays the "Available Features" tab.

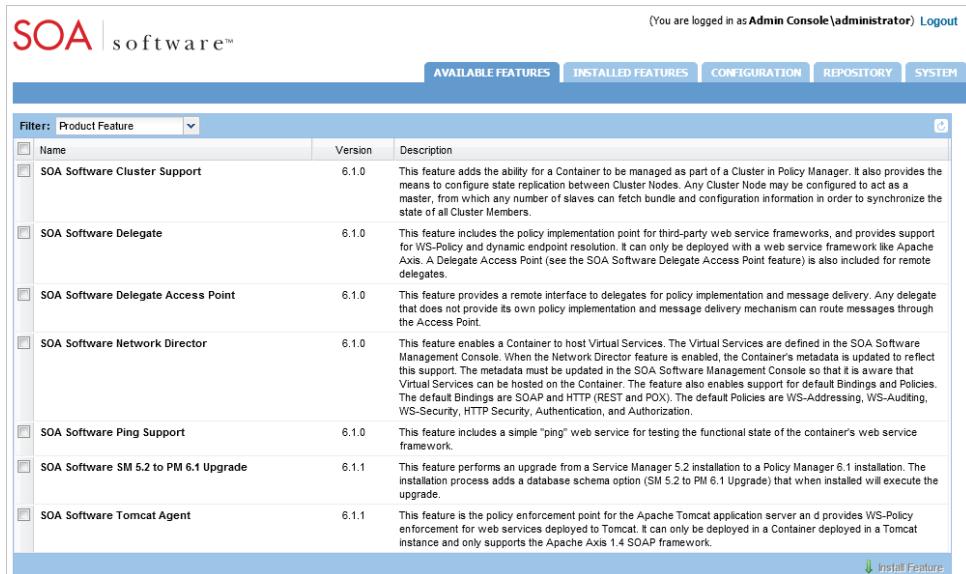


Figure 1-23: SOA Software Administration Console—Available Features Tab

3. The next step is to install SOA Software Platform features. Refer to the "Step 5: Install Policy Manager Features" section.

STEP 5: INSTALL POLICY MANAGER FEATURES

This section provides a walkthrough of the SOA Software Administration Console "Install Feature" function. The following procedure will focus on installing the two "Policy Manager" features (SOA Software Policy Manager Console, and SOA Software Policy Manager Web Services).

Note: The installation process is the same for all features. Each feature should be installed in a separate container instance except for the SOA Software Policy Manager Console, and SOA Software Policy Manager Web Services features. These two features can be installed in separate container instances if there are special requirements (e.g., load distribution in a cluster, etc.).

To Install Policy Manager Features

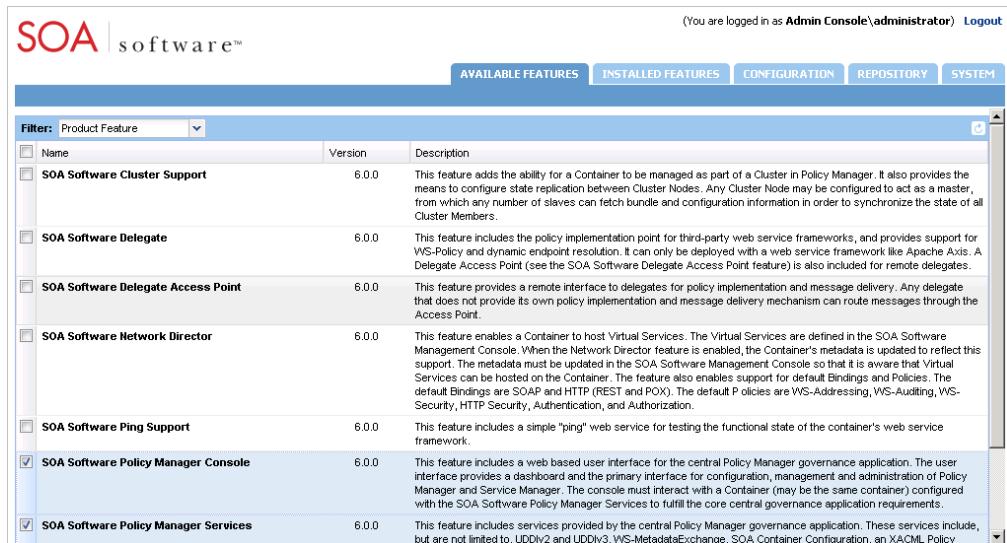
Step	Procedure
1.	<p>On the SOA Software Administration Console, click the "Available Features" tab. A list of available features displays.</p>  <p>The screenshot shows the SOA Software Administration Console interface. At the top, there's a navigation bar with tabs: AVAILABLE FEATURES (which is selected), INSTALLED FEATURES, CONFIGURATION, REPOSITORY, and SYSTEM. Below the navigation bar, there's a search/filter field labeled 'Filter: Product Feature'. A table lists several features with their names, versions, and descriptions. Two features have checkboxes next to them: 'SOA Software Policy Manager Console' and 'SOA Software Policy Manager Services'. Both checkboxes are checked, indicating they are selected for installation.</p>
2.	<p>To select the "SOA Software Policy Manager Console" and "SOA Software Policy Manager Web Services" features, click the checkbox next to the feature line item. After clicking the checkbox, the "Install Feature" button displays in focus.</p>
3.	<p>To begin installing the selected features, click Install Feature. The feature installation wizard goes through several prerequisite steps to verify the installation. In the "Resolve" phase, the system determines all the bundle and package dependencies for the selected feature.</p>

Figure 1-24: Policy Manager Console/Web Services Installation—Available Features Tab

To Install Policy Manager Features

The screenshot shows the SOA Software Platform 6.0.0 Policy Manager Console. On the left, a sidebar lists various software components. In the center, a main panel displays a progress message: "Resolving 2 feature(s)". A tooltip for the selected "SOA Software Policy Manager" feature provides detailed information about its implementation, support for Apache Axis, and its role in message delivery. At the bottom right of the main panel, there are "Cancel", "Install Feature", and a large green "Install Feature" button.

Figure 1-25: Policy Manager Console/Web Services Installation —Install Feature — Resolve Phase

4. After the "Resolve" phase is complete, a "Feature Resolution Report" is presented that includes a list of dependencies for the selected feature.

The screenshot shows the SOA Software Platform 6.0.0 Policy Manager Console after the resolution phase. The central panel now displays a "Feature Resolution Report" titled "Resolution Complete". It states that the user's selections have been resolved and provides a list of dependencies: 2 selected feature(s), 87 required bundle(s), and 0 optional bundle(s). The right side of the screen contains a detailed tooltip about the selected feature, similar to Figure 1-25. The bottom right features the standard "Cancel", "Install Feature", and large green "Install Feature" button.

Figure 1-26: Policy Manager Console/Web Services Installation—Install Feature — Feature Resolution Report

5. To begin installing the feature click "Install Feature." The "Installing..." status displays along with a progress indicator.

To Install Policy Manager Features

	<p>Figure 1-27: Policy Manager Console/Web Services Installation—Install Feature – Install In Progress</p>
6.	<p>When the installation process is completed, the "Installation Complete" screen displays and the feature(s) being installed are removed from the listing under the "Available Features" tab and transitioned to the "Installed Features" tab.</p>
7.	<p>After the installation is complete, the next step is to configure the feature. This is done by executing a series of one-time and/or repeatable tasks. Refer to "Step 6: Configure the Policy Manager Features" for information.</p>

STEP 6: CONFIGURE POLICY MANAGER FEATURES

This section provides a walkthrough of the SOA Software Administration Console "Tasks" that apply to the "SOA Software Policy Manager Console" and "SOA Software Policy Manager Web Services" features.

Configure Policy Manager Console/Web Services

After installing the "SOA Software Policy Manager Console" and "SOA Software Policy Manager Web Services" features via the "Available Features" tab on the SOA Software Administration Console a series of configuration tasks must be applied to the feature. Configuration tasks can be executed using two tracks.

- The first track can be started by clicking the "Configure" button on the "Installation Complete" screen at the end of the feature installation process.
- The second track allows you to resume the configuration at a later time by clicking "Cancel" on the "Installation Complete" screen and executing the "Complete Configuration" button in the "Pending Installation Tasks" section via the "Installed Features" tab.

Multiple configuration tasks are executed in a single stream using a wizard application. After the configuration process is complete, tasks that are "repeatable" are available in the "Configuration Actions" section of the "Configuration" tab. Tasks can be re-executed as needed.

Note: This chapter assumes a starting point of having launched the configuration wizard using either track. Tasks procedures are listed in sequential order.

Configure SOA Software Policy Manager Console/SOA Software Policy Manager Web Services Features

Step	Procedure
1.	<p>Select one of the following configuration tracks, to begin the configuration process for the "SOA Software Policy Manager Console/SOA Software Policy Manager Web Services."</p> <ul style="list-style-type: none"> • <i>Available Features Tab:</i> Click "Configure" on the "Installation Complete" screen of the feature installation wizard. <p>OR</p> <ul style="list-style-type: none"> • <i>Installed Features Tab:</i> Click "Complete Configuration" in the "Pending Installation Tasks" section. <p>The first page of the "Manage PKI Keys Wizard" displays. This is the starting point for beginning the SOA Software Policy Manager Console/SOA Software Policy Manager Web Services configuration.</p> <p>The following sections provide a walkthrough of each task in the configuration wizard for the SOA Software Policy Manager Console and SOA Software Policy Manager Web Services.</p>

Configure SOA Software Policy Manager Console/SOA Software Policy Manager Web Services Features

	Service features.
--	-------------------

Configure PKI Keys (Policy Manager Console/Web Services)

This section provides instructions on how to configure keys for the current feature set.

To Configure PKI Keys (Policy Manager Console/Web Services)

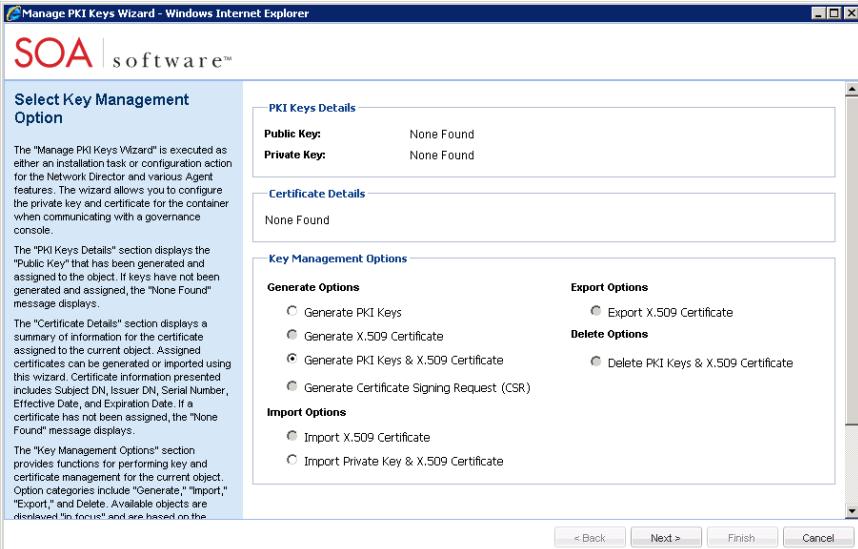
Step	Procedure
1.	<p>The "Manage PKI Keys Wizard" wizard allows you to configure the private key and certificate for the container when communicating with a governance console.</p> 

Figure 1-29: Manage PKI Keys Wizard (Select Key Management Option)—Policy Manager Console/Web Services

The screen is organized as follows:

- **PKI Keys Details**—Displays the "Public Key" that has been generated and assigned to the object. If keys have not been generated and assigned, the "None Found" message displays.
- **Certificate Details**—Displays a summary of information for the certificate assigned to the current object. Assigned certificates can be generated or imported using this wizard. Certificate information presented includes Subject DN, Issuer DN, Serial Number, Effective Date, and Expiration Date. If a certificate has not been assigned, the "None Found" message displays.
- **Key Management Options**—Provides functions for performing key and certificate management for the current object. Option categories include "Generate," "Import," "Export," and "Delete." Available objects are displayed "in focus" and are

To Configure PKI Keys (Policy Manager Console/Web Services)

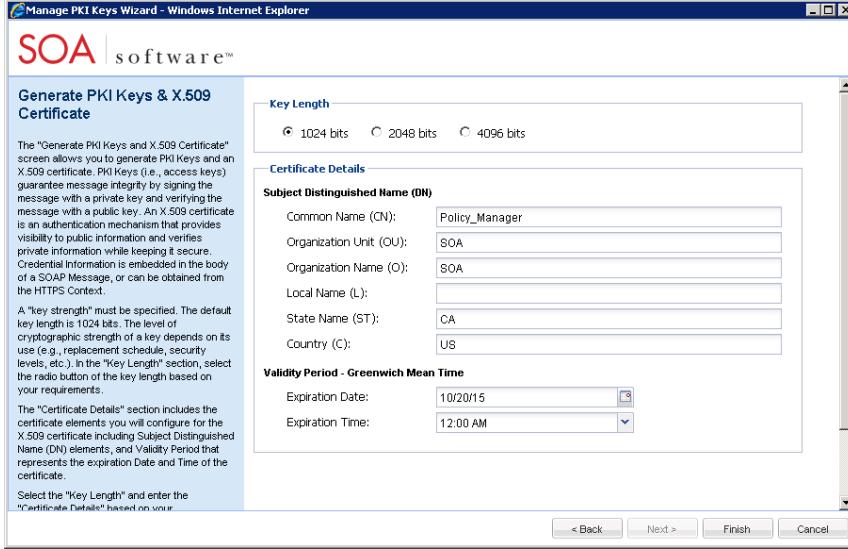
	based on the object's configuration "state."
2.	<p>Select a "Key Management Option" and click Next to continue. For this walkthrough we will use the default key option "Generate PKI Keys & X.509 Certificate." The "Generate PKI Keys & X.509 Certificate" screen displays.</p> 

Figure 1-30: Manage PKI Keys Wizard (Generate PKI Keys & X.509 Certificate)—Policy Manager Console/Web Services

The "Generate PKI Keys and X.509 Certificate" screen allows you to generate PKI Keys and an X.509 certificate. PKI Keys (i.e., access keys) guarantee message integrity by signing the message with a private key and verifying the message with a public key. An X.509 certificate is an authentication mechanism that provides visibility to public information and verifies private information while keeping it secure. Credential Information is embedded in the body of a SOAP Message, or can be obtained from the HTTPS Context.

The screen is organized as follows:

- Key Length—A "key strength" must be specified. The default key length is 1024 bits. The level of cryptographic strength of a key depends on its use (e.g., replacement schedule, security levels, etc.). In the "Key Length" section, select the radio button of the key length based on your requirements.
- Certificate Details—Includes the certificate elements you will configure for the X.509 certificate including Subject Distinguished Name (DN) elements, and Validity Period that represents the expiration Date and Time of the certificate.

Select the radio button of the "Key Length" and enter the "Certificate Details" based on your requirements. After completing your entries, click **Finish**. Certificate details are displayed on the "Summary" screen.

To Configure PKI Keys (Policy Manager Console/Web Services)

3.	<p>Click Go To Next Task. The "Select Database Options" screen displays. A walkthrough of this configuration task is outlined in the "Configure Database Options" section.</p>

Configure Database Options (Policy Manager Console/Web Services)

The "Select Database Option" screen provides options for selecting the database to be used with the current SOA Software Container configuration.

Note: If database and schemas have been manually installed, select the "Use existing database" option on the "Configure Database Options Wizard." When the "Manage Schemas Wizard" displays the schemas that were manually installed will be displayed in the "Installed Schemas" section. You can click **Finish** to complete the configuration.

- The "Create new database" option creates a new Policy Manager database and associated properties based on the selected database type.
- The "Use existing database" option uses an existing Policy Manager tablespace, and retains all tables created by any previous installation.
- The "Use JNDI datasource" option allows you to connect to a database from a server using the datasource name. *This option is currently unavailable and is for embedded implementations only.*

To Configure Database Options (Policy Manager Console/Web Services)

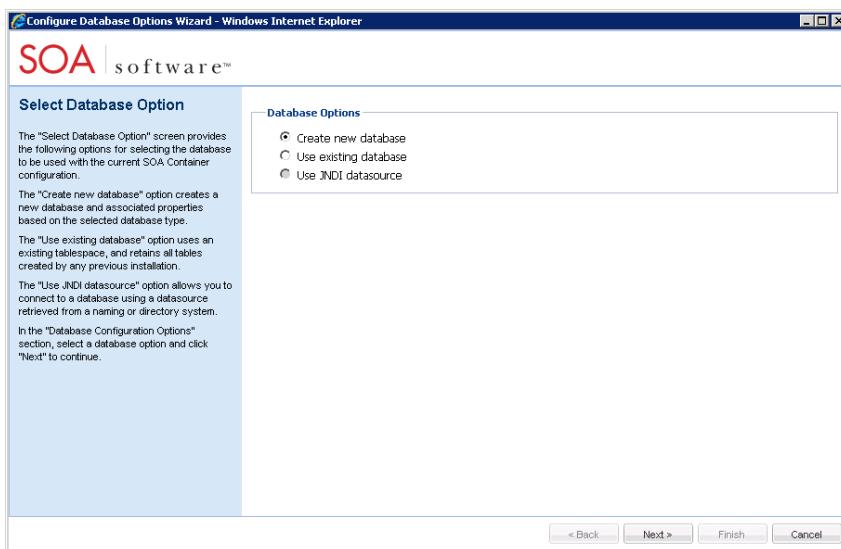
Step	Procedure
1.	<p>In the "Database Options" section, select a database option and click Next to continue.</p> <p><i>Note: A summary of property information is presented below for the "Create new database" and "Use existing database" options.</i></p> 
2.	<p>The "Specify Database Options" screen displays.</p> <p>For the "Create new database" and "Use existing database" options, the following</p>

Figure 1-32: Configure Database Options Wizard (Select Database Option—Create new database)—Policy Manager Console/Web Services

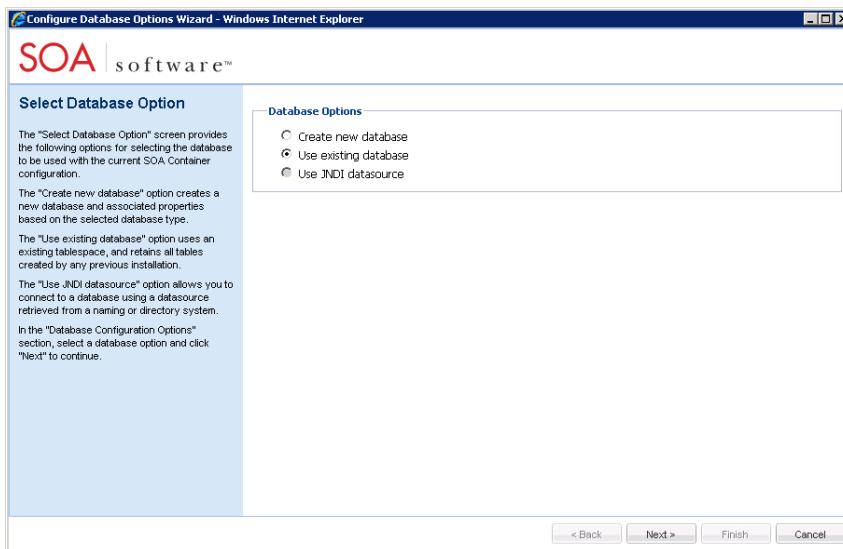


Figure 1-33: Configure Database Options Wizard (Select Database Option—Use existing database)—Policy Manager Console/Web Services

To Configure Database Options (Policy Manager Console/Web Services)

	<p>"Database Types" are supported: MS SQL Server, MySQL Server, Oracle SID, Oracle Service Name, and DB2. Select the "Database Type" from the drop-down list box, review the configuration options for each database type (below), and configure the options.</p> <p><i>NOTE: The database properties for each database option are the same except that the "Administrator Credentials" section is not required on the "Use existing database" option as the database already exists and permissions have been previously established.</i></p> <p><u>MS SQL SERVER</u></p> <p>This section provides an overview of the configuration options for MS SQL Server.</p> <p><u>Database Details</u></p> <ul style="list-style-type: none"> • Database Type—Select the MS SQL Server database type. • Name—Enter the database name. <p><u>Administrator Credentials</u></p> <ul style="list-style-type: none"> • Admin Username—Enter a valid administrator Username. • Admin Password—Enter a valid administrator Password. <p><i>Note: You must supply the Username and Password of a user with sufficient privileges to create a new tablespace, such as a DBA.</i></p> <p><u>Properties</u></p> <ul style="list-style-type: none"> • Hostname—Enter the name or IP address of the computer that is hosting the database. Default entry = [computer_name]. • Port—Enter a port number. Port 1433 is the default port assigned in a standard SQL Server installation. • Named Instance—Used if you have set up separate SQL Server databases and would like to use a specific instance to store Policy Manager data. • Database—Enter a database name. You may enter any valid name. • Username—Enter the database Username. • Password—Enter the database Password. <p><u>Pool Configuration</u></p> <p>The following "Pool Configuration" options are available. Default values represent those used for a typical configuration.</p> <ul style="list-style-type: none"> • Max Pool Size—The maximum number of active connections that can be allocated from this pool at the same time, or negative for no limit. The default value is 30. • Min Pool Size—The minimum number of connections that can remain idle in the pool, without extra ones being created, or zero to create none. The default value is 5. • Max Wait Time— The maximum number of milliseconds that the pool will wait (when there are no available connections) for a connection to be returned before throwing an exception, or -1 to wait indefinitely. The default value is 30,000.
--	--

To Configure Database Options (Policy Manager Console/Web Services)

Specify Database Options

The "Specify Database Options" screen provides options for configuring the database server where you would like to create a new SOA Container instance. Supported database types include MS SQL Server, MySQL Server, Oracle (SID, Service Name), and DB2.

Select a "Database Type." The screen will refresh and display the configuration options associated with the selected database type. After completing your entries, click "Next" or "Finish" based on the selected database option.

Database Details

Database Type: MS SQL Server
Name: MSSQL-1

Administrator Credentials

Admin Username: sa
Admin Password:

Properties

Hostname: localhost
Port: 1433
Named Instance:
Database:
Username:
Password:

Figure 1-34: Specify Database Options (MS SQL Server #1)—Policy Manager Console/Web Services

Properties

Hostname: localhost
Port: 1433
Named Instance:
Database:
Username:
Password:

Pool Configuration

Max Pool Size: 30
Min Pool Size: 5
Max Wait Time: 30000

Figure 1-35: Specify Database Options (MS SQL Server #2)—Policy Manager Console/Web Services

MY SQL

This section provides an overview of the configuration options for MySQL Server.

Database Details

- Database Type—Select the MySQL database type.
- Name—Enter the database name.

Administrator Credentials

- Admin Username—Enter a valid administrator Username.

To Configure Database Options (Policy Manager Console/Web Services)

- Admin Password—Enter a valid administrator Password.
Note: You must supply the Username and Password of a user with sufficient privileges to create a new tablespace, such as a DBA.

Properties

- Hostname—Enter the name or IP address of the computer that is hosting the database. Default entry = [computer_name].
- Port—Enter a port number. Port 3306 is the default port assigned in a standard SQL Server installation.
- Named Instance—Used if you have set up separate SQL Server databases and would like to use a specific instance to store Policy Manager data.
- Database—Enter a database name. You may enter any valid name.
- Username—Enter the database Username.
- Password—Enter the database Password.

Pool Configuration

The following "Pool Configuration" options are available. Default values represent those used for a typical configuration.

- Max Pool Size—The maximum number of active connections that can be allocated from this pool at the same time, or negative for no limit. The default value is 30.
- Min Pool Size—The minimum number of connections that can remain idle in the pool, without extra ones being created, or zero to create none. The default value is 5.
- Max Wait Time—The maximum number of milliseconds that the pool will wait (when there are no available connections) for a connection to be returned before throwing an exception, or -1 to wait indefinitely. The default value is 30,000.

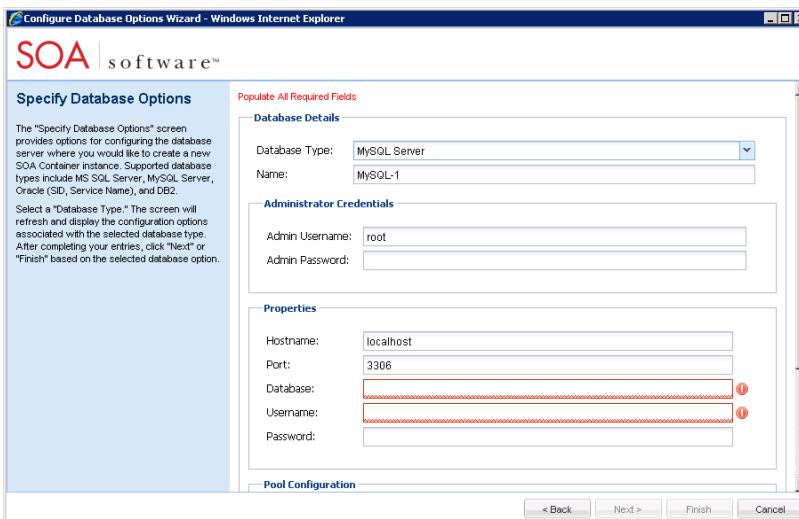


Figure 1-36: Specify Database Options (MySQL Server #1)—Policy Manager Console/Web Services

To Configure Database Options (Policy Manager Console/Web Services)

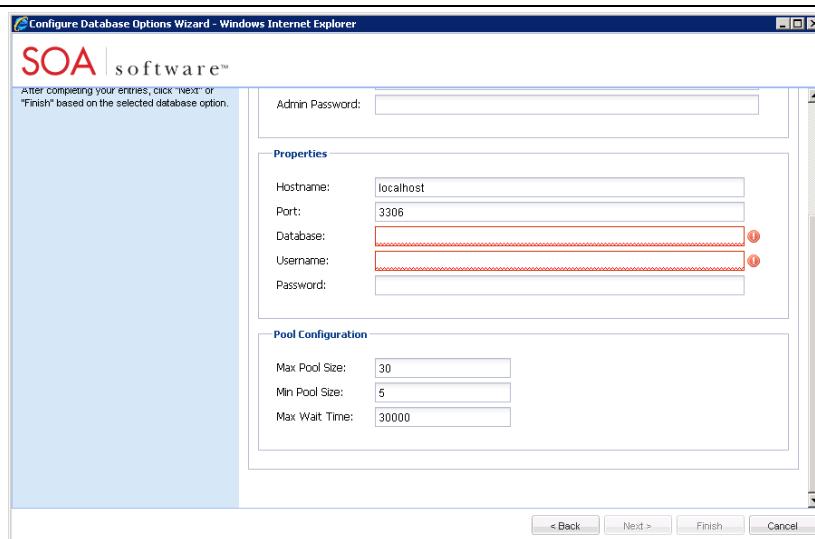


Figure 1-37: Specify Database Options (MySQL Server #2)—Policy Manager Console/Web Services

Oracle SID

This section provides an overview of the configuration options for Oracle SID.

Database Details

- Database Type—Select the Oracle SID database type.
- Name—Enter the database name.

Administrator Credentials

- Admin Username—Enter a valid administrator Username.
- Admin Password—Enter a valid administrator Password.

Note: You must supply the Username and Password of a user with sufficient privileges to create a new tablespace, such as a DBA.

Properties

- Username—Enter the database Username.
- Password—Enter the database Password.
- Hostname—Enter the name or IP address of the computer that is hosting the database. Default entry = [computer_name].
- Port—Enter a port number. Port 1521 is the default port assigned in a standard Oracle installation.
- SID—Enter an existing Oracle instance.
- Tablespace—Enter a valid name for the new tablespace.

Pool Configuration

The following "Pool Configuration" options are available. Default values represent those used for a typical configuration.

- Max Pool Size—The maximum number of active connections that can be allocated

To Configure Database Options (Policy Manager Console/Web Services)

- from this pool at the same time, or negative for no limit. The default value is 30.
- Min Pool Size—The minimum number of connections that can remain idle in the pool, without extra ones being created, or zero to create none. The default value is 5.
 - Max Wait Time— The maximum number of milliseconds that the pool will wait (when there are no available connections) for a connection to be returned before throwing an exception, or -1 to wait indefinitely. The default value is 30,000.

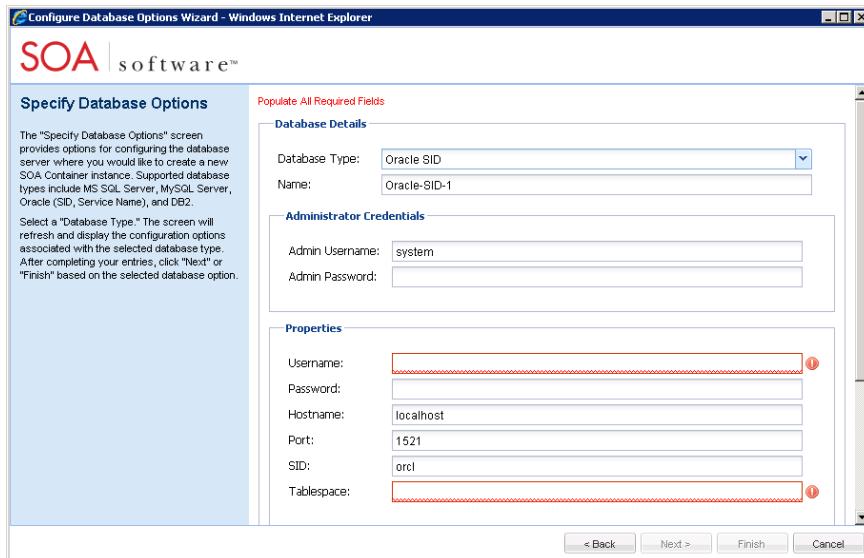


Figure 1-38: Specify Database Options (Oracle SID #1)—Policy Manager Console/Web Services

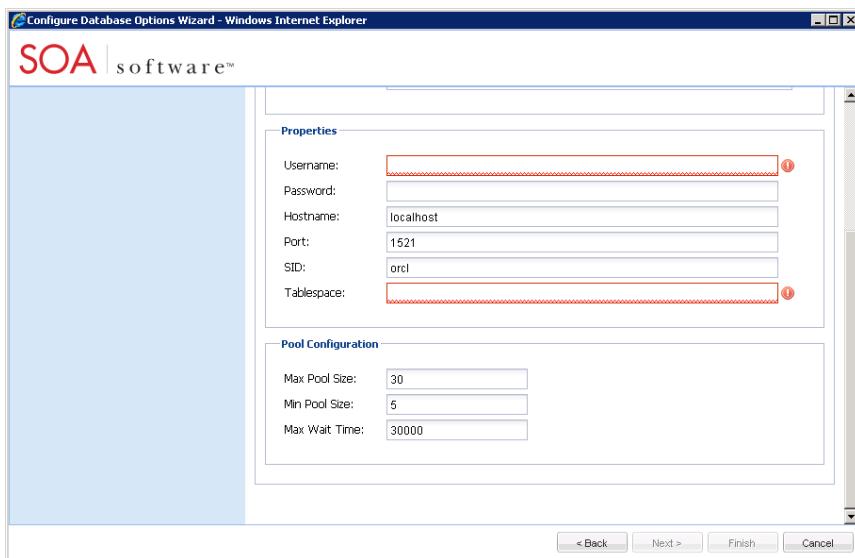


Figure 1-39: Specify Database Options (Oracle SID #2)—Policy Manager Console/Web Services

To Configure Database Options (Policy Manager Console/Web Services)

	<p><u>Oracle Service Name</u></p> <p>This section provides an overview of the configuration options for Oracle Service Name.</p> <p><u>Database Details</u></p> <ul style="list-style-type: none"> • Database Type—Select the Oracle Service Name database type. • Name—Enter the database name. <p><u>Administrator Credentials</u></p> <ul style="list-style-type: none"> • Admin Username—Enter a valid administrator Username. • Admin Password—Enter a valid administrator Password. <p><i>Note: You must supply the Username and Password of a user with sufficient privileges to create a new tablespace, such as a DBA.</i></p> <p><u>Properties</u></p> <ul style="list-style-type: none"> • Username—Enter the database Username. • Password—Enter the database Password. • Hostname—Enter the name or IP address of the computer that is hosting the database. Default entry = [computer_name]. • Port—Enter a port number. Port 1521 is the default port assigned in a standard Oracle installation. • Service Name—Enter an instance alias. • Tablespace—Enter a valid name for the new tablespace. <p><u>Pool Configuration</u></p> <p>The following "Pool Configuration" options are available. Default values represent those used for a typical configuration.</p> <ul style="list-style-type: none"> • Max Pool Size—The maximum number of active connections that can be allocated from this pool at the same time, or negative for no limit. The default value is 30. • Min Pool Size—The minimum number of connections that can remain idle in the pool, without extra ones being created, or zero to create none. The default value is 5. • Max Wait Time— The maximum number of milliseconds that the pool will wait (when there are no available connections) for a connection to be returned before throwing an exception, or -1 to wait indefinitely. The default value is 30,000.
--	--

To Configure Database Options (Policy Manager Console/Web Services)

Specify Database Options

The "Specify Database Options" screen provides options for configuring the database server where you would like to create a new SOA Container instance. Supported database types include MS SQL Server, MySQL Server, Oracle (S), Oracle Name, and DB2.

Selected "Database Type": The screen will refresh and display the configuration options associated with the selected database type. After completing your entries, click "Next" or "Finish" based on the selected database option.

Database Details

Database Type: Oracle Service Name
Name: Oracle-SN-1

Administrator Credentials

Admin Username: system
Admin Password:

Properties

Username: [redacted]
Password: [redacted]
Hostname: localhost
Port: 1521
Service Name: orcl
Tablespace: [redacted]

Figure 1-40: Specify Database Options (Oracle Service Name #1)—Policy Manager Console/Web Services

Properties

Username: [redacted]
Password: [redacted]
Hostname: localhost
Port: 1521
Service Name: orcl
Tablespace: [redacted]

Pool Configuration

Max Pool Size: 30
Min Pool Size: 5
Max Wait Time: 30000

Figure 1-41: Specify Database Options (Oracle Service Name #2)—Policy Manager Console/Web Services

DB2

This section provides an overview of the configuration options for DB2.

Database Details

- Database Type—Select the DB2 database type.
- Name—Enter the database name.

Administrator Credentials

To Configure Database Options (Policy Manager Console/Web Services)

	<ul style="list-style-type: none"> • Admin Username—Enter a valid administrator Username. • Admin Password—Enter a valid administrator Password. <p><i>Note: You must supply the Username and Password of a user with sufficient privileges to create a new tablespace, such as a DBA.</i></p> <p>Properties</p> <ul style="list-style-type: none"> • Hostname—Enter the name or IP address of the computer that is hosting the database. Default entry = [computer_name]. • Port—Enter a port number. Port 50000 is the default port assigned in a standard SQL Server installation. Note: Port 50000 is the default port assigned to a standard DB2 installation. • Database—Enter a database name. You may enter any valid name. • Username—Enter the database Username. • Password—Enter the database Password. • Tablespace—In the Tablespace field, enter the tablespace. You may enter any valid name. Note: If you create a tablespace with the same name as an existing tablespace, then the existing one will be completely overwritten by the new one. • Buffer Name / Is new buffer?:—DB2 buffer pools are where DB2 caches database tables and indexes. To use a DB2 buffer to manage server performance, specify the buffer name in the "Buffer Name" field. The specified buffer will access the appropriate tuning script to obtain pool size information. <p>If you would like Policy Manager to create a buffer, click the "Is New Buffer" checkbox and enter the "Buffer Name." Policy Manager will create a new DB2 Buffer and assign a default size of 32K. You can use the "DB2 Control Center" to update the buffer configuration.</p> <p>Note: The DB2 tablespace creation process requires that a buffer be created. This means that configuring a "Buffer Name" is supported only when creating a new database. You can modify the pool size of the defined buffer, but reconfiguring the tablespace with a new "Buffer Name" is not supported.</p> <p>Pool Configuration</p> <p>The following "Pool Configuration" options are available. Default values represent those used for a typical configuration.</p> <ul style="list-style-type: none"> • Max Pool Size—The maximum number of active connections that can be allocated from this pool at the same time, or negative for no limit. The default value is 30. • Min Pool Size—The minimum number of connections that can remain idle in the pool, without extra ones being created, or zero to create none. The default value is 5. • Max Wait Time—The maximum number of milliseconds that the pool will wait (when there are no available connections) for a connection to be returned before throwing an exception, or -1 to wait indefinitely. The default value is 30,000.
--	---

To Configure Database Options (Policy Manager Console/Web Services)

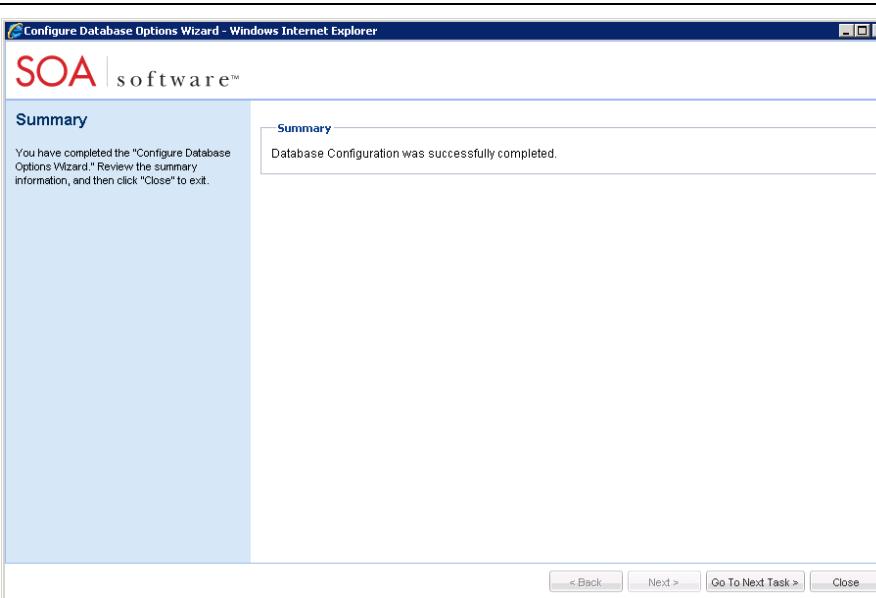
	<p>The "Specify Database Options" screen provides options for configuring the database server where you would like to create a new SOA Container instance. Supported database types include MS SQL Server, MySQL Server, Oracle (SID, Service Name), and DB2.</p> <p>Select a "Database Type." The screen will refresh and display the configuration options associated with the selected database type. After completing your entries, click "Next" or "Finish" based on the selected database option.</p>
--	---

Figure 1-42: Specify Database Options (DB2 #1)—Policy Manager Console/Web Services

	<p>Hostname: localhost Port: 50000 Database: db2 Username: ***** Password: ***** Tablespace: ***** Buffer Name: ***** Is new buffer?: *****</p> <p>Max Pool Size: 30 Min Pool Size: 5 Max Wait Time: 30000</p>
--	--

Figure 1-43: Specify Database Options (DB2 #2)—Policy Manager Console/Web Services

- | | |
|----|---|
| 3. | After completing your database properties entries, click Next to continue. The database configuration "Summary" screen displays. |
|----|---|

To Configure Database Options (Policy Manager Console/Web Services)**Figure 1-44: Configure Database Options Summary**

Click **Go To Next Task**. The "Install Schemas" screen displays.

The "Install Schemas" screen is used to manage schemas associated with the current SOA Container. Schemas add tables to the database used by the SOA Container and populate them with data. The screen is organized into two sections:

The "Available Schemas" section displays a list of schemas that are available to install into the current SOA Container. To install an available schema, click the checkbox next to the schema line item and click **Finish**.


The "Installed Schemas" section provides a list of schemas that are currently installed in the SOA Container. To uninstall a schema, click the checkbox next to the schema line item and click **Finish**.

After the schema management process is complete, the "Summary" screen displays.

To Configure Database Options (Policy Manager Console/Web Services)

	<p>Figure 1-45: Manage Schemas Wizard (Install Schemas)—Policy Manager Console/Web Services</p> <hr/> <p>Note: When a schema is selected, the system will also install all preceding versions of the selected schema if they have not been previously installed. In this scenario, preceding schema versions will display in the "Installed Schemas" section of the "Manage Schemas Wizard" (accessible via the "Configuration" tab) after the installation is complete.</p> <hr/> <p>4. Click the checkbox of the schemas you would like to install and/or uninstall and click Finish. The "Summary" screen displays. Review the summary information and click Continue To Next Task.</p>

To Configure Database Options (Policy Manager Console/Web Services)

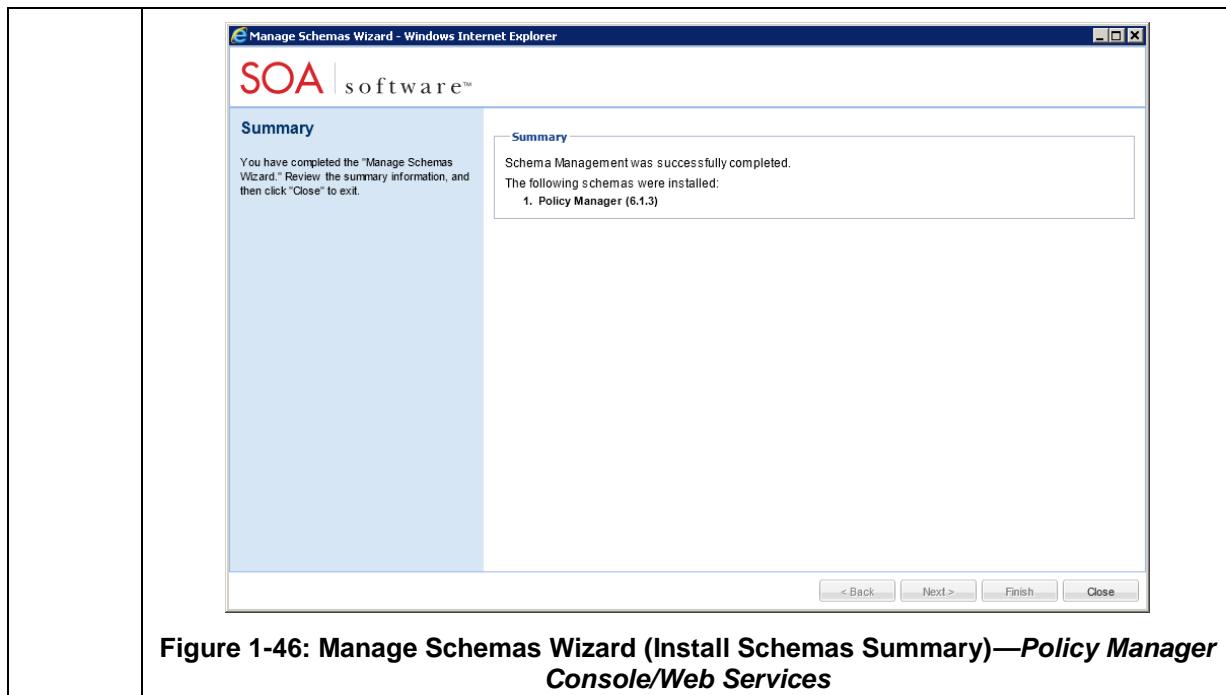

Configure Policy Manager Administrator Credentials (Policy Manager Console/Web Services)

This section provides instructions on how to specify Policy Manager "Administrator" credentials that will allow you to log into the Policy Manager "Management Console."

To Configure Policy Manager Administrator Credentials

Step	Procedure
1.	<p>The "Policy Manager Administrator Credentials" screen is used to create an "Administrator" user account definition for logging into the Policy Manager "Management Console." The user account definition is composed of a "Username" and "Password."</p> <p>After restarting the SOA Software Administration Console, you can log into the Policy Manager "Management Console" using the administrator credentials. The User Account definition can be updated via the "Security" tab.</p>

To Configure Policy Manager Administrator Credentials

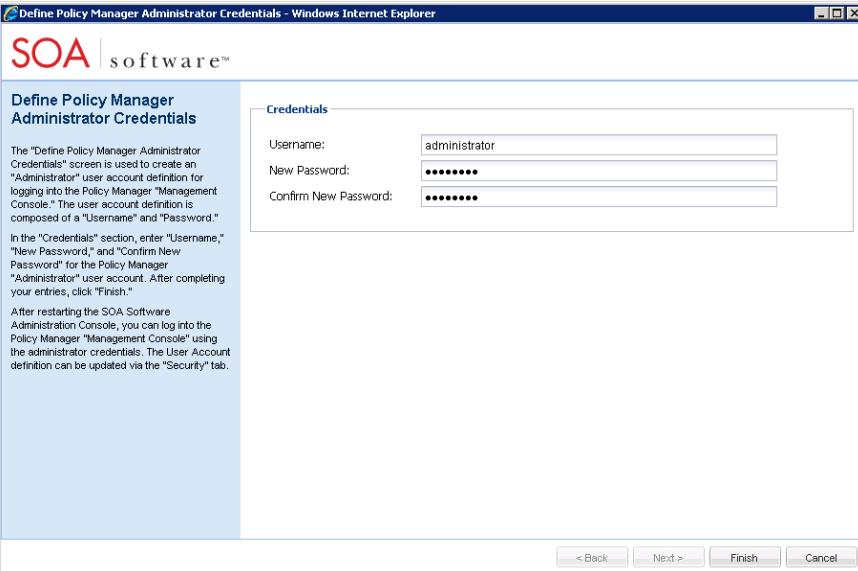
	 <p>Define Policy Manager Administrator Credentials</p> <p>The "Define Policy Manager Administrator Credentials" screen is used to create an "Administrator" user account definition for logging into the Policy Manager "Management Console." The user account definition is composed of a "Username" and "Password."</p> <p>In the "Credentials" section, enter "Username," "New Password," and "Confirm New Password" for the Policy Manager "Administrator" user account. After completing your entries, click "Finish."</p> <p>After restarting the SOA Software Administration Console, you can log into the Policy Manager "Management Console" using the administrator credentials. The User Account definition can be updated via the "Security" tab.</p> <p>Username: <input type="text" value="administrator"/> New Password: <input type="password" value="*****"/> Confirm New Password: <input type="password" value="*****"/></p> <p>< Back Next > Finish Cancel</p>
--	--

Figure 1-47: Define Policy Manager Administration Credentials—Policy Manager Console/Web Services

2. In the "Credentials" section, enter "Username," "New Password," and "Confirm New Password" for the Policy Manager "Administrator" user account. After completing your entries, click **Finish**. The system restart message displays. Click **OK** to restart the system, click **Cancel** to restart the system later.

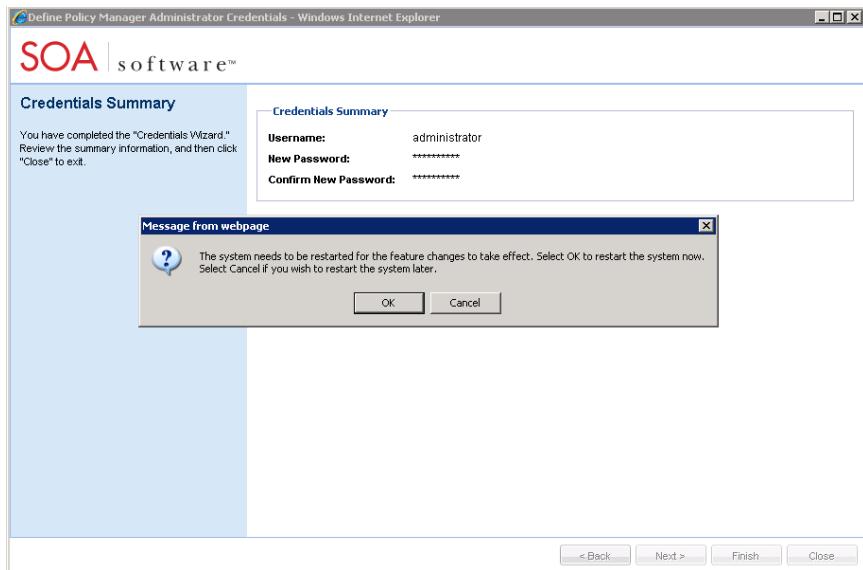


Figure 1-48: Define Policy Manager Administration Credentials (Credentials Summary)—Policy Manager Console/Web Services

3. The "Complete Configuration" displays. Refer to the "Completing the Configuration" section for more information.

Completing the Configuration (Policy Manager Console/Web Services)

The "Complete Configuration" screen displays a system restart progress indicator and allows you to log out of the SOA Software Administration Console after the system restart is complete.

To Complete the Configuration

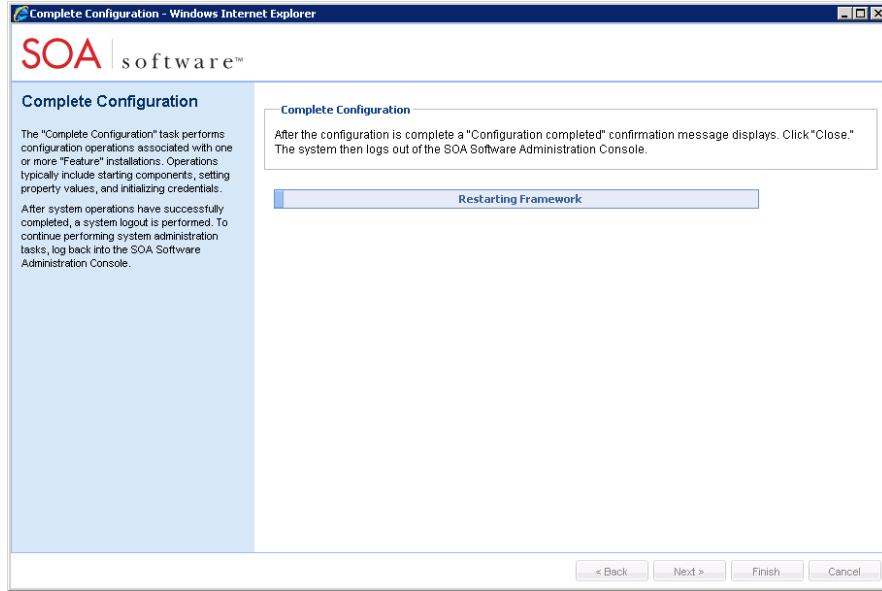
Step	Procedure
1.	<p>The "Complete Configuration" task performs configuration operations associated with one or more "Feature" installations. Operations typically include starting components, setting property values, and initializing credentials.</p> <p>The system restart was initiated when Finish was clicked on the "Credentials Summary" screen. After the system restarts and initializes the installed features for use, click Close to log out of the SOA Software Administration Console.</p> <p>To exit the wizard and perform a system restart at a later time, click Close. Configuration changes are saved and the "Complete Configuration" task is available via the "Installed Features" tab in the "Pending Installation Tasks" section.</p> 

Figure 1-49: Complete Configuration—Policy Manager Console/Web Services

STEP 7: PERFORM SOA SOFTWARE ADMINISTRATION CONSOLE LOGIN (POLICY MANAGER CONSOLE/WEB SERVICES)

After the system exits the SOA Software Administration Console, the "Login" screen displays. Select the "Admin Console" domain and click "Enter" to log back in and continue system administration activities.



Figure 1-50: SOA Software Administration Console—Login Screen

STEP 8: LAUNCH POLICY MANAGER MANAGEMENT CONSOLE

After completing the configuration of Policy Manager features, and restarting the system, launch the "Policy Manager Management Console" as follows:

Enter: `http://<hostname>:<port>/ms/index.do`

Enter the Username and Password credentials you defined on the "Define Policy Manager Administrator Credentials" screen during the configuration of the Policy Manager feature.

**

Chapter 2: Installing Updates to Existing SOA Software Platform Installation

This chapter provides instructions for installing SOA Software Platform Updates (Manual and Silent methods).

CONFIRM INSTALLED UPDATES

If you need to confirm which SOA Software Platform updates are currently installed perform the following steps:

- Launch the SOA Software Administration Console and click the "Installed Features" tab.
- To view bundles associated with a current update, click the "Installed Features" tab, select "Bundle" from the "Filter" drop-down list box, and click the "Version" column to sort by version.
- To view "Bundle Details" click on a bundle line item.

MANUALLY INSTALLING SCHEMAS

If you have a requirement to manually install the SOA Software Platform schemas, contact SOA Software Customer Support prior to beginning this installation to obtain a series of schema installation scripts and additional instructions.

UPDATE EXISTING SOA SOFTWARE PLATFORM 6.1 INSTALLATION (MANUAL)

This section provides instructions for applying an SOA Software Platform 6.1 Update to a SOA Software Platform 6.1 Installation. GUI and Silent Update instructions are provided. The update must be applied to all SOA Container Instances (e.g., Policy Manager, Network Director, Tomcat agent, etc.).

The update process involves a series of configuration steps including:

- Copying the SOA Software Platform Update .zip files to the SOA Software Platform 6.1 Release Directory (\sm60) and extracting the automated .zip file.
- Applying the update(s) by running the "Configure Container Instance Wizard" (GUI) or running the Silent Update.
- Starting the SOA Container Instance after the "Configure Container Instance Wizard" (GUI) or Silent Update has completed the update process.

- Updating database schemas via SOA Software Administration Console (GUI), or by using a third-party Database Schema Management Tool (Silent Update).

The SOA Software Platform Update .zip files can be obtained via the SOA Software Customer Support website www.support.soa.com in the Downloads > Policy Manager > PM61 > Updates section.

An existing SOA Software Platform 6.1 installation will have one or more SOA Containers configured.

Files required for this task include:

- SOA Software Platform .zip File (e.g., soa-update-6.1.X.zip)

Apply SOA Software Platform Update (Existing Installation—Manual)

Step	Procedure
1.	Make a backup copy of your SOA Software Platform 6.1 Release Directory (\sm60) and database(s).
2.	<ol style="list-style-type: none"> 1. Copy the SOA Software Platform Update .zip file (soa-update-6.1.X.zip) to the SOA Software Platform 6.1 Release Directory (\sm60). Update .zip files can be obtained via the SOA Software Customer Support website (https://support.soa.com/support). 2. Extract the soa-update-6.1.X.zip file to the SOA Software Platform 6.1 Release Directory (\sm60). If multiple updates are being applied, files should be extracted in version order (earliest version first). 3. When the "Confirm file replace" dialog displays, click Yes to All. <p>The automated zip file then updates a series of files in the SOA Software Platform 6.1 Release Directory (\sm60) and adds the update to the SOA Software Administration Console "Repository."</p>
3.	<p>After the automated zip file completes its processing, stop the SOA Container Instance that the update will be applied to.</p> <p><u>Stop Process in Windows</u> Close the DOS Window or type ctrl-C.</p> <p><u>Stop Process as Windows Service</u> Launch Program Group (Settings /Control Panel/Administrative Tools/Services). Select SM 6.0 - <Container Instance> - Note that the instance name is displayed as the Container Key. From "Actions" menu, select Stop.</p> <p><u>Stop Process in UNIX</u> Send the process a KILL signal or Ctrl-C.</p> <p><u>Stop Process in UNIX (Background)</u></p>

Apply SOA Software Platform Update (Existing Installation—Manual)

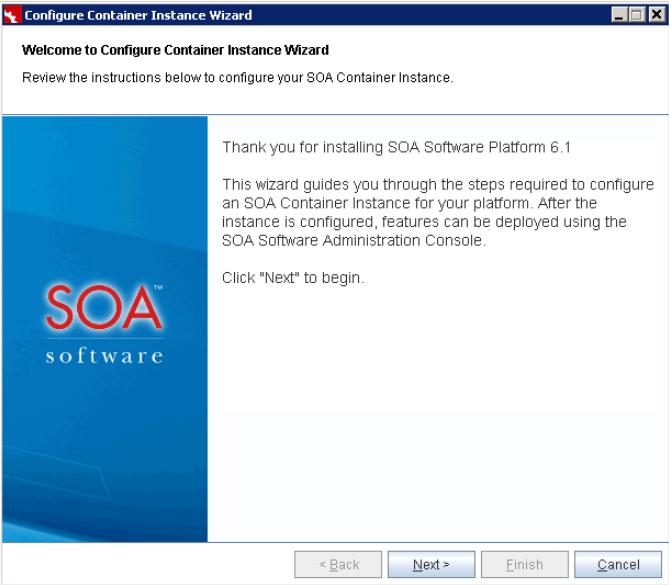
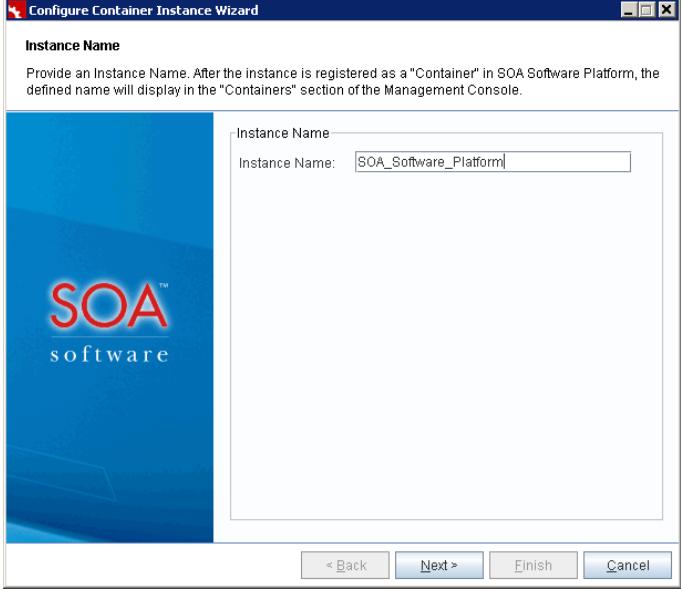
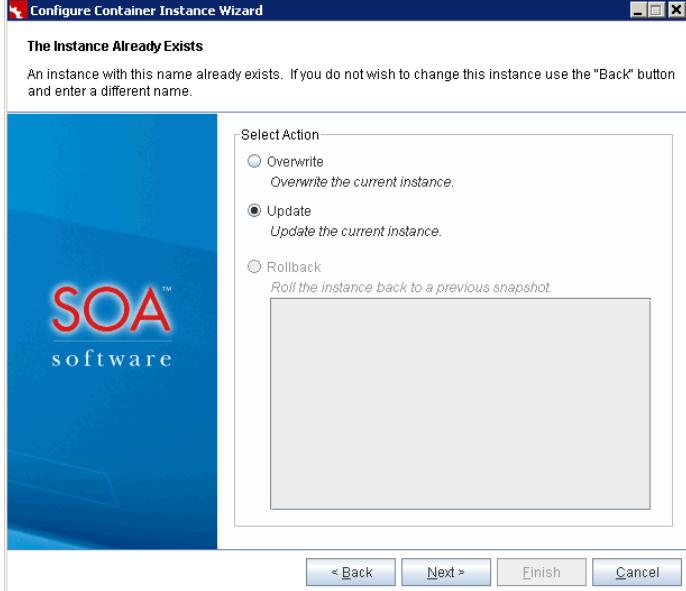
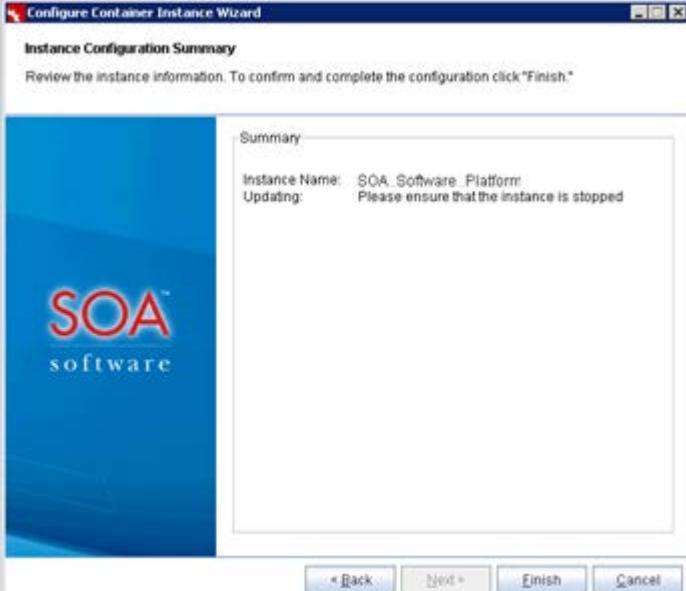
Step	Procedure
	<p>Navigate to <code>sm60/bin</code> and type <code>shutdown.sh</code></p>
4.	<p>After applying the <code>.zip</code> file update(s), delete the <code>/sm60/instances/configurator/cache</code> directory if it exists.</p>
5.	<p>The next step is to launch the "Configure Container Instance Wizard" and enter the SOA Container Instance Name that the SOA Software Platform 6.1 update(s) will be applied to.</p> <p>Two methods can be used to launch the "Configure Container Instance Wizard."</p> <ol style="list-style-type: none"> 1) Launch from the SOA Software Platform Program Group: <p>Click the Start menu, navigate to the SOA Software Platform Program Group, and click Configure Container Instance.</p> 2) Perform a manual start: <p>Navigate to the SOA Software Platform Release Directory <code>c:\sm60\bin</code> and enter:</p> <pre>startup configurator</pre> <p>The "Welcome to Configure Container Instance Wizard" screen displays. Review the information and click Next to continue.</p> 
6.	<p>The "Instance Name" screen displays. Here you specify the name of the "SOA Software Container Instance" the update(s) will be applied to.</p>

Figure 2-1: Configure Container Instance Wizard—Welcome to Configure Container Instance

Apply SOA Software Platform Update (Existing Installation—Manual)

Step	Procedure
	
	<p>7. Enter the Container Instance Name and click Next to continue.</p> <hr/> <p>Note: To find the Container Instance Name, navigate to the <code>sm60/instances</code> folder and view the instances currently defined. Note that the Container Instance Name is case sensitive.</p> <hr/> <p>The "Instance Already Exists" screen displays. To apply the update to the selected container instance, click the Update radio button and click Next.</p>

Apply SOA Software Platform Update (Existing Installation—Manual)

Step	Procedure
	 <p>The Instance Already Exists</p> <p>An instance with this name already exists. If you do not wish to change this instance use the "Back" button and enter a different name.</p> <p>Select Action:</p> <ul style="list-style-type: none"> <input type="radio"/> Overwrite Overwrite the current instance. <input checked="" type="radio"/> Update Update the current instance. <input type="radio"/> Rollback Roll the instance back to a previous snapshot. <p>< Back Next > Finish Cancel</p>
	<p>Figure 2-3: Instance Already Exists—Update</p> <p>8. The "Instance Configuration Summary" screen displays. To apply the update(s), click Finish. Note that the SOA Container Instance must be stopped prior to applying the update(s).</p>  <p>Instance Configuration Summary</p> <p>Review the instance information. To confirm and complete the configuration click "Finish."</p> <p>Summary</p> <p>Instance Name: SOA_Software_Platform Updating: Please ensure that the instance is stopped</p> <p>< Back Next > Finish Cancel</p>
	<p>Figure 2-4: Configure Container Instance Wizard—Instance Configuration Summary (Complete Update)</p> <p>9. The SOA Container update process begins and a progress indicator displays. After the update process is complete the "Update Complete" dialog displays and indicates the</p>

Apply SOA Software Platform Update (Existing Installation—Manual)


Step	Procedure
	<p>number of bundles that have been updated.</p> <hr/> <p>Note: The number of bundles displayed on the "Update Complete" message will vary based on your specific SOA Container configuration and number of updates being applied."</p> <hr/> 
	<p>Figure 2-5: Configure Container Instance Wizard—Update Complete</p> <p>10. Click OK on the "Update Complete" dialog. The "Configure Container Instance Wizard" closes.</p>
11.	<p>Start the updated SOA Container.</p> <p><u>Start Process in Windows</u></p> <p>Navigate to <code>sm60\bin</code> and type <code>startup <instance name></code></p> <p><u>Start Process as Windows Service</u></p> <p>Launch Program Group (Settings /Control Panel/Administrative Tools/Services)</p> <p>Select <code>SM 6.0 - <Container Instance></code> - Note that the instance name is displayed as the Container Key.</p> <p>From "Actions" menu, select Start.</p> <p><u>Start Process in UNIX</u></p> <p>Navigate to <code>sm60/bin</code> and type <code>startup.sh <instance name></code></p>

Apply SOA Software Platform Update (Existing Installation—Manual)

Step	Procedure
	<p><u>Start Process in UNIX (Background)</u> Navigate to sm60/bin and type startup.sh <instance name> -bg</p>
14.	<p>Perform the following prerequisite steps before launching the SOA Software Administration Console</p> <ul style="list-style-type: none"> • <u>Deploy Database Driver</u>—Before performing the database configuration in the SOA Software Administration Console, verify that a database driver for the database used with the current SOA Container configuration is deployed to the c:\sm60\instances\<container instance>\deploy folder. If a database driver is not deployed, copy the database driver to the \deploy directory. Refer to the "Appendix B: Database Drivers" for a list of supported database drivers. • <u>Clear Browser Cache</u>—Before launching the SOA Software Administration Console, clear the browser cache. This is necessary to ensure that user interface changes included in the SOA Software Platform update(s) display properly. • <u>Manually Installing Policy Manager Schemas</u>—If you have a requirement to manually install the Policy Manager schemas, contact SOA Software Customer Support prior to beginning this installation to obtain a series of schema installation scripts and additional instructions.
15.	<p>Users that will not be utilizing the SOA Software Administration Console can skip the remainder of this procedure.</p>
16.	<p>After successfully starting the container instance, deploying the database driver, and clearing the browser cache, launch the "SOA Software Administration Console" for the updated SOA Container Instance:</p> <p>Enter: <a href="http://<hostname>:<port>/admin">http://<hostname>:<port>/admin</p> 

Figure 2-6: SOA Software Administration Console—Login

Apply SOA Software Platform Update (Existing Installation—Manual)

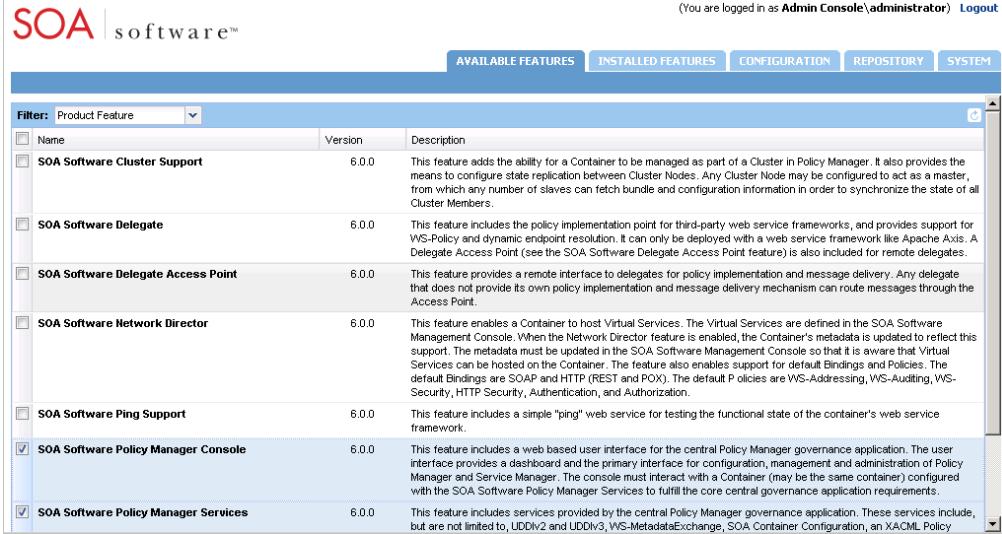Step	Procedure
17.	<p>Select the "Admin Console" domain, enter the "Username" and "Password," and click Login. The SOA Software Administration Console launches and displays the "Available Features" tab.</p> 
	Figure 2-7: SOA Software Administration Console—Available Features Tab
18.	<p>If you have previously installed the "SOA Software Policy Manager Services" feature, verify if additional schemas must be installed using the "Manage Schemas Wizard."</p> <p>To perform this task, in the SOA Software Administration Console, click the "Configure" tab. In the "Configuration Actions" section click "Manage Schemas." The "Manage Schemas Wizard" launches and displays the "Install Schemas" screen. In the "Available Schemas" section, select the checkbox of the available Policy Manager schema and click "Finish."</p> <hr/> <p>Note: If you have not previously installed the "SOA Software Policy Manager Services" feature, skip this section and refer to "Chapter 1: Installing and Configuring SOA Software Platform > Step 5: Install Policy Manager Features." Complete the procedure. During the database and schemas configuration process select all "Available" schemas on the "Manage Schemas Wizard" screen.</p> <hr/>
19.	After the configuration tasks are complete, navigate to the "Repository" tab and verify that the repository for the installed update is present. If it is not, click Refresh  to update the repository.
20.	As a final step, navigate to the "System" tab and click Restart .
21.	The update process is now complete.

UPDATE EXISTING SOA SOFTWARE PLATFORM 6.1 INSTALLATION (SILENT UPDATE)

This section describes the steps for applying a "SOA Software Platform Update" using an automated configuration properties file to an *existing* SOA Software Platform 6.1 installation.

An existing SOA Software Platform 6.1 installation will have an SOA Container installed.

Files required for this task include:

- SOA Software Platform Update .zip File (e.g., soa-update-6.1.X.zip).
- Silent Update Properties File configured with the wizard.mode=update option.

Apply SOA Software Platform 6.1 Silent Update (Existing Installation)

Step	Procedure
1.	Make a backup copy of your SOA Software Platform 6.1 Release Directory (\sm60) and database(s).
2.	<ol style="list-style-type: none"> 1. Copy the SOA Software Platform 6.1 Update .zip file (soa-update-6.1.X.zip) to the SOA Software Platform 6.1 Release Directory (\sm60). The update .zip file can be obtained via the SOA Software Customer Support website (https://support.soa.com/support). 2. Extract the soa-update-6.1.X.zip to the SOA Software Platform 6.1 Release Directory (\sm60). If multiple updates are being applied, files should be extracted in version order (earliest version first). 3. When the "Confirm file replace" dialog displays, click Yes to All. <p>The automated zip file then updates a series of files in the SOA Software Platform 6.1 Release Directory (\sm60) and adds the update to the SOA Software Administration Console "Repository."</p>
3.	<p>After the automated zip file completes its processing, stop the SOA Container Instance that the update will be applied to.</p> <p><u>Stop Process in Windows</u> Close the DOS Window or type ctrl-C <u>Stop Process as Windows Service</u> Launch Program Group (Settings /Control Panel/Administrative Tools/Services) Select SM 6.0 - <Container Instance> - Note that the instance name is displayed as the Container Key. From "Actions" menu, select Stop.</p>

Apply SOA Software Platform 6.1 Silent Update (Existing Installation)

	<p><u>Stop Process in UNIX</u> Send the process a KILL signal or Ctrl-C</p> <p><u>Stop Process in UNIX (Background)</u> Navigate to <code>sm60/bin</code> and type <code>shutdown.sh</code></p>
4.	<p>After applying the .zip file update(s), delete the <code>/sm60/instances/configurator/cache</code> directory if it exists.</p>
5.	<p>The "Configure Container Instance Wizard" update process can be set up to run in an automated mode (i.e., silent). This is done by defining a properties file and pre-defining a set of property values to be used by the "Configure Container Instance Wizard" to automatically configure a Container instance.</p> <p><u>Define Silent Update Property File</u></p> <ol style="list-style-type: none"> 1) Define a properties file (e.g., <code>update.properties</code>) 2) Add the following default content: <pre>container.instance.name=instancename wizard.mode=update</pre> <p><u>Run Silent Configuration</u></p> <p>The "Configure Container Instance Wizard (Silent Update)" properties file accepts the following system properties which together are used to perform the silent update:</p> <ol style="list-style-type: none"> 1. silent (If True, silent configuration will be performed) 2. properties (location on filesystem of property file to be used for configuration) <p><u>Windows:</u></p> <pre>\sm60\bin>startup.bat configurator "-Dsilent=true" "- Dproperties=<property file directory location>/update.properties"</pre> <p><u>UNIX:</u></p> <pre>\sm60\bin>startup.sh configurator -Dsilent=true - Dproperties=opt/<property file directory location>/update.properties</pre>
6.	Run the silent update.
7.	<p>Perform the following prerequisite steps before launching the SOA Software Administration Console</p> <ul style="list-style-type: none"> • <u>Deploy Database Driver</u>—Before performing the database configuration in the SOA Software Administration Console, verify that a database driver for the database used with the current SOA Container configuration is deployed to the <code>c:\sm60\instances\<container instance>\deploy</code> folder. If a database driver is not deployed, copy the database driver to the <code>\deploy</code> directory. Refer to the "Appendix B: Database Drivers" for a list of supported database drivers. • <u>Clear Browser Cache</u>—Before launching the SOA Software Administration Console, clear the browser cache. This is necessary to ensure that user interface changes included in the SOA Software Platform 6.1 update(s) display properly. • <u>Manually Installing Policy Manager Schemas</u>—If you have a requirement to manually install the SOA Software Platform schemas, contact SOA Software

Apply SOA Software Platform 6.1 Silent Update (Existing Installation)

	Customer Support prior to beginning this installation to obtain a series of schema installation scripts and additional instructions.
8.	<p>After the update is complete, start the updated SOA Container Instance.</p> <p><u>Start Process in Windows</u></p> <p>Navigate to sm60\bin and type startup <instance name></p> <p><u>Start Process as Windows Service</u></p> <p>Launch Program Group (Settings /Control Panel/Administrative Tools/Services)</p> <p>Select SM 6.0 - <Container Instance> - Note that the instance name is displayed as the Container Key.</p> <p>From "Actions" menu, select Start.</p> <p><u>Start Process in UNIX</u></p> <p>Navigate to sm60/bin and type startup.sh <instance name></p> <p><u>Start Process in UNIX (Background)</u></p> <p>Navigate to sm60/bin and type startup.sh <instance name> -bg</p>
9.	Users that will not be utilizing the SOA Software Administration Console can skip the remainder of this procedure.
10.	<p>Launch the "SOA Software Administration Console" for the updated SOA Container Instance:</p> <p>Enter: <code>http://<hostname>:<port>/admin</code></p> 
11.	Select the "Admin Console" domain, enter the "Username" and "Password," and click Login . The SOA Software Administration Console launches and displays the "Available

Figure 2-8: SOA Software Administration Console—Login

Apply SOA Software Platform 6.1 Silent Update (Existing Installation)

	<p>Features" tab.</p> <table border="1"> <thead> <tr> <th>Feature</th><th>Version</th><th>Description</th></tr> </thead> <tbody> <tr> <td>SOA Software Delegate</td><td>6.0.0</td><td>This feature includes the policy implementation point for third-party web service frameworks, and provides support for WS-Policy and dynamic endpoint resolution. It can only be deployed via a web service framework like Apache Axis. A Delegate Access Point (see the SOA Software Delegate Access Point feature) is also included for remote delegates.</td></tr> <tr> <td>SOA Software Delegate Access Point</td><td>6.0.0</td><td>This feature provides a remote interface to delegates for policy implementation and message delivery. Any delegate that does not provide its own policy implementation and message delivery mechanism can route messages through the Access Point.</td></tr> <tr> <td>SOA Software Network Director</td><td>6.0.1</td><td>This feature enables a Container to host Virtual Services. The Virtual Services are defined in the SOA Software Management Console. When the Network Director feature is enabled, the Container's metadata is updated to reflect this support. The metadata must be updated in the SOA Software Management Console so that it is aware that Virtual Services can be hosted on the Container. The feature also enables support for default Bindings and Policies. The default Bindings are SOAP and HTTP (REST and POX). The default Policies are WS-Addressing, WS-Authoring, WS-Security, HTTP Security, Authentication, and Authorization.</td></tr> <tr> <td>SOA Software Ping Support</td><td>6.0.0</td><td>This feature includes a simple "ping" web service for testing the functional state of the container's web service framework.</td></tr> <tr> <td>SOA Software Policy Manager Console</td><td>6.0.1</td><td>This feature includes a web based user interface for the central Policy Manager governance application. The user interface provides a dashboard and the primary interface for configuration, management and administration of Policy Manager and Service Manager. The console must interact with a Container (may be the same container) configured with the SOA Software Policy Manager Services to fulfill the core central governance application requirements.</td></tr> <tr> <td>SOA Software Policy Manager Services</td><td>6.0.3</td><td>This feature includes services provided by the central Policy Manager governance application. These services include, but are not limited to, UDDIv2 and UDDIv3, WS-MetadataExchange, SOA Container Configuration, an XACML Policy Decision Point, a WS-Trust Security Token Service, Alert reporting, and RESTful interfaces to the governance model. In addition, this feature includes engines for performing Quality of Service calculations and health and status monitoring.</td></tr> <tr> <td>SOA Software SM 5.2 to PM 6.0 Upgrade</td><td>6.0.4</td><td>This feature performs an upgrade from a Service Manager 5.2 installation to a Policy Manager 6.0 installation. The installation process adds a database schema option (SM 5.2 to PM 6.0 Upgrade) that when installed will execute the upgrade.</td></tr> <tr> <td>SOA Software Tomcat Agent</td><td>6.0.1</td><td>This feature is the policy enforcement point for the Apache Tomcat application server and provides WS-Policy enforcement for web services deployed to Tomcat. It can only be deployed in a Container deployed in a Tomcat</td></tr> </tbody> </table>	Feature	Version	Description	SOA Software Delegate	6.0.0	This feature includes the policy implementation point for third-party web service frameworks, and provides support for WS-Policy and dynamic endpoint resolution. It can only be deployed via a web service framework like Apache Axis. A Delegate Access Point (see the SOA Software Delegate Access Point feature) is also included for remote delegates.	SOA Software Delegate Access Point	6.0.0	This feature provides a remote interface to delegates for policy implementation and message delivery. Any delegate that does not provide its own policy implementation and message delivery mechanism can route messages through the Access Point.	SOA Software Network Director	6.0.1	This feature enables a Container to host Virtual Services. The Virtual Services are defined in the SOA Software Management Console. When the Network Director feature is enabled, the Container's metadata is updated to reflect this support. The metadata must be updated in the SOA Software Management Console so that it is aware that Virtual Services can be hosted on the Container. The feature also enables support for default Bindings and Policies. The default Bindings are SOAP and HTTP (REST and POX). The default Policies are WS-Addressing, WS-Authoring, WS-Security, HTTP Security, Authentication, and Authorization.	SOA Software Ping Support	6.0.0	This feature includes a simple "ping" web service for testing the functional state of the container's web service framework.	SOA Software Policy Manager Console	6.0.1	This feature includes a web based user interface for the central Policy Manager governance application. The user interface provides a dashboard and the primary interface for configuration, management and administration of Policy Manager and Service Manager. The console must interact with a Container (may be the same container) configured with the SOA Software Policy Manager Services to fulfill the core central governance application requirements.	SOA Software Policy Manager Services	6.0.3	This feature includes services provided by the central Policy Manager governance application. These services include, but are not limited to, UDDIv2 and UDDIv3, WS-MetadataExchange, SOA Container Configuration, an XACML Policy Decision Point, a WS-Trust Security Token Service, Alert reporting, and RESTful interfaces to the governance model. In addition, this feature includes engines for performing Quality of Service calculations and health and status monitoring.	SOA Software SM 5.2 to PM 6.0 Upgrade	6.0.4	This feature performs an upgrade from a Service Manager 5.2 installation to a Policy Manager 6.0 installation. The installation process adds a database schema option (SM 5.2 to PM 6.0 Upgrade) that when installed will execute the upgrade.	SOA Software Tomcat Agent	6.0.1	This feature is the policy enforcement point for the Apache Tomcat application server and provides WS-Policy enforcement for web services deployed to Tomcat. It can only be deployed in a Container deployed in a Tomcat
Feature	Version	Description																										
SOA Software Delegate	6.0.0	This feature includes the policy implementation point for third-party web service frameworks, and provides support for WS-Policy and dynamic endpoint resolution. It can only be deployed via a web service framework like Apache Axis. A Delegate Access Point (see the SOA Software Delegate Access Point feature) is also included for remote delegates.																										
SOA Software Delegate Access Point	6.0.0	This feature provides a remote interface to delegates for policy implementation and message delivery. Any delegate that does not provide its own policy implementation and message delivery mechanism can route messages through the Access Point.																										
SOA Software Network Director	6.0.1	This feature enables a Container to host Virtual Services. The Virtual Services are defined in the SOA Software Management Console. When the Network Director feature is enabled, the Container's metadata is updated to reflect this support. The metadata must be updated in the SOA Software Management Console so that it is aware that Virtual Services can be hosted on the Container. The feature also enables support for default Bindings and Policies. The default Bindings are SOAP and HTTP (REST and POX). The default Policies are WS-Addressing, WS-Authoring, WS-Security, HTTP Security, Authentication, and Authorization.																										
SOA Software Ping Support	6.0.0	This feature includes a simple "ping" web service for testing the functional state of the container's web service framework.																										
SOA Software Policy Manager Console	6.0.1	This feature includes a web based user interface for the central Policy Manager governance application. The user interface provides a dashboard and the primary interface for configuration, management and administration of Policy Manager and Service Manager. The console must interact with a Container (may be the same container) configured with the SOA Software Policy Manager Services to fulfill the core central governance application requirements.																										
SOA Software Policy Manager Services	6.0.3	This feature includes services provided by the central Policy Manager governance application. These services include, but are not limited to, UDDIv2 and UDDIv3, WS-MetadataExchange, SOA Container Configuration, an XACML Policy Decision Point, a WS-Trust Security Token Service, Alert reporting, and RESTful interfaces to the governance model. In addition, this feature includes engines for performing Quality of Service calculations and health and status monitoring.																										
SOA Software SM 5.2 to PM 6.0 Upgrade	6.0.4	This feature performs an upgrade from a Service Manager 5.2 installation to a Policy Manager 6.0 installation. The installation process adds a database schema option (SM 5.2 to PM 6.0 Upgrade) that when installed will execute the upgrade.																										
SOA Software Tomcat Agent	6.0.1	This feature is the policy enforcement point for the Apache Tomcat application server and provides WS-Policy enforcement for web services deployed to Tomcat. It can only be deployed in a Container deployed in a Tomcat																										
	<p>Figure 2-9: SOA Software Administration Console—Available Features Tab</p>																											
12.	<p>If you have previously installed the "SOA Software Policy Manager Services" feature, verify if additional schemas must be installed using the "Manage Schemas Wizard."</p> <p>To perform this task, in the SOA Software Administration Console, click the "Configure" tab. In the "Configuration Actions" section click "Manage Schemas." The "Manage Schemas Wizard" launches and displays the "Install Schemas" screen. In the "Available Schemas" section, select the checkbox of the available Policy Manager schema and click "Finish."</p> <hr/> <p>Note: If you have not previously installed the "SOA Software Policy Manager Services" feature, skip this section and refer to "Chapter 1: Installing and Configuring SOA Software Platform > Step 5: Install Policy Manager Features." Complete the procedure. During the database and schemas configuration process select all "Available" schemas on the "Manage Schemas Wizard" screen.</p> <hr/>																											
22.	<p>After the configuration tasks are complete, navigate to the "Repository" tab and verify that the repository for the installed update is present. If it is not, click Refresh to update the repository.</p>																											
23.	<p>As a final step, navigate to the "System" tab and click Restart.</p>																											
13.	<p>After the configuration tasks are complete, navigate to the "System" tab and click Restart.</p>																											
14.	<p>The update process is now complete.</p>																											

ROLLBACK UPDATE

The "Configure Container Instance Wizard" includes a Rollback option that allows you to rollback updates to the previous snapshot. Note that the SOA Container Instance must be stopped prior completing the rollback process. To rollback an SOA Software Platform Update, perform the following steps:

To Rollback an Update

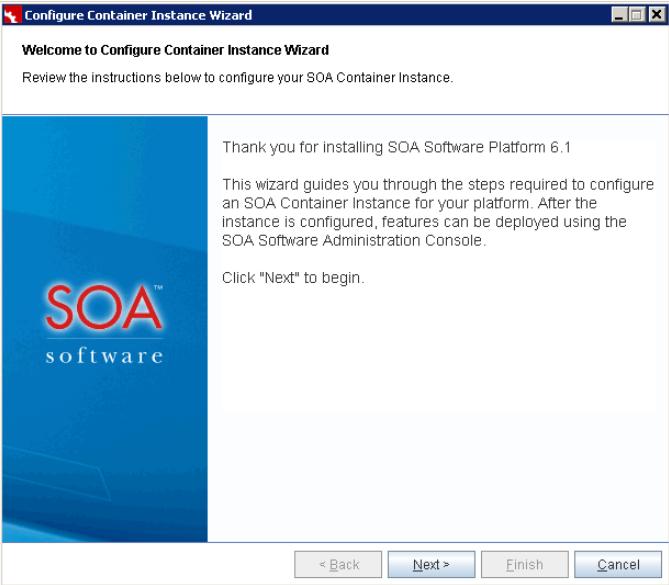
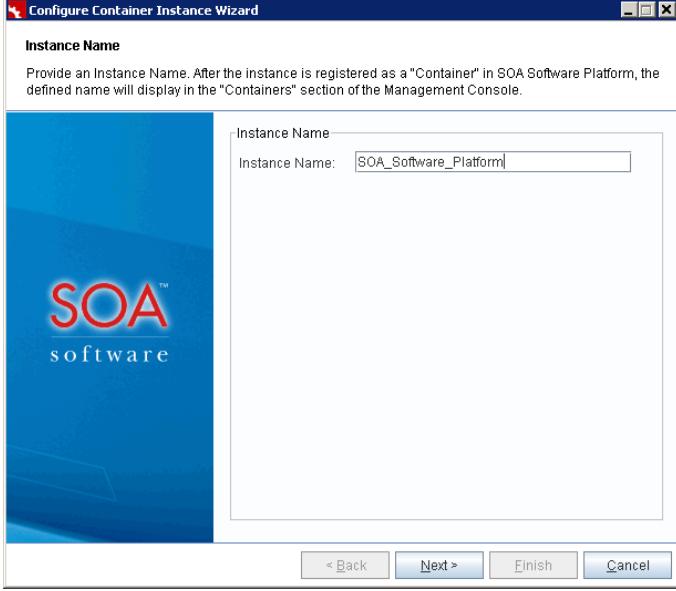
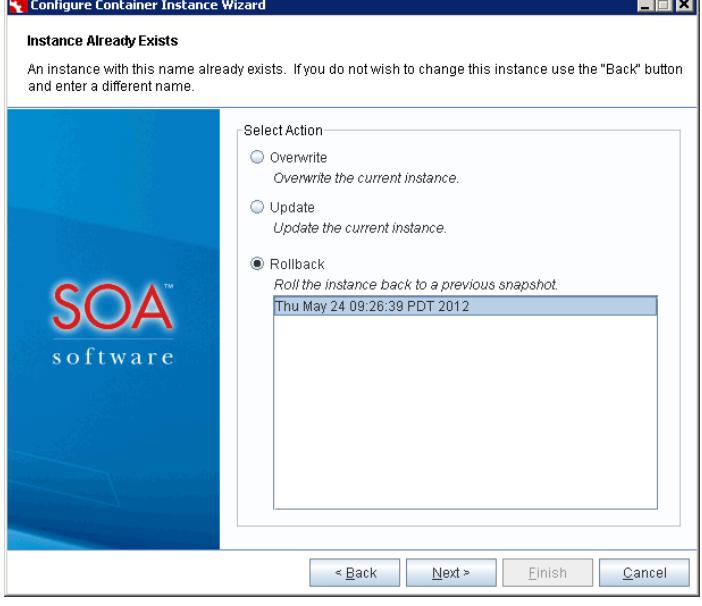
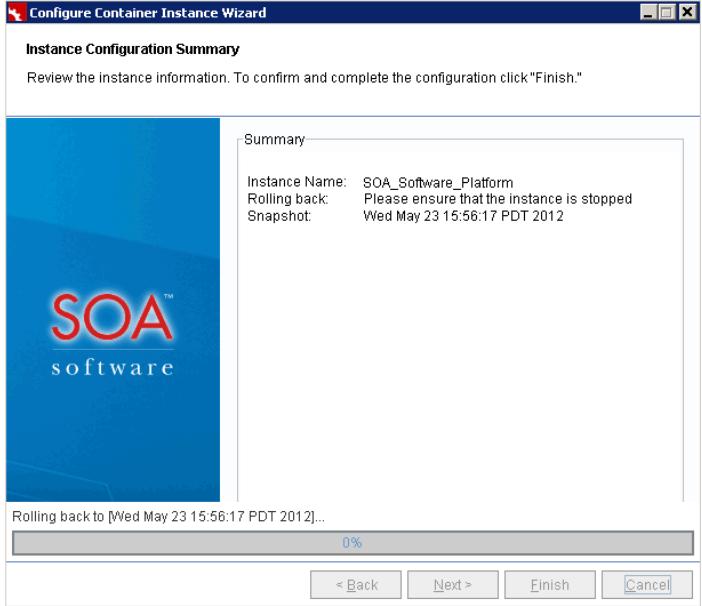
Step	Procedure
1.	<p>Launch the "Configure Container Instance Wizard" and enter the SOA Container Instance Name that includes an update you would like to rollback.</p> <p>Two methods can be used to launch the "Configure Container Instance Wizard."</p> <ol style="list-style-type: none"> 1) Launch from the SOA Software Platform Program Group. <p>Click the Start menu, navigate to the SOA Software Platform Program Group, and click Configure Container Instance.</p> <ol style="list-style-type: none"> 2) Perform a manual start: <p>Navigate to the SOA Software Platform Release Directory <code>c:\sm60\bin</code> and enter:</p> <pre>startup configurator</pre> <p>The "Welcome to Configure Container Instance Wizard" screen displays. Review the information and click Next to continue.</p> 
2.	The "Instance Name" screen displays. Here you specify the name of the "SOA Software Container Instance" that includes an update you would like to rollback.

Figure 2-10: Configure Container Instance Wizard—Welcome to Configure Container Instance


To Rollback an Update

Step	Procedure
	
	<p>3. Enter the Container Instance Name and click Next to continue.</p> <hr/> <p>Note: To find the Container Instance Name, navigate to the <code>sm60/instances</code> folder and view the instances currently defined. Note that the Container Instance Name is case sensitive.</p> <hr/> <p>The "Instance Already Exists" screen displays. To rollback an update, click the Rollback radio button, select one update from the listing to rollback to the previous snapshot, and click Next.</p> <hr/> <p>Note: You must run the "Configure Container Instance Wizard" for each rollback you would like to perform.</p>

To Rollback an Update

Step	Procedure
	
	<p data-bbox="616 952 1225 984">Figure 2-12: Instance Already Exists—Rollback</p> <p data-bbox="279 1015 1437 1110">4. The "Instance Configuration Summary" screen displays. To complete the rollback, click Finish. Note that the SOA Container Instance must be stopped prior to applying the rollback.</p> 
	<p data-bbox="442 1755 1393 1818">Figure 2-13: Configure Container Instance Wizard—Instance Configuration Summary (Rollback in Progress)</p> <p data-bbox="279 1854 1432 1886">5. The SOA Container update process begins and a progress indicator displays. After the</p>

To Rollback an Update

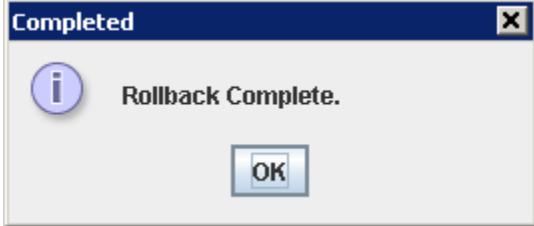Step	Procedure
	<p>update process is complete the "Rollback Complete" dialog displays and indicates the number of bundles that have been updated.</p> 
6.	<p>Click OK on the "Rollback Complete" dialog. The "Configure Container Instance Wizard" closes.</p>
7.	<p>Start the updated SOA Container.</p> <p><u>Start Process in Windows</u> Navigate to sm60\bin and type startup <instance name></p> <p><u>Start Process as Windows Service</u> Launch Program Group (Settings /Control Panel/Administrative Tools/Services) Select SM 6.0 - <Container Instance> - Note that the instance name is displayed as the Container Key. From "Actions" menu, select Start.</p> <p><u>Start Process in UNIX</u> Navigate to sm60/bin and type startup.sh <instance name></p> <p><u>Start Process in UNIX (Background)</u> Navigate to sm60/bin and type startup.sh <instance name> -bg</p>

Chapter 3: Installing and Configuring Network Director

OVERVIEW

The Network Director feature enables a Container to host Virtual Services. The Virtual Services are defined in the SOA Software Management Console. When the Network Director feature is enabled, the Container's metadata is updated to reflect this support. The metadata must be updated in the SOA Software Management Console so that it is aware that Virtual Services can be hosted on the Container. The feature also enables support for default Bindings and Policies. The default Bindings are SOAP and HTTP (REST and POX). The default Policies are WS-Addressing, WS-Auditing, WS-Security, HTTP Security, Authentication, and Authorization.

This chapter provides instructions for configuring a Network Director container instance, and installing and configuring the SOA Software Network Director feature.

Note: This procedure assumes that SOA Software Platform has been installed, and SOA Software Platform Updates outlined in "Chapter 1: Installing and Configuring SOA Software Platform > Step 2: Install SOA Software Platform Updates" or "Chapter 2: Installing Updates to Existing SOA Software Platform Installation" have already been installed.

STEP 1: CONFIGURE NETWORK DIRECTOR CONTAINER INSTANCE

This section provides instructions for using the "Configure Container Instance Wizard" to configure a Network Director Container Instance. GUI and Silent configuration instructions are provided.

Configure Network Director Container Instance (GUI)

The following procedure uses the "Configure Container Instance Wizard" to create a Network Director Container Instance.

To Configure a Network Director Container Instance

Step	Procedure
1.	<p>Navigate to the SOA Software Platform release directory <code>c:\sm60\bin</code> and enter: <code>startup configurator</code></p> <p>The "Welcome to Configure Container Instance Wizard" screen displays. Review the information and click Next to continue.</p>

To Configure a Network Director Container Instance

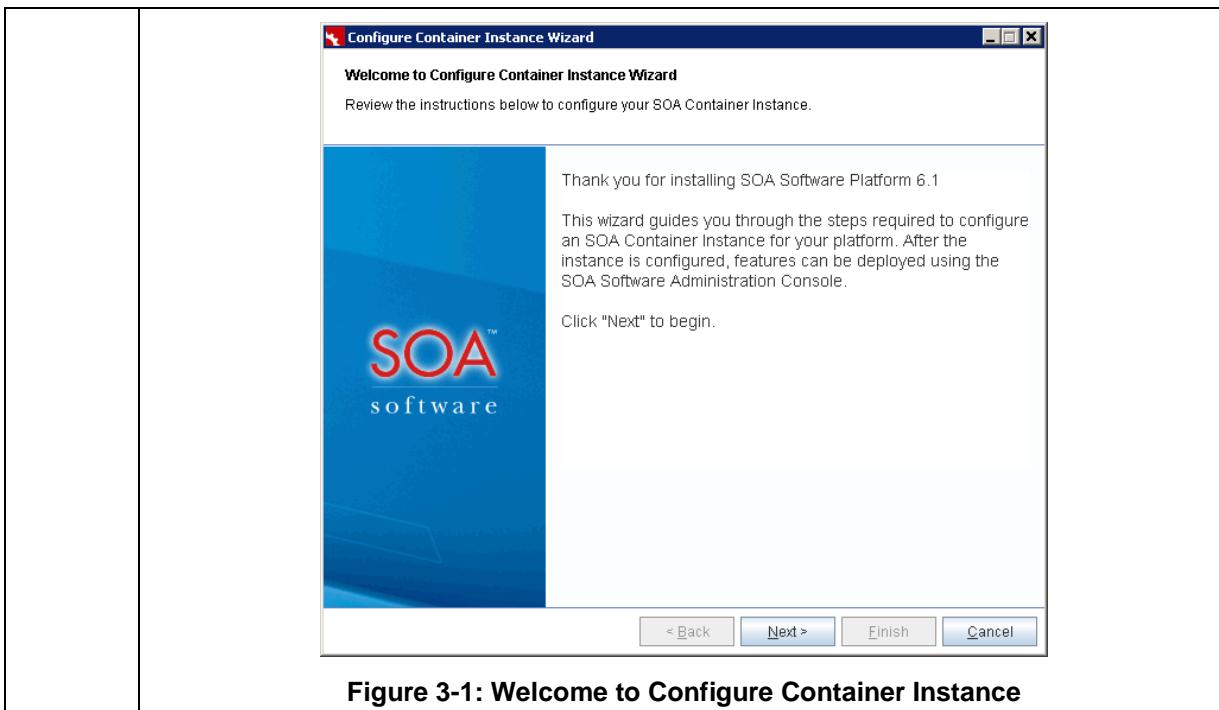


Figure 3-1: Welcome to Configure Container Instance

	<p>2. The "Instance Name" screen displays. Here you specify the name of the container instance. The instance name should be unique and easily identifiable (e.g., ND or Network Director). The instance name will display in the browser tab of the SOA Software Administration Console. Enter your container instance name and click Next to continue.</p> <p>The screenshot shows the 'Configure Container Instance Wizard' window with the title 'Instance Name'. The main area has the instruction 'Provide an Instance Name. After the instance is registered as a "Container" in SOA Software Platform, the defined name will display in the "Containers" section of the Management Console.' Below this is a large blue background image featuring the 'SOA software' logo. To the right of the image, there is a form field labeled 'Instance Name' with the value 'Network_Director' entered. At the bottom are buttons for '< Back', 'Next >', 'Finish', and 'Cancel'.</p>
3.	The "Default Admin User" screen displays. Define the "Username" and "Password"

Figure 3-2: Instance Name—Standalone Deployment

To Configure a Network Director Container Instance

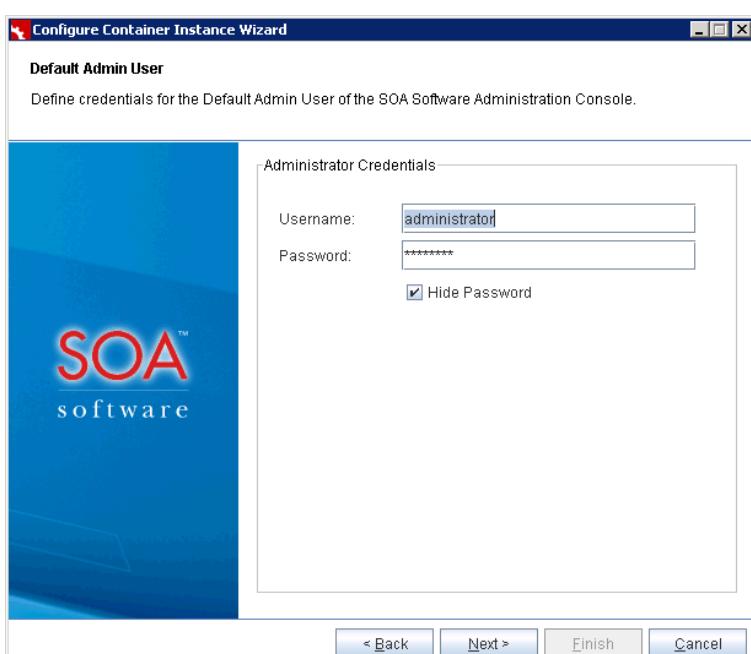
	<p>credentials of the administrator that will be using the SOA Software Administration Console.</p> <p>The "Password" field includes a default password that can be used to log into the SOA Software Administration Console. The "Hide Password" checkbox allows you to display the password as encrypted or unencrypted. To view the default password, uncheck the "Hide Password" checkbox. Use the default password to log into the SOA Software Administration Console, or enter a new password. After entering the credential information, click Next to continue.</p> 
4.	<p>The "Instance Configuration Options" screen displays. Here you will select the "Standalone Deployment" option.</p>

Figure 3-3: Default Admin User—Standalone Deployment

To Configure a Network Director Container Instance

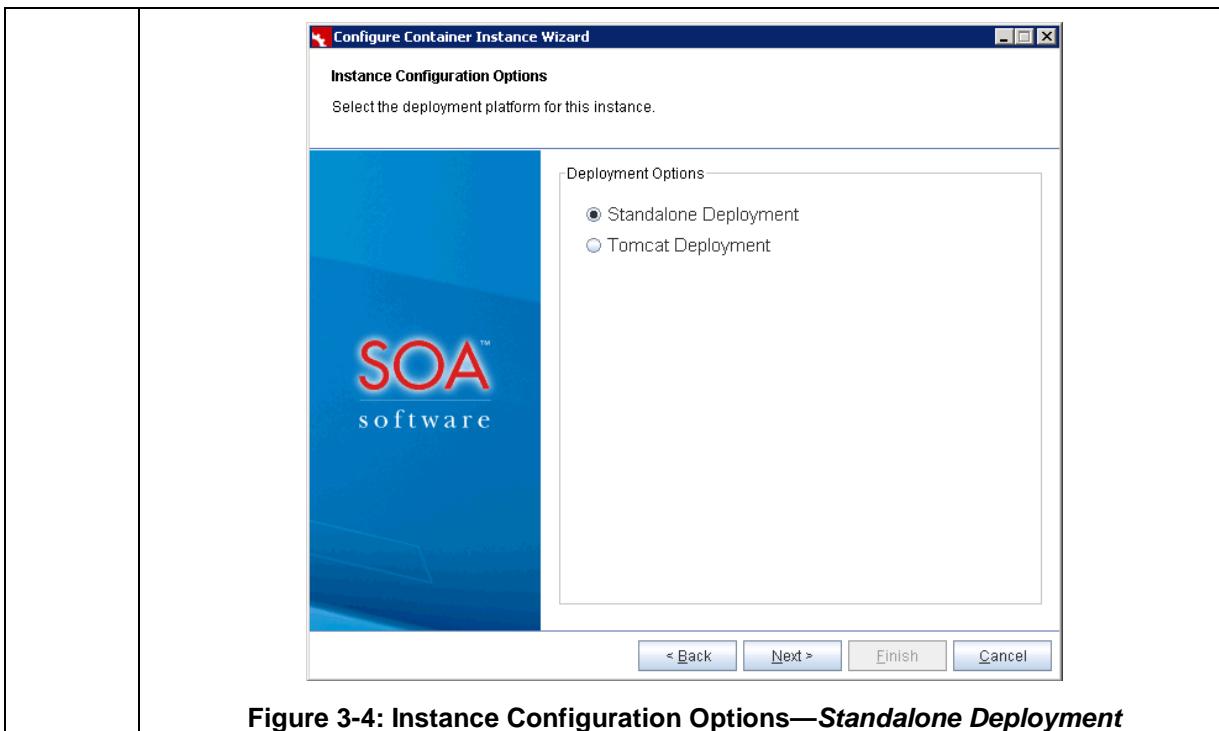


Figure 3-4: Instance Configuration Options—Standalone Deployment

5. Select "Standalone Deployment." The "Default HTTP Listener" screen displays. Set the default HTTP Port and Host IP Address for this instance. This listener configuration will be used as the SOA Software Administration Console address.

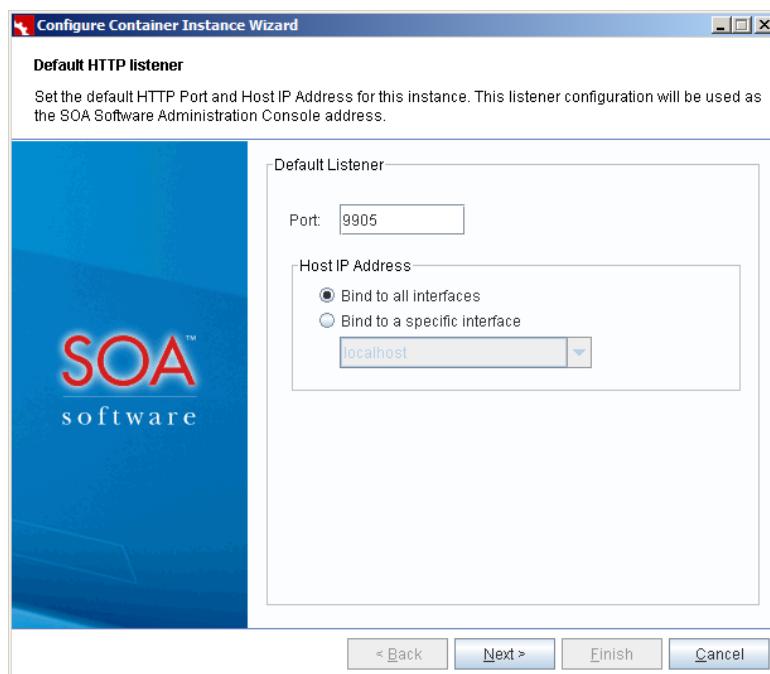


Figure 3-5: Default HTTP Listener—Standalone Deployment

To Configure a Network Director Container Instance

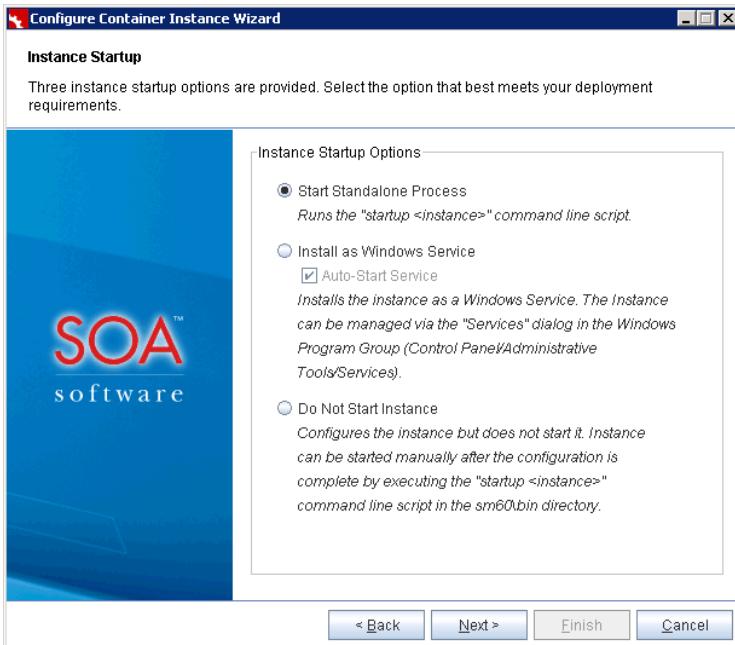
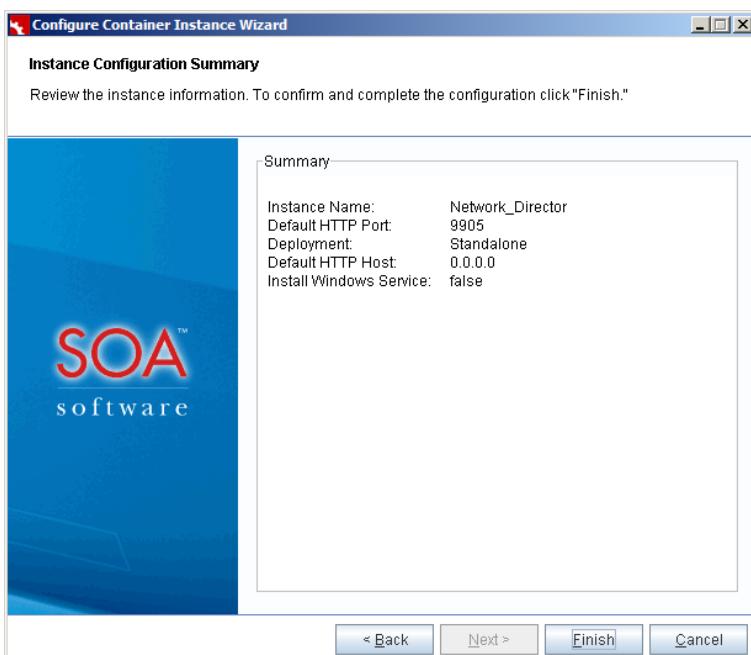
	<p>Default HTTP Listener</p> <ul style="list-style-type: none"> Port—Represents the default HTTP Port. <p><u>Host IP Address:</u></p> <ul style="list-style-type: none"> Bind to all interfaces—if you select this option, the listener binds to the 0.0.0.0 address. "localhost" or any other valid IP for the machine can be used to connect to the client/browser. Bind to a specific interface—if you select this option, the selected host name is used to connect to the client/browser. <p>The Default HTTP Listener information is used to compose the SOA Software Administration Console URL as follows:</p> <p><code>http://<hostname>:<port>/admin/</code></p> <p><i>Note: The trailing forward slash is required in the Admin Console URL (i.e., admin/).</i></p>
6.	<p>Click Next to continue. The "Instance Startup" screen displays. Three instance startup options are provided.</p> <ul style="list-style-type: none"> Start Standalone Process—Runs the "startup <instance>" command line script located in the <code>sm60\bin</code> directory. Install as Windows Service—Installs the instance as a Windows Service. The Instance can be managed via the "Services" dialog in the Windows Program Group (Control Panel/Administrative Tools/Services). Do Not Start Instance—Configures the instance but does not start it. Instance can be started manually after the configuration is complete by executing the "startup <instance>" command line script in the <code>sm60\bin</code> directory. 

Figure 3-6: Instance Setup—Standalone Deployment

Click the radio button of the startup option you would like to use for the current

To Configure a Network Director Container Instance

	<p>container instance, and click Next to continue.</p> <hr/> <p>Note: The "Instance Startup" screen does not display on UNIX systems because a manual startup is required. Container Startup instructions are provided later in this procedure</p> <hr/>
7.	<p>The "Summary" screen displays. Review the summary information. To confirm, click Finish.</p> 
8.	<p>This completes the container configuration process.</p> <p>If you selected the "Do Not Start Instance" option, the following methods can be used to start a container instance:</p> <p><u>Start Process in Windows</u> Start—Navigate to <code>sm60\bin</code> and type <code>startup <instance name></code></p> <p><u>Start Process as Windows Service</u> Launch Program Group (Settings /Control Panel/Administrative Tools/Services). Select <code>SM 6.0 - <Container Instance></code> - Note that the instance name is displayed as the Container Key.</p> <p><u>Start Process in UNIX</u> Start—Navigate to <code>sm60/bin</code> and type <code>startup.sh <instance name></code></p> <p><u>Start Process in UNIX (Background)</u></p>

To Configure a Network Director Container Instance

	Start—Navigate to sm60/bin and type startup.sh <instance name> -bg
9.	<p>Perform the following prerequisite steps before launching the SOA Software Administration Console:</p> <ul style="list-style-type: none"> • <u>Deploy Database Driver</u>—Before performing the database configuration in the SOA Software Administration Console, verify that a database driver for the database used with the current SOA Container configuration is deployed to the c:\sm60\instances\<container instance>\deploy folder. If a database driver is not deployed, copy the database driver to the \deploy directory. Refer to "Appendix B: Database Drivers" for a list of supported database drivers. • <u>Clear Browser Cache</u>—Before launching the SOA Software Administration Console, clear the browser cache. This is necessary to ensure that user interface changes included in the Policy Manager update(s) display properly. • <u>Manually Installing Policy Manager Schemas</u>—If you have a requirement to manually install the Policy Manager schemas, contact SOA Software Customer Support prior to beginning this installation to obtain a series of schema installation scripts and additional instructions.
10.	If the "Launch Admin Console" checkbox is selected on the "Launch Admin Console" screen, the SOA Software Administration Console will launch automatically. If you selected "Do Not Start Instance," refer to the "Launch SOA Software Administration Console" section for instructions.

Configure Network Director Container Instance (Silent Configuration)

This section provides instructions on how to configure an automated configuration properties file that is used to create a new Network Director Container Instance.

To Configure a Network Director Instance (Silent Configuration)

Step	Procedure
1.	<p>The "Configure Container Instance Wizard" can be set up to run in an automated mode (i.e., silent). This is done by defining a properties file and pre-defining a set of property values to be used by the "Configure Container Instance Wizard" to automatically configure a Container instance.</p> <ol style="list-style-type: none"> 1. Define a properties file (e.g., myprops.properties) 2. Add the following default content: <pre>container.instance.name=instancename credential.username = administrator credential.password = password default.host=localhost default.port=9905</pre> <p><u>Base Properties</u> The following properties are used for Standalone deployments.</p> <p>container.instance.name—Name of the Container. credential.username—Username for logging into the SOA Software</p>


To Configure a Network Director Instance (Silent Configuration)

	<p>Administration Console. credential.password—Password for logging into the SOA Software Administration Console. default.host—Host for the Container Instance. default.port—Port for the Container Instance.</p> <p><u>Running Silent Configuration</u></p> <p>The "Configure Container Instance Wizard (Silent Configuration)" properties file accepts the following system properties which together are used to perform a silent configuration:</p> <ol style="list-style-type: none"> 1. silent (If True, silent configuration will be performed) 2. properties (location on filesystem of property file to be used for configuration) <p><u>Windows:</u></p> <pre>\sm60\bin>startup.bat configurator "-Dsilent=true" "-Dproperties=C:/<property file directory location>/myprops.properties"</pre> <p><u>UNIX</u></p> <pre>\sm60\bin>startup.sh configurator -Dsilent=true -Dproperties=/export/home/username/<property file directory location>\myprops.properties</pre>
2.	<p>Perform the following prerequisite steps before launching the SOA Software Administration Console:</p> <ul style="list-style-type: none"> • <u>Deploy Database Driver</u>—Before performing the database configuration in the SOA Software Administration Console, verify that a database driver for the database used with the current SOA Container configuration is deployed to the c:\sm60\instances\<container instance>\deploy folder. If a database driver is not deployed, copy the database driver to the \deploy directory. Refer to "Appendix B: Database Drivers" for a list of supported database drivers. • <u>Clear Browser Cache</u>—Before launching the SOA Software Administration Console, clear the browser cache. This is necessary to ensure that user interface changes included in the SOA Software Platform update(s) display properly. • <u>Manually Installing Policy Manager Schemas</u>—If you have a requirement to manually install the Policy Manager schemas, contact SOA Software Customer Support prior to beginning this installation to obtain a series of schema installation scripts and additional instructions.
3.	<p>Start the container instance. The following methods can be used to start a container instance:</p> <p><u>Start / Stop Process in Windows</u></p> <p>Start—Navigate to sm60\bin and type startup <instance name></p> <p><u>Start Process as Windows Service</u></p> <p>Launch Program Group (Settings /Control Panel/Administrative Tools/Services). Select SM 6.0 – <Container Instance> - Note that the instance name is displayed as</p>

To Configure a Network Director Instance (Silent Configuration)

	<p>the Container Key.</p> <p><u>Start / Stop Process in UNIX</u></p> <p>Start—Navigate to sm60/bin and type startup.sh <instance name></p> <p><u>Start / Stop Process in UNIX (Background)</u></p> <p>Start—Navigate to sm60/bin and type startup.sh < —Navigate to sm60/bin and type shutdown.sh</p> <p><i>Refer to Appendix A: Start / Stop / Restart Container Instance for a complete list of container start/stop instructions.</i></p>
4.	The next step is to launch the SOA Software Administration Console. Refer to the "Launch SOA Software Administration Console" section.

STEP 2: LAUNCH SOA SOFTWARE ADMINISTRATION CONSOLE**To Configure a Container Instance (Silent Configuration)**

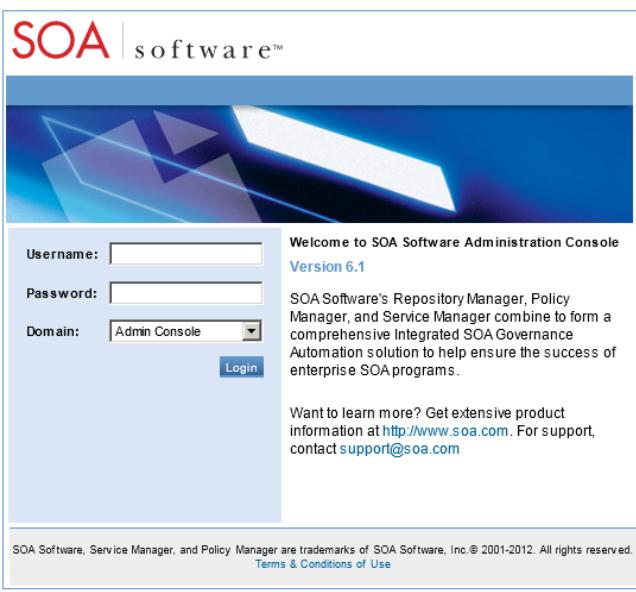Step	Procedure
1.	<p>After successfully starting the container instance, deploying the database driver, and clearing the browser cache, launch the "SOA Software Administration Console" for the updated SOA Container Instance:</p> <p>Enter: <u><a href="http://<hostname>:<port>/admin">http://<hostname>:<port>/admin</u></p>  <p>Figure 3-8: SOA Software Administration Console—Login</p>

STEP 3: INSTALL FEATURE (SOA SOFTWARE NETWORK DIRECTOR)

This section provides a walkthrough for installing the "SOA Software Network Director" feature.

To Install SOA Software Network Director Feature

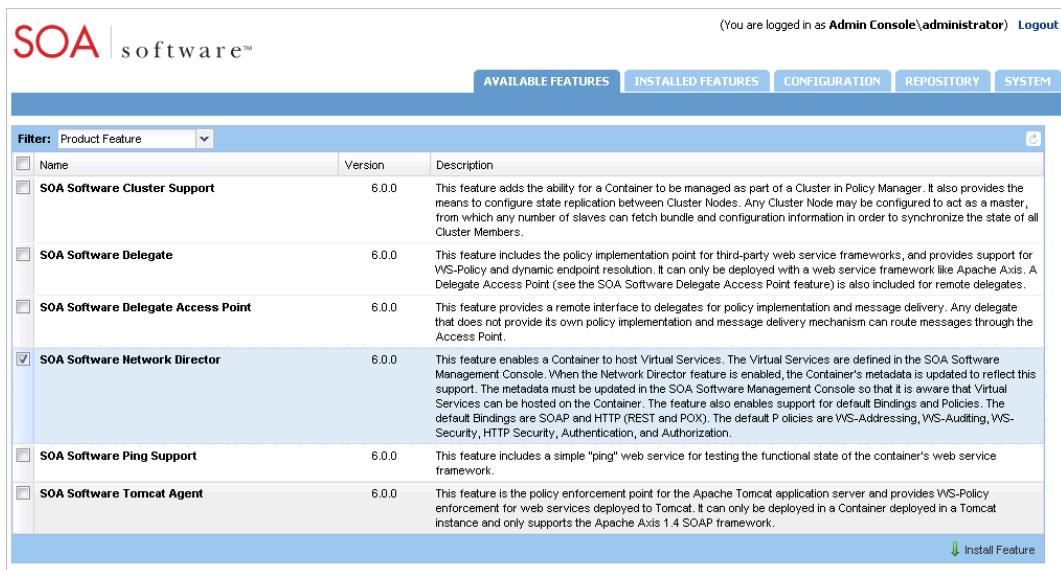
Step	Procedure
1.	<p>On the SOA Software Administration Console, click the "Available Features" tab. A list of available features displays. To select the "SOA Software Network Director" feature, click the checkbox next to the feature line item. After clicking the checkbox, the Install Feature button displays in focus.</p>  <p>The screenshot shows the SOA Software Administration Console interface. At the top, there's a header with the SOA software logo and a user login message. Below the header, there are tabs: AVAILABLE FEATURES (which is selected), INSTALLED FEATURES, CONFIGURATION, REPOSITORY, and SYSTEM. Under the AVAILABLE FEATURES tab, there's a filter dropdown set to 'Product Feature'. A table lists several features with their names, versions, and descriptions. The 'SOA Software Network Director' feature is highlighted with a blue background and has a checked checkbox next to it. At the bottom right of the table area, there's a large green button labeled 'Install Feature'.</p>
2.	<p>To begin installing the selected features, click Install Feature. The feature installation wizard goes through several prerequisite steps to verify the installation. In the "Resolve" phase, the system determines all the bundle and package dependencies for the selected feature.</p>

Figure 3-9: SOA Software Network Director Installation—Available Features Tab

To Install SOA Software Network Director Feature

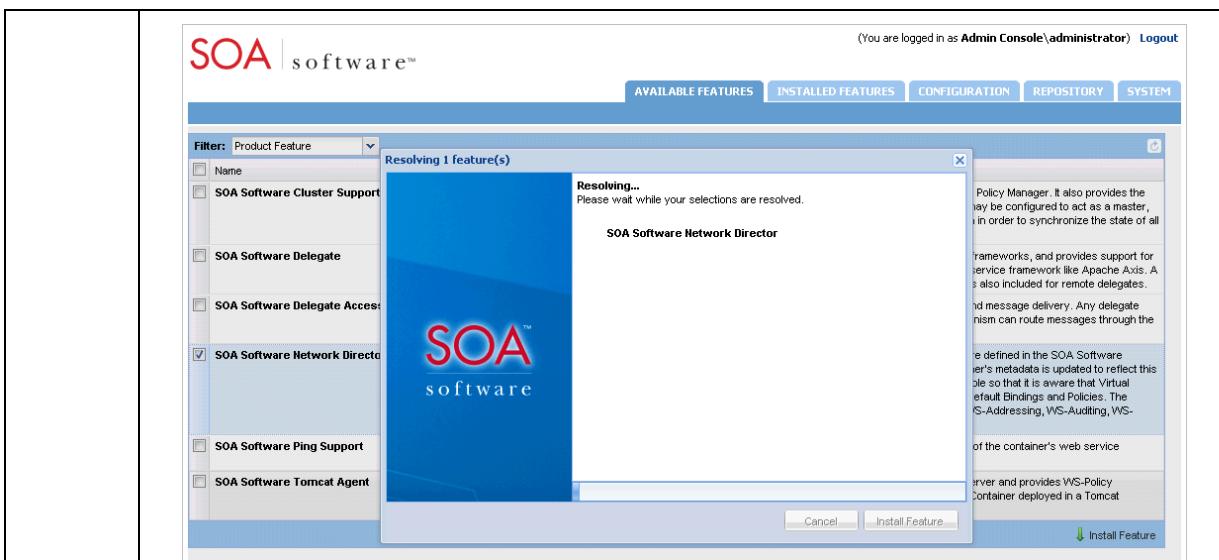


Figure 3-10: SOA Software Network Director Installation—Install Feature – Resolve Phase

- After the "Resolve" phase is complete, a "Feature Resolution Report" is presented that includes a list of dependencies for the selected feature.

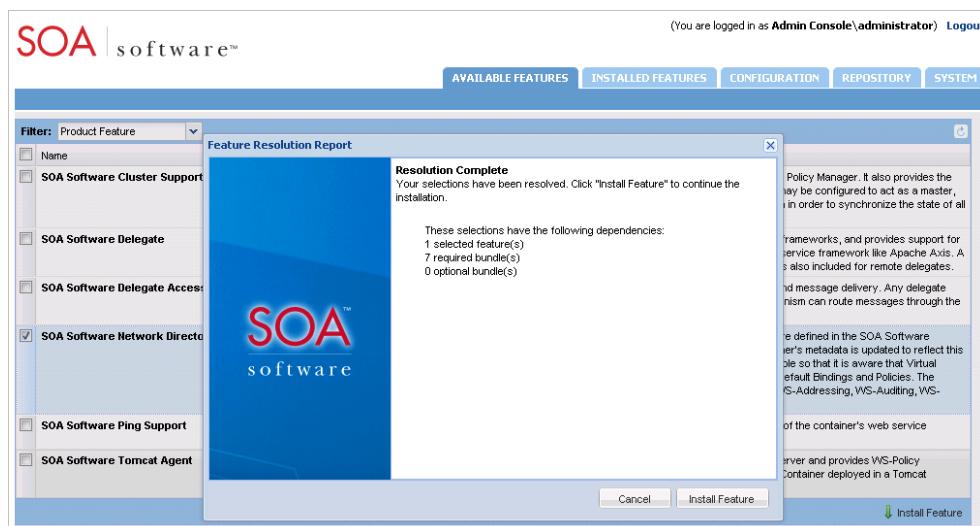


Figure 3-11: SOA Software Network Director Installation—Install Feature – Feature Resolution Report

- To begin installing the feature click **Install Feature**. The "Installing..." status displays along with a progress indicator.

To Install SOA Software Network Director Feature

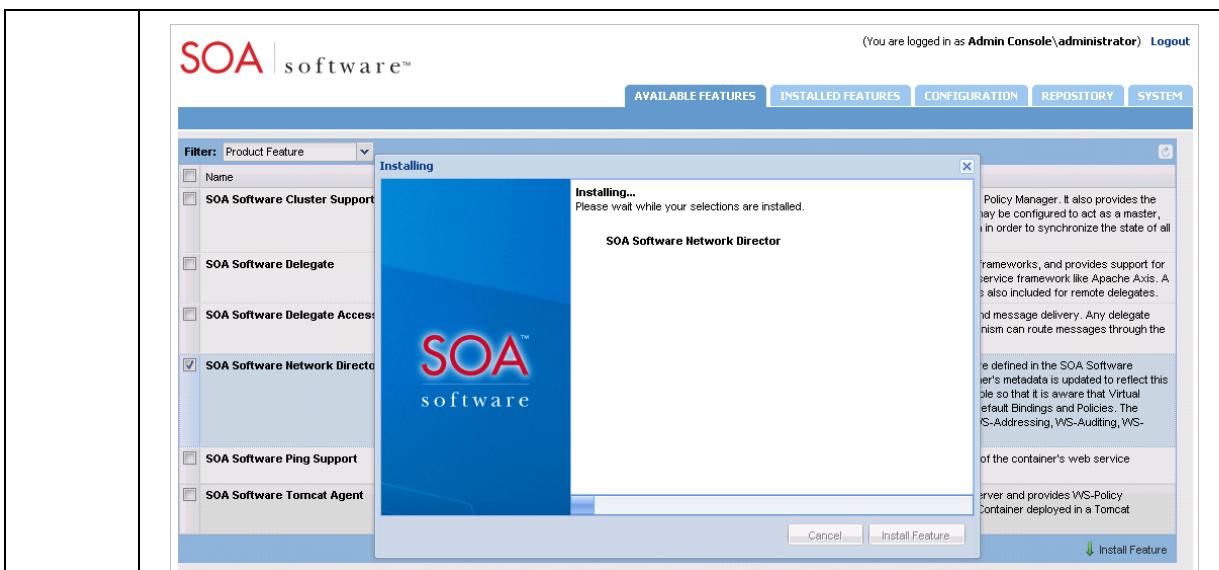


Figure 3-12: SOA Software Network Director Installation—*Install Feature – Install In Progress*

5. When the installation process is completed, the "Installation Complete" screen displays and the feature(s) being installed are removed from the listing under the "Available Features" tab and transitioned to the "Installed Features" tab.

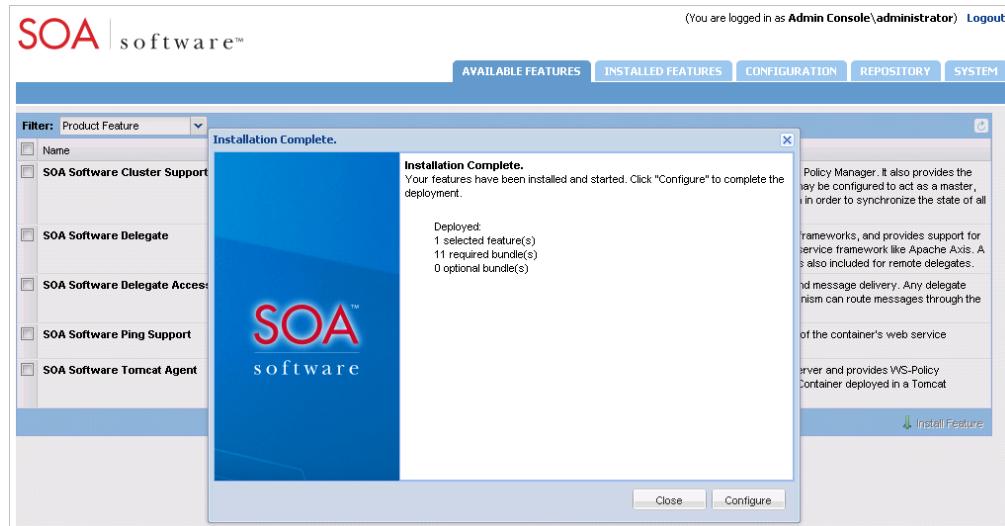


Figure 3-13: SOA Software Network Director Installation—*Install Feature – Installation Complete*

6. After the installation is complete, the next step is to configure the feature. This is done by executing a series of one-time and/or repeatable tasks. Refer to "Configure Network Director" for information on feature configuration.

STEP 4: CONFIGURE NETWORK DIRECTOR

After installing the "Network Director" feature via the "Available Features" tab on the SOA Software Administration Console a series of configuration tasks must be applied to the feature. Configuration tasks can be executed using two tracks. The first track can be started by clicking the "Configure" button on the "Installation Complete" screen at the end of the feature installation process. The second track allows you to resume the configuration at a later time by clicking **Cancel** on the "Installation Complete" screen and executing the "Complete Configuration" button in the "Pending Installation Tasks" section via the "Installed Features" tab.

Multiple configuration tasks are executed in a single stream using a wizard application. After the configuration process is complete, tasks that are "repeatable" are available via the "Configuration" tab and can be re-executed as needed.

Note: This section assumes a starting point of having launched the configuration wizard using either track. Tasks procedures are listed in sequential order.

To Begin Network Director Configuration

Step	Procedure
1.	<p>Select one of the following configuration tracks, to begin the configuration process for the "Network Director" feature.</p> <ul style="list-style-type: none"> • <i>Available Features Tab:</i> Click Configure on the "Installation Complete" screen of the feature installation wizard. <p>OR</p> <ul style="list-style-type: none"> • <i>Installed Features Tab:</i> Click Complete Configuration in the "Pending Installation Tasks" section. <p>The first page of the "WS-MetaDataExchange Options" displays. This is the starting point for beginning the Network Director configuration.</p> <p>The following sections provide a walkthrough of each task in the configuration wizard for the Network Director feature.</p>

Configure WS-MetaDataExchange Options (Network Director)

The "WS-MetaDataExchange Options" screen allows you specify the URL of the Policy Manager "Metadata Exchange Service." Connecting to the "Metadata Exchange Service" enables communication between the current SOA Software Container instance and Policy Manager to retrieve key information (e.g., service hosting, database, etc.).

Specifying the "WS-MetaDataExchange" URL is a required installation task for the "SOA Software Network Director" feature.

In the Policy Manager 6.1 Management Console, the URL can be found by viewing the Access Point URL of the "Metadata Exchange Service" or by viewing the WSDL of the "Metadata Exchange Service" at <SOAP:address location>. For Network Director, the

wsmex address you use should be the URL of the WS-MetaDataExchange service of the Policy Manager instance that is hosting the Network Director container.

To Configure WS-MetaDataExchange Options (Network Director)


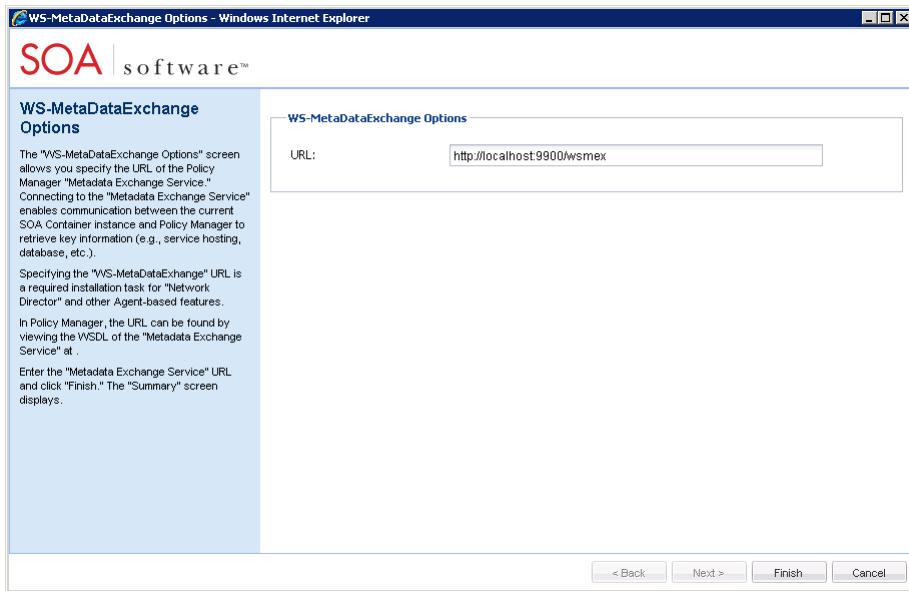
Step	Procedure
1.	<p>Enter the "Metadata Exchange Service" URL in the field display: <code>http://<hostname>:<port>/wsmex</code></p> <p>After completing your entry, click Finish. The "Summary" screen displays.</p> 
2.	<p>Review the summary information and click Continue To Next Task. The "Select Key Management Option" screen displays. See the "Manage PKI Keys" section for details on performing this task.</p>

Figure 3-14: Configure WS-MetaDataExchange Options Wizard (WS-MetaDataExchange Options)—Network Director

To Configure WS-MetaDataExchange Options (Network Director)

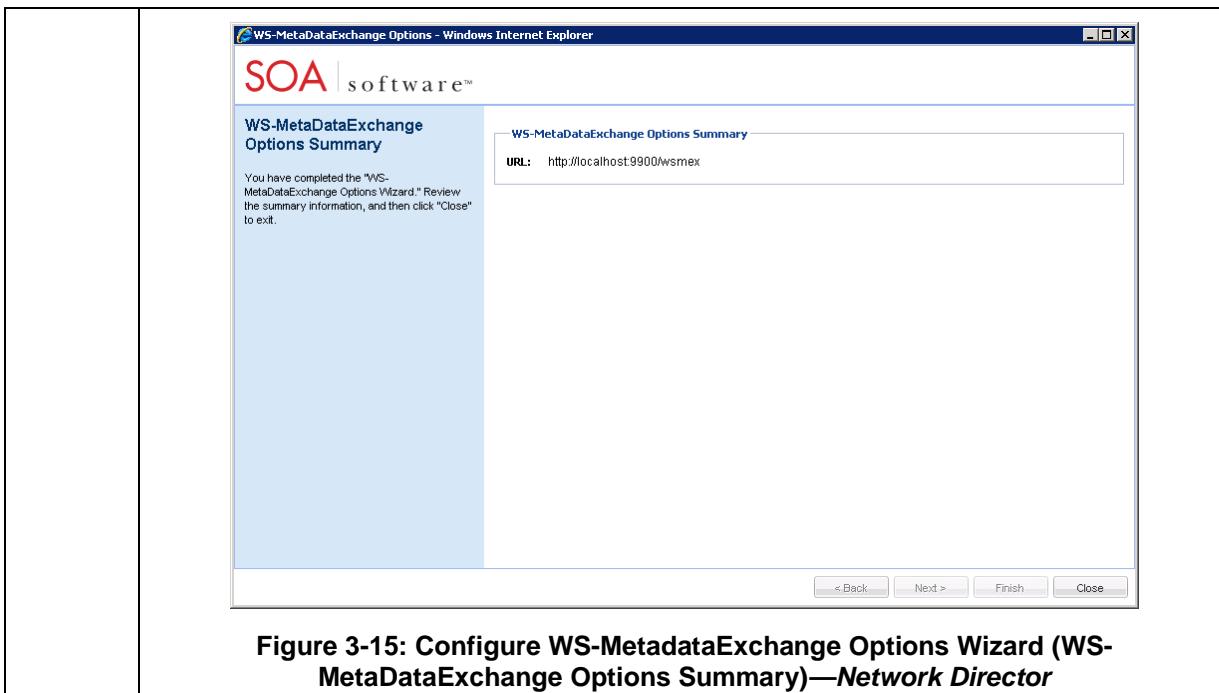

Manage PKI Keys (Network Director)

This section provides instruction for configuring PKI keys for the current container.

To Configure PKI Keys

Step	Procedure
1.	<p>The "Manage PKI Keys Wizard" is executed as either an installation task or configuration action for the Network Director and various Agent features. The wizard allows you to configure the private key and certificate for the container when communicating with a governance console.</p> <p>The first screen that displays in the "Manage PKI Keys Wizard" is the "Select Key Management Options" screen. It is organized as follows:</p> <ul style="list-style-type: none"> • PKI Keys Details—Displays the "Public Key" that has been generated and assigned to the container. If keys have not been generated and assigned, the "None Found" message displays. • Certificate Details—Displays a summary of information for the certificate assigned to the current container. Assigned certificates can be generated or imported using this wizard. Certificate information presented includes Subject DN, Issuer DN, Serial Number, Effective Date, and Expiration Date. If a certificate has not been assigned, the "None Found" message displays. • Key Management Options—Provides functions for performing key and certificate management for the current container. Option categories include "Generate," "Import," "Export," and Delete. Available objects are displayed "in focus" and are based on the object's configuration "state."

To Configure PKI Keys

2.	<p>Select a "Key Management Option" and click Next to continue. The pre-selected option is the assigned default. The "Generate PKI keys & X.509 Certificate" screen displays.</p> <p>The "Generate PKI Keys and X.509 Certificate" screen allows you to generate PKI Keys and an X.509 certificate. PKI Keys (i.e., access keys) guarantee message integrity by signing the message with a private key and verifying the message with a public key. An X.509 certificate is an authentication mechanism that provides visibility to public information and verifies private information while keeping it secure. Credential Information is embedded in the body of a SOAP Message, or can be obtained from the HTTPS Context.</p> <p>A "key strength" must be specified. The default key length is 1024 bits. The level of cryptographic strength of a key depends on its use (e.g., replacement schedule, security levels, etc.). In the "Key Length" section, select the radio button of the key length based on your requirements.</p> <p>The "Certificate Details" section includes the certificate elements you will configure for the X.509 certificate including Subject Distinguished Name (DN) elements, and Validity Period that represents the expiration Date and Time of the certificate.</p> <p>Select the "Key Length" and enter the "Certificate Details" based on your requirements. After completing your entries, click Finish. Certificate details are displayed on the "Summary" screen.</p>

To Configure PKI Keys

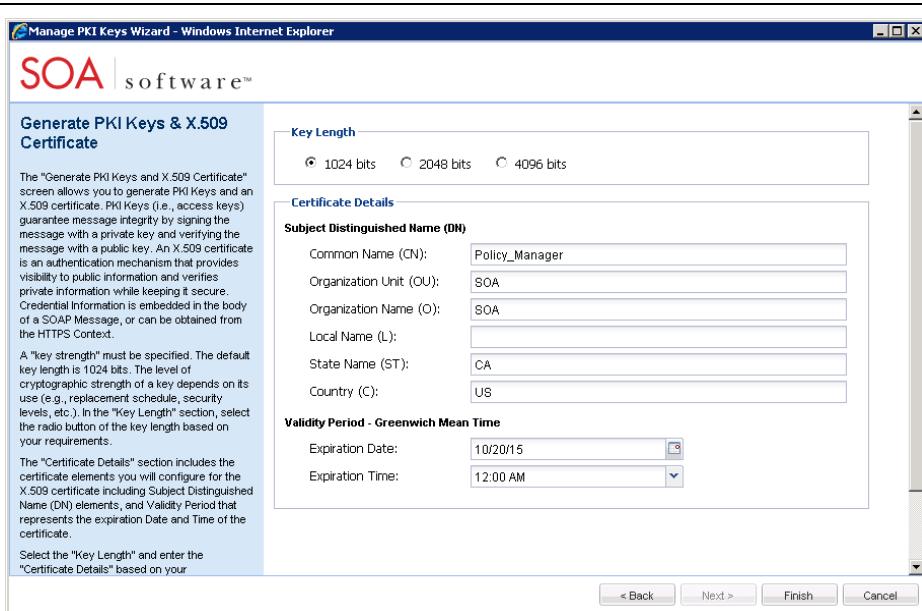


Figure 3-17: Manage PKI Keys Wizard (Generate PKI Keys & X.509 Certificate)—Network Director

3. To continue with the Network Director click **Go To Next Task**. The "Complete Configuration" screen displays.

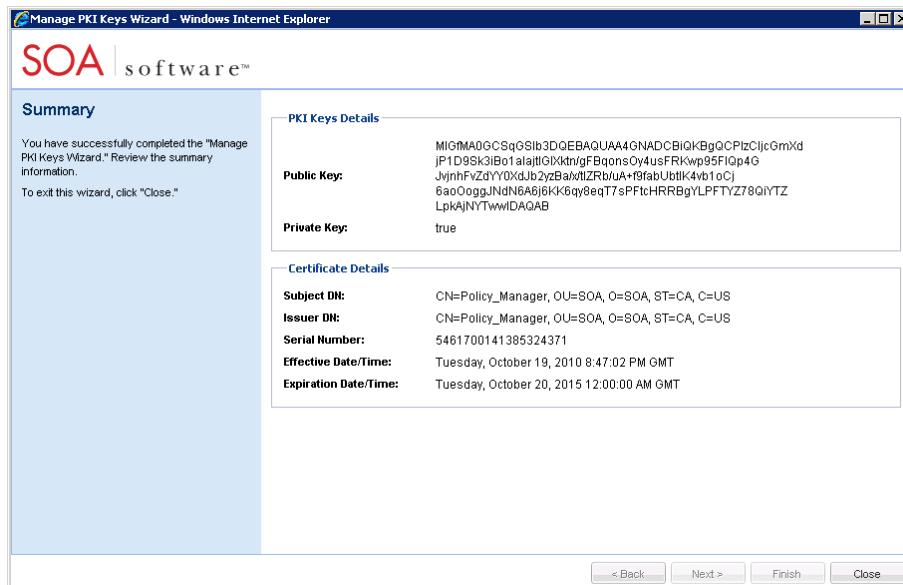


Figure 3-18: Manage PKI Keys Wizard Summary—Network Director

Completing the Configuration (Network Director)

The "Complete Configuration" screen displays a system restart progress indicator and allows you to log out of the SOA Software Administration Console after the system restart is complete.

To Complete the Configuration (Network Director)

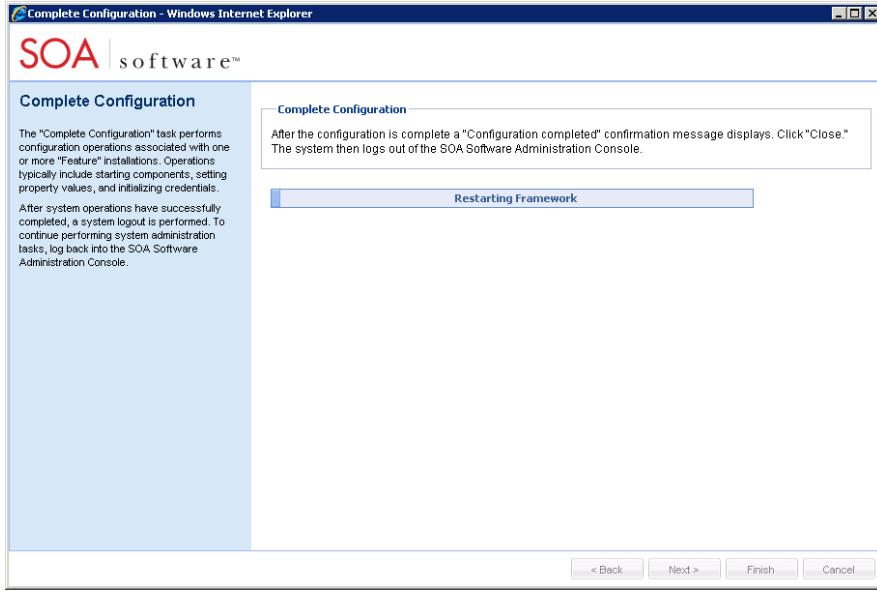
Step	Procedure
	<p>1. The "Complete Configuration" task performs configuration operations associated with one or more "Feature" installations. Operations typically include starting components, setting property values, and initializing credentials.</p> <p>The system restart was initiated when Finish was clicked on the "Credentials Summary" screen. After the system restarts and initializes the installed features for use, click Close to log out of the SOA Software Administration Console.</p> <p>To exit the wizard and perform a system restart at a later time, click Close. Configuration changes are saved and the "Complete Configuration" task is available via the "Installed Features" tab in the "Pending Installation Tasks" section.</p> 

Figure 3-19: Complete Configuration—Network Director

Perform SOA Software Administration Console Login (Network Director)

After the system exits the SOA Software Administration Console, the "Login" screen displays. Select the "Admin Console" domain and click "Enter" to log back in and continue system administration activities.



Figure 3-20: SOA Software Administration Console—Login (Admin Console)

STEP 5: REGISTER NETWORK DIRECTOR CONTAINER

This section provides instructions on how to register the Network Director Container. This process involves configuring an SOA Container and Service Hosting.

To Register Network Director Container

Step	Procedure
1.	<p>After successfully installing and configuring the Network Director feature, the next step is to register the Network Director Container in Policy Manager "Management Console."</p> <p>Login to the Policy Manager "Management Console" and navigate to "Org > Containers." The "Containers Summary" screen displays.</p> <p>Click Add Container. The "Add Container Wizard" launches and the "Select Container Type" screen displays. In the "SOA Container Types" section click the "SOA Container" radio button.</p>

To Register Network Director Container

Figure 3-21: Register Network Director—Add Container Wizard (Select Container Type)	

2. Click **Next** to continue. The "Specify Metadata Import Options" screen displays and is organized as follows:

Metadata Options

- Metadata URL—This option is used to enter the URL address that represents the location where the Network Director Metadata will be retrieved. Computer Name / Port Number should be the Hostname and Port Number of Network Director.
- Metadata Path—This option is used to enter the file system path of the metadata document.

To obtain a Metadata Document perform the following steps:


- 1) Access the Metadata URL in any browser.
- 2) After accessing the URL in the browser, Right click on the page and select "View Page Source"
- 3) Save the opened page using the .xml format.

Authentication Options

This section allows you to specify options for how to pass the credentials used to retrieve container metadata. Three options are available:

- Anonymous—This option does not pass user credentials to the container to retrieve its metadata.
- Logged in User—This option passes the current logged in user's credentials to the container to retrieve its metadata.
- Specify Credentials—This option passes the supplied credentials in the Username, Password, and Domain fields to the container to retrieve its metadata.

To Register Network Director Container

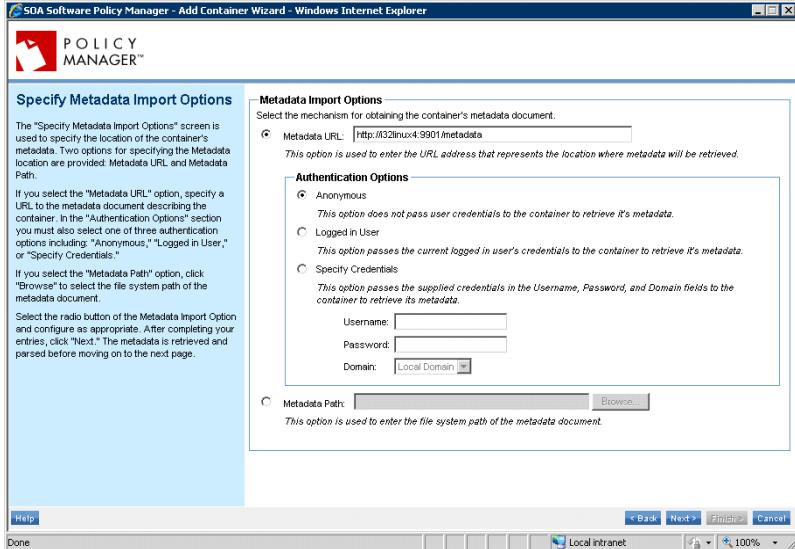	<p>Configure a Metadata and Authentication option and click Next to continue.</p> 
3.	<p>If the metadata contains a certificate that does not reside in the Policy Manager Trusted Certificate Authority store, you will receive the "X.509 Certificate Not Trusted" screen. Here you can add the current certificate to the Trusted Certificate Authority store, or you can manually add using the Import Trusted Certificate function in the "Configure > Security > Certificates > Trusted CA Certificates" section of the "Management Console".</p> <p>Select "Yes" to add the certificate to the Policy Manager Trusted Certificate Authority store, and click Next. The "Specify Container Details" screen displays. Selecting "No"</p>

To Register Network Director Container

	<p>returns you to the "Select Container Type" screen.</p> <p>Click the "Yes" radio button, and click Next to continue.</p>
4.	<p>The "Container Details" screen displays.</p> <p>Each container definition needs an instance name and description to distinguish it from other container types, an encryption seed (i.e., Container Key) to ensure security when it is launched, and must be assigned to an Organization. The "Organization" represents the owner of the container. The screen is organized into two sections:</p> <p><u>Container Details</u></p> <ul style="list-style-type: none"> • Type—Displays the container type. • Container Key—A field display that is used to specify a custom container encryption key. If no custom key is specified, Policy Manager will auto-generate a key. • Instance Name—A field display that allows you to specify an instance name for the container. • Description—A field display that allows you to specify a description for the container. <p><u>Organization Tree</u></p> <ul style="list-style-type: none"> • An "Organization Tree" that allows you to select the organization that represents the owner of the container.

To Register Network Director Container

--	--

Figure 3-25: Register Network Director—Add Container Wizard (Specify Container Details)

5. Complete your entries and click **Finish** to continue. The "Add Container Wizard" configures the container and saves the information to the Policy Manager data repository. When the configuration process is complete, the "Completion Summary" screen displays.

After you have reviewed the summary screen, click **Close**.

--	--

Figure 3-26: Register Network Director—Add Container Wizard (Completion Summary)

The Network Director Container is now successfully registered in the "Management

To Register Network Director Container

	<p>"Console" and the Container Details screen displays.</p> 
--	--

Figure 3-27: Register Network Director—Container Details

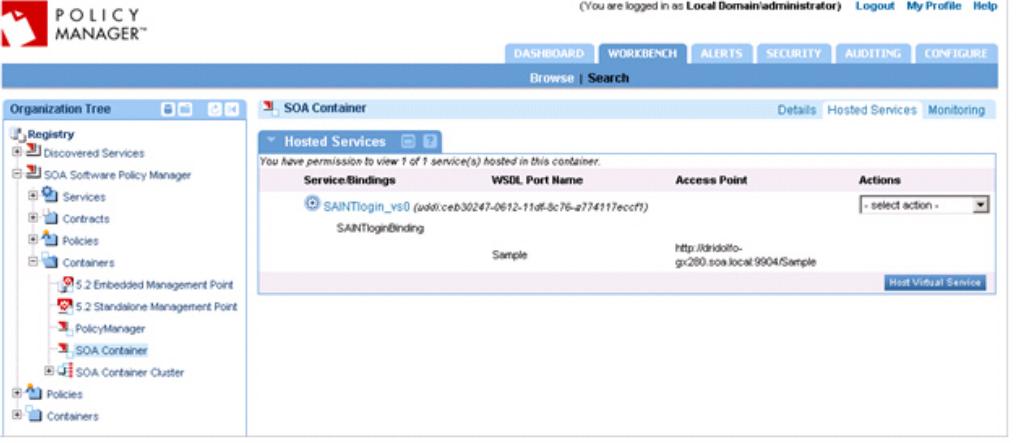
6.	<p>After registering the Network Director in the "Management Console," the next step is to host virtual services in the Network Director Container Instance. From the Containers Folder in the Organization Tree, or by selecting a line item on the "Containers Summary" select a container that you would like to configure or manage virtual service hosting for. The "Container Details" tab displays. Click the "Hosted Services" tab. The "Hosted Services Summary" screen displays and presents a list of virtual services that are hosted by the current container.</p> 
----	--

Figure 3-28: Register Network Director—Hosted Services Summary

7.	<p>To add a virtual service to the current container, click "Host Virtual Service." The "Host Virtual Service Wizard" launches and displays the "Select Virtual Service" Screen. Click the "Help" button to launch the "Policy Manager Online Help" for complete instructions on selecting a virtual service and configuring service hosting.</p>
----	---

Chapter 4: SOA Software Administration Console

OVERVIEW

SOA Software Platform 6.1 configuration and administration is performed using the "SOA Software Administration Console." After the "SOA Software Platform Installation Wizard" installs the SOA Software Platform application, and the "Configure Container Instance Wizard" is used to define a container that will host selected "Features," the "SOA Software Administration Console" is used to install and configure these "Features."

When assessing your deployment requirements, you will determine how many container instances are required and which features you would like installed in each container instance. Configuration and administration of each feature installation is performed using a variety of different options offered in the "SOA Software Administration Console." Base features include SOA Software Policy Manager Console & SOA Software Policy Manager Web Services. These two features represent the Policy Manager application and can be installed in a single container or separate containers. The feature list is available on a per-version basis is based on your specific customer requirements.

ADMIN CONSOLE ORGANIZATION

The "SOA Software Administration Console" is organized into five functional areas.

Available Features

The "Available Features" tab displays a list of features that are available to be installed on the current SOA Software Container instance.

Feature List

The feature list can be filtered to show "Product Feature" or "Tool" via the "Filter" drop-down.

Install Feature

To install a feature, select the corresponding checkbox, and then click "Install Feature." Select additional checkboxes to install multiple features. After the installation process is complete, the feature is listed in the "Installed Features" tab where additional configuration steps may be required to complete the installation.

Name	Version	Description
SOA Software Cluster Support	6.0.0	This feature adds the ability for a Container to be managed as part of a Cluster in Policy Manager. It also provides the means to configure state replication between Cluster Nodes. Any Cluster Node may be configured to act as a master, from which any number of slaves can fetch bundle and configuration information in order to synchronize the state of all Cluster Members.
SOA Software Delegate	6.0.0	This feature includes the policy implementation point for third-party web service frameworks, and provides support for WS-Policy and dynamic endpoint resolution. It can only be deployed with a web service framework like Apache Axis. A Delegate Access Point (see the SOA Software Delegate Access Point feature) is also included for remote delegates.
SOA Software Delegate Access Point	6.0.0	This feature provides a remote interface to delegates for policy implementation and message delivery. Any delegate that does not provide its own policy implementation and message delivery mechanism can route messages through the Access Point.
SOA Software Network Director	6.0.0	This feature enables a Container to host Virtual Services. The Virtual Services are defined in the SOA Software Management Console. When the Network Director feature is enabled, the Container's metadata is updated to reflect this support. The metadata must be updated in the SOA Software Management Console so that it is aware that Virtual Services can be hosted on the Container. The feature also enables support for default Bindings and Policies. The default Bindings are SOAP and HTTP (REST and POX). The default Policies are WS-Addressing, WS-Auditing, WS-Security, HTTP Security, Authentication, and Authorization.
SOA Software Ping Support	6.0.0	This feature includes a simple "ping" web service for testing the functional state of the container's web service framework.
SOA Software Tomcat Agent	6.0.0	This feature is the policy enforcement point for the Apache Tomcat application server and provides WS-Policy enforcement for web services deployed to Tomcat. It can only be deployed in a Container deployed in a Tomcat instance and only supports the Apache Axis 1.4 SOAP framework.

Figure 4-1: SOA Software Administration Console—Available Features

Installed Features

The "Installed Features" tab displays a list of features that are installed on the current SOA Software Container instance. The feature list "Filter" drop-down list box allows you to filter features by "Product Feature" or "Bundle" categories.

Update Feature

To update features, select a "Feature" line item and click "Search for Updates." An installation wizard displays and presents a listing of available updates (if applicable). To install the updates proceed with the installation process. After the update is complete, the "Version" number of updated features is changed to reflect the installed version.

Rollback Feature

To rollback a feature, select a "Feature" line item and click "Rollback Changes." The system uninstalls the selected feature, removes it from the "Installed Features" tab, and moves it back to the "Available Features" tab.

Uninstall Feature

To uninstall a feature, select the icon and click "OK." The system uninstalls the selected feature, removes it from the "Installed Features" tab, and moves it back to the "Available Features" tab.

Pending Installation Tasks

The "Pending Installation Tasks" is a list of configuration tasks (if applicable) that are required to complete the installation process. To perform pending installation tasks, click "Complete Configuration."

View Bundles

To view bundles associated with a current update, click the "Installed Features" tab, select "Bundle" from the "Filter" drop-down list box, and click the "Version" column to sort by version. To view "Bundle Details" click on a bundle line item.

Name	Version	Description	Uninstall
SOA Software Policy Manager Services	6.0.0	This feature includes services provided by the central Policy Manager governance application. These services include, but are not limited to, UDDIv2 and UDDIv3, WS-MetadataExchange, SOA Container Configuration, an XACML Policy Decision Point, a WS-Trust Security Token Service, Alert reporting, and RESTful interfaces to the governance model. In addition, this feature includes engines for performing Quality of Service calculations and health and status monitoring.	Uninstall
SOA Software Policy Manager Console	6.0.0	This feature includes a web based user interface for the central Policy Manager governance application. The user interface provides a dashboard and the primary interface for configuration, management and administration of Policy Manager and Service Manager. The console must interact with a Container (may be the same container) configured with the SOA Software Policy Manager Services to fulfill the core central governance application requirements.	Uninstall

Pending Installation Tasks
There are 0 installation task(s) pending completion.

Figure 4-2: SOA Software Administration Console—*Installed Features*

Configuration

The "Configuration" tab provides two methods of modifying a container configuration including "Configuration Actions" on the left sidebar that execute wizards, and "Properties" that are presented in a table format.

After modifying any container configuration properties you must restart your container. See "Appendix A: Start / Stop / Restart Container Instance" for more information.

Configuration Actions

Configuration Actions are located in the bottom left sidebar area of the "Configuration" tab on the SOA Software Administration Console. They represent "repeatable" tasks that were performed during the initial container configuration. To modify properties for a specific configuration area, click the task link to launch a wizard and then configure the properties.

Configuration Properties

Configuration properties are organized into "Configuration Categories" and are located in the top left sidebar area of the "Configuration" tab on the SOA Software Administration Console. To view properties, click a "Configuration Category" link and a properties table displays. To update a property, modify the property information in the table row and click **Apply Changes**. To add additional properties click, **Add Property**.

- The "Configuration Categories" section displays a list of property categories that expand to display specific property names and values. The initial property configuration is created during the installation and configuration of features.
- To update a property value, select a property name in the "Configuration Categories" section, update the property value, and click **Apply Changes**.
- To add a property value, select a "Configuration Category" to add a property to, and click "Add Property." The "Add Configuration Property" popup displays. Enter a "Property Name" and "Property Value" and click **Apply**.
- The "Configuration Actions" section displays a list of maintenance actions.

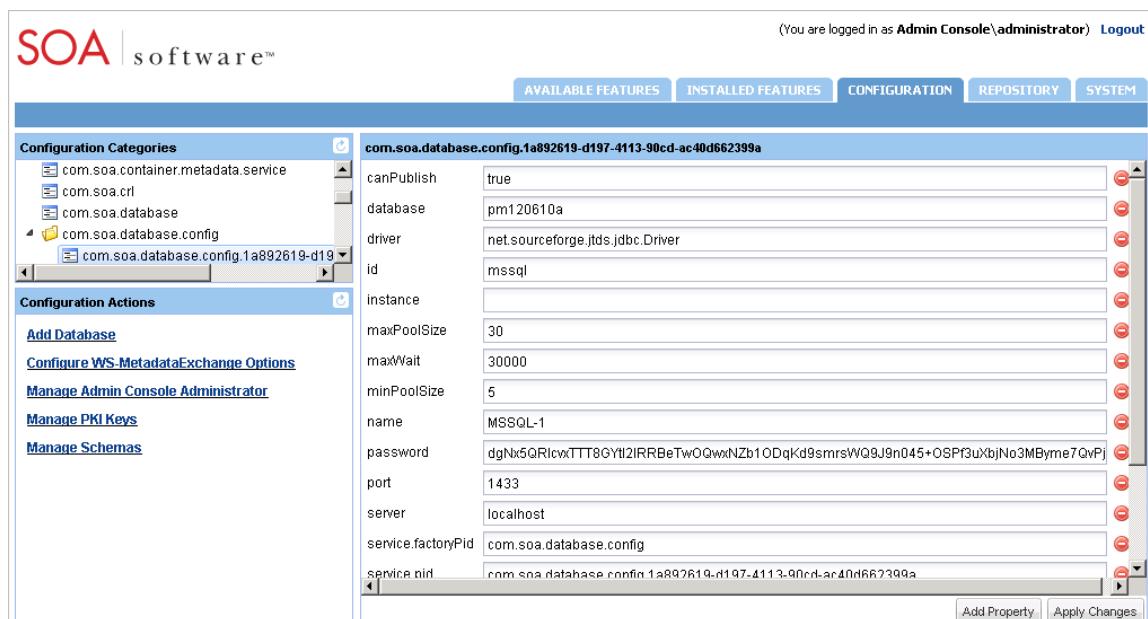


Figure 4-3: SOA Software Administration Console—Configure

Repository

The "Repository" screen displays a list of repositories identified by "Location" that store product features that are available for installation on the current SOA Software Container instance. A default repository (SOA Software Platform Default Repository) is added as part of the initial SOA Software Platform installation.

Install Container Updates

SOA Software Container Updates are distributed using a Repository URL that points to a repository that contains designated product features or updates. The Repository URL is added to the "Repository" tab via the SOA Software Administration Console. Updates include bundles that represent new features, or updates to existing features.

After a Repository URL is added to the "Repository," updates to a specific feature can be applied by clicking the "Search for Updates" button via the "Installed Features" tab and applying the list of updates found.

This section provides instructions for adding a Repository URL to the SOA Software Administration Console and applying an update.

Add Repository URL

SOA Software product updates are installed via the SOA Software Administration Console. The first step in applying a product update is to add the Repository URL that includes the update data to via the "Repository" tab.

To Add a Repository URL

Step	Procedure
1.	<p>To add a Repository URL that contains SOA Software product updates, enter or paste the Repository URL provided by SOA Software Customer Support into the "Repository URL" field display.</p> <hr/> <p>Note: You must reformat your Repository URL by prepending "file://" to the URL and changing the backslashes to forward slashes (/).</p> <hr/> <p>After the URL is reformatted, click Add. The URL is added to the Repository as follows:</p>  <p>The screenshot shows the SOA software administration console interface. At the top, there's a logo and a user status message '(You are logged in as Admin Console\administrator) Logout'. Below the header, there are tabs: AVAILABLE FEATURES, INSTALLED FEATURES, CONFIGURATION, REPOSITORY (which is selected), and SYSTEM. In the main content area, there's a table titled 'Repository' with columns for 'Name', 'Last Modified', and 'Location'. Two entries are listed: 'SOA Software Default Policy Manager Repository' with a location of 'file:///C:/sm60/120210a/sm60/lib/ext/repository.xml' and 'SOA Software Update 6.0.X' with a location of 'file:///C:/Update_repository'. At the bottom of the table, there's a blue bar with a text input field labeled 'Repository URL:' and a button labeled 'Add'.</p>

Figure 4-4: Admin Console—Repository (Add Repository)

2. You have successfully added the Repository URL. The next step in the update process is to apply the updates. Refer to the "Apply Updates" section for more information.

Apply Updates

After successfully adding the Repository URL, the next step in the update process is to search for product updates and apply them. The following two update scenarios apply:

- If the update delivers a new feature, the new feature will be available for installation via the "Available Features" tab.
- If the update delivers updates to currently installed features, the updates are applied and can be viewed by selecting the "Bundle" filter on the "Installed Updates" screen. Each bundle is labeled with the update version number.

To Search For and Apply Update

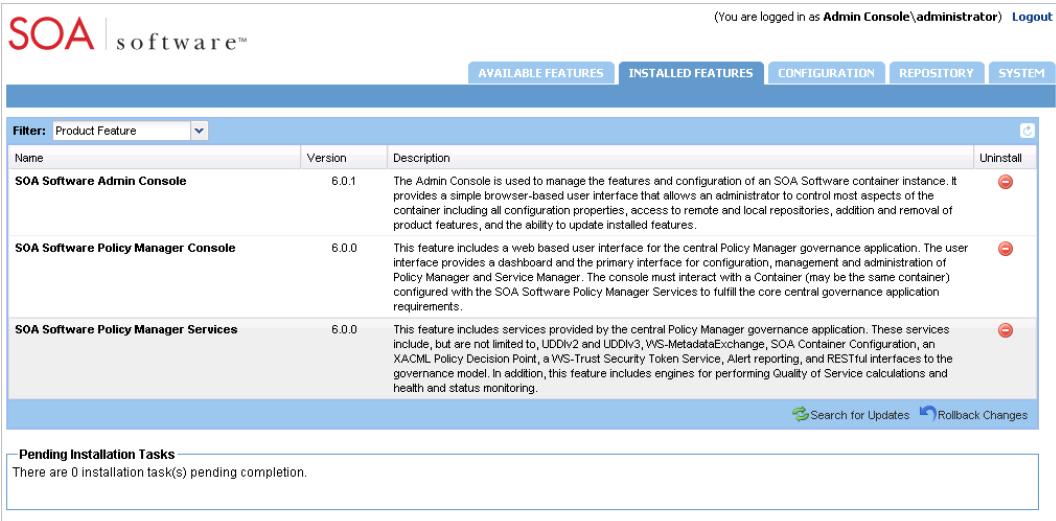
Step	Procedure
1.	<p>After adding the Repository URL for the current update, navigate to the "Installed Features" tab. Click Search for Updates.</p> 

Figure 4-5: Admin Console—Search for Updates Button

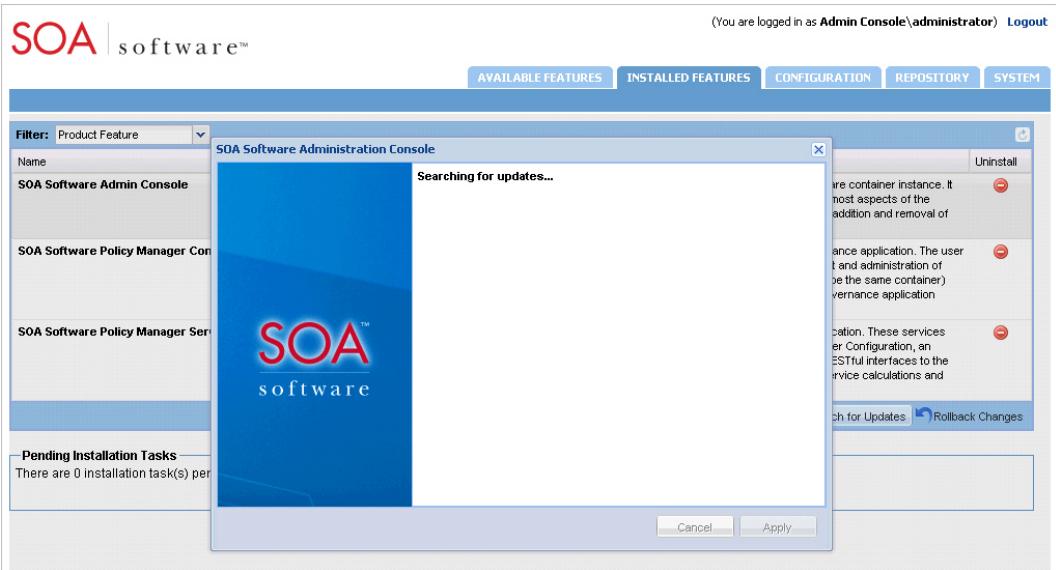
2.	<p>The "Searching for updates..." screen displays.</p> 
----	---

Figure 4-6: Admin Console—Searching for Updates

After the query for updates is completed, the "Updates Found" screen displays and presents a list of features that updates are available for. To install the updates for the list of features, click **Apply**.

To Search For and Apply Update

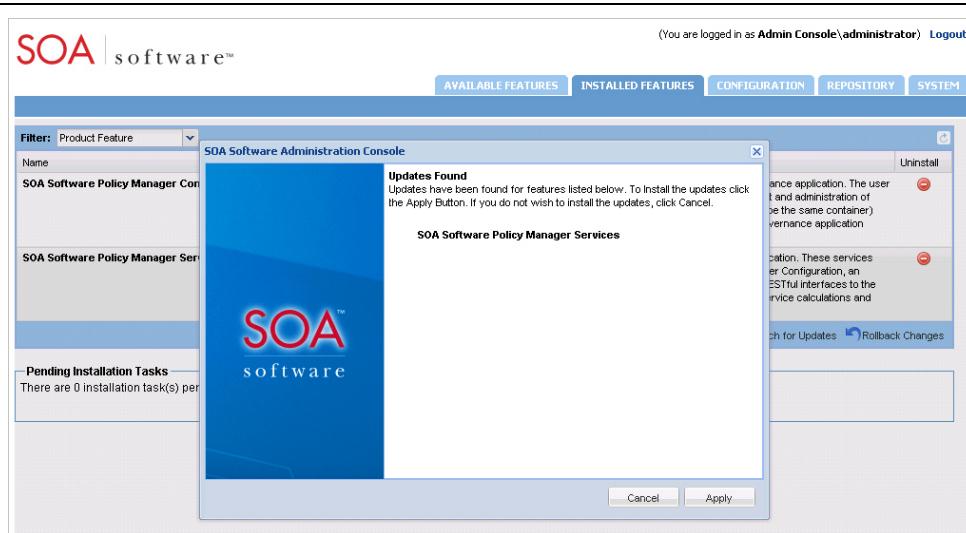


Figure 4-7: Admin Console—*Installed Features (Updates Found)*

The "Updating" screen displays while the update process is being performed. After the updating process is complete the wizard closes.

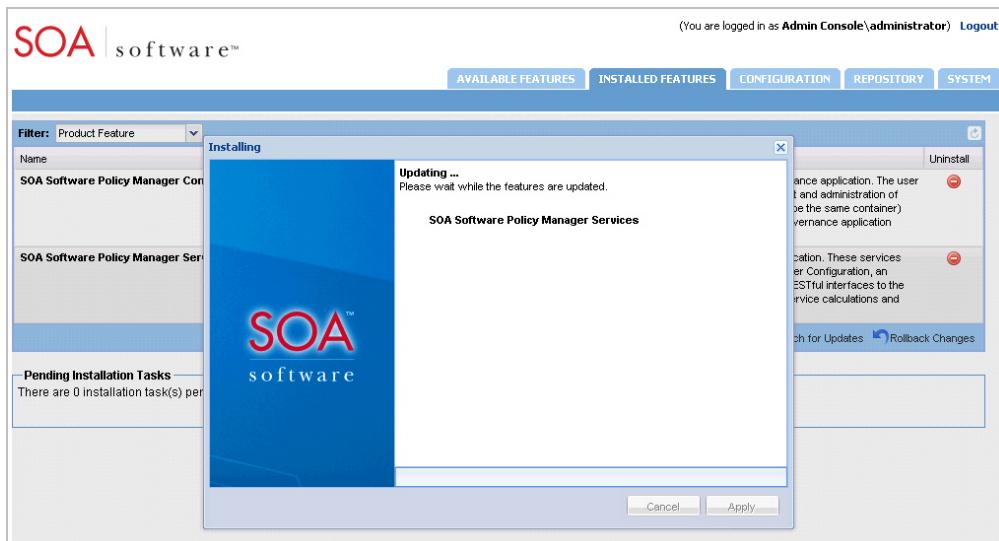


Figure 4-8: Admin Console—*Installed Features (Updating)*

- | | |
|----|--|
| 3. | To view updates, select "Bundle" from the "Filter" dropdown list box. Review the list of updates (i.e., bundles). Items are sorted by update "Version" number. |
|----|--|

To Search For and Apply Update

	<p>The screenshot shows the SOA Software Administration Console interface. At the top, there's a navigation bar with tabs: AVAILABLE FEATURES, INSTALLED FEATURES, CONFIGURATION, REPOSITORY, and SYSTEM. The user is currently logged in as 'Admin Console\administrator'. Below the navigation bar is a search/filter field set to 'Bundle'. A table displays a list of installed features:</p> <table border="1"> <thead> <tr> <th>Bundle ID</th> <th>Name</th> <th>Symbolic Name</th> <th>Status</th> <th>Version</th> </tr> </thead> <tbody> <tr><td>121</td><td>Saxon</td><td>net.sf.saxon</td><td>ACTIVE</td><td>9.2.0.6</td></tr> <tr><td>129</td><td>SOA Software HTTP JBI Binding Components</td><td>com.soa.jbi.component.http</td><td>INSTALLED</td><td>6.0.2</td></tr> <tr><td>2</td><td>SOA Software Container Identity</td><td>com.soa.container.identity</td><td>INSTALLED</td><td>6.0.1</td></tr> <tr><td>6</td><td>SOA Software Security APIs</td><td>com.soa.security</td><td>INSTALLED</td><td>6.0.1</td></tr> <tr><td>10</td><td>SOA Software Default Policy Handlers</td><td>com.soa.policy.handlers</td><td>INSTALLED</td><td>6.0.1</td></tr> <tr><td>14</td><td>SOA Software JBI Framework</td><td>com.soa.jbi</td><td>INSTALLED</td><td>6.0.1</td></tr> <tr><td>34</td><td>SOA Software Message APIs</td><td>com.soa.message</td><td>INSTALLED</td><td>6.0.1</td></tr> <tr><td>42</td><td>SOA Software Alert Client</td><td>com.soa.client.alerts</td><td>INSTALLED</td><td>6.0.1</td></tr> <tr><td>51</td><td>SOA Software Transports</td><td>com.soa.transport</td><td>INSTALLED</td><td>6.0.1</td></tr> <tr><td>55</td><td>SOA Software SOAP APIs and Message Handlers</td><td>com.soa.soap</td><td>INSTALLED</td><td>6.0.1</td></tr> <tr><td>95</td><td>SOA Software Container Lifecycle Control and Monitoring</td><td>com.soa.container.lifecycle</td><td>INSTALLED</td><td>6.0.1</td></tr> <tr><td>123</td><td>SOA Software Compliance Policy UI</td><td>com.soa.console.policy.compliance</td><td>INSTALLED</td><td>6.0.1</td></tr> <tr><td>128</td><td>SOA Software JMS Transport</td><td>com.soa.transport.jms</td><td>INSTALLED</td><td>6.0.1</td></tr> <tr><td>134</td><td>SOA Software Usage Monitoring Service</td><td>com.soa.jbi.component.usage</td><td>INSTALLED</td><td>6.0.1</td></tr> <tr><td>157</td><td>SOA Software Contract Handler</td><td>com.soa.message.handler.contract</td><td>INSTALLED</td><td>6.0.1</td></tr> </tbody> </table> <p>At the bottom of the table, it says 'Displaying 1 - 15 of 221'. Navigation icons for previous, next, and search are also present.</p>	Bundle ID	Name	Symbolic Name	Status	Version	121	Saxon	net.sf.saxon	ACTIVE	9.2.0.6	129	SOA Software HTTP JBI Binding Components	com.soa.jbi.component.http	INSTALLED	6.0.2	2	SOA Software Container Identity	com.soa.container.identity	INSTALLED	6.0.1	6	SOA Software Security APIs	com.soa.security	INSTALLED	6.0.1	10	SOA Software Default Policy Handlers	com.soa.policy.handlers	INSTALLED	6.0.1	14	SOA Software JBI Framework	com.soa.jbi	INSTALLED	6.0.1	34	SOA Software Message APIs	com.soa.message	INSTALLED	6.0.1	42	SOA Software Alert Client	com.soa.client.alerts	INSTALLED	6.0.1	51	SOA Software Transports	com.soa.transport	INSTALLED	6.0.1	55	SOA Software SOAP APIs and Message Handlers	com.soa.soap	INSTALLED	6.0.1	95	SOA Software Container Lifecycle Control and Monitoring	com.soa.container.lifecycle	INSTALLED	6.0.1	123	SOA Software Compliance Policy UI	com.soa.console.policy.compliance	INSTALLED	6.0.1	128	SOA Software JMS Transport	com.soa.transport.jms	INSTALLED	6.0.1	134	SOA Software Usage Monitoring Service	com.soa.jbi.component.usage	INSTALLED	6.0.1	157	SOA Software Contract Handler	com.soa.message.handler.contract	INSTALLED	6.0.1
Bundle ID	Name	Symbolic Name	Status	Version																																																																													
121	Saxon	net.sf.saxon	ACTIVE	9.2.0.6																																																																													
129	SOA Software HTTP JBI Binding Components	com.soa.jbi.component.http	INSTALLED	6.0.2																																																																													
2	SOA Software Container Identity	com.soa.container.identity	INSTALLED	6.0.1																																																																													
6	SOA Software Security APIs	com.soa.security	INSTALLED	6.0.1																																																																													
10	SOA Software Default Policy Handlers	com.soa.policy.handlers	INSTALLED	6.0.1																																																																													
14	SOA Software JBI Framework	com.soa.jbi	INSTALLED	6.0.1																																																																													
34	SOA Software Message APIs	com.soa.message	INSTALLED	6.0.1																																																																													
42	SOA Software Alert Client	com.soa.client.alerts	INSTALLED	6.0.1																																																																													
51	SOA Software Transports	com.soa.transport	INSTALLED	6.0.1																																																																													
55	SOA Software SOAP APIs and Message Handlers	com.soa.soap	INSTALLED	6.0.1																																																																													
95	SOA Software Container Lifecycle Control and Monitoring	com.soa.container.lifecycle	INSTALLED	6.0.1																																																																													
123	SOA Software Compliance Policy UI	com.soa.console.policy.compliance	INSTALLED	6.0.1																																																																													
128	SOA Software JMS Transport	com.soa.transport.jms	INSTALLED	6.0.1																																																																													
134	SOA Software Usage Monitoring Service	com.soa.jbi.component.usage	INSTALLED	6.0.1																																																																													
157	SOA Software Contract Handler	com.soa.message.handler.contract	INSTALLED	6.0.1																																																																													

Figure 4-9: Admin Console—*Installed Features (Bundle Filter)*

Perform System Rollback

When changes are made to an SOA Container (e.g., installing, updating, uninstalling a features, etc.), a snapshot is taken that reflects the date and time when the change occurred. The state of an SOA Container can be rolled back to a previous date. The following procedure illustrates how to perform a system rollback.

To Perform a System Rollback

Step	Procedure																
1.	<p>Navigate to the "Installed Features" tab. Click "Rollback Changes."</p> <p>The screenshot shows the SOA Software Administration Console interface. At the top, there's a navigation bar with tabs: AVAILABLE FEATURES, INSTALLED FEATURES, CONFIGURATION, REPOSITORY, and SYSTEM. The user is currently logged in as 'Admin Console\administrator'. Below the navigation bar is a search/filter field set to 'Product Feature'. A table displays a list of installed features:</p> <table border="1"> <thead> <tr> <th>Name</th> <th>Version</th> <th>Description</th> <th>Uninstall</th> </tr> </thead> <tbody> <tr> <td>SOA Software Admin Console</td> <td>6.0.1</td> <td>The Admin Console is used to manage the features and configuration of an SOA Software container instance. It provides a simple browser-based user interface that allows an administrator to control most aspects of the container, including all configuration properties, access to remote and local repositories, addition and removal of product features, and the ability to update installed features.</td> <td></td> </tr> <tr> <td>SOA Software Policy Manager Console</td> <td>6.0.0</td> <td>This feature includes a web based user interface for the central Policy Manager governance application. The user interface provides a dashboard and the primary interface for configuration, management and administration of Policy Manager and Service Manager. The console must interact with a Container (may be the same container) configured with the SOA Software Policy Manager Services to fulfill the core central governance application requirements.</td> <td></td> </tr> <tr> <td>SOA Software Policy Manager Services</td> <td>6.0.0</td> <td>This feature includes services provided by the central Policy Manager governance application. These services include, but are not limited to, UDDIv2 and UDDIv3, Ws-MetadataExchange, SOA Container Configuration, an XACML Policy Decision Point, a WS-Trust Security Token Service, Alert reporting, and RESTful interfaces to the governance model. In addition, this feature includes engines for performing Quality of Service calculations and health and status monitoring.</td> <td></td> </tr> </tbody> </table> <p>At the bottom left, it says 'Pending Installation Tasks' and 'There are 0 installation task(s) pending completion.' At the bottom right, there are buttons for 'Search for Updates' and 'Rollback Changes'.</p>	Name	Version	Description	Uninstall	SOA Software Admin Console	6.0.1	The Admin Console is used to manage the features and configuration of an SOA Software container instance. It provides a simple browser-based user interface that allows an administrator to control most aspects of the container, including all configuration properties, access to remote and local repositories, addition and removal of product features, and the ability to update installed features.		SOA Software Policy Manager Console	6.0.0	This feature includes a web based user interface for the central Policy Manager governance application. The user interface provides a dashboard and the primary interface for configuration, management and administration of Policy Manager and Service Manager. The console must interact with a Container (may be the same container) configured with the SOA Software Policy Manager Services to fulfill the core central governance application requirements.		SOA Software Policy Manager Services	6.0.0	This feature includes services provided by the central Policy Manager governance application. These services include, but are not limited to, UDDIv2 and UDDIv3, Ws-MetadataExchange, SOA Container Configuration, an XACML Policy Decision Point, a WS-Trust Security Token Service, Alert reporting, and RESTful interfaces to the governance model. In addition, this feature includes engines for performing Quality of Service calculations and health and status monitoring.	
Name	Version	Description	Uninstall														
SOA Software Admin Console	6.0.1	The Admin Console is used to manage the features and configuration of an SOA Software container instance. It provides a simple browser-based user interface that allows an administrator to control most aspects of the container, including all configuration properties, access to remote and local repositories, addition and removal of product features, and the ability to update installed features.															
SOA Software Policy Manager Console	6.0.0	This feature includes a web based user interface for the central Policy Manager governance application. The user interface provides a dashboard and the primary interface for configuration, management and administration of Policy Manager and Service Manager. The console must interact with a Container (may be the same container) configured with the SOA Software Policy Manager Services to fulfill the core central governance application requirements.															
SOA Software Policy Manager Services	6.0.0	This feature includes services provided by the central Policy Manager governance application. These services include, but are not limited to, UDDIv2 and UDDIv3, Ws-MetadataExchange, SOA Container Configuration, an XACML Policy Decision Point, a WS-Trust Security Token Service, Alert reporting, and RESTful interfaces to the governance model. In addition, this feature includes engines for performing Quality of Service calculations and health and status monitoring.															

Figure 4-10: Admin Console—*Rollback Changes Button*

To Perform a System Rollback

2. The "Rollback Changes" screen includes a "Snapshots Taken" display window that includes Date/Time entries that represent when changes were made to the current SOA Container.
- To rollback the state of the current SOA Container to a previous Date/Time, select a Snapshot line item and click **Rollback Changes**.

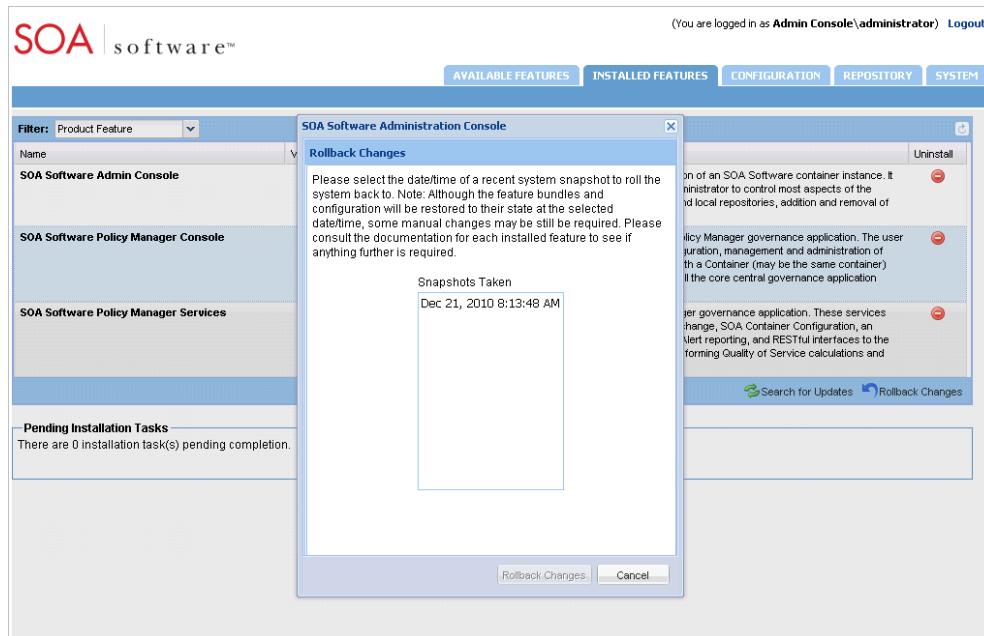


Figure 4-11: Admin Console—Installed Features (Rollback Changes)

3. The system displays a "Processing Request" indicator, performs a system rollback, and then provides a prompt to restart the system.

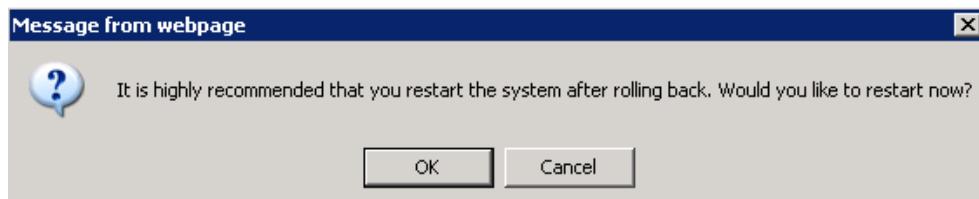


Figure 4-12: Admin Console—Installed Features (Restart System after Rollback Message)

4. Click **OK** to restart, then log back into the SOA Software Administration Console.

System

The "System" tab provides a summary of the SOA Software Platform process characteristics and states. Information includes the last start time of the process, memory details (i.e., Total, Used, Free), and a listing of associated system properties. System details can be used to review system health and for troubleshooting purposes.

Restart Container

To restart the current SOA Software Container instance and associated bundles, click "Restart." Note that "Restart" applies to standalone deployments only.

The screenshot shows the SOA software administration console interface. At the top, there's a header bar with the SOA software logo and navigation tabs for Available Features, Installed Features, Configuration, Repository, and System. On the far right of the header, it says "(You are logged in as Admin Console\administrator) Logout". Below the header, there's a "System Properties" table with various system configuration details. A prominent "Restart" button is located at the top left of the main content area. The "System Properties" table contains the following data:

Name	Value
sun.io.unicode.encoding	UnicodeLittle
java.version	1.5.0_21
java.class.path	C:\sm60\PM072410\asm60\lib\felix.jar
java.awt.graphicsenv	sun.awt.Win32GraphicsEnvironment
user.language	en
sun.os.patch.level	Service Pack 3
java.specification.vendor	Sun Microsystems Inc.
org.osgi.service.http.port	9900
os.version	5.1
sun.boot.class.path	C:\sm60\PM072410\asm60\re\lib\rt.jar;C:\sm60\PM072410\asm60\re\lib\i18n.jar;C:\sm60\PM072410\asm60\re\lib\sunrasi10n.jar;C:\sm60\PM072410\asm60\re\lib\jse.jar;C:\sm60\PM072410\asm60\re\lib\jce.jar;C:\sm60\PM072410\asm60\re\lib\charsets.jar;C:\sm60\PM072410\asm60\re\classes
java.class.version	49.0
file.encoding	CP1252

Figure 4-13: SOA Software Administration Console—System

Appendix A: Start / Stop / Restart Container Instance

The section provides instructions on how to start and stop a container instance.

START / STOP CONTAINER INSTANCE

The following methods can be used to start and stop a container instance.

Start / Stop Container Methods	<p><u>Start / Stop Process in Windows</u></p> <p>Start—Navigate to sm60\bin and type <code>startup <instance name></code> Stop—Close the DOS Window or type Ctrl-C</p> <p><u>Start Process as Windows Service</u></p> <p>Start—Launch Program Group (Settings /Control Panel/Administrative Tools/Services)</p> <p>Select SM 6.0 - <Container Instance> - Note that the instance name is displayed as the Container Key.</p> <p>Stop—Select SM 6.0 - <Container Instance> - Note that the instance name is displayed as the Container Key.</p> <p>From "Actions" menu, select Stop.</p> <p><u>Start / Stop Process in UNIX</u></p> <p>Start—Navigate to sm60/bin and type <code>startup.sh <instance name></code> Stop—Send the process a KILL signal or Ctrl-C</p> <p><u>Start / Stop Process in UNIX (Background)</u></p> <p>Start—Navigate to sm60/bin and type <code>startup.sh <instance name> -bg</code> Stop—Navigate to sm60/bin and type <code>shutdown.sh</code></p>
---------------------------------------	--

RESTART CONTAINER INSTANCE

To restart the current SOA Software Container instance and associated bundles, click "Restart." Note that "Restart" applies to standalone deployments only.

Appendix A: Start / Stop / Restart Container Instance

The screenshot shows the SOA software administration console interface. At the top, there is a header with the SOA software logo and navigation tabs for 'AVAILABLE FEATURES', 'INSTALLED FEATURES', 'CONFIGURATION', 'REPOSITORY', and 'SYSTEM'. The 'SYSTEM' tab is currently selected. Below the header, there is a 'Restart' button. Underneath it, system status information is displayed: 'Last started: Saturday, July 24, 2010 10:19:01 AM Etc/GMT+7', 'Total Memory: 357,859,328 bytes', 'Used Memory: 241,035,728 bytes', and 'Free Memory: 116,823,600 bytes'. A 'System Properties' table follows, listing various system configuration details. The table has two columns: 'Name' and 'Value'. Some of the entries include:

Name	Value
sun.io.unicode.encoding	UnicodeLittle
java.version	1.5.0_21
java.class.path	C:\sm60\PM072410a\sm60\lib\felix.jar
java.awt.graphicsenv	sun.awt.Win32GraphicsEnvironment
user.language	en
sun.os.patch.level	Service Pack 3
java.specification.vendor	Sun Microsystems Inc.
org.osgi.service.http.port	9900
os.version	5.1
sun.boot.class.path	C:\sm60\PM072410a\sm60\re\lib\rt.jar;C:\sm60\PM072410a\sm60\re\lib\18n.jar;C:\sm60\PM072410a\sm60\re\lib\sunrasisign.jar;C:\sm60\PM072410a\sm60\re\lib\ssse.jar;C:\sm60\PM072410a\sm60\re\lib\jce.jar;C:\sm60\PM072410a\sm60\re\lib\charsets.jar;C:\sm60\PM072410a\sm60\re\classes
java.class.version	49.0
file.encoding	Cp1252

Figure A-1: SOA Software Administration Console—System

Appendix B: Database Drivers

Database drivers are deployed to the `c:\sm60\instances\<container instance>\deploy` of the SOA Software Platform 6.1 Release directory. The following database drivers are supported:

Database Type	Driver Requirement
Oracle 10 (SID, Service Name)	Requires database driver <code>ojdbc5.jar</code> , version 11.2.0.1.0.
Microsoft SQL Server 2005	Database driver included with SOA Software Platform.
IBM DB2 Universal Database V9.7	Requires DB2 Universal JDBC Driver (e.g., <code>db2jcc.jar</code>) for your specific DB2 installation.
MySQL 5.1	Requires database driver <code>mysql-connector-java-5.0.8-bin.jar</code> , version 5.0.

Appendix C: Uninstalling SOA Software Platform

OVERVIEW

The SOA Software Platform provides an uninstall utility for removing the current product version. The Uninstall process is implemented using the "Uninstall SOA Software Wizard" that is launched using the "Uninstall SOA Software Platform" application in the sm60\UnInstallerData folder in the SOA Software Platform release directory. When you run the "Uninstall SOA Software Platform Wizard" to uninstall an SOA Software Platform version, all feature related files are removed from the designated SOA Software Platform directory. Some folder and configuration files remain in the directory after the Uninstall procedure completes its process. The remaining folders and files must be manually deleted.

Uninstall procedures are provided for SOA Software Platform 6.1 Windows and UNIX platform versions.

BACKUP PROCEDURES

The SOA Software Platform uninstall process permanently removes SOA Software Platform feature files from the specified directory. Therefore, as a standard practice we recommend that you have a complete backup copy of the most recent SOA Software Platform Installation Files and Database.

UNINSTALL SOA SOFTWARE PLATFORM (GUI)

To Uninstall SOA Software Platform (GUI)

Step	Procedure
1.	To uninstall SOA Software Platform 6.1—Windows: Navigate to the sm60\UnInstallerData directory. Execute "Uninstall SOA Software Platform" to launch the "SOA Software Platform Uninstall Wizard."
2.	To uninstall SOA Software Platform 6.1—Linux or Solaris: Navigate to the sm60\UnInstallerData directory. Execute "sh Uninstall SOA Software Platform" to launch the "SOA Software Platform Uninstall Wizard." <hr/> <p>Note: To uninstall SOA Software Platform via the "Console," see the "Uninstalling SOA Software Platform—Console" section.</p> <hr/>

To Uninstall SOA Software Platform (GUI)

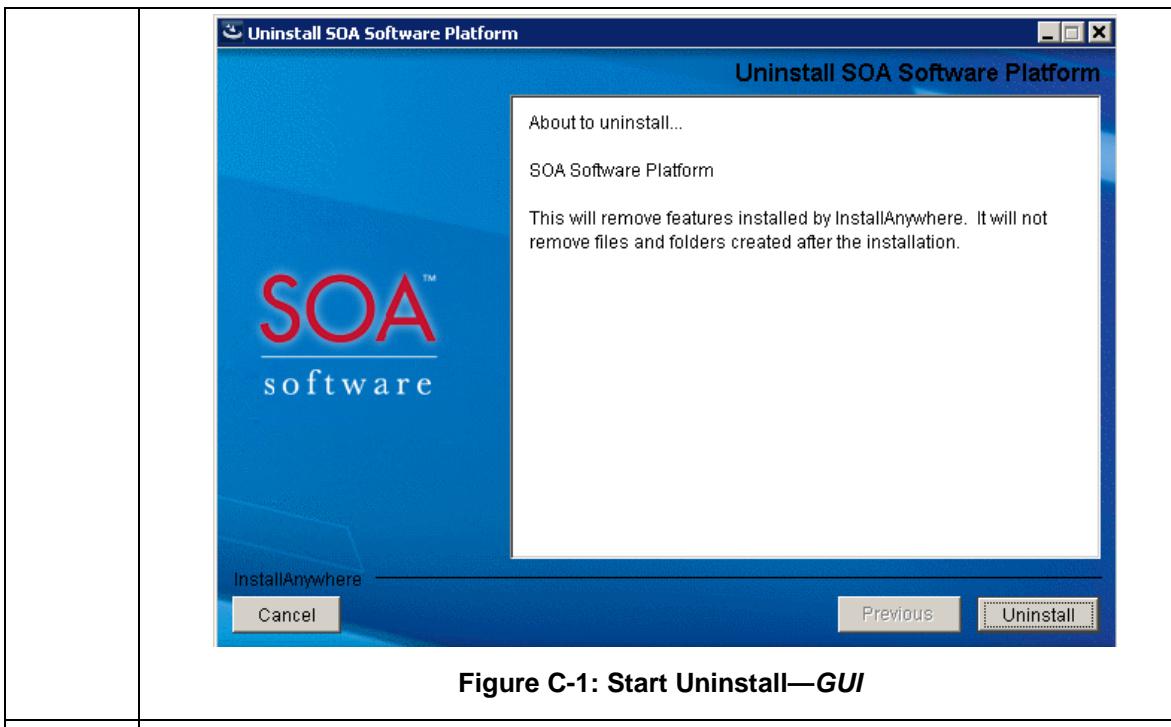


Figure C-1: Start Uninstall—*GUI*

3. The "Uninstall Software Platform Wizard" cannot be cancelled after **Uninstall** is clicked. If you would like to exit the "SOA Software Platform Uninstall Wizard," click **Cancel**. The system displays the "Uninstall Not Complete" message.



Figure C-2: Cancel Installation—*Uninstall Not Complete* Message

4. To continue with the uninstall process, click **Resume** then click **Uninstall**. The following warning message displays providing key information pertaining to the uninstall process:

To Uninstall SOA Software Platform (GUI)



Figure C-3: Uninstall Warning Message

- To begin the Uninstall process, click **OK**.

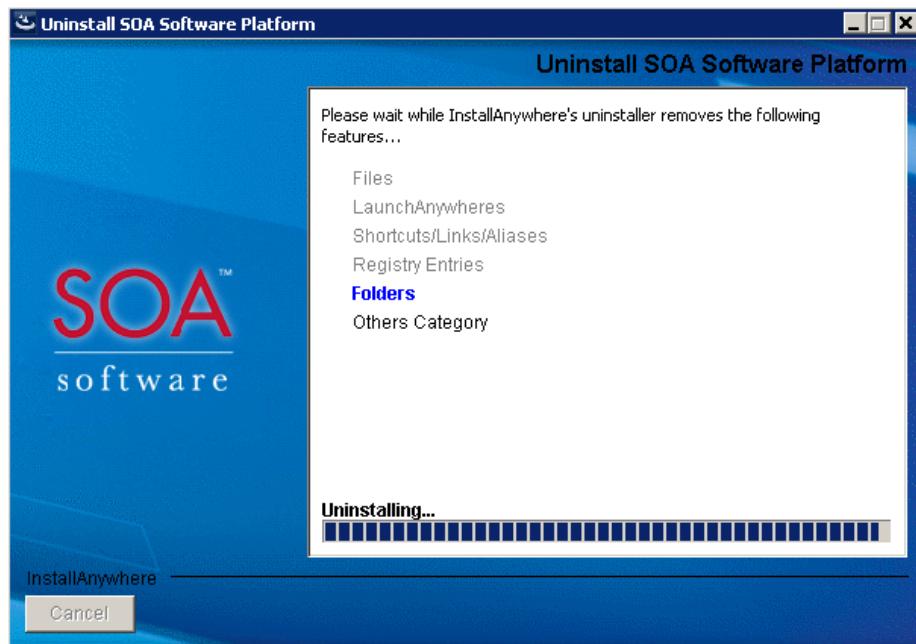
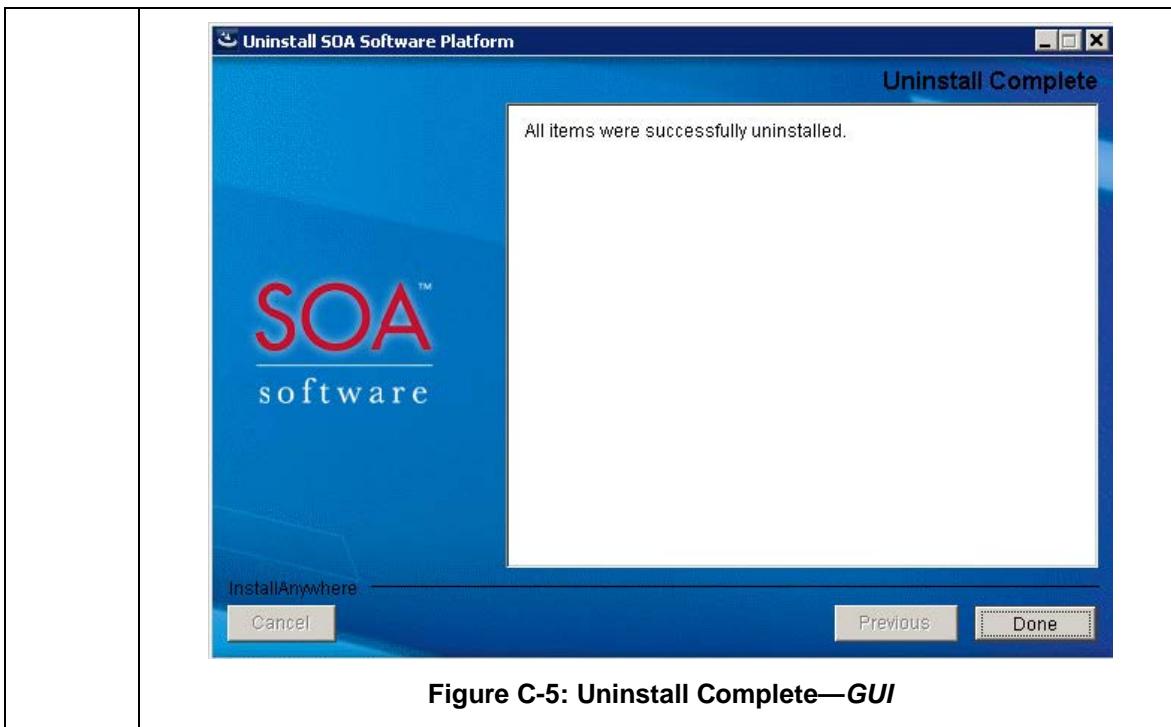


Figure C-4: Uninstalling SOA Software Platform—GUI

- | | |
|----|--|
| 5. | When the uninstall process is complete, the "Uninstall Complete" screen displays and presents a list of directories and/or files that need to be physically deleted. Click Done to exit the "SOA Software Platform Uninstall Wizard." |
|----|--|

To Uninstall SOA Software Platform (GUI)**UNINSTALL SOA SOFTWARE PLATFORM (CONSOLE)**

This section provides instructions for uninstalling a Linux or Solaris version of SOA Software Platform 6.1 via the console.

To Uninstall SOA Software Platform (Console)

Step	Procedure
1.	To uninstall SOA Software Platform 6.1 for Linux or Solaris via the console, navigate to the sm60\UninstallerData directory. Execute "sh Uninstall SOA Software Platform -i" to launch the "SOA Software Platform Uninstall Wizard." The "Start Uninstall" console screen displays.

To Uninstall SOA Software Platform (Console)

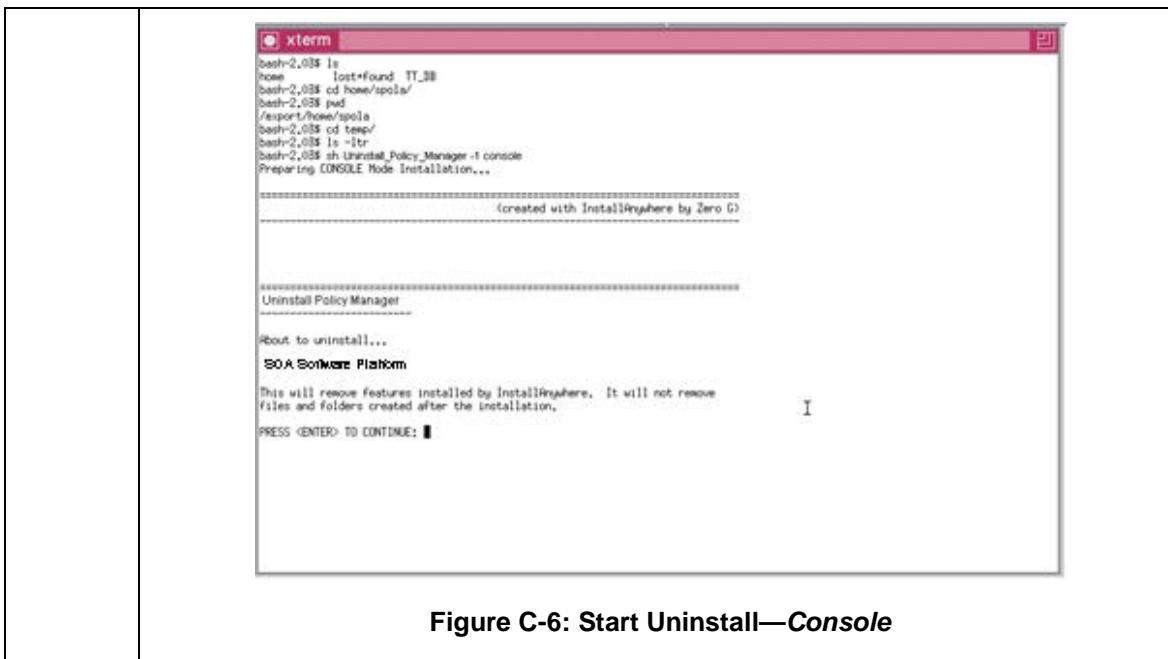


Figure C-6: Start Uninstall—Console

	<p>2. The "Uninstall SOA Software Platform Wizard" cannot be cancelled after Uninstall is clicked. If you would like to exit the "SOA Software Platform Uninstall Wizard," execute Cancel. The system displays the following message:</p> <p><i>"Uninstall Not Complete. If you cancel uninstall now, SOA Software Platform will not be uninstalled. To continue uninstall, click "Resume." To cancel uninstall, click "Quit."</i></p> <p>3. To begin the Uninstall process, click Enter. The "Uninstalling SOA Software Platform" screen displays, and the wizard begins the uninstall process and presents a list of features that are being uninstalled.</p>
--	--

Figure C-7: Uninstalling SOA Software Platform—Console

To Uninstall SOA Software Platform (Console)

- | | |
|----|--|
| 4. | When the uninstall process is complete, the "Uninstall Complete" screen displays and presents a list of directories and/or files that need to be physically deleted. |
|----|--|