

# Fast and Faithful? Distilling an 8B Reasoning Teacher into a Sub-1B On-Device Student for Structured News Enrichment

Vinay Kumar Chaganti

**Abstract**—What does knowledge distillation actually buy a production pipeline, per sub-task, against the cheaper levers tried first? It is quantified on a shipped deployment—an RSS reader enriching each article with one structured JSON object (a free-text summary, five categorical labels, open-set topics) at the output quality of an 8B reasoning teacher (deepseek-r1:8b) but without its  $\sim 39$  s/article latency. A 600M student (Qwen3-0.6B) is fine-tuned on the teacher’s outputs (QLoRA, three seeds) and scored per sub-task against two non-distillation controls (few-shot prompting, constrained JSON decoding) and a larger managed pipeline, by a blinded, reference-free, three-judge panel grading the full article. Speed is a property of size, not distillation: every 0.6B arm runs at  $\sim 0.8$  s/article. Summary quality is where distillation earns its keep: the tuned student closes  $\sim 58\%$  of the base-to-teacher gap and significantly beats both controls (+16.8 over constrained decoding, +4.9 over few-shot). A same-size non-reasoning-teacher control isolates that gain: an equal-size non-reasoning teacher trains a student no better than the untuned base, so the summary advantage is specific to the teacher’s reasoning nature—an advantage in specificity and thesis-capture, not faithfulness. Classification splits by field: the urgency win is mostly majority-class alignment, tone belongs to prompting, and the macro ties few-shot. Faithfulness holds at the untuned base in aggregate; the residual risk is thin-source articles, where the reasoning-teacher lineage fabricates while a plain instruction teacher stays grounded. The managed platform ties on summaries with an inverted profile—best small-model classifier, worst thin-source faithfulness. The deliverable is a per-field engine assignment: the smallest routed subset that pays, with a teacher fallback for faithfulness-critical thin sources.

**Index Terms**—Edge inference, knowledge distillation, large language models, LLM-as-a-judge evaluation, model compression, reasoning-model distillation, small language models, structured output generation, text summarization.

## I. Introduction

**H**IGH-volume structured enrichment—one prompt, one schema-bound JSON object per item, repeated over thousands of items—recurs across production pipelines: ticket triage, log classification, document intake, moderation pre-filters, catalog extraction. Run through a mid- or large model, it pays that model’s latency on every item. Distilling the task into a small on-device model promises the large model’s output quality at a fraction of the latency and cost. This paper measures what that

promise delivers, per sub-task, against the cheaper levers a practitioner tries first.

The concrete instance studied is news enrichment: each article is turned into one JSON object with a short summary and five closed-vocabulary labels—sentiment, urgency, frame, tone, depth. An 8B reasoning teacher (deepseek-r1:8b) produces acceptable output but at  $\sim 39$  s/article; a 500-item batch takes 5.4 hours on a consumer laptop. Size and distillation are separate levers. A 0.6B model runs  $\sim 40\times$  faster regardless of how it is trained; distillation is the only lever that recovers the teacher’s output quality at that size. What is under test is recovery: how much of the teacher’s per-sub-task quality a 0.6B student inherits, and whether it preserves faithfulness—the one property a reader-facing pipeline cannot compromise. The question is posed per sub-task because the sub-tasks carry different failure costs, and a single aggregate averages away the axis where a regression is unacceptable.

The models under study run locally by design. Fixed weights at temperature 0 give deterministic, unlimited reruns, so the measurement holds still and every reported number recomputes offline. The only hosted components are the independent judge panel (Section V-B), chosen for capability and family-independence, and the larger third teacher.

The findings are per-field, not a single verdict. Distillation recovers most of the teacher’s summary quality and beats both non-distillation controls. A same-size non-reasoning-teacher control shows that gain is the teacher’s reasoning nature, not its scale: an equal-size non-reasoning teacher trains a student no better than the untuned base. But capabilities split by teacher—the reasoning teacher transfers writing quality, a plain instruction teacher transfers faithfulness (its students stay grounded on thin sources where the reasoning students fabricate), and a larger managed pipeline transfers label diversity. Short, thin-source articles are hard across nearly every quality axis. The deliverable is therefore a per-field engine assignment, not a blanket “use the small model.”

A credible answer needs more than the obvious first cut—a single same-family judge, a handful of test items, a saturating 0–5 rubric, and one training run. The design resists each: 93 held-out test articles; twelve arms spanning three distillation teachers (a reasoning 8B, a same-size non-reasoning 8B, and a larger managed pipeline), two non-distillation controls, and the untuned base; two sub-tasks

The author is an independent researcher (e-mail: cvk.atreya@gmail.com).

Evaluation-harness code, figure-generation scripts, and portions of the manuscript were produced with AI-agent assistance; see the Acknowledgment.

with different success criteria; a three-family judge panel validated by a negative control; three training seeds; and paired-bootstrap significance tests. The summary rubric was fixed after a pilot and before any scored run, so it could not be tuned to the result.

The contributions are, findings first: (1) a same-size non-reasoning-teacher control that isolates the teacher’s reasoning nature from its scale and shows the summary gain depends on the former but does not extend to faithfulness; (2) a capability split across three teachers—reasoning transfers writing, a plain instruction teacher transfers grounding, scale-plus-synthetic-data transfers label diversity—that no aggregate score reveals; (3) a per-field engine assignment for on-device enrichment; and, supporting these, (4) a fully local, reference-free, human-free evaluation harness—decomposed binary checklist, gap-closure-to-teacher reporting, two non-distillation controls, a negative control, and a full-source faithfulness-grading result—reproducible offline from a cached judge log.

The claims are bounded in ways stated plainly: no human gold labels; a three-judge panel, so exact magnitudes are not judge-invariant; and classification “accuracy” measured against panel consensus, not ground truth (Section X).

## II. Related Work

Distilling into small on-device models. Training a small student to imitate a larger teacher dates to Hinton et al. [1], with sequence-level distillation for generation from Kim and Rush [2]; the modern black-box variant supervises a small model on a large model’s outputs [3], [4]. Sub-billion on-device models are now a deliberate design target [5], [6], and distillation is a standard route to their capability [7]. Closest to this work are targeted distillations for structured extraction: UniversalNER distills an LLM into a small open-NER student [8], and a distilled biomedical extractor beats its own teacher at a fraction of the size [9]. Most such work reports one aggregate quality delta; this study decomposes by sub-task and adds non-distillation controls, so distillation is credited only for what cheaper levers do not already provide.

Which teacher, and does reasoning help? DeepSeek-R1 [10] showed reasoning ability transfers to smaller dense models, triggering a wave of replications [11], [12] concentrated on math, code, and reasoning benchmarks at 1.5B–32B scale—not the non-reasoning production tasks studied here. Whether a stronger or reasoning teacher helps is contested. Controlled studies find teacher task-fit, not benchmark score, governs student gains [13]; that distillation improves a student’s outputs without transferring the teacher’s fidelity [14]; that teacher size has an optimum rather than a maximum [15]; and that too large a teacher–student gap degrades the student [16]. On simple inputs reasoning can actively hurt: overthinking and chain-of-thought overhead transfer through distillation [17], [18], [19], and reasoning-oriented training can raise hallucination [20]. This study trains on the teacher’s

final answers only (thinking disabled)—the deployment-realistic recipe; rationale supervision [21] is left to future work. To our knowledge no prior work isolates the teacher’s reasoning nature with a same-size non-reasoning-teacher control on a non-reasoning structured task, which is what Section VI-D does.

Synthetic-data distillation. The managed-pipeline arm expands its training data synthetically—a lineage from Self-Instruct [22] to recent work isolating synthetic data’s contribution within distillation [23].

Faithfulness in small and compressed summarizers. That the smaller, non-reasoning lineage is the most grounded here echoes a counterintuitive prior result: pruned models can hallucinate less, leaning harder on the source [24]. Faithfulness also varies with input characteristics [25] and tracks instruction-tuning more than scale [26]—consistent with the thin-source and teacher-nature effects reported below. On-device serving quantizes the model [27], [28]; every arm here is measured at its deployed 4-bit quantization.

LLM-as-a-judge and panels. Scalar LLM judges suffer position, verbosity, and self-preference biases and saturation near the ceiling [29], [30], [31], [32]. Two responses shape this harness. Decomposition: binary checklists and decomposed-requirement pass-rates are more reliable than a 0–5 score [33], [34], [35]. And panels over single judges: a panel of diverse models reduces intra-model bias and tracks humans better than one large judge [36], and an ensemble is better calibrated than an overconfident single judge [37]. Because evaluators favor their own and same-family generations [38], [39], the panel here excludes the teacher’s and student’s families. Faithfulness is graded reference-free against the source—related to atomic-fact and entailment checkers [40], [41] and to reference-free metrics that score against the input rather than a gold reference [42], and distinct from consistency-based detection [43], which uses no source. Schema-constrained-generation benchmarks test JSON validity [44] but not content correctness—the gap this content grading fills.

What is being distilled. deepseek-r1:8b is DeepSeek-R1-Distill-Llama-8B, itself distilled from the 671B R1 [10], and Qwen3-0.6B is itself a distillation product [5]. The pipeline is therefore third-order distillation, which caps the achievable ceiling (Section X).

## III. The Structured Enrichment Task

The reader enriches every incoming article with one JSON object carrying seven fields: a free-text summary, five categorical labels, and an open-set topic list. These surface directly in the user interface as a content-analysis panel (Fig. 1). A representative teacher output pairs a three-to-four-sentence summary with the label fields, e.g., sentiment=positive, urgency=developing, frame=analytical, tone=analytical, depth=standard, and topics={AI Safety, Responsible AI}.

The categorical fields draw from small closed vocabularies observed in the teacher’s own labels: sentiment  $\in$  {positive, neutral, negative}; urgency  $\in$  {breaking, developing,

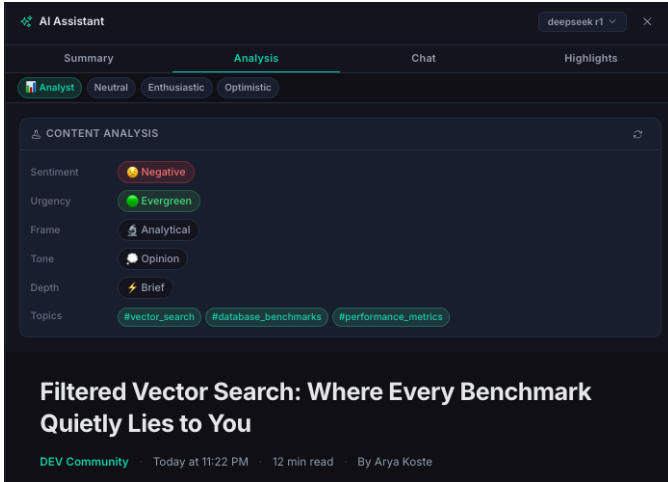


Fig. 1. The enrichment as the reader sees it. The five categorical fields and the topic tags render as badges in a content-analysis panel; the free-text summary is shown separately. A hallucinated summary misleads the reader, whereas a mislabelled badge is glanceable and cheap—the asymmetry that motivates the per-field engine assignment.

TABLE I  
The Enrichment Output Is Two Sub-Tasks With Different Failure Costs

| Sub-task                  | Type                 | Failure cost in the product            |
|---------------------------|----------------------|----------------------------------------|
| Summarization (summary)   | free-text generation | high — a hallucinated summary misleads |
| Classification (5 labels) | closed-set labels    | low — a mislabeled badge is cheap      |

evergreen}; frame  $\in$  {analytical, conflict, human\_interest, economic}; tone  $\in$  {analytical, optimistic, opinion, alarming}; depth  $\in$  {brief, standard, deep\_dive}. Several vocabularies are imbalanced in the teacher’s own labels (depth, for instance, is 71% standard with deep\_dive near-absent; full distributions in Table II), which matters directly for interpreting per-field accuracy and is made concrete with a majority-class baseline in Section VI-E.

This output is really two machine-learning problems with different success criteria (Table I)—free-text summarization and closed-set classification—and scoring them together hides what distillation moved. Open-set topics are reported as one coverage check inside the summary rubric, not a third sub-task, since there is no per-topic gold to score against. The asymmetry in failure cost is why the study’s conclusion is a per-field engine assignment (Section VIII) rather than a single verdict: the quality bar a field must clear depends on what a wrong value costs.

#### IV. Experimental Setup

**Models.** The teacher is DeepSeek-R1 8B (deepseek-r1:8b); the student is Qwen3-0.6B. Both are served on-device at Q4\_K\_M quantization. A  $\sim 13\times$  parameter gap and a difference in kind: DeepSeek-R1 emits chain-of-thought before answering, whereas the student is trained

on the teacher’s final outputs only, compiling task knowledge into weights and skipping runtime deliberation. This choice is deployment-realistic; whether the teacher’s reasoning nature, as opposed to its 8B scale, is what the student actually inherits is settled separately by a same-size non-reasoning-teacher control (Section VI-D).

**Data and split.** 500 articles were sampled fairly across all feeds; the teacher generated a gold JSON for each; the six whose JSON was malformed were dropped, leaving 494 labeled articles. A stratified-random split (test fraction 0.2, every feed represented) gives 401 train / 93 test. The test set is new articles from known feeds—matching deployment (the reader follows fixed feeds and sees new items), not generalization to unseen sources, which is out of scope.

**Corpus characteristics.** The dataset shapes several of this study’s central findings, so its properties are reported explicitly (Table II). The 494 articles span 24 feeds; sampling was balanced (27 articles for each of the 16 largest feeds, tapering to 2–3 for the smallest), so no single source dominates. The subject mix is technology- and AI-leaning—AI research and news, software and web development, cybersecurity—alongside general-interest long-form (The Atlantic, Longreads, The Marginalian, Aeon). Two properties bear directly on the results. First, article length is bimodal and capped: full text is stored up to  $\sim 4096$  characters (median 4040), but 22 of the 93 test articles ( $\sim 24\%$ ) arrive as short RSS excerpts of  $\leq 1200$  characters—the thin-source regime where the faithfulness regression concentrates (Section VI-C). Second, every categorical vocabulary is imbalanced in the teacher’s own labels (Table II): depth is 71% standard with deep\_dive essentially absent (0.8%), urgency is dominated by developing/evergreen with breaking at 1.6%, and tone is 68% analytical. These skews—not raw article count—bound what the categorical fields can learn, and are the reference for the majority-class baselines in Section VI-E. Fewer than 1% of teacher labels fell outside the closed vocabularies (e.g., a stray humourous frame); these off-vocabulary values were retained as-is rather than corrected, and are a minor source of proxy-gold noise. Topics are genuinely open-set: 1359 distinct tags over 494 articles, a mean of 3.4 per article. Teacher summaries are a median of three sentences (431 characters).

**Training.** A QLoRA fine-tune of Qwen3-0.6B directly on the 401 teacher outputs (LoRA rank 32, response-only loss masking, thinking disabled), on a free cloud T4 GPU. Three seeds (42/123/7) are trained so that seed variance is characterized rather than assumed away. Models are exported to Q4\_K\_M and served locally.

**Arms.** All arms generate at temperature 0 and see the full article. The twelve arms are the two 8B teachers—reasoning (deepseek-r1:8b) and same-size non-reasoning (llama-3.1-8b-instruct)—each graded on the test set as an arm; the untuned base Qwen3-0.6B; base + few-shot prompting (2–3 in-context examples, controlling for prompting); base + constrained JSON decoding (controlling for formatting); the reasoning-teacher student at three

## Study at a glance: distilling into a 0.6B on-device student — two training pipelines

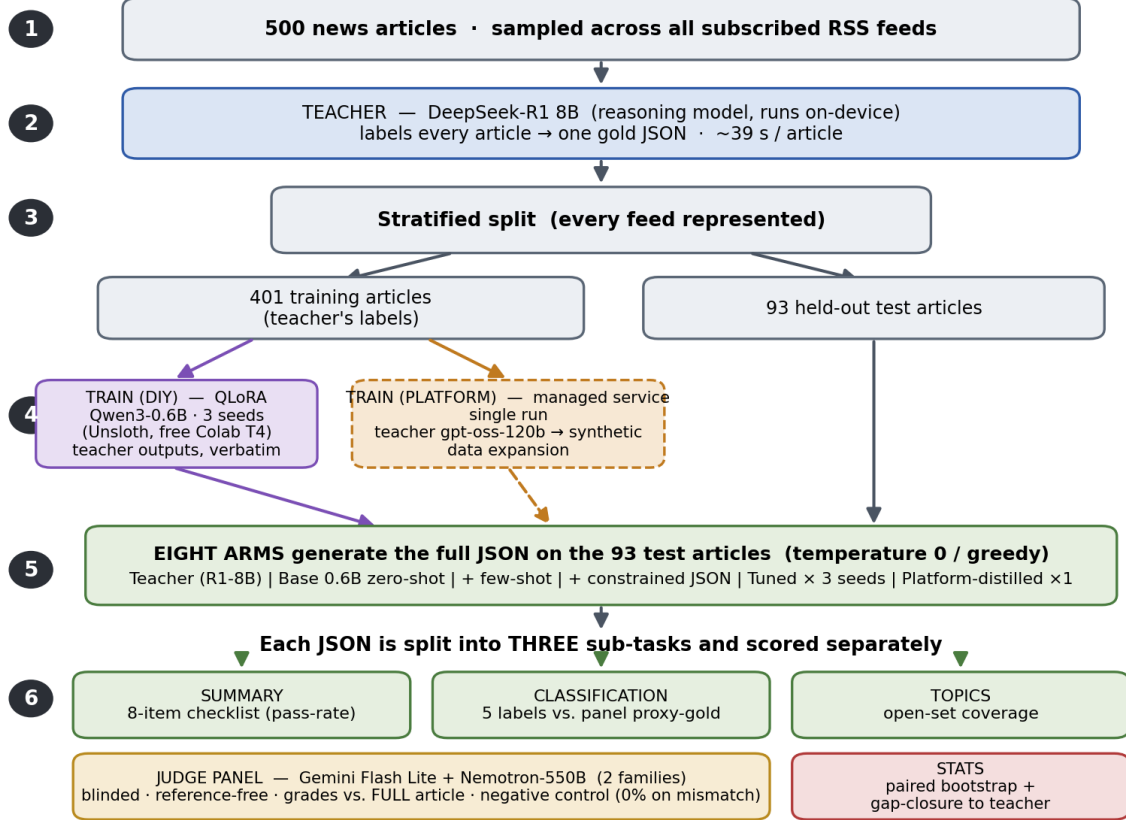


Fig. 2. The experimental pipeline. 500 articles are labeled by the teacher and split 401/93; the training labels feed two pipelines—the do-it-yourself QLoRA fine-tune (three seeds) and a managed-platform distillation (its own teacher and synthetic-data expansion)—and the eight core arms generate outputs on the held-out test set, scored on two sub-tasks by a three-judge panel and reported as gap-closure toward the teacher. Two further teachers—a same-size non-reasoning 8B and a larger managed pipeline (Sections VI-D and VI-H), with both 8B teachers also graded on the test set—bring the total to twelve arms.

TABLE II  
Corpus Characteristics (494 Labeled Articles, 24 Feeds)

| Property                       | Value                                               |
|--------------------------------|-----------------------------------------------------|
| Articles (train / test)        | 494 (401 / 93), stratified by feed                  |
| Feeds                          | 24; balanced ( $\leq 27$ /feed), range 2–27         |
| Article length (chars)         | median 4040; capped ~4096; min 197                  |
| Short excerpts ( $\leq 1200$ ) | 22/93 test (~24%)                                   |
| sentiment                      | neutral 46 / positive 44 / negative 9               |
| urgency                        | developing 59 / evergreen 39 / breaking 2           |
| frame                          | analytical 55 / conflict 24 / human 15 / econ. 5    |
| tone                           | analytical 68 / optimistic 17 / opinion 8 / alarm 7 |
| depth                          | standard 71 / brief 28 / deep_dive 1                |
| Topics (open-set)              | 1359 distinct; mean 3.4/article                     |
| Summary (teacher)              | median 3 sentences / 431 chars                      |

seeds; the non-reasoning-teacher student at three seeds (identical recipe and seeds; Section VI-D); and a managed-pipeline student (Section VI-H) trained from the same 401-item upload through a commercial service with a larger teacher (gpt-oss-120b) and synthetic-data expansion, a single run. Distillation is credited only where it beats both non-distillation controls on something real.

## V. Evaluation Method

### A. Metrics per Sub-Task

Structure is schema validity: parses as JSON with all seven fields; computed deterministically. Classification is per-field accuracy plus macro-average against a panel-consensus proxy-gold (Section V-B; the majority-class baseline of Section VI-E is the reference line). Summarization is an eight-item binary checklist (pass-rate), the primary metric, chosen because a 0–5 rubric saturates; the checks are faithful, thesis, takeaway, length, opening, teacher-lens, tech-lens, and tone, with a separately reported topics\_cover check (full wording in Appendix A). Efficiency is latency, throughput, and memory, measured per-arm. The summary checklist and primary comparison were fixed after a 12-article pilot and before any scored run, so the rubric could not be tuned to the result; two checks were dropped at the pilot for lack of headroom, dropped rather than reworded to avoid post-hoc bias.

### B. Judge Panel and Grading

Grading is reference-free, against the full article, never against the teacher’s answer (which would induce teacher-

mimicry bias); blinded, with shuffled anonymous arm labels; and at temperature 0. The panel deliberately excludes the teacher’s and student’s families, since evaluators favor their own and same-family generations [38], [39]. Results come from a three-judge panel—Gemini Flash Lite, Nemotron-550B, and Mistral-Small-119B—across three distinct families (Google, NVIDIA, Mistral),  $N = 93$ ; a panel of diverse models is more reliable than any single judge [36]. Groq-hosted judges were evaluated during panel selection but excluded for free-tier instability. Three judges give a true majority on every checklist item and classification label, so both the summary pass-rates and the classification proxy-gold are majority votes with no tie-breaking heuristic. Per-judge robustness is still reported (Section VII): a finding is trusted when it survives under each judge alone. Grading uses the full article throughout: partial-context grading systematically understates faithfulness and manufactures an apparent regression, quantified in Section VII.

### C. Grader Validation Without Humans

At this scale, human adjudication is the bottleneck, so the grader is validated by construction: a negative control grades a sample of summaries against a mismatched article. A grader that cannot tell a real summary from a mismatched one is not measuring anything. The result is 0% faithful on mismatched articles ( $n = 30$ ): the grader demonstrably discriminates the gross case. It does not confirm detection of subtle, in-domain fabrication—a plausible invented detail inside an otherwise-correct summary—which would require injected-fabrication tests or a human-labeled set (Section XI). The faithfulness numbers should be read with that boundary in mind.

### D. Statistics

Metrics are reported as mean with 95% confidence interval (bootstrap over the 93 test items; headline comparisons use a paired bootstrap over per-article scores, 20 000 resamples, cancelling per-article difficulty). Tuned metrics are the mean across three seeds. The primary comparison, fixed before scoring, is tuned versus base + constrained on checklist pass-rate. Secondary comparisons (tuned versus base, tuned versus few-shot, and the per-field classification comparisons) are numerous, so individual secondary wins not also confirmed under each judge alone (Section VII) are treated as suggestive. The per-article bootstrap captures article-level variance around the three-seed mean; it does not fully propagate training-seed variance, which Section VI-G shows is first-order on the subjective fields—there, the seed range, not the bootstrap interval, is the representative uncertainty.

## VI. Results

### A. Gap-Closure Toward the Teacher

Because the goal was teacher quality at student speed, the natural scale is how far the student traveled from

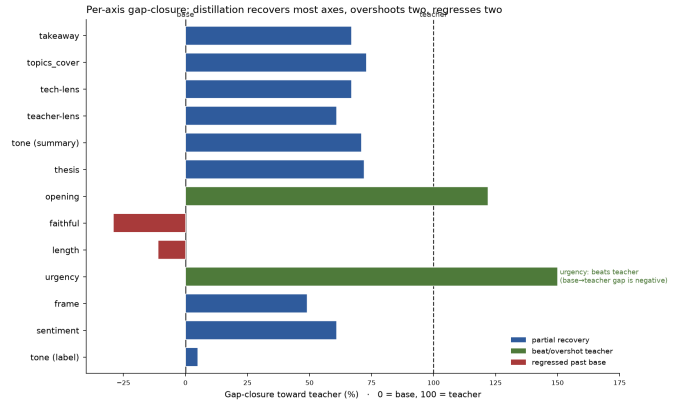


Fig. 3. Per-axis gap-closure toward the teacher (0 = untuned base, 100 = teacher). Partial recovery and overshoot are distinguished. Under the canonical three-judge grading every summary axis is recovered or overshoot; classification is more mixed. The per-axis pattern, not any single aggregate, is the primary result.

TABLE III  
Summary Checklist Pass-Rate by Arm (Full-Text Grading,  $N = 93$ )

| Arm                | Checklist % | 95% CI       |
|--------------------|-------------|--------------|
| Teacher            | 88.6        | [86.3, 91.5] |
| Tuned (distilled)  | 75.1        | [73.9, 76.5] |
| Base + few-shot    | 70.2        | [69.4, 71.0] |
| Base + constrained | 58.2        | [54.8, 60.9] |
| Base zero-shot     | 56.3        | [53.6, 58.1] |

the untuned base (0%) toward the teacher (100%) on each axis:  $(\text{tuned} - \text{base}) / (\text{teacher} - \text{base})$ . Fig. 3 is the paper in one chart. The headline is not one number; it is the shape: distillation recovered most of the teacher’s quality on the summary axes and overshoot two, with no axis left below base. The one residual concern is short-source faithfulness, a subgroup effect the per-axis averages cannot show (Section VI-C). On classification the picture is more mixed (Section VI-E). Gap-closure is a ratio and becomes unstable when teacher and base are close, so absolute deltas are reported alongside every gap-closure figure and axes where teacher  $\approx$  base are flagged; because the student can exceed 100% on some axes, the teacher is a reference point, not a ceiling.

### B. Summarization

Checklist pass-rates (Fig. 4, Table III) show a decisive, significant primary win: tuned versus base + constrained is 75.1 versus 58.2, +16.8 points, paired bootstrap [11.4, 22.5],  $p < 0.001$ , holding for each of the three seeds independently. Distillation also beats the prompting control, 75.1 versus 70.2, +4.9 [1.6, 8.2],  $p = 0.003$ . The gain therefore survives both controls a reviewer would demand: it is not reducible to schema formatting or to a few in-context examples. Overall the tuned student closes 58% of the base-to-teacher summary gap.

The per-check breakdown (Table IV) shows the gain is broad and, under the canonical grading, carries no aggregate regression: every check improves over base,

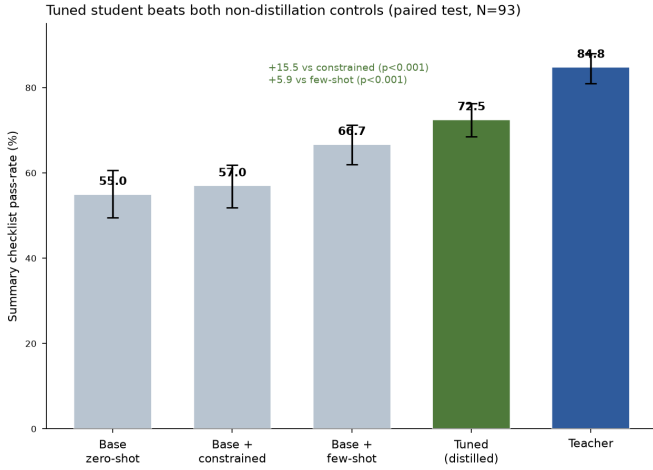


Fig. 4. Summary checklist pass-rate by arm, full-text grading, mean with bootstrap 95% interval ( $N = 93$ ). The tuned student significantly beats both non-distillation controls on the paired per-article test. The win rests on the paired comparison, which cancels per-article difficulty, not on marginal-interval separation.

TABLE IV  
Per-Check Summary Pass-Rates and Absolute Deltas

| Check        | Base | Few-shot | Tuned $\mu$ | Teacher | $\Delta$ vs. base |
|--------------|------|----------|-------------|---------|-------------------|
| faithful     | 69.9 | 82.8     | 73.1        | 95.7    | +3.2              |
| takeaway     | 37.6 | 36.6     | 68.5        | 89.2    | +30.9             |
| teacher-lens | 21.5 | 37.6     | 50.2        | 76.3    | +28.7             |
| tech-lens    | 33.3 | 43.0     | 48.4        | 57.0    | +15.6             |
| tone         | 57.0 | 80.6     | 79.2        | 94.6    | +21.2             |
| opening      | 80.6 | 97.8     | 98.2        | 100.0   | +17.6             |
| thesis       | 80.6 | 87.1     | 87.1        | 97.8    | +6.5              |
| length       | 69.9 | 95.7     | 95.7        | 97.8    | +25.8             |
| topics_cover | 78.5 | 81.7     | 82.8        | 96.8    | +4.3              |

from specificity (takeaway 38 to 69) and the persona lenses through faithfulness (+3) and length (+26). The product-critical faithfulness check sits slightly above base in aggregate and within the instrument’s noise. The one real concern is invisible in these article-averaged numbers because it is a subgroup effect: faithfulness on short, thin-source articles, isolated in Section VI-C. So the honest headline is not “the student regressed on faithfulness” but “the student improved everywhere the aggregate can see, and the residual risk is confined to a length-defined subgroup.”

### C. The Faithfulness Gap

Under the canonical full-source grading, aggregate faithfulness is base 69.9, tuned 73.1, teacher 95.7: the tuned student sits at or slightly above base, so the aggregate “faithfulness regression” that coarser gradings suggest does not survive here. What is robust is a subgroup effect tied to article length. On long articles ( $> 1200$  chars,  $n = 71$ ) the tuned student is above base (78.6 versus 71.9); on short articles ( $\leq 1200$ ,  $n = 22$ ) it drops below (55.0 versus 64.0). The mechanism is thin source: given little article to ground in, the reasoning-teacher student fills the

summary with specific-sounding but unsupported claims (Example B, Section VI-I); on rich source material it stays grounded. This is a property of the teacher’s lineage, not of small models in general—the same-size non-reasoning teacher’s students stay faithful on exactly these short articles (74.2, Section VI-H). The short-source magnitude is grading-sensitive (Section VII) and rests on 22 articles, so it is read as a direction—the reasoning lineage fabricates on thin sources—not a fixed number. For a reader-facing product that cannot tolerate fabrication, even a localized dip is worth routing around (Section VIII).

### D. Three Teachers, One Recipe: What the Student Inherits

The title’s “reasoning teacher” is a claim, not a given; the cheapest rival explanation for the summary win is a merely capable 8B teacher. To settle it, the same Qwen3-0.6B base is distilled by the identical QLoRA recipe, seeds, and split from three teachers, so that what the student inherits is attributable to the teacher and not the procedure. The reasoning teacher is DeepSeek-R1-Distill-Llama-8B; the same-size non-reasoning teacher is Llama-3.1-8B-Instruct, which re-labeled the 401 training articles under the identical prompt at temperature 0, yielding usable JSON on 396; the third teacher is a managed pipeline running a larger model, gpt-oss-120b, with proprietary synthetic-data expansion. The two 8B teachers differ only in reasoning nature and isolate it; the managed pipeline additionally varies scale and adds synthetic data, and is treated separately (Section VI-H). Each 8B teacher’s own outputs on the test set are graded as an arm, so a teacher sits beside its students under one rubric (Fig. 5); all twelve arms were re-graded together and prior aggregates reproduce within  $\sim 2$  points.

Reasoning is what the summary gain depends on. The reasoning teacher out-writes the non-reasoning teacher on its own summaries—88.6 versus 68.8 on the checklist—and that  $\sim 20$ -point teacher-level gap propagates almost intact to the students: 75.1 versus 56.9, a paired +18.1 points, bootstrap [14.4, 22.0],  $p < 0.001$ , holding across all three seed pairs (+19.1, +17.5, +17.9). The comparison to no distillation makes it sharp: the reasoning student beats the untuned base by +18.7 [13.1, 24.4], whereas the non-reasoning student does not beat base at all (+0.6 [−5.2, 6.4], n.s.). A same-size non-reasoning teacher bought essentially nothing on summary quality; the student inherits its teacher’s ceiling, and only the reasoning teacher’s ceiling is high enough to move the result. That a stronger kind of teacher rather than a stronger-scoring one is what transfers echoes reports that teacher task-fit, not benchmark score, governs distillation gains [13], [14].

The advantage is specificity, not faithfulness. Two qualifications keep the claim precise. The gain is not an artifact of a rubric that rewards the teacher’s persona: on the three article-grounded, persona-free checks—faithful, thesis, takeaway—the reasoning student still leads 76.2 versus 57.0, +19.2 [14.2, 24.4],  $p < 0.001$ , driven by takeaway specificity (68.5 versus 16.5), the reasoning teacher

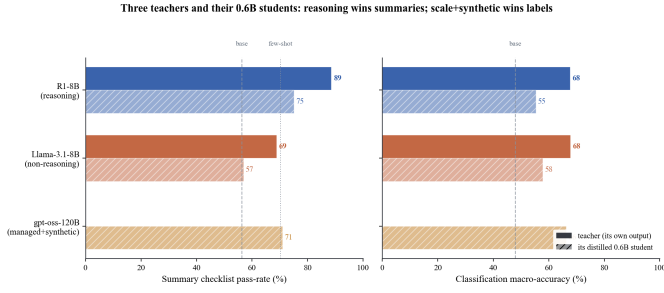


Fig. 5. Three teachers and their 0.6B students under one rubric (full 12-arm re-grade,  $N = 93$ ; students are three-seed means). Solid bars are a teacher’s own output, hatched bars its distilled student. Left, summaries: the reasoning teacher (R1-8B) and its students dominate; the same-size non-reasoning teacher (Llama-3.1-8B) and its students sit at the untuned-base line; the managed 120B pipeline falls between. Right, classification: teachers and students are level and the managed pipeline leads. Reasoning transfers writing quality; scale with synthetic expansion transfers label diversity.

supplying concrete exemplars where the non-reasoning teacher supplied vague ones. But the advantage stops short of faithfulness: on the faithful check alone the non-reasoning student is marginally higher, 77.8 versus 73.1 ( $\Delta = 4.7$  [−11.8, 2.5],  $p = 0.19$ ), matching evidence that reasoning-oriented training can raise rather than lower hallucination [19], [20]. And on closed-set labeling the two 8B teachers themselves tie (macro 67.8 versus 67.7), as do their students (57.8 versus 55.3): reasoning lifts the open-ended sub-task and leaves classification untouched. The reasoning teacher earns its place in the title on summaries, and there alone.

## E. Classification

Per-field accuracy against the panel proxy-gold (Table V) is read against a majority-class baseline, since several vocabularies are imbalanced and accuracy below that line is worse than a constant guess. Urgency looks like a win—the tuned student reaches 72.4%, above the teacher’s 67.7—but the proxy-gold is heavily evergreen-skewed (majority baseline  $\sim 74\%$ ) and the student predicts evergreen on the large majority of items, so its urgency accuracy mostly reflects alignment with the skewed gold rather than learned discrimination; no arm reliably detects the rare breaking class ( $n = 6$ ). Frame shows a milder version of the same pattern. Depth is a caution: at 42.7 the tuned student sits below the  $\sim 56\%$  of always guessing “standard,” and no 8B-teacher arm clears the line—only the managed pipeline does (Section VI-H). Tone as a label barely moves under distillation (34.1 versus base 32.6) while few-shot reaches 74.7—a field cued far better in context than baked into weights. On the macro average, fine-tuning does not beat prompting (55.3 versus 58.5): on the aggregate categorical task the distillation advantage is confined to urgency and frame. This is why the deployment recommendation is per-field (Section VIII).

TABLE V  
Per-Field Classification Accuracy vs. Panel Proxy-Gold

| Field     | Agr. | Maj.      | Base | Few  | Tuned $\mu$ | Teach. |
|-----------|------|-----------|------|------|-------------|--------|
| urgency   | 0.56 | $\sim 74$ | 55.8 | 50.5 | 72.4        | 67.7   |
| frame     | 0.70 | —         | 51.2 | 39.6 | 58.4        | 63.4   |
| sentiment | 0.77 | —         | 48.8 | 67.0 | 69.2        | 81.7   |
| depth     | 0.38 | $\sim 56$ | 51.2 | 60.4 | 42.7        | 48.4   |
| tone      | 0.68 | —         | 32.6 | 74.7 | 34.1        | 77.4   |
| macro     | —    | —         | 47.9 | 58.5 | 55.3        | 67.7   |

TABLE VI  
Per-Arm Latency and Throughput

| Arm                | p50 (ms)       | p95 (ms) | Throughput (tok/s) |
|--------------------|----------------|----------|--------------------|
| Teacher (R1-8B)    | $\sim 39\,200$ | —        | $\sim 40$          |
| Base               | 845            | 1434     | 172                |
| Base + few-shot    | 856            | 1367     | 154                |
| Base + constrained | 824            | 1422     | 173                |
| Tuned (distilled)  | 774            | 1341     | 165                |

## F. Structure, Topics, and Efficiency

The tuned student produces valid seven-field JSON reliably, but constrained decoding reaches the same validity with zero training, so structure is a decoding flag, not a reason to distill. Topic coverage is tuned 82.8% versus base 78.5% versus teacher 96.8%, a solid low-stakes gain. On efficiency (Table VI, Fig. 6), every 0.6B arm runs at  $\sim 0.8$  s/article; the tuned model is fastest by wall-clock, not because throughput is higher but because distillation taught it to write shorter outputs. The 5.4 h to  $\sim 7$  min batch collapse is real and slightly better for the distilled model than for any other student arm.

## G. Seed Variance

The three seeds diverge sharply on the hardest axis: tone-label accuracy ranged 8.6% to 46.2% across seeds, and classification macro ranged 50.3 to 66.5. A single-seed study could have reported any point in that range as “the” result; at 0.6B, seed choice is first-order on the subjective fields, not a rounding error, which is why tuned values are reported as three-seed means. Seed disagreement is also a free confidence signal (Table VII): where the three seeds agree unanimously, accuracy is 18–43 points higher than where they split, and tone, the field distillation fails, is precisely where the seeds almost never agree. Since the three seeds together still run in  $\sim 2.4$  s/article, seed-ensemble agreement is a zero-training-cost per-item confidence flag: trust unanimous labels, route split items to a fallback engine (Section VIII).

## H. The Third Teacher: Scale and Synthetic Expansion

The third teacher is a managed pipeline: the same 401 articles are uploaded to a commercial service that runs a larger teacher (gpt-oss-120b), expands them synthetically, and fine-tunes the same Qwen3-0.6B base in one hands-off run. Scale, data recipe, and run count all differ from the

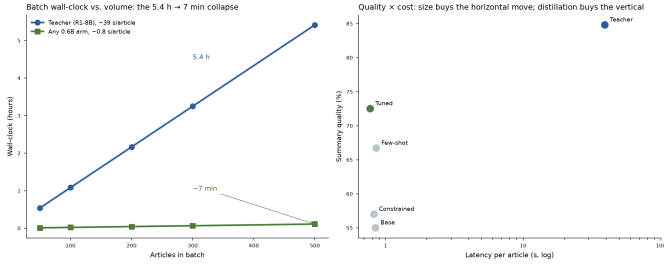


Fig. 6. Left: batch wall-clock versus volume—the 5.4 h to ~7 min collapse at 500 articles that motivated the work. Right: the quality-cost plane—every 0.6B arm sits at ~0.8 s (the horizontal move is free with size); the vertical axis is where distillation, prompting, and the teacher differ.

TABLE VII  
Seed Unanimity Predicts Label Correctness

| Field     | Unanimous (3/3) | Acc. | Split | Acc. |
|-----------|-----------------|------|-------|------|
| urgency   | 83              | 83.1 | 10    | 40.0 |
| sentiment | 67              | 73.1 | 26    | 47.4 |
| frame     | 57              | 64.9 | 36    | 47.2 |
| depth     | 36              | 61.1 | 57    | 40.9 |
| tone      | 12              | 50.0 | 81    | 25.9 |

two 8B teachers at once, so this is a systems comparison, not a clean control. Its student trails the reasoning student on summaries (71.0 versus 75.1) yet posts the best small-model classification macro—66.3, against 55.3 and 57.8 for the two 8B-teacher students and close to the teachers themselves—and it alone among the students clears the depth majority baseline. Scale with synthetic expansion transferred label diversity where the reasoning teacher transferred writing.

Side by side (Table VIII) the three teachers show a capability split, not a ranking: no teacher wins everything. The reasoning teacher owns summary quality, the managed pipeline owns classification, and—unexpectedly—the non-reasoning teacher owns faithfulness. The plain instruction teacher is the most grounded model measured (96% faithful, 95% even on short sources) and passes that grounding down: its students stay faithful on thin sources (74%) exactly where the reasoning students drop to 55%, while the managed student collapses to 36%, the worst in the study. The short-source magnitudes are grading-sensitive (Section VII), so the reliable signal is the ordering, not the point estimate: thin-source grounding tracks the teacher’s lineage—worst for the synthetically expanded pipeline, best for the plain instruction teacher. Different teachers transfer different capabilities, which is exactly why deployment is decided per field, not per model (Section VIII).

### I. Qualitative Examples

Example A, a clean win. The base model’s characteristic failure is to dump the categorical field values into the summary prose (“...The sentiment is positive, with urgency as developing, frame as human\_interest...” instead of

TABLE VIII  
Three Teachers and Their Students: Different Capabilities Transfer (12-Arm Re-Grade,  $N = 93$ )

| Arm                          | Summary | Faithful | Faith. short | Macro |
|------------------------------|---------|----------|--------------|-------|
| R1-8B teacher (reasoning)    | 88.6    | 96       | 86           | 67.3  |
| its 0.6B students            | 75.1    | 73       | 55           | 55.3  |
| Llama-8B teacher (non-reas.) | 68.8    | 96       | 95           | 67.3  |
| its 0.6B students            | 56.9    | 78       | 74           | 57.8  |
| Managed 120B student         | 71.0    | 66       | 36           | 66.3  |
| Few-shot (no distillation)   | 70.2    | 83       | 64           | 58.8  |
| Base (no distillation)       | 56.3    | 70       | 64           | 47.2  |

writing a summary. The tuned student instead writes a faithful, correctly structured summary that captures the article’s thesis and independently corrects the urgency label the base got wrong.

Example B, the faithfulness cost. On a short article, the tuned student invents a framing—a subject’s presidency described as an “Obama-style conflict”—that appears nowhere in the source, whereas the teacher stays grounded. This is the residual faithfulness gap of Section VI-C in a single instance: a genuine fabrication, the thin-source failure mode isolated statistically, and the reason the routing table (Section VIII) falls back to a more careful engine for faithfulness-critical prose.

### VII. Robustness Across Judges

Per-judge robustness. The three judges disagree on individual items, so magnitudes are panel-dependent, but every directional finding in Section VI holds under each judge alone: all three rank the tuned student above both non-distillation controls on the checklist, all three place the reasoning-teacher student far above the non-reasoning one, and all three rank tone-label few-shot far above tuned. Only directional claims are made on judge-graded magnitudes; only human gold labels can settle the exact values (Section X). Notably, the judges disagree even on mechanically checkable predicates such as sentence count and opening phrase, confirming that rule-checkable checks are better computed by rule than judged; and any verbosity bias runs against this study’s conclusion, since the winning arm writes the shortest outputs.

The faithful check is composition-sensitive. It is the most sensitive of the eight to prompt composition: adding or removing an arm reshuffles the blinded label order in every batched prompt, and the faithful value then moves several points on some arms while the other checks stay put. This is why the short-source faithfulness gap is reported as a direction, not a fixed number.

Reference-free faithfulness grading must use the full source. This is the single most transferable methodological result. Grading against only the first 1200 characters produces a large spurious faithfulness deficit for the tuned student that full-article grading removes, leaving only the genuine short-article effect (Section VI-C). Two checks confirm the artifact: the lead-only-to-full uplift appears for every arm—a grading-setup effect, not a model

TABLE IX  
Per-Field Best On-Device Engine

| Field / output                 | Best engine                              | Why                                                                   |
|--------------------------------|------------------------------------------|-----------------------------------------------------------------------|
| JSON structure, urgency, frame | constrained decoding distilled student   | free; no training needed<br>best judge agreement; beats both controls |
| sentiment, topics depth        | distilled or few-shot platform-distilled | roughly tied; sub-second only arm above the majority-class line       |
| tone label                     | few-shot base                            | prompting far better here                                             |
| summary, long/rich             | distilled student                        | 59% gap closed; faithful level with base                              |
| summary, short/thin            | teacher (if latency allows)              | student fabrication concentrates here (Section VIII-A)                |

regression—and on long articles the tuned student is at or above base, while short articles, where the two contexts coincide, are unaffected: a built-in control. The lesson generalizes: grade reference-free faithfulness against the full source, or a truncation artifact masquerades as a model regression larger than the real effect.

### VIII. Per-Field Engine Assignment

Judged against the goal of teacher-quality output at student speed: speed is fully met ( $\sim 0.8$  s/article, 5.4 h to  $\sim 7$  min, on-device, at no cost); summary quality is substantially met (58% gap closure, significant wins over both controls), with one localized caveat, faithfulness on short-source articles; classification quality is met unevenly (about a third of the gap closed, the macro does not beat few-shot, tone barely moves, and depth sits below its majority-class baseline). The measured result—and the transferable idea—is therefore not “use the distilled model” but a per-field routing map (Table IX). The map is a measurement deliverable; Section VIII-B reduces it to the configuration that should ship.

The task pattern was chosen because it recurs: the batch collapse is the signature of any high-volume, schema-bound, latency-sensitive enrichment pipeline paying mid- or large-model latency per item—ticket triage (priority + category, the direct analogue of urgency + frame), log classification, document intake, moderation pre-filters, catalog extraction. For each, the recipe is the same: distill the small model for the structured, high-frequency labels; keep the large model for low-frequency, high-stakes free text; and measure per field rather than assuming the small model wins everything. One task family has been measured; the harness, not this routing table, is the artifact built to transfer.

TABLE X  
Routing Configurations Scored as Assembled Systems

| Configuration                   | Chk. | vs. all-tuned | Faith. | Batch         |
|---------------------------------|------|---------------|--------|---------------|
| All-tuned                       | 71.6 | —             | 72.7   | $\sim 7$ min  |
| A: short $\rightarrow$ few-shot | 71.2 | −0.4          | 76.4   | $\sim 7$ min  |
| C: short $\rightarrow$ base     | 69.6 | −2.0          | 77.4   | $\sim 7$ min  |
| B: short $\rightarrow$ teacher  | 77.2 | +5.5          | 79.6   | $\sim 82$ min |
| All-teacher                     | 84.0 | —             | 93.5   | 5.4 h         |

#### A. The Routing Table, Scored as a System

A recommendation assembled from per-field verdicts can and should be scored as a system. Because every arm’s output for every test article was individually graded, any deterministic routing rule selects, for each article, an output that already carries grades, so the assembled system’s metrics are exact arithmetic over existing per-item scores and the paired-bootstrap machinery applies unchanged. Three summary-routing variants are scored (Table X; labels always route per-field). The results are: (1) the few-shot fallback for short sources does not work—Router A is indistinguishable from no routing, and its faithfulness moves by less than the instrument’s composition noise, so no on-device fallback claims a noise-robust fix; pay the teacher on short sources, or knowingly accept the regression; (2) the teacher-fallback hybrid is a distinct point on the quality-latency frontier—sending only the 22/93 short articles to the teacher buys +5.5 checklist points over all-tuned (paired [2.7, 8.5]) and the best faithfulness of any on-device-dominant configuration, at  $\sim 82$  minutes per 500 articles; (3) per-field classification routing reaches teacher-level agreement (macro 70.4 versus the teacher’s 70.7) at student latency—the strongest quantitative case for treating the field, not the model, as the unit of deployment. These summary-routing differences ride on the 22-article short subgroup, and the routing rules were fixed after seeing the per-field results, so this is engineering validation, not a confirmatory finding.

#### B. From Measurement to Solution Design

The routing map answers a measurement question: which engine is best on each field, and by how much. A deployment answers a different question: which of those wins are worth operating. Measurement should be exhaustive; design should be ruthless. The design rule is the product of three measured quantities: route a field only where (accuracy gain from routing)  $\times$  (cost of that field being wrong) exceeds the standing cost of one more engine to version, monitor, and re-evaluate. Applied here, the shipped configuration is two engines and one rule—the tuned student everywhere, a single few-shot pass for tone (a +50-point gain at low failure cost), with the teacher fallback for thin-source summaries held as a deliberate, latency-priced option—not the full map. That captures most of the measured routing benefit at a fraction of the operating surface. Two costs this harness does not measure are stated plainly: cross-field coherence (nothing enforces

TABLE XI  
The Decision Surface, as Practitioner Guidance

| Decision          | What the study taught                                                                                                                                          |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Teacher           | Output you would ship is the bar; a same-size non-reasoning teacher does not match it on summaries—the reasoning nature is what transfers there (Section VI-D) |
| Student size      | Viable for style, structure, some labels—but seed variance is first-order; budget $\geq 3$ seeds                                                               |
| Quantization      | Measure at the quantization you will ship                                                                                                                      |
| Tuning recipe     | The cheapest recipe moved summary quality decisively; evaluation rigor, not recipe cost, was the bottleneck                                                    |
| Training-set size | Enough for style and structure; class balance, not raw count, bound the subjective labels                                                                      |
| Task framing      | The single most consequential evaluation decision: real findings are invisible in the aggregate                                                                |
| Controls          | Nearly free, and they changed the conclusion twice                                                                                                             |
| Judges            | Grade against the full source or a truncation artifact masquerades as a regression                                                                             |
| Ship decision     | The unit of measurement is the field; the unit of deployment is the minimal routing that pays                                                                  |
| Build vs. buy     | A statistical tie on summaries; the recipes transfer different capabilities—choose per field                                                                   |

agreement between a routed label and the summary), and maintenance surface (every routed engine is one more artifact to re-evaluate on any change). The distinction generalizes: the scientific value of a per-field evaluation is the complete map; the application value is the smallest routed subset that pays.

## IX. Discussion and Methods Contribution

Beyond the routing table, the study contributes a decomposed, reference-free, fully local evaluation harness for structured-output distillation. Each ingredient is individually established in the judging literature (Section II); the contribution is assembling them into a discipline that catches the ways a less controlled evaluation would overstate the method: a per-sub-task decomposition that localizes what distillation moves; gap-closure-to-teacher as a goal-matched reporting scale; two non-distillation controls; the full-source faithfulness-grading result; and human-free grader validation with direction-only multi-judge reporting. The findings came from a chain of build decisions any team distilling for a production task must cross (Table XI); recording them is much of the exercise’s transferable value.

## X. Limitations

The reasoning-teacher question is now addressed by a same-size non-reasoning-teacher control (Section VI-D),

which shows the summary gain is reasoning-specific; but that control varies the teacher’s reasoning nature without holding constant every other difference between two distinct 8B models—their label distributions differ, and the non-reasoning teacher yielded 396 usable label sets against the reasoning teacher’s 401—so it attributes the gain to the reasoning teacher as a whole, not to chain-of-thought as an isolated mechanism, and it rests on the same three-judge instrument as every other magnitude here. Labels are silver, not gold: classification accuracy is against a panel consensus, not human truth, so the numbers are judge priors, not ground truth. The three-judge panel gives a true majority but does not make magnitudes judge-invariant; a different panel would shift exact values, which is why per-judge robustness is reported and only directional claims are made on judge-graded magnitudes. Faithfulness is reference-free LLM-judged, not entailment-verified, and the negative control validates only the gross case, not subtle in-domain fabrication. The short-article finding rests on a small subgroup ( $n = 22$ ). Seed variance is first-order on subjective fields and is not fully propagated by the per-article bootstrap, and the platform arm is a single run without a seed-variance estimate of its own. The pipeline is third-order distillation, which caps the ceiling. Finally, a single task family and feed set is measured; no generalization to unseen sources is claimed.

## XI. Future Work

Ordered by expected value: (1) add a human-gold anchor on  $\sim 50$  items to convert directional magnitudes into settled numbers and calibrate the judges—the single change that would most raise the evidentiary standing of every quantitative claim here; (2) confirm the residual faithfulness gap with a formal entailment verifier and inject-fabrication tests; (3) turn the truncation observation into a measured curve; (4) fix the short-article fabrication mode via faithfulness-filtered data or a decoding-time guard; (5) recover tone labeling with a class-balanced training set; (6) add a reasoning-trace transfer arm, testing whether supervising on the teacher’s traces rather than its answers widens the reasoning-teacher advantage established here; and (7) identify which property of the reasoning teacher’s labels—specificity, thesis selection, or structure—carries the summary gain isolated in Section VI-D.

## XII. Conclusion

A distilled 600M student runs the 500-article enrichment in  $\sim 7$  minutes instead of 5.4 hours, recovers most of the teacher’s summary quality (58% of the gap) and about a third of the classification gap, and beats both non-distillation controls on summary quality. The recovery is uneven in ways that matter: on classification the aggregate does not beat few-shot prompting, depth is untrustworthy for every small-model arm, and on summaries the student matches or beats base on every axis with one residual risk—fabrication on short-source articles, a property of

the reasoning teacher’s lineage. The verdict is therefore not “distillation works” or “distillation hallucinates” but a two-layer answer: the measurement layer is a per-field map in which every field has a best engine and the winners differ; the design layer is deliberately smaller—ship the tuned student everywhere, one few-shot pass for tone, and hold the teacher fallback for faithfulness-critical thin-source prose as a priced option. Two lessons generalize. Decompose before concluding, and check the instrument: scoring the sub-tasks apart made every real finding visible that an aggregate would hide, and grading against the full source rather than a truncated lead removed a spurious faithfulness “regression” and left only a genuine short-source effect—in reference-free evaluation the measurement setup can be a larger effect than the model. And separate the lever from the goal: speed came from model size, quality-at-that-size from distillation. The question the earlier version left open is now closed: a same-size non-reasoning teacher, distilled by the identical recipe, does not beat the untuned base on summaries, so it is the teacher’s reasoning nature and not its scale that the student inherits—an inheritance of specificity and thesis-capture, not of faithfulness.

## Appendix A

### Summary Checklist and Judge Prompts

The checklist (eight binary checks plus topics), graded by the panel against the full article, was fixed after the pilot and before scoring: faithful (every factual claim supported by the article); thesis (captures the central thesis); takeaway (a concrete, specific takeaway); length (3–4 sentences); opening (does not begin with “This/The article”); teacher-lens (explains a concept accessibly); tech-lens (addresses the technical angle); tone (direct, contemplative, not alarmist); and topics\_cover (the listed topics capture the main themes), reported separately. The checklist judge receives the full article and all arms’ summaries under shuffled anonymous labels and returns strict JSON keyed by label. The classification judge assigns exactly one label per field from the closed vocabularies of Section III; the panel vote is the proxy-gold. The negative control pairs each summary with a mismatched article; faithful collapses to 0% ( $n = 30$ ).

## Appendix B

### Teacher-Comparison Protocol

Three teachers label the same 401 training articles under the identical system prompt at temperature 0, and the same Qwen3-0.6B base is distilled from each by the identical QLoRA recipe (rank 32, response-only loss, thinking disabled). The reasoning teacher is DeepSeek-R1-Distill-Llama-8B (deepseek-r1:8b); the same-size non-reasoning teacher is Llama-3.1-8B-Instruct, which produced usable JSON for 396 of the 401 articles against the reasoning teacher’s 401; the managed pipeline uses gpt-oss-120b with proprietary synthetic-data expansion in a single hands-off run. The two 8B teachers differ

only in reasoning nature, isolating that one variable; the managed pipeline additionally varies teacher scale and adds synthetic expansion, so it is a systems comparison rather than a clean control. Each 8B teacher’s own outputs on the 93 test articles are graded as an arm under the same blinded checklist as its students; the managed pipeline’s teacher is not graded directly, because its student was trained on synthetically expanded data rather than the teacher’s raw labels, so a raw self-score would not be the signal the student actually saw. Adding any arm re-shuffles every blinded batched prompt, so all arms are re-graded together; reported aggregates reproduce within  $\sim 2$  points across successive re-grades.

## Appendix C

### Reproducibility

All headline metrics recompute offline from the cached judge log, with no API keys. The judge cache holds both the truncated and the canonical full-text responses, keyed by prompt; an environment variable selects which. Released artifacts include the test set with teacher gold, the 401/93 split, per-arm outputs with measured per-item latency (including the two 8B teachers’ self-scored arms and both distilled-student families), the non-reasoning-teacher training set, the full-context multi-arm score-card, the per-item per-check detail, the analysis, teacher-contrast, and neutral-subset paired-bootstrap scripts, and the judge-panel clients.

## Acknowledgment

The evaluation-harness code, the figure-generation scripts (which render measured data as plots; no figure content is AI-generated), and portions of the manuscript prose were produced with the assistance of AI coding and writing agents. All experimental design, the analysis plan, and the interpretation of results are the author’s.

## References

- [1] G. Hinton, O. Vinyals, and J. Dean, “Distilling the knowledge in a neural network,” arXiv:1503.02531, 2015.
- [2] Y. Kim and A. M. Rush, “Sequence-level knowledge distillation,” in Proc. EMNLP, 2016.
- [3] X. Xu et al., “A survey on knowledge distillation of large language models,” arXiv:2402.13116, 2024.
- [4] X. Zhu et al., “A survey on model compression for large language models,” arXiv:2308.07633, 2023.
- [5] A. Yang et al., “Qwen3 technical report,” arXiv:2505.09388, 2025.
- [6] Z. Liu et al., “MobileLLM: Optimizing sub-billion parameter language models for on-device use cases,” arXiv:2402.14905, 2024.
- [7] M. Rang et al., “Revealing the power of post-training for small language models via knowledge distillation,” arXiv:2509.26497, 2025.
- [8] W. Zhou et al., “UniversalNER: Targeted distillation from large language models for open named entity recognition,” arXiv:2308.03279, 2023.
- [9] Y. Gu et al., “Distilling large language models for biomedical knowledge extraction: A case study on adverse drug events,” arXiv:2307.06439, 2023.
- [10] DeepSeek-AI, “DeepSeek-R1: Incentivizing reasoning capability in LLMs via reinforcement learning,” arXiv:2501.12948, 2025.

- [11] C. Zhang et al., “100 days after DeepSeek-R1: A survey on replication studies and more directions for reasoning language models,” arXiv:2505.00551, 2025.
- [12] Y. Li et al., “NaturalThoughts: Selecting and distilling reasoning traces for general reasoning tasks,” arXiv:2507.01921, 2025.
- [13] X. Chen et al., “Unveiling the key factors for distilling chain-of-thought reasoning,” in Findings of the Assoc. Comput. Linguistics: ACL 2025, 2025, arXiv:2502.18001.
- [14] S. K. Ramesh et al., “On the generalization vs fidelity paradox in knowledge distillation,” in Findings of the Assoc. Comput. Linguistics: ACL 2025, 2025, arXiv:2505.15442.
- [15] D. Busbridge et al., “Distillation scaling laws,” arXiv:2502.08606, 2025.
- [16] S.-I. Mirzadeh et al., “Improved knowledge distillation via teacher assistant,” in Proc. AAAI, 2020, arXiv:1902.03393.
- [17] X. Chen et al., “Do not think that much for  $2+3=?$  On the overthinking of o1-like LLMs,” arXiv:2412.21187, 2024.
- [18] T. Zheng et al., “The curse of CoT: On the limitations of chain-of-thought in in-context learning,” arXiv:2504.05081, 2025.
- [19] P. Aggarwal et al., “OptimalThinkingBench: Evaluating over and underthinking in LLMs,” arXiv:2508.13141, 2025.
- [20] Z. Yao et al., “Are reasoning models more prone to hallucination?,” arXiv:2505.23646, 2025.
- [21] C.-Y. Hsieh et al., “Distilling step-by-step! Outperforming larger language models with less training data and smaller model sizes,” in Findings of ACL, 2023.
- [22] Y. Wang et al., “Self-Instruct: Aligning language models with self-generated instructions,” in Proc. ACL, 2023, arXiv:2212.10560.
- [23] A. Shirgaonkar et al., “Knowledge distillation using frontier open-source LLMs: Generalizability and the role of synthetic data,” arXiv:2410.18588, 2024.
- [24] G. Chrysostomou et al., “Investigating hallucinations in pruned large language models for abstractive summarization,” arXiv:2311.09335, 2023.
- [25] S. Ramprasad et al., “Evaluating the factuality of zero-shot summarizers across varied domains,” arXiv:2402.03509, 2024.
- [26] T. Zhang et al., “Benchmarking large language models for news summarization,” arXiv:2301.13848, 2023.
- [27] Q. Song et al., “A systematic evaluation of on-device large language models: Quantization, performance, and resources,” arXiv:2505.15030, 2025.
- [28] J. Lin et al., “AWQ: Activation-aware weight quantization for LLM compression and acceleration,” arXiv:2306.00978, 2023.
- [29] L. Zheng et al., “Judging LLM-as-a-judge with MT-Bench and Chatbot Arena,” arXiv:2306.05685, 2023.
- [30] P. Wang et al., “Large language models are not fair evaluators,” arXiv:2305.17926, 2023.
- [31] J. Ye et al., “Justice or prejudice? Quantifying biases in LLM-as-a-judge,” arXiv:2410.02736, 2024.
- [32] Y. Liu et al., “G-Eval: NLG evaluation using GPT-4 with better human alignment,” arXiv:2303.16634, 2023.
- [33] Y. Lee et al., “CheckEval: A reliable LLM-as-a-judge framework for evaluating text generation using checklists,” arXiv:2403.18771, 2024.
- [34] J. Cook et al., “TICKing all the boxes: Generated checklists improve LLM evaluation and generation,” arXiv:2410.03608, 2024.
- [35] Y. Qin et al., “InFoBench: Evaluating instruction following ability in large language models,” in Findings of ACL, 2024, arXiv:2401.03601.
- [36] P. Verga et al., “Replacing judges with juries: Evaluating LLM generations with a panel of diverse models,” arXiv:2404.18796, 2024.
- [37] Z. Tian et al., “Overconfidence in LLM-as-a-judge: Diagnosis and confidence-driven solution,” arXiv:2508.06225, 2025.
- [38] A. Panickssery, S. R. Bowman, and S. Feng, “LLM evaluators recognize and favor their own generations,” arXiv:2404.13076, 2024.
- [39] K. Wataoka et al., “Self-preference bias in LLM-as-a-judge,” arXiv:2410.21819, 2024.
- [40] S. Min et al., “FactScore: Fine-grained atomic evaluation of factual precision in long form text generation,” arXiv:2305.14251, 2023.
- [41] L. Tang, P. Laban, and G. Durrett, “MiniCheck: Efficient fact-checking of LLMs on grounding documents,” arXiv:2404.10774, 2024.
- [42] D. Jiang et al., “TIGERScore: Towards building explainable metric for all text generation tasks,” arXiv:2310.00752, 2023.
- [43] P. Manakul, A. Liusie, and M. J. F. Gales, “SelfCheckGPT: Zero-resource black-box hallucination detection for generative large language models,” arXiv:2303.08896, 2023.
- [44] S. Geng et al., “JSONSchemaBench: A rigorous benchmark of structured outputs for language models,” arXiv:2501.10868, 2025.