

Fast and Faithful? Distilling an 8B Reasoning Teacher into a Sub-1B On-Device Student for Structured News Enrichment

Vinay Kumar Chaganti

Abstract—What does knowledge distillation actually buy a production pipeline, per sub-task, against the cheaper levers tried first? It is quantified on a shipped deployment—an RSS reader enriching each article with one structured JSON object (a free-text summary, five categorical labels, open-set topics) at the output quality of an 8B reasoning teacher (deepseek-r1:8b) but without its ~ 39 s/article latency. A 600M student (Qwen3-0.6B) is fine-tuned on the teacher’s outputs (QLoRA, three seeds) and scored per sub-task against two non-distillation controls (few-shot prompting, constrained JSON decoding) and a managed-platform pipeline, by a blinded, reference-free, two-judge panel grading the full article. Speed is a property of size, not distillation: every 0.6B arm runs at ~ 0.8 s/article. Summary quality is where distillation earns its keep: the tuned student closes $\sim 59\%$ of the base-to-teacher gap and significantly beats both controls ($+15.5$ over constrained decoding, $+5.9$ over few-shot). A same-size non-reasoning-teacher control isolates that gain: an equal-size non-reasoning teacher does not beat the untuned base, so the summary advantage is specific to the teacher’s reasoning nature—an advantage in specificity and thesis-capture, not faithfulness. Classification splits by field: the urgency win is mostly majority-class alignment, tone belongs to prompting, and the macro ties few-shot. Faithfulness shows only a small deficit, within instrument noise, robust mainly as fabrication on short-source articles. The managed platform ties on summaries with an inverted profile—best small-model classifier, worst thin-source faithfulness. The deliverable is a per-field engine assignment: the smallest routed subset that pays, with a teacher fallback for faithfulness-critical thin sources.

Index Terms—Edge inference, knowledge distillation, large language models, LLM-as-a-judge evaluation, model compression, reasoning-model distillation, small language models, structured output generation, text summarization.

I. Introduction

THIS study began as a quantification problem: before adopting distillation across a family of production tasks, one wants a defensible measurement of what it actually buys, per sub-task, against the cheaper levers a practitioner would try first. The task pattern under study—one prompt, one schema-bound JSON object per item, repeated over thousands of items—recurs across production pipelines (ticket triage, log classification, document intake, catalog extraction), so the lessons are expected to outlive the first application.

The author is an independent researcher (e-mail: cvk.atreya@gmail.com).

Evaluation-harness code, figure-generation scripts, and portions of the manuscript were produced with AI-agent assistance; see the Acknowledgment.

That first application is real and shipped: a local-first RSS reader¹ that enriches every incoming article with a structured JSON object: a short analytical summary, five closed-vocabulary content-analysis labels—sentiment, urgency, frame, tone, depth—and open-set topic tags (full vocabularies in Section III). Generating that with the deepseek-r1:8b teacher produced acceptable output, but at ~ 39 s/article; enriching a 500-article backlog was a 5.4-hour job on a consumer laptop (Fig. 6, left). The engineering goal was to keep that output quality while making the batch fast enough to run locally as a routine, unattended job.

Running the study fully locally was itself a measurement decision, not only a deployment constraint. Free-tier hosted APIs proved too unreliable for controlled quantification—rate limits and dropped completions later constrained even the judge panel (Section V-B)—whereas local models hold still: fixed weights, temperature 0, no quotas, unlimited reruns. Everything needed to re-measure is therefore local and free.

Size and distillation are separable levers, and the question sharpens once they are kept apart. Size alone buys the $\sim 40\times$ speedup, independent of how the small model is trained; distillation is the only lever that recovers teacher-quality output at that size. What is under test is therefore not speed but recovery: how much of the teacher’s per-sub-task output quality a 600M student inherits, and whether it preserves the property a reader-facing product cannot compromise—faithfulness. Posing it per sub-task matters because the sub-tasks have different failure costs, so a single aggregate would average away the one axis where a regression is unacceptable.

A credible answer needs more than the obvious first cut—a single same-family judge, a handful of test items, a 0–5 rubric that saturates near the ceiling, and one training run. This study answers the question with a design built to resist each of those failure modes: 93 held-out test articles; twelve arms spanning three distillation teachers—a reasoning 8B, a same-size non-reasoning 8B, and a larger managed pipeline—two non-distillation controls, and the untuned base; a decomposition into three sub-tasks with different success criteria; a multi-family judge

¹The deployment is a personal RSS reader; the product itself is incidental to this study and is named only for reproducibility of the corpus. The paper’s claims concern the distillation and evaluation method, not the application.

panel validated by a negative control; three training seeds; and paired-bootstrap significance tests. The summary rubric was fixed after a pilot and before any scored run, so it could not be tuned to the result.

The contributions are: (1) a fully local, reference-free, human-free evaluation harness for structured-output distillation, reproducible offline from a cached judge log; (2) gap-closure-to-teacher as a reporting scale matched to the engineering goal, which naturally exposes overshoot and regression; (3) a per-sub-task decomposition separating summarization, classification, and topic tagging, which reveals effects any aggregate score hides; (4) two non-distillation controls so distillation is credited only for what neither cheaper lever provides; (5) a same-size non-reasoning-teacher control that isolates what the teacher’s reasoning nature—as opposed to its scale—actually contributes; and (6) a per-field engine assignment for on-device enrichment plus an explicit map of the build decisions the exercise required.

This paper establishes, through a same-size non-reasoning-teacher control, that the teacher’s reasoning nature—not merely its 8B scale—is what the summary gain depends on, while showing that contribution is specific to the generative sub-task and does not extend to faithfulness (Section VI-D). It remains bounded in ways stated plainly: it uses no human gold labels; it uses a two-judge panel, so exact magnitudes are not judge-invariant; and its classification “accuracy” is measured against a judge-panel consensus, not ground truth (Section X).

II. Related Work

Knowledge distillation. Training a small student to imitate a larger teacher dates to Hinton et al. [1], with sequence-level distillation for generation introduced by Kim and Rush [2]. The modern LLM variant—a large model generates outputs on which a smaller model is supervised-fine-tuned—is what surveys term black-box or sequence-level distillation [3], [4]. The pipeline here is a textbook instance; what distinguishes this study is not the method but the measurement: most distillation work reports a single aggregate quality delta, whereas this study decomposes by sub-task and controls for cheaper alternatives.

Rationale over labels. A parallel line supervises the student on the teacher’s reasoning, not just its answers. Distilling step-by-step [5] shows rationale supervision is more data-efficient than label-only; symbolic chain-of-thought distillation [6] shows sub-1.3B students can absorb chain-of-thought. This study deliberately trains on the teacher’s final outputs only (thinking disabled): these tasks are non-reasoning and it is the deployment-realistic recipe; whether trace supervision would help is left as future work.

Reasoning-teacher distillation. DeepSeek-R1 [7] showed that distilling a strong reasoning model into smaller dense models transfers reasoning ability, triggering a wave of replication studies [8]. That literature is almost entirely

about math, code, and reasoning benchmarks at the 1.5B–32B scale. Whether a stronger or reasoning teacher reliably helps is in fact contested: controlled studies find a teacher’s task fit rather than its benchmark score governs student gains, that stronger teachers do not always yield better students, and that knowledge distillation improves student outputs without transferring the teacher’s fidelity [9], [10]. NaturalThoughts [11] frames the answer-only versus trace distillation axis directly and studies equal-size non-reasoning students. The present setting sits in the gap that leaves: a reasoning teacher distilled into a sub-1B student for non-reasoning production tasks, where the recipe’s value is contested rather than assumed—and where, to our knowledge, no prior work isolates the teacher’s reasoning nature with a same-size non-reasoning-teacher control on such a task (Section VI-D).

Reasoning can hurt. The assumption that a reasoning teacher helps is not safe for simple tasks. Reasoning models overthink easy inputs [12], chain-of-thought can underperform direct answering on non-decomposable pattern-based tasks [13], and OptimalThinkingBench [14] documents that thinking models distilled into non-thinking students degrade on straightforward queries—“overthinking” transfers through distillation. A separate line finds reasoning-oriented training and distillation can raise hallucination [15]. Both threads are borne out here: the reasoning teacher lifts summary specificity but not faithfulness (Section VI-D), and the residual faithfulness regression (Section VI-C) is an independent data point in the same direction.

Small models and their limits. Qwen3 [16] is itself a strong-to-weak distillation product, and Qwen3-0.6B is at the low edge where chain-of-thought distillation is known to become unreliable. Speculative distillation [17] covers 0.5B-class students on summarization, but via on-policy methods and without the per-field, controlled decomposition used here.

Judging and faithfulness evaluation. Scalar LLM judging [18], [19] is known to suffer positional, verbosity, and style biases and to saturate near the ceiling. The field’s response is decomposition: checklist-based judging [20] and open-rubric judges [21]. For faithfulness, atomic-fact methods [22], [23] and efficient local entailment checkers [24] replace n -gram overlap, and reference-free hallucination detection [25] avoids gold references. The harness here adopts the checklist-decomposition and reference-free-validation lessons from this line while staying fully local and human-free.

What is being distilled. deepseek-r1:8b is DeepSeek-R1-Distill-Llama-8B, itself a distilled dense model derived from the 671B R1 [7], and Qwen3-0.6B is itself a distillation product. The pipeline is therefore third-order distillation, which caps the achievable ceiling (Section X).

III. The Structured Enrichment Task

The reader enriches every incoming article with one JSON object carrying seven fields: a free-text summary, five categorical labels, and an open-set topic list. These

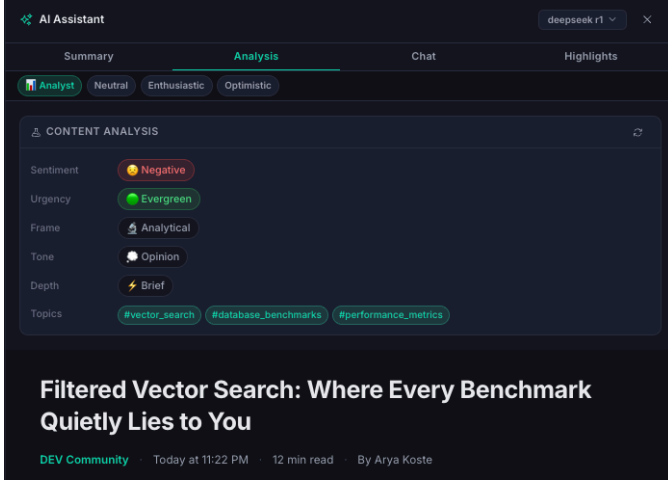


Fig. 1. The enrichment as the reader sees it. The five categorical fields and the topic tags render as badges in a content-analysis panel; the free-text summary is shown separately. A hallucinated summary misleads the reader, whereas a mislabelled badge is glanceable and cheap—the asymmetry that motivates the per-field engine assignment.

surface directly in the user interface as a content-analysis panel (Fig. 1). A representative teacher output pairs a three-to-four-sentence summary with the label fields, e.g., sentiment=positive, urgency=developing, frame=analytical, tone=analytical, depth=standard, and topics={AI Safety, Responsible AI}.

The categorical fields draw from small closed vocabularies observed in the teacher’s own labels: sentiment $\in$ {positive, neutral, negative}; urgency $\in$ {breaking, developing, evergreen}; frame $\in$ {analytical, conflict, human_interest, economic}; tone $\in$ {analytical, optimistic, opinion, alarming}; depth $\in$ {brief, standard, deep_dive}. Several vocabularies are imbalanced in the teacher’s own labels (depth, for instance, is 71% standard with deep_dive near-absent; full distributions in Table II), which matters directly for interpreting per-field accuracy and is made concrete with a majority-class baseline in Section VI-E.

This single output is really three machine-learning problems with different success criteria (Table I), and scoring them together hides what distillation moved. The asymmetry in failure cost is why the study’s conclusion is a per-field engine assignment (Section VIII) rather than a single verdict: the quality bar a field must clear depends on what a wrong value costs.

IV. Experimental Setup

Models. The teacher is DeepSeek-R1 8B (deepseek-r1:8b); the student is Qwen3-0.6B. Both are served on-device at Q4_K_M quantization. A $\sim 13\times$ parameter gap and a difference in kind: DeepSeek-R1 emits chain-of-thought before answering, whereas the student is trained on the teacher’s final outputs only, compiling task knowledge into weights and skipping runtime deliberation. This choice is deployment-realistic; whether the teacher’s reasoning nature, as opposed to its 8B scale, is what the

TABLE I
The Enrichment Output Is Three Sub-Tasks With Different Failure Costs

Sub-task	Type	Failure cost in the product
Summarization (summary)	free-text generation	high — a hallucinated summary misleads
Classification (5 labels)	closed-set labels	low — a mislabeled badge is cheap
Topic tagging (topics)	open-set multi-label	low — affects filtering, not comprehension

student actually inherits is settled separately by a same-size non-reasoning-teacher control (Section VI-D).

Data and split. 500 articles were sampled fairly across all feeds; the teacher generated a gold JSON for each; the six whose JSON was malformed were dropped, leaving 494 labeled articles. A stratified-random split (test fraction 0.2, every feed represented) gives 401 train / 93 test. The test set is new articles from known feeds—matching deployment (the reader follows fixed feeds and sees new items), not generalization to unseen sources, which is out of scope.

Corpus characteristics. The dataset shapes several of this study’s central findings, so its properties are reported explicitly (Table II). The 494 articles span 24 feeds; sampling was balanced (27 articles for each of the 16 largest feeds, tapering to 2–3 for the smallest), so no single source dominates. The subject mix is technology- and AI-leaning—AI research and news, software and web development, cybersecurity—alongside general-interest long-form (The Atlantic, Longreads, The Marginalian, Aeon). Two properties bear directly on the results. First, article length is bimodal and capped: full text is stored up to ~ 4096 characters (median 4040), but 22 of the 93 test articles ($\sim 24\%$) arrive as short RSS excerpts of ≤ 1200 characters—the thin-source regime where the faithfulness regression concentrates (Section VI-C). Second, every categorical vocabulary is imbalanced in the teacher’s own labels (Table II): depth is 71% standard with deep_dive essentially absent (0.8%), urgency is dominated by developing/evergreen with breaking at 1.6%, and tone is 68% analytical. These skews—not raw article count—bound what the categorical fields can learn, and are the reference for the majority-class baselines in Section VI-E. Fewer than 1% of teacher labels fell outside the closed vocabularies (e.g., a stray humorous frame); these off-vocabulary values were retained as-is rather than corrected, and are a minor source of proxy-gold noise. Topics are genuinely open-set: 1359 distinct tags over 494 articles, a mean of 3.4 per article. Teacher summaries are a median of three sentences (431 characters).

Training. A QLoRA fine-tune of Qwen3-0.6B directly on the 401 teacher outputs (LoRA rank 32, response-only loss masking, thinking disabled), on a free cloud T4 GPU. Three seeds (42/123/7) are trained so that seed variance

Study at a glance: distilling into a 0.6B on-device student — two training pipelines

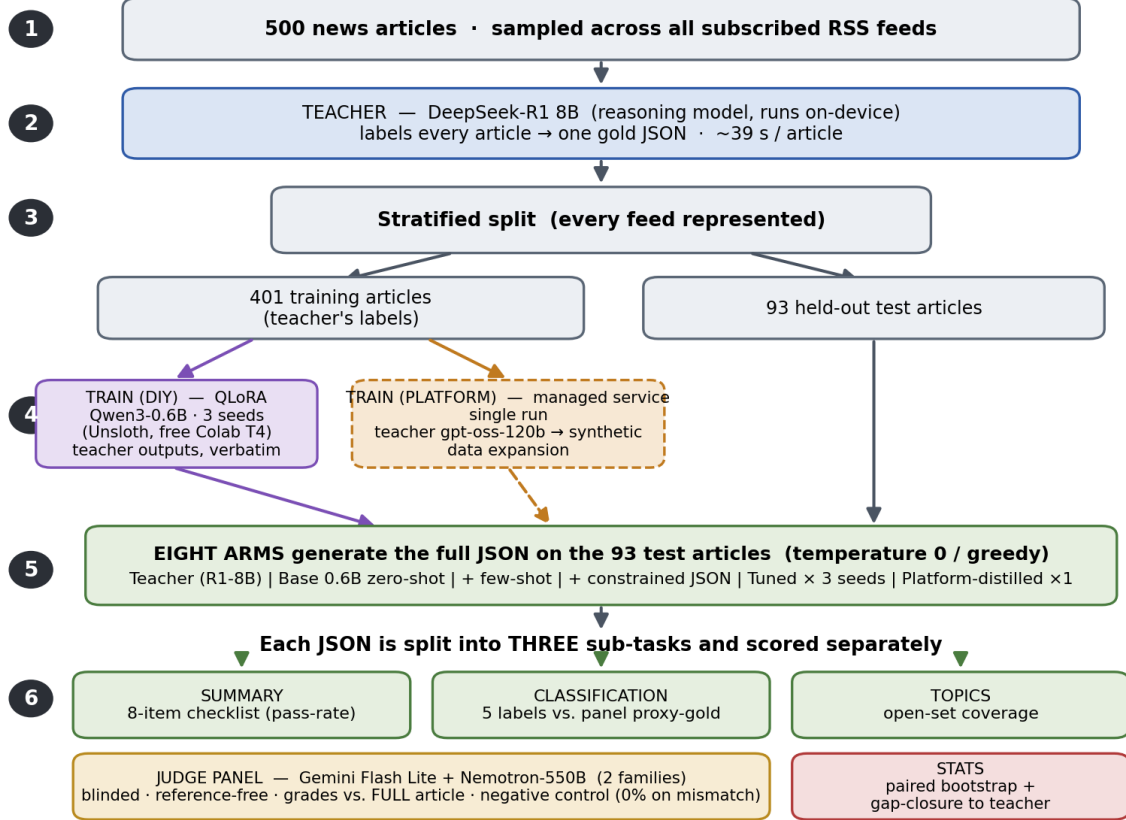


Fig. 2. The experimental pipeline. 500 articles are labeled by the teacher and split 401/93; the training labels feed two pipelines—the do-it-yourself QLoRA fine-tune (three seeds) and a managed-platform distillation (its own teacher and synthetic-data expansion)—and the eight core arms generate outputs on the held-out test set, scored on three sub-tasks by a two-judge panel and reported as gap-closure toward the teacher. Two further teachers—a same-size non-reasoning 8B and a larger managed pipeline (Sections VI-D and VI-H), with both 8B teachers also graded on the test set—bring the total to twelve arms.

TABLE II
Corpus Characteristics (494 Labeled Articles, 24 Feeds)

Property	Value
Articles (train / test)	494 (401 / 93), stratified by feed
Feeds	24; balanced (≤ 27 /feed), range 2–27
Article length (chars)	median 4040; capped ~ 4096 ; min 197
Short excerpts (≤ 1200)	22/93 test ($\sim 24\%$)
sentiment	neutral 46 / positive 44 / negative 9
urgency	developing 59 / evergreen 39 / breaking 6
frame	analytical 55 / conflict 24 / human 15 / none 6
tone	analytical 68 / optimistic 17 / opinion 8 / alarm 7
depth	standard 71 / brief 28 / deep_dive 1
Topics (open-set)	1359 distinct; mean 3.4/article
Summary (teacher)	median 3 sentences / 431 chars

is characterized rather than assumed away. Models are exported to Q4_K_M and served locally.

Arms. All arms generate at temperature 0 and see the full article. The twelve arms are the two 8B teachers—reasoning (deepseek-r1:8b) and same-size non-reasoning (llama-3.1-8b-instruct)—each graded on the test set as an arm; the untuned base Qwen3-0.6B; base + few-

shot prompting (2–3 in-context examples, controlling for prompting); base + constrained JSON decoding (controlling for formatting); the reasoning-teacher student at three seeds; the non-reasoning-teacher student at three seeds (identical recipe and seeds; Section VI-D); and a managed-pipeline student (Section VI-H) trained from the same 401-item upload through a commercial service with a larger teacher (gpt-oss-120b) and synthetic-data expansion, a single run. Distillation is credited only where it beats both non-distillation controls on something real.

V. Evaluation Method

A. Metrics per Sub-Task

Structure is schema validity: parses as JSON with all seven fields, computed deterministically. Classification is per-field accuracy plus macro-average against a panel-consensus proxy-gold (Section V-B; the majority-class baseline of Section VI-E is the reference line). Summarization is an eight-item binary checklist (pass-rate), the primary metric, chosen because a 0–5 rubric saturates; the checks are faithful, thesis, takeaway, length, opening, teacher-lens, tech-lens, and tone, with a separately

reported topics `cover check` (full wording in Appendix A). Efficiency is latency, throughput, and memory, measured per-arm. The summary checklist and primary comparison were fixed after a 12-article pilot and before any scored run, so the rubric could not be tuned to the result; two checks were dropped at the pilot for lack of headroom, dropped rather than reworded to avoid post-hoc bias.

B. Judge Panel and Grading

Grading is reference-free, against the full article, never against the teacher’s answer (which would induce teacher-mimicry bias); blinded, with shuffled anonymous arm labels; and at temperature 0. The panel deliberately excludes the teacher’s family and the student’s family, since a same-family judge can self-prefer. Results come from a two-judge panel, Gemini Flash Lite and Nemotron-550B (two distinct families, $N = 93$). Other hosted judges failed mid-run on the free tier and were excluded. Per-check inter-judge disagreement is 26.8%, so each judge’s direction is reported independently (Section VII) rather than hidden inside a majority vote. For the classification proxy-gold, where a single label per field is required, ties on the $\sim 27\%$ of items where the judges disagree are broken by a fixed judge-priority order; this is a known limitation, since a two-judge “consensus” has no true majority on disagreements, so the accuracy numbers should be read as directional (Section X). Grading uses the full article throughout: partial-context grading systematically understates faithfulness and manufactures an apparent regression, quantified in Section VII.

C. Grader Validation Without Humans

At this scale, human adjudication is the bottleneck, so the grader is validated by construction: a negative control grades a sample of summaries against a mismatched article. A grader that cannot tell a real summary from a mismatched one is not measuring anything. The result is 0% faithful on mismatched articles ($n = 30$): the grader demonstrably discriminates the gross case. It does not confirm detection of subtle, in-domain fabrication—a plausible invented detail inside an otherwise-correct summary—which would require injected-fabrication tests or a human-labeled set (Section XI). The faithfulness numbers should be read with that boundary in mind.

D. Statistics

Metrics are reported as mean with 95% confidence interval (bootstrap over the 93 test items; headline comparisons use a paired bootstrap over per-article scores, 20 000 resamples, cancelling per-article difficulty). Tuned metrics are the mean across three seeds. The primary comparison, fixed before scoring, is tuned versus base + constrained on checklist pass-rate. Secondary comparisons (tuned versus base, tuned versus few-shot, and the per-field classification comparisons) are numerous, so individual secondary wins not also confirmed by both

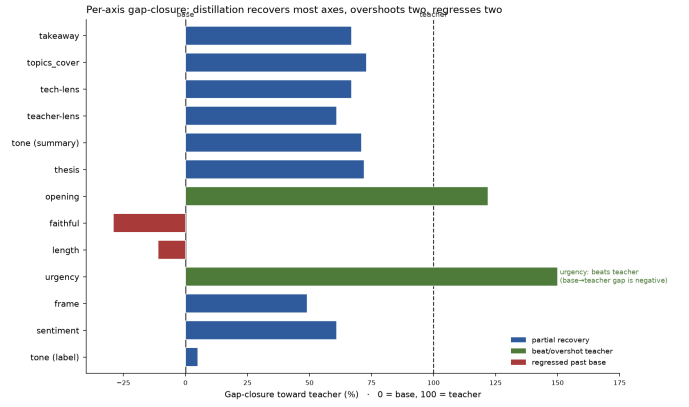


Fig. 3. Per-axis gap-closure toward the teacher (0 = untuned base, 100 = teacher). Partial recovery, overshoot, and regression below base are distinguished. Distillation recovers most summary and classification axes, overshoots two, and leaves two small summary regressions. The per-axis pattern, not any single aggregate, is the primary result.

judges (Section VII) are treated as suggestive. The per-article bootstrap captures article-level variance around the three-seed mean; it does not fully propagate training-seed variance, which Section VI-G shows is first-order on the subjective fields—there, the seed range, not the bootstrap interval, is the representative uncertainty.

VI. Results

A. Gap-Closure Toward the Teacher

Because the goal was teacher quality at student speed, the natural scale is how far the student traveled from the untuned base (0%) toward the teacher (100%) on each axis: $(\text{tuned} - \text{base}) / (\text{teacher} - \text{base})$. Fig. 3 is the paper in one chart. The headline is not one number; it is the shape: distillation recovered most of the teacher’s quality on most summary axes, exceeded it on two, and left two small summary regressions—faithfulness and length. On classification the picture is more mixed (Section VI-E). Gap-closure is a ratio and becomes unstable when teacher and base are close, so absolute deltas are reported alongside every gap-closure figure and axes where teacher $\approx$ base are flagged; because the student can exceed 100% on some axes, the teacher is a reference point, not a ceiling.

B. Summarization

Checklist pass-rates (Fig. 4, Table III) show a decisive, significant primary win: tuned versus base + constrained is 72.5 versus 57.0, +15.5 points, paired bootstrap [11.1, 20.3], and it holds for each of the three seeds independently. Distillation also beats the prompting control significantly, 72.5 versus 66.7, +5.9 [2.5, 9.5]. The summary gain therefore survives both controls a reviewer would demand: it is not reducible to schema formatting or to a few in-context examples. Overall the tuned student closes 59% of the base-to-teacher summary gap.

The per-check breakdown (Table IV) separates the product-critical faithfulness axis from the stylistic ones.

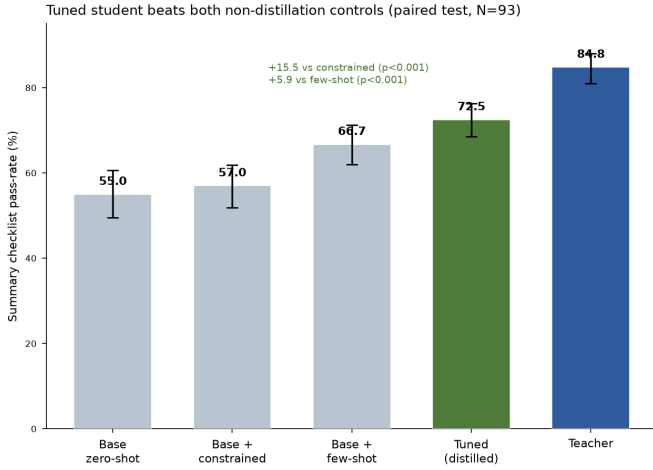


Fig. 4. Summary checklist pass-rate by arm, full-text grading, mean with bootstrap 95% interval ($N = 93$). The tuned student significantly beats both non-distillation controls on the paired per-article test. The win rests on the paired comparison, which cancels per-article difficulty, not on marginal-interval separation.

TABLE III

Summary Checklist Pass-Rate by Arm (Full-Text Grading, $N = 93$)

Arm	Checklist %	95% CI
Teacher	84.8	[81.0, 88.0]
Tuned (distilled)	72.5	[68.5, 76.3]
Base + few-shot	66.7	[62.0, 71.2]
Base + constrained	57.0	[51.9, 61.8]
Base zero-shot	55.0	[49.5, 60.6]

Gains are broad—specificity (takeaway 44 to 74), the persona lenses, tone, and opening style recover most of the way, and two axes overshoot the teacher. The two soft spots are faithfulness (-4) and length (-2); the length miss is over-compression, the same style-transfer overshoot that makes the tuned arm fastest (Section VI-F). Because failure costs are asymmetric (Section III), faithfulness is not folded into a single “the student is better” headline: the aggregate checklist win is driven by style and specificity while the one product-critical property regressed slightly. That tension is the central result of this section.

C. The Faithfulness Gap

Under full-text grading, faithfulness is base 79.6, tuned 75.6, teacher 93.5—the tuned student sits slightly below the untuned base, a -4 point gap. Two things resolve what is real. First, the aggregate deficit is within the instrument’s noise: the same tuned-versus-base quantity reads -4.0 under the seven-arm grading and -1.5 under the eight-arm re-grade (Section VII), and the faithful check carries ± 5 – 7 points of prompt-composition sensitivity. Because the aggregate gap moves by more than half its size when only the prompt packaging changes, the honest claim is direction-consistent but smaller than the instrument’s composition noise. Second, what is robust is localized. Splitting by article length, on long articles (> 1200 chars,

TABLE IV
Per-Check Summary Pass-Rates and Absolute Deltas

Check	Base	Few-shot	Tuned μ	Teacher	Δ vs. base
faithful	79.6	83.9	75.6	93.5	-4.0
takeaway	44.1	47.3	74.2	89.2	$+30.1$
teacher-lens	22.6	41.9	62.0	87.1	$+39.4$
tech-lens	36.6	44.1	54.5	63.4	$+17.9$
tone	59.1	80.6	82.8	92.5	$+23.7$
opening	51.6	79.6	77.8	73.1	$+26.2$
thesis	84.9	91.4	94.2	97.8	$+9.3$
length	61.3	64.5	59.1	81.7	-2.2
topics_cover	87.1	95.7	95.7	98.9	$+8.6$

$n = 71$) the tuned student is level with base (81.7 versus 80.3); the residual regression concentrates in short articles (≤ 1200 chars, $n = 22$), where tuned drops to 56.0 versus base 77.3 (-21.3). The sample size warrants caution: -21 points on 22 articles, split three ways by seed, is a real but wide signal, best read as “concentrated in short sources,” not “confined to exactly this.” The mechanism is consistent across seeds: given little article to work with, the student fills the summary with specific-sounding but unsupported claims (Example B, Section VI-I); on rich source material it stays grounded. For a reader-facing product that cannot tolerate fabrication, even a localized dip is worth routing around (Section VIII).

D. Three Teachers, One Recipe: What the Student Inherits

The title’s “reasoning teacher” is a claim, not a given; the cheapest rival explanation for the summary win is a merely capable 8B teacher. To settle it, the same Qwen3-0.6B base is distilled by the identical QLoRA recipe, seeds, and split from three teachers, so that what the student inherits is attributable to the teacher and not the procedure. The reasoning teacher is DeepSeek-R1-Distill-Llama-8B; the same-size non-reasoning teacher is Llama-3.1-8B-Instruct, which re-labeled the 401 training articles under the identical prompt at temperature 0, yielding usable JSON on 396; the third teacher is a managed pipeline running a larger model, gpt-oss-120b, with proprietary synthetic-data expansion. The two 8B teachers differ only in reasoning nature and isolate it; the managed pipeline additionally varies scale and adds synthetic data, and is treated separately (Section VI-H). Each 8B teacher’s own outputs on the test set are graded as an arm, so a teacher sits beside its students under one rubric (Fig. 5); all twelve arms were re-graded together and prior aggregates reproduce within ~ 2 points.

Reasoning is what the summary gain depends on. The reasoning teacher out-writes the non-reasoning teacher on its own summaries—84.3 versus 64.0 on the checklist—and that 20-point teacher-level gap propagates almost intact to the students: 72.4 versus 53.3, a paired $+19.1$ points, bootstrap $[15.6, 22.8]$, $p < 0.001$, holding across all three seed pairs ($+19.9$, $+18.5$, $+19.0$). The comparison to no distillation makes it sharp: the reasoning student

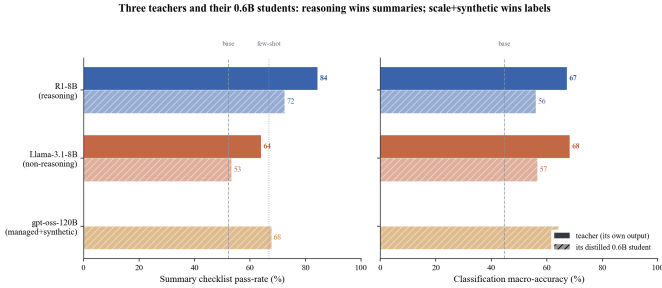


Fig. 5. Three teachers and their 0.6B students under one rubric (full 12-arm re-grade, $N = 93$; students are three-seed means). Solid bars are a teacher’s own output, hatched bars its distilled student. Left, summaries: the reasoning teacher (R1-8B) and its students dominate; the same-size non-reasoning teacher (Llama-3.1-8B) and its students sit at the untuned-base line; the managed 120B pipeline falls between. Right, classification: teachers and students are level and the managed pipeline leads. Reasoning transfers writing quality; scale with synthetic expansion transfers label diversity.

beats the untuned base by +20.3 [14.7, 26.1], whereas the non-reasoning student does not beat base at all (+1.2 [−3.6, 6.0], n.s.). A same-size non-reasoning teacher bought essentially nothing on summary quality; the student inherits its teacher’s ceiling, and only the reasoning teacher’s ceiling is high enough to move the result. That a stronger kind of teacher rather than a stronger-scoring one is what transfers echoes reports that teacher task-fit, not benchmark score, governs distillation gains [9], [10].

The advantage is specificity, not faithfulness. Two qualifications keep the claim precise. The gain is not an artifact of a rubric that rewards the teacher’s persona: on the three article-grounded, persona-free checks—faithful, thesis, takeaway—the reasoning student still leads 80.3 versus 63.8, +16.5 [12.4, 20.8], $p < 0.001$, driven by takeaway specificity (74.2 versus 26.2), the reasoning teacher supplying concrete exemplars where the non-reasoning teacher supplied vague ones. But the advantage stops short of faithfulness: on the faithful check alone the non-reasoning student is marginally higher, 78.5 versus 73.5 ($\Delta - 5.0$ [−11.8, 1.4], $p = 0.13$), matching evidence that reasoning-oriented training can raise rather than lower hallucination [14], [15]. And on closed-set labeling the two 8B teachers themselves tie (macro 68.3 versus 67.3), as do their students (56.6 versus 56.0): reasoning lifts the open-ended sub-task and leaves classification untouched. The reasoning teacher earns its place in the title on summaries, and there alone.

E. Classification

Per-field accuracy against the panel proxy-gold (Table V) is read against a majority-class baseline, because several vocabularies are imbalanced and accuracy below that line is worse than a constant guess. Urgency first looked like the standout—the tuned student hits 78.5%, above every arm including the teacher—but a per-class confusion analysis demotes it: the proxy-gold is heavily skewed (69/93 evergreen, a 74.2% majority baseline), and the tuned seeds predict evergreen on 79–86 of 93 items

TABLE V
Per-Field Classification Accuracy vs. Panel Proxy-Gold

Field	Agr.	Maj.	Base	Few	Tuned μ	Teach.
urgency	0.85	~74	62.8	56.0	78.5	57.0
frame	0.86	—	50.0	39.6	58.1	66.7
sentiment	0.91	—	43.0	63.7	66.0	80.6
depth	0.70	~56	43.0	50.5	48.8	53.8
tone	0.78	—	24.4	79.1	29.0	78.5
macro	—	—	44.7	57.8	56.0	67.3

TABLE VI
Per-Arm Latency and Throughput

Arm	p50 (ms)	p95 (ms)	Throughput (tok/s)
Teacher (R1-8B)	~39 200	—	~40
Base	845	1434	172
Base + few-shot	856	1367	154
Base + constrained	824	1422	173
Tuned (distilled)	774	1341	165

(evergreen recall 96–100%; developing 28–33%; breaking 0%). The student sits +4.3 points above a constant guess: real but modest signal, not learned mastery. No arm ever detects breaking ($n = 6$). Frame shows a smaller version of the same pattern. Depth is a caution: at 48.8 the tuned student scores below the ~56% of always guessing “standard,” and no small-model arm clears the constant-guess line. Tone as a categorical label is nearly untouched by distillation (29 versus base 24) while few-shot reaches 79—a field cued far better in-context than baked into weights. On the macro average, distillation ties few-shot (56.0 versus 57.8): on the aggregate categorical task, prompting is as good as fine-tuning, and the distillation advantage is concentrated in urgency and frame. This is why the deployment recommendation is per-field (Section VIII).

F. Structure, Topics, and Efficiency

The tuned student produces valid seven-field JSON reliably, but constrained decoding reaches the same validity with zero training, so structure is a decoding flag, not a reason to distill. Topic coverage is tuned 95.7% versus base 87.1% versus teacher 98.9%, a solid low-stakes gain level with few-shot. On efficiency (Table VI, Fig. 6), every 0.6B arm runs at ~0.8 s/article; the tuned model is fastest by wall-clock, not because throughput is higher but because distillation taught it to write shorter outputs. The 5.4 h to ~7 min batch collapse is real and slightly better for the distilled model than for any other student arm.

G. Seed Variance

The three seeds diverge sharply on the hardest axis: tone-label accuracy ranged 8.6% to 46.2% across seeds, and classification macro ranged 50.3 to 66.5. A single-seed study could have reported any point in that range as “the” result; at 0.6B, seed choice is first-order on the subjective fields, not a rounding error, which is why tuned values

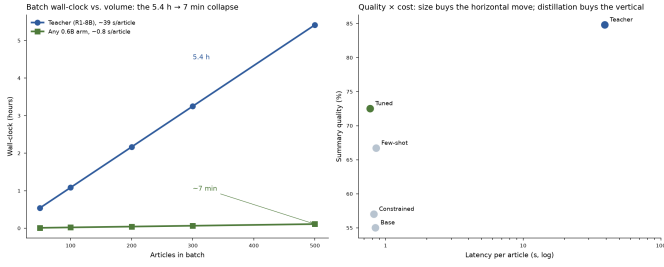


Fig. 6. Left: batch wall-clock versus volume—the 5.4 h to ~7 min collapse at 500 articles that motivated the work. Right: the quality-cost plane—every 0.6B arm sits at ~0.8 s (the horizontal move is free with size); the vertical axis is where distillation, prompting, and the teacher differ.

TABLE VII
Seed Unanimity Predicts Label Correctness

Field	Unanimous (3/3)	Acc.	Split	Acc.
urgency	83	83.1	10	40.0
sentiment	67	73.1	26	47.4
frame	57	64.9	36	47.2
depth	36	61.1	57	40.9
tone	12	50.0	81	25.9

are reported as three-seed means. Seed disagreement is also a free confidence signal (Table VII): where the three seeds agree unanimously, accuracy is 18–43 points higher than where they split, and tone, the field distillation fails, is precisely where the seeds almost never agree. Since the three seeds together still run in ~2.4 s/article, seed-ensemble agreement is a zero-training-cost per-item confidence flag: trust unanimous labels, route split items to a fallback engine (Section VIII).

H. The Third Teacher: Scale and Synthetic Expansion

The third teacher is a managed pipeline: the same 401 articles are uploaded to a commercial service that runs a larger teacher (gpt-oss-120b), expands them synthetically, and fine-tunes the same Qwen3-0.6B base in one hands-off run. Scale, data recipe, and run count all differ from the two 8B teachers at once, so this is a systems comparison, not a clean control. Its student ties the reasoning student on summaries (checklist 67.7 versus 72.4, a gap inside the instrument’s composition noise) yet posts the best small-model classification macro—64.3 against ~56 for both 8B students—with balanced classes: its developing recall is 78% against the reasoning students’ 28%, and it alone clears the depth majority baseline. Scale with synthetic expansion transferred label diversity where the reasoning teacher transferred writing.

Side by side (Table VIII) the three teachers show a capability split, not a ranking: no teacher wins everything. The reasoning teacher owns summary quality, the managed pipeline owns classification, and—unexpectedly—the non-reasoning teacher owns faithfulness. The plain instruction teacher is the most grounded model measured (96.8% faithful, 95.5% even on short sources) and passes

TABLE VIII
Three Teachers and Their Students: Different Capabilities Transfer (12-Arm Re-Grade, $N = 93$)

Arm	Summary	Faithful	Faith. short	Mac
R1-8B teacher (reasoning)	84.3	93.5	77.3	67.7
its 0.6B students	72.4	73.5	51.5	56.3
Llama-8B teacher (non-reas.)	64.0	96.8	95.5	68.3
its 0.6B students	53.3	78.5	74.2	56.3
Managed 120B student	67.7	65.6	31.8	64.3
Few-shot (no distillation)	66.7	80.6	54.5	57.7
Base (no distillation)	52.2	69.9	54.5	44.3

that grounding down: its students stay faithful on thin sources (74.2%) exactly where the reasoning students fabricate (51.5%), while the managed student collapses to 31.8%, the worst in the study. The absolute short-source magnitudes are grading-sensitive—the faithful check carries the composition noise quantified in Section VII, so the reasoning-versus-base thin-source gap that reads –21 under the primary grading (Section VI-C) compresses under this re-grade—so the reliable signal is the ordering, not the point estimate: thin-source grounding tracks the teacher’s lineage, worst for the synthetically expanded pipeline and best for the plain instruction teacher. Different teachers transfer different capabilities, which is exactly why deployment is decided per field, not per model (Section VIII).

I. Qualitative Examples

Example A, a clean win. The base model’s characteristic failure is to dump the categorical field values into the summary prose (“...The sentiment is positive, with urgency as developing, frame as human_interest...”) instead of writing a summary. The tuned student instead writes a faithful, correctly structured summary that captures the article’s thesis and independently corrects the urgency label the base got wrong.

Example B, the faithfulness cost. On a short article, the tuned student invents a framing—a subject’s presidency described as an “Obama-style conflict”—that appears nowhere in the source, whereas the teacher stays grounded. This is the residual faithfulness gap of Section VI-C in a single instance: a genuine fabrication, the thin-source failure mode isolated statistically, and the reason the routing table (Section VIII) falls back to a more careful engine for faithfulness-critical prose.

VII. Robustness Across Judges

Inter-judge disagreement is 26.8% per check, so magnitudes are judge-dependent. But every directional finding in Section VI holds under each judge independently: both judges rank tuned above constrained and above few-shot on the checklist, both put urgency-tuned above the teacher, and both rank tone-label few-shot far above tuned. Only directional claims are therefore made. A third same-family judge was not added because it cannot change a

direction the two already agree on; only human gold labels can settle the magnitudes (Section X).

Aggregates reproduce; the faithful check shows packaging sensitivity. Re-grading all arms inside the eight-arm prompts reproduced every checklist aggregate within 1.6 points. The faithful check, however, moved -5.4 to -7.5 points on three arms while remaining unchanged on the others. The cause is not temporal drift: adding a candidate reshuffles the blinded label order in every prompt, so faithful verdicts carry $\sim \pm 5$ – 7 points of prompt-composition sensitivity. This is why direction-only claims are made on judge-graded magnitudes.

Where the disagreement lives. The faithful check has the lowest inter-judge disagreement of all eight (13.7%) and thesis the second lowest (14.4%): the product-critical checks are the panel’s most reliable. Disagreement concentrates in persona and style checks and, strikingly, in two mechanically verifiable checks—length (30.6%) and opening (26.3%). Judges disagree $\sim 30\%$ of the time on counting sentences and checking a two-word prefix, a measured noise floor confirming that rule-checkable predicates should be computed by rule. Any verbosity bias runs against this study’s conclusion, since the winning arm writes the shortest outputs: the tuned student’s wins are, if anything, understated.

Reference-free faithfulness grading must use the full source. This is the single most transferable methodological result. Grading against only the first 1200 characters produces a -9 -point faithfulness gap for the tuned student; grading against the full article (the only change) shrinks that to -4 and reveals its concentration in short articles (Section VI-C). Two checks confirm the artifact: the $+25$ – 35 point full-versus-lead uplift appears for every arm (a grading-setup effect, not a model regression), and on long articles the tuned student is level with base. The item-level pattern is stark: moving from lead-only to full-text grading flips 209 faithful verdicts up and only 7 down, every up-flip occurs on articles longer than the truncation point, and short articles—where the two contexts are identical—flip zero verdicts, a built-in negative control. The lesson for reference-free LLM-judge faithfulness evaluation generally: grade against the full source, or a truncation artifact will masquerade as a model regression, here more than twice the size of the real effect.

VIII. Per-Field Engine Assignment

Judged against the goal of teacher-quality output at student speed: speed is fully met (~ 0.8 s/article, 5.4 h to ~ 7 min, on-device, at no cost); summary quality is substantially met (59% gap closure, significant wins over both controls), with one localized caveat, faithfulness on short-source articles; classification quality is met unevenly (50% of the gap closed, but the macro only ties few-shot, tone barely moves, and depth sits below its majority-class baseline). The measured result—and the transferable idea—is therefore not “use the distilled model” but a per-field routing map (Table IX). The map is a measurement

TABLE IX
Per-Field Best On-Device Engine

Field / out-put	Best engine	Why
JSON structure urgency, frame	constrained decoding distilled student	free; no training needed best judge agreement; beats both controls
sentiment, topics depth	distilled or few-shot platform-distilled	roughly tied; sub-second only arm above the majority-class line
tone label	few-shot base	prompting far better here
summary, long/rich	distilled student	59% gap closed; faithful level with base
summary, short/thin	teacher (if latency allows)	student fabrication concentrates here (Section VIII-A)

deliverable; Section VIII-B reduces it to the configuration that should ship.

The task pattern was chosen because it recurs: the batch collapse is the signature of any high-volume, schema-bound, latency-sensitive enrichment pipeline paying mid- or large-model latency per item—ticket triage (priority + category, the direct analogue of urgency + frame), log classification, document intake, moderation pre-filters, catalog extraction. For each, the recipe is the same: distill the small model for the structured, high-frequency labels; keep the large model for low-frequency, high-stakes free text; and measure per field rather than assuming the small model wins everything. One task family has been measured; the harness, not this routing table, is the artifact built to transfer.

A. The Routing Table, Scored as a System

A recommendation assembled from per-field verdicts can and should be scored as a system. Because every arm’s output for every test article was individually graded, any deterministic routing rule selects, for each article, an output that already carries grades, so the assembled system’s metrics are exact arithmetic over existing per-item scores and the paired-bootstrap machinery applies unchanged. Three summary-routing variants are scored (Table X; labels always route per-field). The results are: (1) the few-shot fallback for short sources does not work—Router A is indistinguishable from no routing, and its faithfulness moves by less than the instrument’s composition noise, so no on-device fallback claims a noise-robust fix; pay the teacher on short sources, or knowingly accept the regression; (2) the teacher-fallback hybrid is a distinct point on the quality-latency frontier—sending only the 22/93 short articles to the teacher buys $+5.5$ checklist points over all-tuned (paired $[2.7, 8.5]$) and the best faithfulness of any on-device-dominant configuration,

TABLE X
Routing Configurations Scored as Assembled Systems

Configuration	Chk.	vs. all-tuned	Faith.	Batch
All-tuned	71.6	—	72.7	~7 min
A: short→few-shot	71.2	−0.4	76.4	~7 min
C: short→base	69.6	−2.0	77.4	~7 min
B: short→teacher	77.2	+5.5	79.6	~82 min
All-teacher	84.0	—	93.5	5.4 h

at ~82 minutes per 500 articles; (3) per-field classification routing reaches teacher-level agreement (macro 70.4 versus the teacher’s 70.7) at student latency—the strongest quantitative case for treating the field, not the model, as the unit of deployment. These summary-routing differences ride on the 22-article short subgroup, and the routing rules were fixed after seeing the per-field results, so this is engineering validation, not a confirmatory finding.

B. From Measurement to Solution Design

The routing map answers a measurement question: which engine is best on each field, and by how much. A deployment answers a different question: which of those wins are worth operating. Measurement should be exhaustive; design should be ruthless. The design rule is the product of three measured quantities: route a field only where (accuracy gain from routing) $\times$ (cost of that field being wrong) exceeds the standing cost of one more engine to version, monitor, and re-evaluate. Applied here, the shipped configuration is two engines and one rule—the tuned student everywhere, a single few-shot pass for tone (a +50-point gain at low failure cost), with the teacher fallback for thin-source summaries held as a deliberate, latency-priced option—not the full map. That captures most of the measured routing benefit at a fraction of the operating surface. Two costs this harness does not measure are stated plainly: cross-field coherence (nothing enforces agreement between a routed label and the summary), and maintenance surface (every routed engine is one more artifact to re-evaluate on any change). The distinction generalizes: the scientific value of a per-field evaluation is the complete map; the application value is the smallest routed subset that pays.

IX. Discussion and Methods Contribution

Beyond the routing table, the study contributes a decomposed, reference-free, fully local evaluation harness for structured-output distillation. Each ingredient is individually established in the judging literature (Section II); the contribution is assembling them into a discipline that catches the ways a less controlled evaluation would overstate the method: a per-sub-task decomposition that localizes what distillation moves; gap-closure-to-teacher as a goal-matched reporting scale; two non-distillation controls; the full-source faithfulness-grading result; and human-free grader validation with direction-only multi-judge reporting. The findings came from a chain of build

TABLE XI
The Decision Surface, as Practitioner Guidance

Decision	What the study taught
Teacher	Output you would ship is the bar; a same-size non-reasoning teacher does not match it on summaries—the reasoning nature is what transfers there (Section VI-D)
Student size	Viable for style, structure, some labels—but seed variance is first-order; budget ≥ 3 seeds
Quantization	Measure at the quantization you will ship
Tuning recipe	The cheapest recipe moved summary quality decisively; evaluation rigor, not recipe cost, was the bottleneck
Training-set size	Enough for style and structure; class balance, not raw count, bound the subjective labels
Task framing	The single most consequential evaluation decision: real findings are invisible in the aggregate
Controls	Nearly free, and they changed the conclusion twice
Judges	Grade against the full source or a truncation artifact masquerades as a regression
Ship decision	The unit of measurement is the field; the unit of deployment is the minimal routing that pays
Build vs. buy	A statistical tie on summaries; the recipes transfer different capabilities—choose per field

decisions any team distilling for a production task must cross (Table XI); recording them is much of the exercise’s transferable value.

X. Limitations

The reasoning-teacher question is now addressed by a same-size non-reasoning-teacher control (Section VI-D), which shows the summary gain is reasoning-specific; but that control varies the teacher’s reasoning nature without holding constant every other difference between two distinct 8B models—their label distributions differ, and the non-reasoning teacher yielded 396 usable label sets against the reasoning teacher’s 401—so it attributes the gain to the reasoning teacher as a whole, not to chain-of-thought as an isolated mechanism, and it rests on the same two-judge instrument as every other magnitude here. Labels are silver, not gold: classification accuracy is against a panel consensus, not human truth, so the numbers are judge priors, not ground truth. The two-judge panel leaves magnitudes uncertain and has no true majority on the ~27% of items where judges disagree. Faithfulness is reference-free LLM-judged, not entailment-verified, and the negative control validates only the gross case, not subtle in-domain fabrication. The short-article finding rests on a small subgroup ($n = 22$). Seed variance is first-order on subjective fields and is not fully propagated

by the per-article bootstrap, and the platform arm is a single run without a seed-variance estimate of its own. The pipeline is third-order distillation, which caps the ceiling. Finally, a single task family and feed set is measured; no generalization to unseen sources is claimed.

XI. Future Work

Ordered by expected value: (1) add a human-gold anchor on ~ 50 items to convert directional magnitudes into settled numbers and calibrate the judges—the single change that would most raise the evidentiary standing of every quantitative claim here; (2) confirm the residual faithfulness gap with a formal entailment verifier and inject-fabrication tests; (3) turn the truncation observation into a measured curve; (4) fix the short-article fabrication mode via faithfulness-filtered data or a decoding-time guard; (5) recover tone labeling with a class-balanced training set; (6) add a reasoning-trace transfer arm, testing whether supervising on the teacher’s traces rather than its answers widens the reasoning-teacher advantage established here; and (7) identify which property of the reasoning teacher’s labels—specificity, thesis selection, or structure—carries the summary gain isolated in Section VI-D.

XII. Conclusion

A distilled 600M student runs the 500-article enrichment in ~ 7 minutes instead of 5.4 hours, recovers most of the teacher’s summary quality (59% of the gap) and half of the classification gap, and beats both non-distillation controls on summary quality. The recovery is uneven in ways that matter: on classification the aggregate only ties few-shot prompting, depth is untrustworthy for every small-model arm, and on summaries the student transferred the teacher’s style and specificity slightly faster than its faithfulness, leaving a small deficit confined to short-source articles. The verdict is therefore not “distillation works” or “distillation hallucinates” but a two-layer answer: the measurement layer is a per-field map in which every field has a best engine and the winners differ; the design layer is deliberately smaller—ship the tuned student everywhere, one few-shot pass for tone, and hold the teacher fallback for faithfulness-critical thin-source prose as a priced option. Two lessons generalize. Decompose before concluding, and check the instrument: scoring the sub-tasks apart made every real finding visible that an aggregate would hide, and grading against the full source rather than a truncated lead turned a -9 -point “regression” into a -4 -point short-article effect—in reference-free evaluation the measurement setup can be a larger effect than the model. And separate the lever from the goal: speed came from model size, quality-at-that-size from distillation. The question the earlier version left open is now closed: a same-size non-reasoning teacher, distilled by the identical recipe, does not beat the untuned base on summaries, so it is the teacher’s reasoning nature and not its scale that the student inherits—an inheritance of specificity and thesis-capture, not of faithfulness.

Appendix A

Summary Checklist and Judge Prompts

The checklist (eight binary checks plus topics), graded by the panel against the full article, was fixed after the pilot and before scoring: faithful (every factual claim supported by the article); thesis (captures the central thesis); takeaway (a concrete, specific takeaway); length (3–4 sentences); opening (does not begin with “This/The article”); teacher-lens (explains a concept accessibly); tech-lens (addresses the technical angle); tone (direct, contemplative, not alarmist); and topics_cover (the listed topics capture the main themes), reported separately. The checklist judge receives the full article and all arms’ summaries under shuffled anonymous labels and returns strict JSON keyed by label. The classification judge assigns exactly one label per field from the closed vocabularies of Section III; the panel vote is the proxy-gold. The negative control pairs each summary with a mismatched article; faithful collapses to 0% ($n = 30$).

Appendix B

Teacher-Comparison Protocol

Three teachers label the same 401 training articles under the identical system prompt at temperature 0, and the same Qwen3-0.6B base is distilled from each by the identical QLoRA recipe (rank 32, response-only loss, thinking disabled). The reasoning teacher is DeepSeek-R1-Distill-Llama-8B (deepseek-r1:8b); the same-size non-reasoning teacher is Llama-3.1-8B-Instruct, which produced usable JSON for 396 of the 401 articles against the reasoning teacher’s 401; the managed pipeline uses gpt-oss-120b with proprietary synthetic-data expansion in a single hands-off run. The two 8B teachers differ only in reasoning nature, isolating that one variable; the managed pipeline additionally varies teacher scale and adds synthetic expansion, so it is a systems comparison rather than a clean control. Each 8B teacher’s own outputs on the 93 test articles are graded as an arm under the same blinded checklist as its students; the managed pipeline’s teacher is not graded directly, because its student was trained on synthetically expanded data rather than the teacher’s raw labels, so a raw self-score would not be the signal the student actually saw. Adding any arm re-shuffles every blinded batched prompt, so all arms are re-graded together; reported aggregates reproduce within ~ 2 points across successive re-grades.

Appendix C

Reproducibility

All headline metrics recompute offline from the cached judge log, with no API keys. The judge cache holds both the truncated and the canonical full-text responses, keyed by prompt; an environment variable selects which. Released artifacts include the test set with teacher gold, the 401/93 split, per-arm outputs with measured per-item latency (including the two 8B teachers’ self-scored arms

and both distilled-student families), the non-reasoning-teacher training set, the full-context multi-arm score-card, the per-item per-check detail, the analysis, teacher-contrast, and neutral-subset paired-bootstrap scripts, and the judge-panel clients.

Acknowledgment

The evaluation-harness code, the figure-generation scripts (which render measured data as plots; no figure content is AI-generated), and portions of the manuscript prose were produced with the assistance of AI coding and writing agents. All experimental design, the analysis plan, and the interpretation of results are the author’s.

References

- [1] G. Hinton, O. Vinyals, and J. Dean, “Distilling the knowledge in a neural network,” arXiv:1503.02531, 2015.
- [2] Y. Kim and A. M. Rush, “Sequence-level knowledge distillation,” in Proc. EMNLP, 2016.
- [3] X. Xu et al., “A survey on knowledge distillation of large language models,” arXiv:2402.13116, 2024.
- [4] X. Zhu et al., “A survey on model compression for large language models,” arXiv:2308.07633, 2023.
- [5] C.-Y. Hsieh et al., “Distilling step-by-step! Outperforming larger language models with less training data and smaller model sizes,” in Findings of ACL, 2023.
- [6] L. H. Li et al., “Symbolic chain-of-thought distillation: Small models can also ‘think’ step-by-step,” in Proc. ACL, 2023.
- [7] DeepSeek-AI, “DeepSeek-R1: Incentivizing reasoning capability in LLMs via reinforcement learning,” arXiv:2501.12948, 2025.
- [8] C. Zhang et al., “100 days after DeepSeek-R1: A survey on replication studies and more directions for reasoning language models,” arXiv:2505.00551, 2025.
- [9] X. Chen et al., “Unveiling the key factors for distilling chain-of-thought reasoning,” in Findings of the Association for Computational Linguistics: ACL 2025, 2025, arXiv:2502.18001.
- [10] S. K. Ramesh et al., “On the generalization vs fidelity paradox in knowledge distillation,” in Findings of the Association for Computational Linguistics: ACL 2025, 2025, arXiv:2505.15442.
- [11] Y. Li et al., “NaturalThoughts: Selecting and distilling reasoning traces for general reasoning tasks,” arXiv:2507.01921, 2025.
- [12] X. Chen et al., “Do not think that much for $2+3=?$ On the overthinking of o1-like LLMs,” arXiv:2412.21187, 2024.
- [13] T. Zheng et al., “The curse of CoT: On the limitations of chain-of-thought in in-context learning,” arXiv:2504.05081, 2025.
- [14] P. Aggarwal et al., “OptimalThinkingBench: Evaluating over and underthinking in LLMs,” arXiv:2508.13141, 2025.
- [15] Z. Yao et al., “Are reasoning models more prone to hallucination?,” arXiv:2505.23646, 2025.
- [16] A. Yang et al., “Qwen3 technical report,” arXiv:2505.09388, 2025.
- [17] W. Xu et al., “Speculative knowledge distillation: Bridging the teacher-student gap through interleaved sampling,” arXiv:2410.11325, 2024.
- [18] Y. Liu et al., “G-Eval: NLG evaluation using GPT-4 with better human alignment,” arXiv:2303.16634, 2023.
- [19] S. Ye et al., “FLASK: Fine-grained language model evaluation based on alignment skill sets,” arXiv:2307.10928, 2023.
- [20] Y. Lee et al., “CheckEval: A reliable LLM-as-a-judge framework for evaluating text generation using checklists,” arXiv:2403.18771, 2024.
- [21] S. Kim et al., “Prometheus 2: An open source language model specialized in evaluating other language models,” arXiv:2405.01535, 2024.
- [22] S. Min et al., “FactScore: Fine-grained atomic evaluation of factual precision in long form text generation,” arXiv:2305.14251, 2023.
- [23] D. Ru et al., “RAGChecker: A fine-grained framework for diagnosing retrieval-augmented generation,” arXiv:2408.08067, 2024.
- [24] L. Tang, P. Laban, and G. Durrett, “MiniCheck: Efficient fact-checking of LLMs on grounding documents,” arXiv:2404.10774, 2024.
- [25] P. Manakul, A. Liusie, and M. J. F. Gales, “SelfCheckGPT: Zero-resource black-box hallucination detection for generative large language models,” arXiv:2303.08896, 2023.