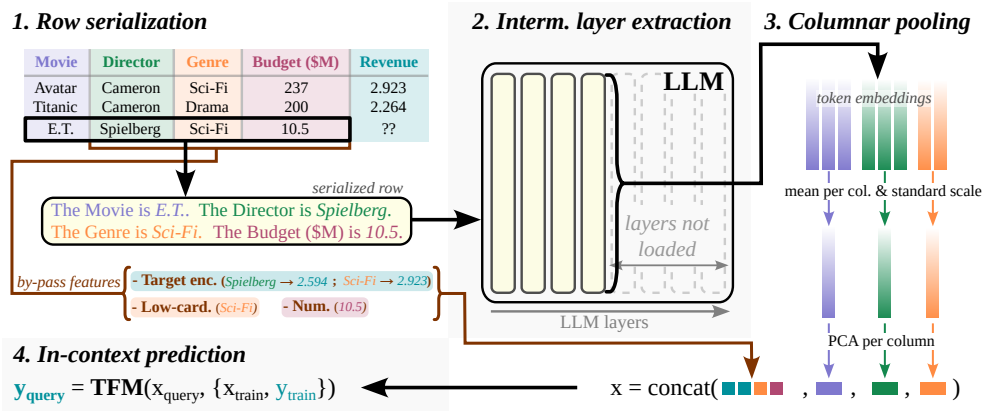
1. Row serialization
2. Interm. layer extraction
3. Columnar pooling
Movie
Director
Genre
Budget ($M)
Revenue
Avatar
Cameron
Sci-Fi
237
2.923
Titanic
Cameron
Drama
200
2.264
E.T.
Spielberg
Sci-Fi
10.5
??
serialized row
The Movie is E.T.. The Director is Spielberg.
The Genre is Sci-Fi. The Budget ($M) is 10.5.
by-pass features
- Target enc. (Spielberg → 2.594 ; Sci-Fi → 2.923)
- Low-card. (Sci-Fi)
- Num. (10.5)
LLM
layers not loaded
LLM layers
token embeddings
mean per col. & standard scale
PCA per column
4. In-context prediction
y_query = TFM(x_query, {x_train, y_train})
x = concat(, , ,)