

SoDam O-Brain — Complete Guide

Even if AI, computers, or software are completely new to you, just follow this guide. Every technical term includes a plain-language explanation. This document and GUIDE.en.pdf have identical content.

Table of Contents

- 1. What Is O-Brain?
- 2. Prerequisites · Required Programs
- 3. How to Download
- 4. Installation (Step by Step)
- 5. Quick Start
- 6. How to Run
- 7. How to Use — Web Dashboard
- 8. How to Use — MCP Tools (Claude Code Integration)
- 9. How It Works (Internal Structure)
- 10. Complete Command Reference
- 11. Workflow (Typical Daily Usage)
- 12. Security · Data Flow
- 13. Architecture (Technical Structure)
- 14. File · Document Locations
- 15. Troubleshooting
- 16. FAQ (Frequently Asked Questions)
- 17. Legal · Copyright · License · Commercial Use

1. What Is O-Brain?

O-Brain is a **completely local** memory system that automatically extracts and saves important content from conversations with AI (like Claude Code), and makes it retrievable anytime.

Simple Analogy

AI is incredibly smart, but it forgets everything the moment a conversation ends. It's like talking to a genius friend with amnesia.

O-Brain is the automatic notepad you keep next to that friend. It records things like "let's use port 7740" or "never put API keys in code," and brings them back up next time.

Key Features

Feature	Description
100% Local	All memories are stored only in your PC (SQLite database). Nothing is sent to external servers or cloud.
Hybrid Search	Uses keyword search (FTS5) and semantic similarity search (vector search) simultaneously. Finds "similar content" too.
Knowledge Graph	Visualizes connections between memories as a 2D/3D graph (dots and lines).

Time Travel	Select a date to see only memories that were "alive" at that point in time.
Confidence Decay	AI-extracted memories automatically lose confidence over time (30-day half-life).
Security Filter	API keys and passwords are automatically removed before saving (replaced with REDACTED).
Auto Backup	Snapshots saved automatically on server start and before bulk delete.
MCP Integration	7 tools for saving, searching, and managing memory relations directly from Claude Code.
Orphan Node Visual	Memories with no user-defined relations are shown with a dashed ring border.

2. Prerequisites · Required Programs

Required

Item	Requirement	Notes
Operating System	Windows 10 / 11 (64-bit)	macOS/Linux may work but require additional troubleshooting
Node.js	20.x LTS or higher	The "engine" that runs programs. Free download from nodejs.org
npm	Included with Node.js	Installed automatically with Node.js
Storage	500 MB+	AI embedding model (~90 MB) + data storage
RAM	4 GB+ recommended	8 GB+ for a smoother experience
Web Browser	Chrome, Edge, Firefox, etc.	Needed to view the dashboard

Optional (Required for MCP Integration)

Item	Notes
Claude Code	Anthropic's AI coding tool. Required only for MCP tool integration.
Internet	Only needed for initial installation and first download of the embedding model. Works fully offline afterward.

Not Required

- No API key needed (for basic operation)
- No paid subscription needed
- No account registration needed
- No cloud service needed

3. How to Download

If You Already Have the Files

If you're reading this guide, the O-Brain files are already on your computer. Check the project folder location:

```
D:\WAI_Dev_Work\2026y\26y_06m_21d_SoDam_0-BrainW
```

If Using Git (For Developers)

```
git clone [repository URL]
cd [folder name]
```

Access permission is required if the repository is private.

4. Installation (Step by Step)

Step 4-1: Install Node.js (One-Time Only)

Node.js is the "engine" that runs JavaScript programs. O-Brain is built with JavaScript, so this engine is required.

1. Open a browser and go to **nodejs.org**
2. Click the green **"LTS"** button (LTS = Long-Term Support, stable version)
3. Download the installer and run it
4. Click "Next" → "Next" → "Install" → "Finish" (use all defaults)
5. After installation, **open a new terminal**

How to open a terminal: Windows key + R → type `cmd` → Enter Or: Windows key → search "PowerShell" → click

6. Verify the installation:

```
node --version
```

v20.x.x or higher = success.

```
npm --version
```

Any number (e.g., 10.x.x) = success.

Step 4-2: Install Dependencies

"Dependencies" are external tools that O-Brain needs to operate. They are downloaded automatically from the internet.

1. In the terminal, navigate to the `app` folder:

```
cd D:\WAI_Dev_Work\2026y\26y_06m_21d_SoDam_0-BrainW\app
```

2. Run the dependency installation:

```
npm install
```

3. Wait 1–5 minutes (depends on internet speed)

4. When the prompt returns without error messages, the installation is complete.

5. Quick Start

Once installation is complete, you can start in 3 steps:

1. Start the server from the terminal:

```
cd D:\WAI_Dev_Work\2026y\26y_06m_21d_SoDam_0-BrainWapp
npm start
```

2. You'll see something like this:

```
O-Brain Local Server ► http://127.0.0.1:7740 (embedding: local)
[backup] Snapshot saved: ...
```

First run only: automatically downloads the AI embedding model (~90 MB). Takes 1–3 minutes the first time. All subsequent runs start instantly.

3. Open the dashboard in your browser:

Type this in your browser's address bar and press Enter:

```
http://127.0.0.1:7740
```

If the O-Brain dashboard opens, you're all set.

6. How to Run

Basic Start

```
# Run from the app/ folder
cd D:\WAI_Dev_Work\2026y\26y_06m_21d_SoDam_0-BrainWapp
npm start
```

Change Port (If Port 7740 Is Already in Use)

```
# Windows PowerShell
$env:OBRAIN_PORT=7741; npm start

# Or add to .env.local file:
# OBRAIN_PORT=7741
```

Stop the Server

Press `Ctrl + C` in the terminal.

Auto-Start on Boot (Optional)

Use Windows Task Scheduler to start automatically when Windows boots. (Windows key → search "Task Scheduler")

7. How to Use — Web Dashboard

Open `http://127.0.0.1:7740` in your browser to see the dashboard.

7-1. Screen Layout (Top Tabs)

Tab	Description
Graph	Knowledge map showing memories as dots and lines. This is the home screen.
Overview	Summary: total memory count, distribution by type/category, most-connected memories
List	Memories displayed as cards, scrollable
Timeline	Memories in chronological order

7-2. Using the Graph Tab

What is the graph? Each memory appears as a dot (node). Memories that are similar or related are connected by lines (edges).

- **Hover over a dot:** Highlights its connected memories
- **Click a dot:** Opens details on the right side
- **Search box:** Searching brightens matching dots
- **2D/3D toggle:** Switch using the "2D"/"3D" button at the top
- **Zoom:** Mouse wheel or buttons at the bottom right
- **Dashed border:** Shown on "orphan memories" with no user-defined relations

Color meaning:

- Dot size = importance + connection count (larger = more important)
- "Category color" button: switch between coloring by type or category

7-3. Viewing Memory Details

Click a memory in the list or graph — a detail panel opens on the right:

- **Content:** The stored memory text
- **Type:** Knowledge / Decision / Promise / Constraint, etc.
- **Importance:** Star rating (1–5)
- **Confidence:** 0.1–1.0 (AI-extracted memories automatically decay over time)
- **Category:** Auto-classified topic
- **Created:** Date the memory was saved
- **View count:** How many times this memory has been opened

7-4. Editing and Deleting Memories

From the detail panel:

- **Edit** (✎): Modify content, type, or importance. Secrets are auto-removed again on save.
- **Delete**: Permanently removes the memory. Recommend backing up first.
- **Copy**: Copies content to clipboard

7-5. Adding a Memory (Directly in UI)

Use the "+" button at the top:

- Enter content
- Select type (Knowledge / Decision / Promise, etc.)
- Choose importance (1–5)
- Click Save → semantic analysis and embedding are created automatically

7-6. Linking Memory Relations

In the detail panel's "Relations" section:

1. Click "Add Relation"
2. Enter the ID of the memory to link
3. Choose relation type: SUPERSEDES (overrides), SUPPORTS (supports), INFLUENCES (influences), CONTRADICTS (contradicts)
4. Save

When choosing SUPERSEDES: the target memory's expiry date (`valid_until`) is automatically set to today.

7-7. Search

In the top search box:

- **Hybrid search**: searches by keyword AND semantic similarity simultaneously
- **Example**: Search "port setting" → shows both memories containing "port" and semantically similar content

7-8. Filters · Sorting

In the top filter bar:

- **Scope**: All (global) / Project specific (project)
- **Sort**: Newest first / By importance
- **Date range**: Filter by date range

7-9. Time Travel Feature (Phase 2)

Select a past date in the date input field:

- Shows only memories that were "alive" at that date
- Memories invalidated by SUPERSEDES are hidden after their invalidation date
- Useful for tracking how your knowledge or decisions have evolved

Example: Select 2026-06-01 to see only memories that were valid up to that date.

7-10. Export

Top-right "Export" button:

- **JSON format**: Machine-readable data format

- **Markdown format:** Easy to read in a text editor

7-11. Bulk Delete

Select multiple memories and delete them at once.

Note: A backup is automatically created before bulk delete. If you need to recover deleted memories, use the latest backup file in `app/data/backups/`.

8. How to Use — MCP Tools (Claude Code Integration)

MCP (Model Context Protocol) is a standard that lets Claude Code use external tools. Register O-Brain's MCP server to save and search memories during Claude Code conversations.

8-1. Register the MCP Server

Add the following to Claude Code's settings file (`~/.claude/settings.json`):

```
{
  "mcpServers": {
    "o-brain": {
      "command": "node",
      "args": [ "C:/absolute/path/to/app/src/mcp-server.mjs" ]
    }
  }
}
```

Use **forward slashes** (`/`) instead of backslashes (`\`) in the path.

Restart Claude Code after registering.

8-2. MCP Tool List

Tool Name	What It Does	Example
save_memory	Save a memory	"Remember this decision"
search_memory	Search by keyword/meaning	"Find memories about port settings"
get_memory	Retrieve a specific memory by ID	Fetch detailed info by memory ID
get_related	List related memories	Find memories related to this one
get_timeline	List memories in chronological order	View recent memories
add_relation	Add a relation between two memories	"Link A as superseding B"
list_categories	Show memory count by category	See which topics have the most

8-3. Example Usage in Claude Code

Me: "We just decided to use port 7740. Remember that."
Claude: (runs save_memory tool) "I've saved the port 7740 decision to memory."

```
Me: "What port decision did we make earlier?"
Claude: (runs search_memory tool) "Found a memory about port: ..."
```

9. How It Works (Internal Structure)

9-1. Memory Storage Process

1. **Input:** Text entered via MCP tool or web UI
2. **Security filter:** Sensitive information (API keys, passwords) is automatically removed
3. **Deduplication:** Compared against existing memories; skipped if duplicate
4. **Embedding:** Text is converted to a 384-dimension numeric vector (all-MiniLM-L6-v2, runs locally)
5. **Storage:** Saved to SQLite database (text + vector + metadata)
6. **Category classification:** Topic is automatically classified using rule-based logic

9-2. Search Process (Hybrid Search)

1. **Keyword search (FTS5):** Exact word matching
2. **Vector search:** Finding content that is semantically similar
3. **RRF merge:** Both results are combined and ranked (using C=60 constant)
4. **Results returned:** Top results ordered by relevance

9-3. Confidence Decay

AI-extracted memories automatically lose confidence over time:

- **Formula:** $\text{new_confidence} = \text{old_confidence} \times 0.5^{(\text{days_elapsed}/30)}$
- **Meaning:** After 30 days, confidence halves; after 60 days, it drops to 1/4
- **Exceptions:** Memories directly entered by users (`source='user'`) and those with confidence ≥ 0.99 are exempt
- **Minimum:** Will not drop below 0.1
- **Frequency:** Applies on server start if more than 12 hours have passed since last application

9-4. Graph Construction

- **Nodes:** Each memory is one dot
- **Edges (automatic):** Memories with similar embeddings are automatically connected (sqlite-vec KNN)
- **Edges (manual):** User-added relations (SUPERSEDES/SUPPORTS, etc.) — shown as colored lines
- **Size:** Proportional to importance + connection count
- **Performance limit:** Maximum 2000 nodes displayed (highest importance first)

9-5. Local API Token

A new random token is generated each time the server starts:

- Automatically injected into the browser and sent with API requests
- Also saved to `data/.api-token` (for the MCP server to read)
- New token issued on each server restart (enhanced security)

10. Complete Command Reference

10-1. npm Scripts

Run from the `app/` folder:

Command	What It Does
npm start	Start local server (default port 7740)
npm run selftest	Self-diagnostics (save/search/security tests)
npm run backup	Create a manual backup
npm run status	View DB stats and statistics
npm run seed	Add sample data (for initial testing)
npm run search	Search demo (terminal-based)

10-2. MCP Tools (Used in Claude Code)

Tool	Input	Output
save_memory	content, type, importance, source, scope	Saved memory ID
search_memory	query, limit	List of search results
get_memory	id	Memory details
get_related	id, limit	List of related memories
get_timeline	limit, offset	Chronological memory list
add_relation	from_id, to_id, type	Relation creation result
list_categories	—	Memory count by category

10-3. HTTP API Endpoints

Accessible at `http://127.0.0.1:7740` while the server is running:

Method	Path	Description
GET	/api/health	Check server status
GET	/api/memories	List memories (paginated)
POST	/api/memory	Add a memory
GET	/api/memory/:id	Get a single memory
PATCH	/api/memory/:id	Update a memory
DELETE	/api/memory/:id	Delete a memory
POST	/api/memory/batch-delete	Bulk delete
GET	/api/search	Search
GET	/api/graph	Graph data
GET	/api/stats	Statistics

GET	/api/categories	Category list
GET	/api/relations	Relation list
POST	/api/relation	Add a relation
DELETE	/api/relation/:id	Delete a relation

10-4. Environment Variables (.env.local)

Create an `.env.local` file in the `app/` folder to configure:

Variable	Default	Description
OBRAIN_PORT	7740	Server port number
OBRAIN_DATA_DIR	./data	Data storage folder path

11. Workflow (Typical Daily Usage)

General User (Web UI Focused)

Morning: Start server with ``npm start``
→ Open `http://127.0.0.1:7740`
→ Review yesterday's saved memories

During work: Enter new memories directly in the web UI
Record important decisions as they happen

Evening: Review today's additions
Link related memories (SUPPORTS, INFLUENCES, etc.)
Clean up/delete unnecessary memories

Weekly: Confirm backups with ``npm run backup``
Review confidence status of older memories

Claude Code User (MCP Integration)

Chat starts: Claude Code automatically references relevant memories
"What was our port setting?" → find instantly with `search_memory`

During chat: Important decision → `save_memory` immediately
"Remember this decision" → handled automatically

After chat: View and visualize saved memories in the web UI

Memory Cleanup Workflow

1. Check the overall picture in the web UI's **Overview** tab
2. In the **Graph** tab, identify memories with dashed borders (orphan nodes)
3. Link important but unconnected memories with relations

4. In the **List** tab, delete old or unnecessary memories
5. Use **Time Travel** to review past memory states

12. Security · Data Flow

12-1. Core Security Principles

O-Brain follows "**Secure by Design**" principles: Safety before features; the default configuration is the most secure state.

12-2. Network Security

Item	Description
Binding address	127.0.0.1 (your PC only). Never opens to 0.0.0.0 (all devices).
CORS policy	Only accepts requests from localhost or 127.0.0.1. Rejects requests from other sites.
HTTPS	HTTP only since it's local. No external exposure.

12-3. Security Headers

The server automatically applies these HTTP security headers:

Header	Value	Meaning
Content-Security-Policy	default-src 'self'	Only same-origin resources allowed
X-Content-Type-Options	nosniff	Prevents content type spoofing
X-Frame-Options	DENY	Blocks iframe embedding
Referrer-Policy	no-referrer	Does not send referrer URLs

12-4. Data Security


Item	How It's Handled
API key detection	Patterns like sk-, AKIA, Bearer → auto-replaced with [REDACTED]
Passwords	Patterns like password=, secret= → auto-removed
Pre-save check	All content fields processed through redact.mjs before saving
Re-check on edit	Content is automatically re-filtered when edited

12-5. File System Security


Item	Description
data/ folder	In .gitignore → never committed to Git
.env.local	In .gitignore → private settings file protected
*.sqlite	In .gitignore → database files protected

API token file	data/.api-token, permissions 0600 (owner read-only)
----------------	---

12-6. Data Flow Diagram

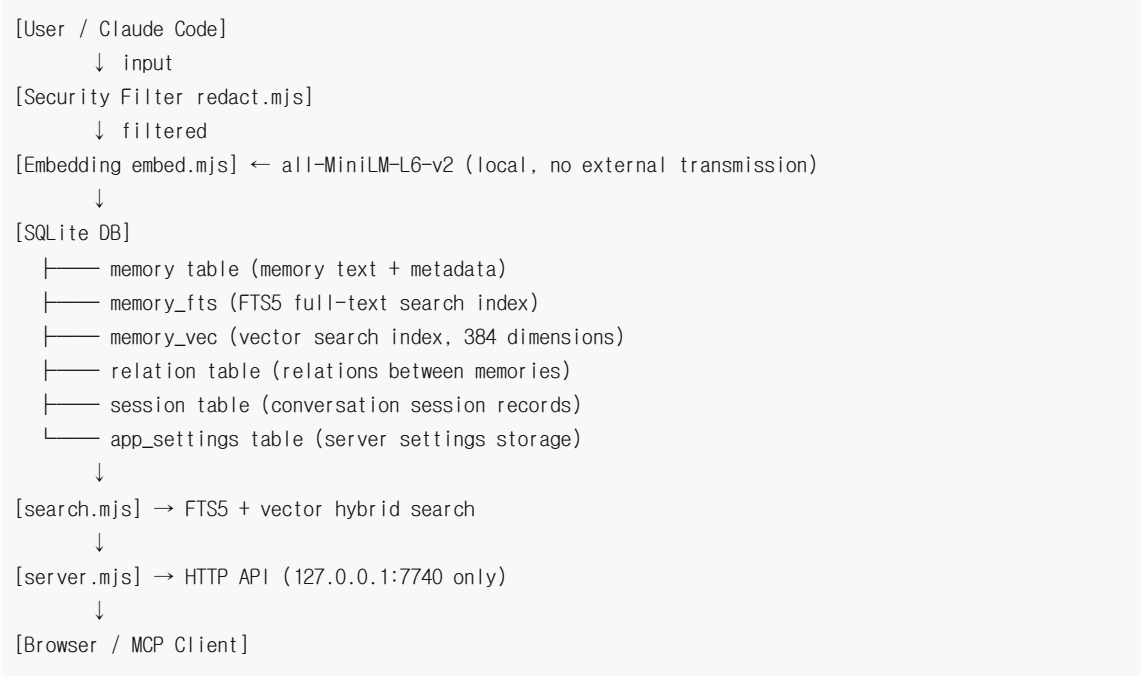

12-7. Local API Token Flow

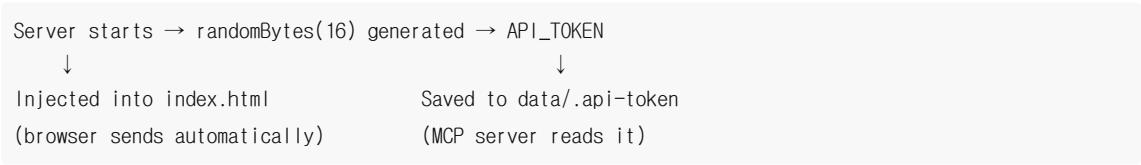

12-8. Cloud Sync Warning

Do NOT place the `data/` folder in a cloud-synced location (Dropbox, OneDrive, Google Drive, etc.):

- Memory data could be uploaded to the cloud
- SQLite file sync conflicts can occur

13. Architecture (Technical Structure)

13-1. Overall Structure



project	TEXT	Project name
scope	TEXT	Scope (global/project)
category	TEXT	Auto-classified category
valid_from	TEXT	Validity start date
valid_until	TEXT	Validity end date (auto-set when SUPERSEDED)
invalidated_by	INTEGER	ID of the memory that invalidated this one
access_count	INTEGER	Number of times viewed
created_at	TEXT	Creation timestamp

relation table:

Column	Type	Description
id	INTEGER PK	Unique relation ID
from_id	INTEGER	Source memory ID
to_id	INTEGER	Target memory ID
type	TEXT	Relation type (SUPERSEDES, etc.)
created_at	TEXT	Creation timestamp

14. File · Document Locations

14-1. Complete Folder Structure

```
Project Root/
├── .PRD/                                Product Requirements Documents (12 files)
│
├── app/                                Local server app (core)
│   ├── src/                            Source code
│   │   ├── server.mjs
│   │   ├── db.mjs
│   │   ├── store.mjs
│   │   ├── embed.mjs
│   │   ├── search.mjs
│   │   ├── graph.mjs
│   │   ├── redact.mjs
│   │   ├── backup.mjs
│   │   ├── mcp-server.mjs
│   │   └── classify.mjs
│   │
│   └── web/
│       └── index.html                Web dashboard UI
│
```

```

├── data/                               Personal data (not committed to Git)
│   ├── obrain.db                       SQLite database (memory storage)
│   ├── backups/                        Automatic backup files
│   └── .api-token                      Local API token (regenerated each run)
│
│   ├── node_modules/
│   ├── package.json
│   └── .env.local
│
├── README.md                           Korean overview
├── README.en.md                        English overview
├── GUIDE.md                            Korean complete guide
├── GUIDE.en.md                         English complete guide (this file)
└── LICENSE                             Apache License 2.0 full text

```

14-2. Key File Locations Summary

File	Role
app/data/obrain.db	Most important: All memories stored here
app/data/backups/	Auto backup files (latest 10 kept)
app/data/.api-token	Server session token (regenerated on restart)
app/.env.local	Personal settings (uses defaults if absent)

14-3. Data Backup and Restore

Auto backup: Runs automatically on server start and before bulk delete

Manual backup:

```
cd app
npm run backup
```

Restore procedure:

1. Find the desired `.db` file in `app/data/backups/`
2. Copy `app/data/obrain.db` somewhere else (preserve current version)
3. Copy the backup file to `app/data/obrain.db`

15. Troubleshooting

15-1. Installation Issues

Symptom	Cause	Fix
'node' is not recognized	Node.js not installed or terminal not reopened	Install LTS from nodejs.org, then open a new terminal

Errors during <code>npm install</code>	Network issue or wrong Node.js version	Check internet connection. Verify <code>node -v</code> is v20+
<code>better-sqlite3</code> build failure	Node.js version mismatch	<code>npm install --force</code> or reinstall Node.js v20 LTS
<code>ERR_MODULE_NOT_FOUND</code>	Dependencies not installed	Run <code>npm install</code>

15-2. Server Start Issues

Symptom	Cause	Fix
<code>EADDRINUSE: address already in use :::7740</code>	Port 7740 already in use	Use a different port: <code>\$env:OBRAIN_PORT=7741; npm start</code>
Server won't start	Various causes	Read the full error message. Run <code>npm run selftest</code>
Server starts but browser can't connect	Firewall issue	Allow Node.js in Windows Firewall. Verify address is <code>http://127.0.0.1:7740</code>

15-3. Dashboard Issues

Symptom	Cause	Fix
Graph is empty	No memories saved	Add sample data with <code>npm run seed</code> or add a memory directly
3D graph won't show	WebGL not supported	Switch to 2D mode. Or use latest Chrome/Edge
New memory not visible	Screen needs refresh	Click the refresh (↻) button at top right
White screen	Server not running	Run <code>npm start</code> , then refresh

15-4. Search Issues

Symptom	Cause	Fix
No search results	No memories exist or embedding not generated	Add a memory and search again. Run <code>npm run selftest</code>
Irrelevant results	Search term too short or generic	Use more specific words
Search is slow	Embedding model initializing	Wait briefly after first launch, then search

15-5. Embedding Model Issues

Symptom	Cause	Fix
First run is very slow	Downloading embedding model (~90 MB)	Wait 1–3 minutes. Subsequent runs are fast

Embedding model download fails	Internet blocked	Check internet connection. Allow Node.js through firewall
--------------------------------	------------------	---

15-6. MCP Integration Issues

Symptom	Cause	Fix
MCP tools not visible in Claude Code	settings.json configuration error	Verify path is an absolute path . Use forward slashes (/)
MCP tool calls fail	Server not running	Start the server with <code>npm start first</code>
Path error	Using backslashes	Change <code>C:\W...</code> to <code>C:/...</code>

15-7. Data Issues

Symptom	Cause	Fix
Accidentally deleted a memory	Deletion is immediate	Restore from the latest file in <code>app/data/backups/</code>
Database file corrupted	Abnormal shutdown	Restore from backup. Use normal shutdown (Ctrl+C) in future
API key still visible in memory	Non-standard format missed by filter	Delete or edit that memory immediately → regenerate the exposed key

16. FAQ (Frequently Asked Questions)

Q. Where is my data stored?

A. All memories are stored in `app/data/obrain.db` (an SQLite file). This file only exists on your computer and is never sent anywhere external.

Q. Do I need internet access?

A. Only for initial installation (`npm install`) and the first embedding model download. After that, it works completely offline.

Q. Can I use it without Claude Code?

A. Yes. The web dashboard (`http://127.0.0.1:7740`) supports all features. Claude Code is only needed for MCP tool integration.

Q. Does it cost anything?

A. O-Brain itself is free. If you use Claude Code or the Anthropic API, those services' fees may apply.

Q. I accidentally deleted a memory. Can I recover it?

A. Auto backups are created on server start and before bulk delete. You can restore from the latest `.db` file in `app/data/backups/` . (Note: no auto backup before single-item deletion — use `npm run backup` regularly for important memories)

Q. Can I change the port?

A. Yes. Add `OBRAIN_PORT=7741` to `app/.env.local` and restart the server.

Q. Can I manage memories across multiple projects?

A. Yes. Set `scope=project` and specify a `project` name when saving memories. Use the `scope` filter when searching or listing to see only that project's memories.

Q. Does it work on Mac or Linux?

A. Developed for Windows. Basic functionality works on macOS/Linux, but the `better-sqlite3` native module may fail to build. Try `npm install --force` or reinstalling Node.js LTS if you encounter errors.

Q. Why does confidence keep getting lower?

A. Confidence decay only applies to AI-extracted memories. Directly entered memories (`source=user`) and those with confidence ≥ 0.99 are exempt.

Q. What is an "orphan memory" (dashed border)?

A. A memory that has no user-added relations (SUPERSEDES, SUPPORTS, etc.). Adding relations to dashed-border memories enriches your knowledge graph.

Q. How do I use the Time Travel feature?

A. Select a date in the date input field at the top of the web dashboard. Only memories that were "alive" at that date will be displayed. Clear the date field to return to the current view (default).

17. Legal · Copyright · License · Commercial Use

 **Important Notice:** This section is for general informational purposes. It does not constitute legal advice. For specific legal questions, please consult a qualified professional.

17-1. License

Apache License 2.0 © SoDam AI Studio, 2026

This software is distributed under the **Apache License 2.0**. The full license text is in the `LICENSE` file at the project root.

17-2. Copyright Holder

Copyright Holder: SoDam AI Studio **Year:** 2026

17-3. Permitted Uses (Under Apache-2.0)

Permitted	Description
Personal use	Free to use for personal purposes
Modification	Modify the source code and use it
Copying	Make copies

Redistribution	Redistribute with or without modifications
Commercial use	Use, sell, or deliver commercially
Patent use	Includes grant of contributor patents

17-4. Obligations (You Must Comply)

When redistributing or using commercially, you **must**:

1. **Preserve copyright notice:** Keep the © SoDam AI Studio, 2026 notice
2. **Preserve license notice:** Include the Apache-2.0 license notice
3. **State changes:** If you modified the original, state that changes were made
4. **Include NOTICE file:** Include the NOTICE file (if present) in distributions

17-5. No Warranty (AS IS)

This software is provided without any warranty of any kind.

All outcomes and risks from use are entirely the user's responsibility.

17-6. External Service Terms Apply Separately

Service	Terms	Relation to O-Brain
Anthropic/Claude	Anthropic Terms of Service	Independent. Unrelated to O-Brain license
Claude Code	Anthropic Terms of Service	Independent. Unrelated to O-Brain license

17-7. Dependency Licenses

Library	Estimated License	Notes
better-sqlite3	MIT	Verify officially before commercial use
sqlite-vec	Apache-2.0/MIT	Verify officially before commercial use
@huggingface/transformers	Apache-2.0	Verify officially before commercial use
all-MiniLM-L6-v2 (AI model)	Apache-2.0	Check model card directly
express	MIT	Verify officially before commercial use
force-graph	MIT	Verify officially before commercial use
3d-force-graph	MIT	Verify officially before commercial use
@modelcontextprotocol/sdk	MIT	Verify officially before commercial use

17-8. Trademark Notice

- "Claude" and "Anthropic" are trademarks of their respective companies
- O-Brain is not affiliated with them and has not received official endorsement

17-9. Privacy and Data Protection

- Memories (data) stored in O-Brain are **entirely the user's responsibility**

- Avoid storing personal information (name, address, account details, etc.) in memories
- O-Brain developers (SoDam AI Studio) cannot access user data and do not do so

All content in this guide is based on functionality verified to work as of June 2026.

If you encounter a problem, share the exact error message or screenshot and we'll work through it together.

Korean version: **GUIDE.md** · Overview: **README.en.md** (English) · **README.md** (Korean)