

Configuración de la aplicación en el servidor

Sofia Jaramillo Ortiz

Servicio Nacional de Aprendizaje - SENA

Tecnólogo en Análisis y Desarrollo de Software


3147206

Instructor: Edwar Velásquez

Fecha 04/08/2026



1. Configurar las variables de entorno

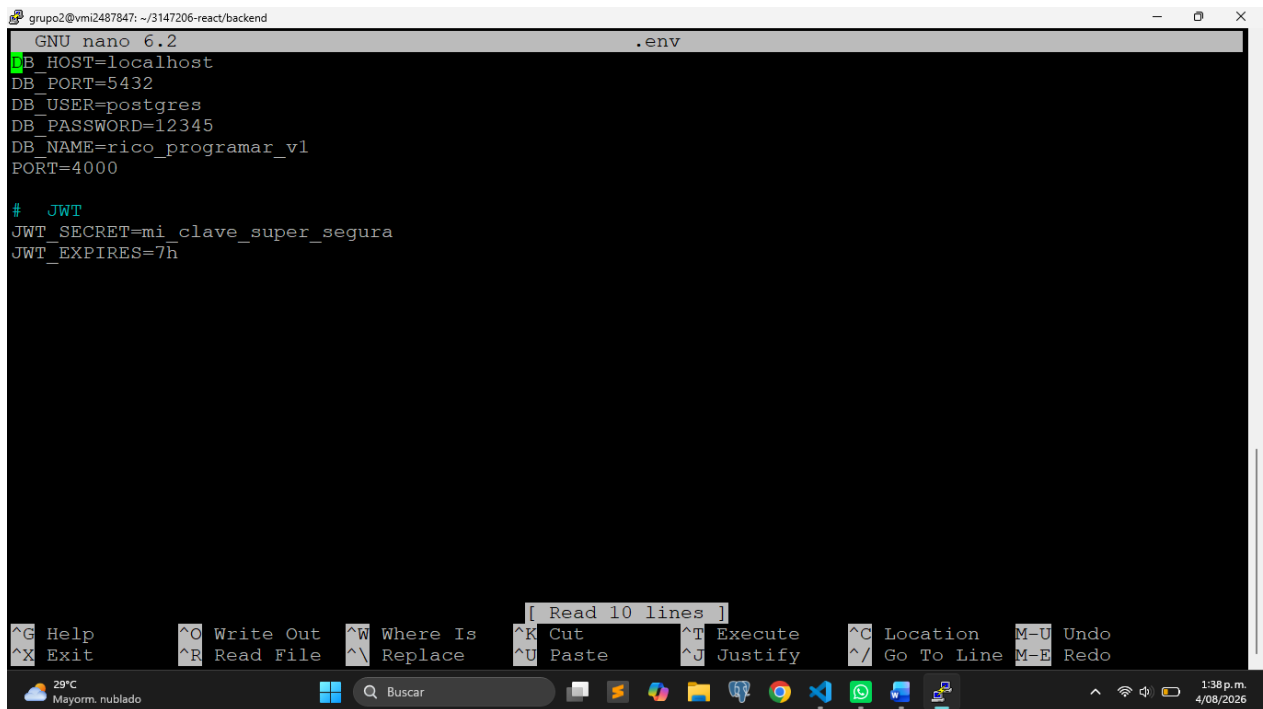

The screenshot shows a terminal window with the title bar "grupo2@vmi2487847: ~/3147206-react/backend". The terminal is running the GNU nano 6.2 editor on a file named ".env". The content of the file is as follows:

```
DB_HOST=localhost
DB_PORT=5432
DB_USER=postgres
DB_PASSWORD=12345
DB_NAME=rico_programar_v1
PORT=4000

# JWT
JWT_SECRET=mi_clave_super_segura
JWT_EXPIRES=7h
```

The bottom of the terminal shows a status bar with various keyboard shortcuts (e.g., ^G Help, ^O Write Out, ^W Where Is, ^K Cut, ^T Execute, ^C Location, ^M-U Undo, ^X Exit, ^R Read File, ^_ Replace, ^U Paste, ^J Justify, ^/ Go To Line, ^M-E Redo) and a system tray at the bottom right indicating the temperature (29°C), weather (Mayorm. nublado), and time (1:38 p.m. 4/08/2026).

2. Verificación del archivo .gitignore



The screenshot shows a terminal window with the title bar "grupo2@vmi2487847: ~/3147206-react/backend". The terminal is running the GNU nano 6.2 editor on a file named ".gitignore". The content of the file is as follows:

```
Variables de entorno
.env
```

The bottom of the terminal shows a status bar with various keyboard shortcuts (e.g., ^G Help, ^O Write Out, ^W Where Is, ^K Cut, ^T Execute, ^C Location, ^M-U Undo, ^X Exit, ^R Read File, ^_ Replace, ^U Paste, ^J Justify, ^/ Go To Line, ^M-E Redo) and a system tray at the bottom right indicating the temperature (29°C), weather (Mayorm. nublado), and time (2:08 p.m. 4/08/2026).

3. Instalación NVM

```

grupo2@vmi2487847: ~/3147206-react/backend
=> Appending nvm source string to /home/grupo2/.bashrc
=> Appending bash_completion source string to /home/grupo2/.bashrc
npm notice
npm notice New major version of npm available! 10.8.2 -> 12.0.2
npm notice Changelog: https://github.com/npm/cli/releases/tag/v12.0.2
npm notice To update run: npm install -g npm@12.0.2
npm notice
=> You currently have modules installed globally with `npm`. These will no
=> longer be linked to the active version of Node when you install a new node
=> with `nvm`; and they may (depending on how you construct your `$PATH`)
=> override the binaries of modules installed with `nvm`:

/usr/lib
├─ corepack@0.32.0
└─ pm2@6.0.14
=> If you wish to uninstall them at a later point (or re-install them under your
=> `nvm` node installs), you can remove them from the system Node as follows:

    $ nvm use system
    $ npm uninstall -g a_module

=> Close and reopen your terminal to start using nvm or run the following to use it now:

export NVM_DIR="$HOME/.nvm"
[ -s "$NVM_DIR/nvm.sh" ] && \. "$NVM_DIR/nvm.sh" # This loads nvm
[ -s "$NVM_DIR/bash_completion" ] && \. "$NVM_DIR/bash_completion" # This loads nvm bash_completion
grupo2@vmi2487847:~/3147206-react/backend$ source ~/.bashrc
grupo2@vmi2487847:~/3147206-react/backend$ nvm --version
0.40.3
grupo2@vmi2487847:~/3147206-react/backend$

```

4. Instalación dependencias frontend y backend

```

grupo2@vmi2487847: ~/3147206-react/frontend
grupo2@vmi2487847:~/3147206-react/backend$ node -v
v20.20.2
grupo2@vmi2487847:~/3147206-react/backend$ npm -v
10.8.2
grupo2@vmi2487847:~/3147206-react/backend$ cd ..
grupo2@vmi2487847:~/3147206-react$ cd frontend
grupo2@vmi2487847:~/3147206-react/frontend$ ls
data          index.html    package-lock.json  public.zip  src
eslint.config.js  package.json  public             README.md   vite.config.js
grupo2@vmi2487847:~/3147206-react/frontend$ nano package.json
grupo2@vmi2487847:~/3147206-react/frontend$ npm install

added 215 packages, and audited 216 packages in 14s

41 packages are looking for funding
  run `npm fund` for details

12 vulnerabilities (2 low, 1 moderate, 9 high)

To address issues that do not require attention, run:
  npm audit fix

Some issues need review, and may require choosing
a different dependency.

Run `npm audit` for details.
grupo2@vmi2487847:~/3147206-react/frontend$ ls
data          index.html    package.json        public        README.md   vite.config.js
eslint.config.js  node_modules  package-lock.json  public.zip    src
grupo2@vmi2487847:~/3147206-react/frontend$

```

```

grupo2@vmi2487847: ~/3147206-react/backend

12 vulnerabilities (2 low, 1 moderate, 9 high)

To address issues that do not require attention, run:
  npm audit fix

Some issues need review, and may require choosing
a different dependency.

Run `npm audit` for details.
grupo2@vmi2487847:~/3147206-react/frontend$ ls
data          index.html    package.json  public        README.md     vite.config.js
eslint.config.js node_modules  package-lock.json public.zip     src
grupo2@vmi2487847:~/3147206-react/frontend$ cd ../backend
grupo2@vmi2487847:~/3147206-react/backend$ npm install

up to date, audited 148 packages in 1s

33 packages are looking for funding
  run `npm fund` for details

3 vulnerabilities (1 low, 2 high)

To address all issues, run:
  npm audit fix

Run `npm audit` for details.
grupo2@vmi2487847:~/3147206-react/backend$ ls
database  node_modules  package.json  package-lock.json  src  src.zip  uploads
grupo2@vmi2487847:~/3147206-react/backend$

```

5. Configuración del archivo Dockerfile en el backend

```

GNU nano 6.2 Dockerfile
#backend/Dockerfile
#Imagen oficial de Node.js 20
FROM node:20
#Directorio de trabajo dentro del contenedor
WORKDIR /app
#Copia los archivos de dependencias
COPY package*.json ./
#Instala las dependencias
RUN npm install
#Copia el resto del proyecto
COPY . .
#Puerto utilizado por Express
EXPOSE 4000
#Inicia la aplicacion "para produccion"
CMD ["npm", "start"]

```