



TD1128 - PowerCARD-Issuer table descriptions

PowerCARD-Issuing

Client: Product
PowerCARD version: V3.5
Document version: V0.26
Product version: V3.5.3

Africa
Casablanca Nearshore Park, Shore 1
1100, boulevard Al Qods - Sidi
Maârouf 20270 Casablanca
Morocco
Tel: + 212 529 045 000

Middle East
209 / 210 Building 12, 2nd Floor,
P.O. Box 500308
Dubai Internet City, Dubai
Tel: + 971 4390 0750

Asia
1 Raffles Place, Tower 1,
Level 24
048616 Singapore
Singapore
Tel: +65 6408 0732

Europe & Americas
25, rue Jean Giraudoux
1st Floor
75116 Paris
France
Tel: + 33 1 58 18 01 34

805 avenue Guilibert Gauthier de
la Lauzière
13290 Aix en Provence
France
Tel: + 33 4 42 91 42 99

Contents

1 Non-disclosure notice.....	10
2 Introduction.....	11
3 Add on services account.....	13
3.1 Parameter tables.....	13
3.1.1 CR_LINKED_PROD_PROFILE.....	13
4 Boarding.....	16
4.1 Conceptual data model.....	16
4.2 Parameter tables.....	16
4.2.1 APPLICATION_STATUS_REASON.....	16
4.2.2 APPLICATION_STATUS_REASON_TRAN.....	17
4.2.3 APPLICATION_TYPE.....	19
4.2.4 BOARDING_BUILDING_BLOCKS.....	24
4.2.5 BOARDING_INDIVIDUAL_FIELDS.....	25
4.2.6 BOARDING_RESP_BUILD_BLOCKS.....	26
4.2.7 BOARDING_RESP_INDIV_FIELDS.....	26
4.2.8 BOARDING_STRUCTURE_LINK.....	27
4.2.9 BOARDING_STRUCTURE_ELIG.....	28
4.2.10 CARD_MANDATORY_ADD_PRODUCT.....	28
4.2.11 CARD_MANDATORY_ADDRESSES.....	29
4.2.12 CARD_MANDATORY_ADDRESSES_PARAM.....	30
4.2.13 CARD_MANDATORY_ADD_TYPE.....	30
4.2.14 CATALOGUE_PACK.....	31
4.2.15 CATALOGUE_PACK_ELIGIBILITY.....	32
4.2.16 CATALOGUE_PACK_ELIG_ACTIV.....	33
4.2.17 CATALOGUE_PACK_ELIG_BRANCH.....	34
4.2.18 CATALOGUE_PACK_ELIG_GENDER.....	35
4.2.19 CATALOGUE_PACK_ELIG_OWNER.....	35
4.2.20 CATALOGUE_PACK_ELIG_PROF.....	36
4.2.21 CATALOGUE_PACK_ELIG_SEGMENT.....	36
4.2.22 CATALOGUE_PACK_ELIG_VIP.....	37
4.2.23 CATALOGUE_PACK_PRODUCTS.....	37
4.2.24 CATALOGUE_PROD_ELIG_GENDER.....	40
4.2.25 CATALOGUE_PROD_ELIGIBILITY.....	41
4.2.26 CATALOGUE_PROD_ELIG_OWNER.....	42
4.2.27 CATALOGUE_PROD_ELIG_PROF.....	42
4.2.28 CATALOGUE_PROD_ELIG_SEGMENT.....	43
4.2.29 CATALOGUE_PROD_ELIG_VIP.....	44
4.2.30 CLIENT_MANDATORY_ADD_OWNER.....	44
4.2.31 CLIENT_MANDATORY_ADDRESSES.....	45
4.2.32 CLIENT_MANDATORY_ADD_TYPE.....	46

4.2.33 CORPORATE_APPLICATION_TYPE.....	46
4.2.34 CREDIT_LIMIT_CALCUL_COMBIN.....	47
4.2.35 CREDIT_LIMIT_CALCUL_CRIT.....	48
4.2.36 ELIGIBLE_DELIVERY.....	49
4.2.37 ELIGIBLE_DELIVERY_METHOD.....	49
4.2.38 ELIGIBLE_DELIVERY_SUPPLIER.....	51
4.2.39 EPP_ELIGIBILITY.....	52
4.2.40 EPP_ELIGIBL_ACC_PRODUCT.....	53
4.2.41 EPP_ELIGIBL_ACTIVITY.....	54
4.2.42 EPP_ELIGIBL_BRANCH.....	55
4.2.43 EPP_ELIGIBL_GENDER.....	55
4.2.44 EPP_ELIGIBL_MCC.....	56
4.2.45 EPP_ELIGIBL_MCC_GRP.....	57
4.2.46 EPP_ELIGIBL_MERCHANT.....	57
4.2.47 EPP_ELIGIBL_ORIG_CODE.....	58
4.2.48 EPP_ELIGIBL_OWNER.....	59
4.2.49 EPP_ELIGIBL_PROF.....	59
4.2.50 EPP_ELIGIBL_SEGMENT.....	60
4.2.51 EPP_ELIGIBL_TRANS_CODE.....	61
4.2.52 EPP_ELIGIBL_VIP.....	61
4.2.53 MAN_DOCUMENTS_APPTYPE_PARAM.....	62
4.2.54 MAN_DOCUMENTS_LIST_PARAM.....	62
4.2.55 MAN_DOCUMENTS_OWNER_PARAM.....	63
4.2.56 MAN_DOCUMENTS_PARAM.....	64
4.2.57 MAN_DOCUMENTS_SOCIO_PARAM.....	64
4.2.58 MARKUP_CALCUL.....	65
4.2.59 MARKUP_ELLIGIBLE_CURRENCIES.....	70
4.2.60 ONLINE_APP_DEDUP_COMBIN.....	70
4.2.61 ONLINE_APP_DEDUP_CRIT.....	71
4.2.62 POLICY_COMBINATION.....	72
4.2.63 POLICY_CRITERIA.....	73
4.2.64 PACK_ACCOUNTS_LINK.....	74
4.2.65 PACK_ISS_POSTING_RULES.....	78
4.3 Operation tables.....	81
4.3.1 ACCOUNTS_LINK_BOARDING.....	81
4.3.2 ADDRESS_DETAILS_BOARDING.....	85
4.3.3 ADDRESS_LIST_BOARDING.....	87
4.3.4 APP_CHECK_FAILS_FORCING_REASON.....	89
4.3.5 APPLICATION_WORKFLOW_TRAIL.....	89
4.3.6 ACCOUNTS_LINK_BOARDING.....	90
4.3.7 BOARD_ACCOUNTS_LINK.....	94
4.3.8 BOARD_AUTO_FEES_CRITERIA.....	99
4.3.9 BOARD_AUTO_FEES_ON_EVENT.....	101
4.3.10 BOARD_AUTO_FEES_ON_TRANS.....	106
4.3.11 BOARD_COM_CHANNELS.....	109
4.3.12 BOARD_COM_EVENTS.....	111
4.3.13 BOARD_COM_SETUP.....	112
4.3.14 BOARD_CORP_ACCOUNTS_LINK.....	113

4.3.15 BOARD_CR_SCHEDULE.....	117
4.3.16 BOARD_ELIG_PACK_CO.....	118
4.3.17 BOARD_ELIG_PACK_PRODUCTS_CO.....	119
4.3.18 BOARD_ELIG_PRODUCT_CO.....	121
4.3.19 BOARD_INTEREST_SCHEDULE.....	122
4.3.20 BOARD_ISS_POSTING_RULES.....	123
4.3.21 BOARD_MARKUP_CALCUL.....	126
4.3.22 BOARD_MARKUP_ELLIGIBLE_CURS.....	130
4.3.23 BOARD_MIN_DUE_SCHEDULE.....	131
4.3.24 BOARD_MIN_DUE_SCHEDULE_INDEX.....	133
4.3.25 BOARDING_ACCOUNT_APP.....	134
4.3.26 BOARDING_ACCOUNT_LINKED_PROD.....	156
4.3.27 BOARDING_ADDITIONAL_FIELDS_APP.....	158
4.3.28 BOARDING_CARD_APP.....	159
4.3.29 BOARDING_CARD_DOMAIN_SETUP.....	173
4.3.30 BOARDING_CARD_FEES.....	175
4.3.31 BOARDING_CLIENT_APP.....	178
4.3.32 BOARDING_CORP_AUTH_SIGNATORY.....	190
4.3.33 BOARDING_CORP_CONTACT_ENTITIES.....	191
4.3.34 BOARDING_CORP_FINANCIAL_FACT.....	193
4.3.35 BOARDING_CORP_HIERARCHY_APP.....	196
4.3.36 BOARDING_CORPORATE_APPLICATION.....	197
4.3.37 BOARDING_DD_BANK_ACCOUNT_APP.....	205
4.3.38 BOARDING_LOAN_APP.....	207
4.3.39 BOARDING_LOY_ACCRUAL_RULES.....	212
4.3.40 BOARDING_LOYALTY_ACCOUNT.....	216
4.3.41 BOARDING_LOYALTY_PROGRAM.....	219
4.3.42 BOARDING_PAN_FEES_PARAM.....	226
4.3.43 BOARDING_P7_PAN_LIMITS_SETUP.....	231
4.3.44 CARD_BOARDING.....	238
4.3.45 CONTRACT_PACK_APP.....	251
4.3.46 NAMELESS_CARD_ORDER.....	253

5 Catalogue.....256

5.1 Parameter tables.....	256
5.1.1 CATALOGUE_DEFAULTING.....	256
5.1.2 CATALOGUE_IDENTIFIERS.....	257
5.1.3 CATALOGUE_INJECTED_PARAM.....	257
5.1.4 CATALOGUE_INJECTORS.....	259
5.1.5 CATALOGUE_MAPPING.....	261
5.1.6 CATALOGUE_NEGOC_DEFAULTING.....	262
5.1.7 CATALOGUE_NEGOC_INJECTORS.....	263
5.1.8 CATALOGUE_NEGOC_MAPPING.....	265
5.1.9 CATALOGUE_PRODUCT.....	266
5.1.10 CATALOGUE_PRODUCT_TEMP.....	268
5.1.11 CATALOGUE_SEQ.....	270
5.1.12 CHANNEL.....	271
5.1.13 CHANNEL_TYPE_LIST.....	275

5.2 Operation tables.....	277
5.2.1 CATALOGUE_STATUS_TRAIL.....	277
5.2.2 CATALOGUE_TRACES.....	278
5.2.3 CATALOGUE_UPGRADE.....	279
5.2.4 CATALOGUE_UPGRADE_INSTRUCTION.....	280
5.2.5 CATALOGUE_UPGRADE_TARGET_PRODS.....	281
6 Customer.....	283
6.1 Parameter tables.....	283
6.1.1 CLIENT_ACTIVITY_SET.....	283
6.1.2 CLIENT_DOCUMENT_LIST.....	283
6.1.3 CORPORATE_TYPE.....	284
6.1.4 CUSTOMER_SEGMENT.....	285
6.1.5 DOCUMENT_LIST.....	286
6.1.6 FUEL_PROVIDER_LIST.....	286
6.1.7 FUEL_PROVIDER_MERCHANT_LINK.....	287
6.1.8 FUEL_TYPE.....	288
6.1.9 M_EDUCATION_LIST.....	289
6.1.10 OWNER_LIST.....	290
6.1.11 PRIORITY_INDICATOR.....	291
6.1.12 PROMOTION_CODE_LIST.....	291
6.1.13 USER_DEFINED_FIELDS_PARAM.....	292
6.1.14 TITLE_LIST.....	293
6.1.15 SOCIOPROF_LIST.....	294
6.1.16 VEHICLE_BRAND_LIST.....	294
6.1.17 VEHICLE_CLASS_LIST.....	295
6.1.18 VEHICLE_MODEL_LIST.....	296
6.2 Operation tables.....	297
6.2.1 CLIENT.....	297
6.2.2 CORPORATE.....	307
6.2.3 CORP_AUTH_SIGNATORY.....	318
6.2.4 CORP_CONTACT_ENTITIES	319
6.2.5 CORP_FINANCIAL_FACT.....	322
6.2.6 ELIGIBLE_PACKS_CORP.....	324
6.2.7 ELIGIBLE_PACKS_PRODUCTS_CORP.....	325
6.2.8 ELIGIBLE_PRODUCTS_CORP.....	326
6.2.9 FLEET_DRIVER.....	327
6.2.10 FLEET_VEHICLE_DRIVER_LINK.....	328
6.2.11 FLEET_VEHICLE_DRIVER_LINK.....	329
6.2.12 FUEL_PROVIDER_CORP_DTLS.....	330
6.2.13 USER_DEFINED_FIELDS.....	331
6.2.14 NEGOC_CORP_POSTING_RULES.....	332
7 Corporate management.....	335
7.1 Parameter tables.....	335
7.1.1 CORP_HIERARCHY_PARAM.....	335

8 Embossing.....	336
8.1 Parameter tables.....	336
8.1.1 DELIVERY_METHOD.....	336
8.1.2 DELIVERY_SUPPLIER_CODE.....	337
8.1.3 EMB_CARD_CARRIER.....	337
8.1.4 EMB_CHIP_APPL_PARAM.....	344
8.1.5 EMB_CHIP_PROFILE_PARAM.....	346
8.1.6 EMB_DELIVERY_CENTER.....	348
8.1.7 EMB_LETTER_LINE.....	349
8.1.8 EMB_LETTER_LINE_COMP.....	350
8.1.9 EMB_PLASTIC_LAYOUT_PARAM.....	351
8.1.10 EMB_PRINT_LINE_COMP.....	353
8.1.11 EMB_TRACK_COMPOSITION.....	354
8.1.12 EMB_TRACK_LAYOUT.....	355
8.1.13 EMBOSSING_ADDRESSES_PARAM.....	356
8.1.14 FEMBOSSING_ARTICLES.....	357
8.1.15 EMBOSSING_ATTACHMENT.....	358
8.1.16 EMBOSSING_BARCODE.....	359
8.1.17 EMBOSSING_CARD_DATA.....	361
8.1.18 EMBOSSING_CARD_MATERIALS.....	363
8.1.19 EMBOSSING_ERROR.....	368
8.1.20 EMBOSSING_LOGO.....	369
8.1.21 EMBOSSING_SPLITTING_PARAMETER.....	370
8.1.22 EMBOSSING_STICKER.....	376
8.1.23 EMBOSSING_TAG.....	377
8.1.24 EMBOSSING_TAG_REF.....	378
8.1.25 Functional description.....	379
8.1.26 FOURTH_LINE_EMBOSSING.....	379
8.1.27 PIN_MAILER_FORMAT.....	380
8.1.28 STK_INVENTORY_ITEM_RULE.....	385
8.1.29 STK_INVENTORY_ITEM_DESC.....	386
8.2 Operation tables.....	387
8.2.1 CARD_PRODUCTION.....	387
8.2.2 CARD_PRODUCTION_HIST.....	400
8.2.3 EMB_RECYCLING.....	401
8.2.4 EMBOSSING_ERROR.....	402
8.2.5 NEGOC_EMV_TAGS.....	402
8.2.6 STK_INVENTORY_MAINTENANCE.....	404
9 Financial account.....	406
9.1 Conceptual data model.....	406
9.2 Parameter tables.....	406
9.2.1 CR_AUTO_FEES_ON_EVENT.....	406
9.2.2 CR_AUTO_FEES_ON_TRANS.....	411
9.2.3 CR_AUTO_FEES_ON_TRANS_ID.....	414
9.2.4 CR_CHARGING.....	415

9.2.5 CR_SCHEDULE.....	416
9.2.6 CR_MIN_DUE_SCHEDULE.....	417
9.2.7 CR_MIN_DUE_SCHEDULE_INDEX.....	419
9.2.8 CR_PAYMENT_INCIDENT_REASON.....	420
9.2.9 CR_TRANSACTION_PARAMETER.....	423
9.2.10 CYCLE_CUTOFF_LIST.....	434
9.2.11 CYCLE_CUTOFF_PARAMETERS.....	436
9.2.12 PAYMENT_INC_RESOLUT_REASON.....	439
9.2.13 SHADOW_ACCOUNT_STATUS.....	439
9.2.14 SKIP_PARENT_RULES.....	446
9.3 Operation tables.....	449
9.3.1 CR_SETTLEMENT_TRANSACTION.....	449
9.3.2 CR_TERM.....	454
9.3.3 CR_TERM_HIST.....	465
9.3.4 CR_TRANSACTION.....	475
9.3.5 CR_TRANSACTION_HIST.....	492
9.3.6 SHADOW_ACCOUNT.....	509
9.3.7 SHADOW_ACCOUNT_ACTIVITY; SHADOW_ACCOUNT_ACTIVITY_DF.....	530
9.3.8 SHADOW_ACCOUNT_ACTIVITY_MVT.....	536
10 Issuer general parameters.....	540
10.1 STATUS_LIST.....	540
10.1.1 Columns description.....	540
11 Loan.....	544
11.1 Operation tables.....	544
11.1.1 CR_LOAN.....	544
12 Loyalty.....	553
12.1 Conceptual data model.....	553
12.2 Parameter tables.....	553
12.2.1 LOYALTY_GIFT.....	553
12.2.2 LOYALTY_PROGRAM.....	554
12.3 Operation tables.....	560
12.3.1 LOYALTY_ACCOUNT.....	560
12.3.2 LOYALTY_TRANSACTION.....	566
13 Payment instrument.....	574
13.1 Conceptual data model.....	574
13.2 Parameter tables.....	574
13.2.1 BATCH_RENEWAL_CRITERIA.....	574
13.2.2 CARD_FEES.....	575
13.2.3 CARD_FEES_ADVANCED.....	579
13.2.4 CARD_GEN_COUNTERS.....	585
13.2.5 CARD_PERMITTED_PROD_CHANGE.....	589
13.2.6 CARD_RANGE.....	590

13.2.7 CARD_RANGE_KEY.....	597
13.2.8 CARD_PRODUCT.....	597
13.2.9 CARD_TYPE.....	611
13.2.10 ICC_APPLICATION_PAR_INDEX.....	613
13.2.11 ISS_POSTING_RULES.....	614
13.2.12 ISS_TRANSACTION_FEES_PARAM.....	618
13.2.13 ISS_TRANSACTION_FEES_PARAM.....	621
13.2.14 MARKUP_INDEX.....	625
13.2.15 MULTI_RANGE_PRODUCTS.....	625
13.2.16 PCRD_CARD_PROD_PARAM.....	626
13.2.17 PLASTIC_LIST.....	629
13.2.18 PRODUCT_EMV_TAGS.....	630
13.2.19 PWC_TOKEN_FORMAT.....	632
13.2.20 PWC_TOKEN_INTERFACE_SETUP.....	633
13.2.21 REPLACEMENT_REASON_CODE.....	634
13.2.22 STOP_LIST_FEES_PARAM.....	635
13.2.23 STOP_RENEWAL_CRITERIA.....	636
13.3 Operation tables.....	638
13.3.1 CARD.....	638
13.3.2 CARD_CONTRACT.....	652
13.3.3 CARDBATCH.....	653
13.3.4 CARD_PRODUCT_CHANGE.....	654
13.3.5 CARD_REPLACE.....	657
13.3.6 LOST_STOLEN_CASE_DECLAR_HST.....	659
13.3.7 LOST_STOLEN_CASE_DECLARATION.....	662
13.3.8 NEGOC_MARKUP_CALCUL.....	665
13.3.9 NEGOC_MARKUP_ELLIGIBLE_CURS.....	670
13.3.10 NEGOCIATED_CARD_FEES.....	671
13.3.11 NEGOC_CORP_POSTING_RULES.....	675
13.3.12 FLEET_VEHICLE_CARD.....	676
13.3.13 PWC_TOKEN_VAULT.....	677

14 Transaction.....679

14.1 Operation tables.....	679
14.1.1 TRANSACTION_HIST.....	679
14.1.2 TRANSACTION_HIST_CARD.....	712
14.1.3 TRANSACTION_HIST_ADD_FRAUD.....	716
14.1.4 TRANSACTION_HIST_ADD_TCR01.....	720
14.1.5 TRANSACTION_HIST_AL.....	728
14.1.6 TRANS_HIST_NAT_SETTLEMENT.....	733
14.1.7 TRANS_HIST_FIN_PROMO_DATA.....	734
14.1.8 TRANS_HIST_LIMIT_USE_DATA.....	736
14.1.9 TRANSACTION_HIST_ADD_CHIP.....	738
14.1.10 TRANS_HIST_MVT_MISC.....	741
14.1.11 TRANS_HIST_MVT_PT.....	744
14.1.12 TRANSACTION_HIST_LG.....	746
14.1.13 TRANSACTION_HIST_ADD_LG.....	749
14.1.14 TRANSACTION_HIST_RC.....	753

14.1.15 TRANSACTION_HIST_ADD_RC.....	755
14.1.16 BASE2_INCOMING_TABLE_HIST.....	760
14.1.17 TRANS_HIST_ADD_CAR_RENTAL.....	762
14.1.18 TRANS_HIST_ADD_LODGING.....	763
14.1.19 TRANS_HIST_ADD_GENERIC.....	765
14.1.20 TRANS_HIST_ADD_PASSENGER_IT.....	766
14.1.21 TRANS_HIST_ADD_PASSENGER_LEG.....	768
14.1.22 TRANS_HIST_ADD_INVOICE_HS.....	770
14.1.23 TRANS_HIST_ADD_INVOICE_DL.....	771
14.1.24 TRANS_HIST_INSTALLMENT.....	772
14.1.25 TRANSACTION_HIST_ADD_RL.....	774
14.1.26 TRANSACTION_HIST_ADD_GT.....	776
14.1.27 TRANSACTION_HIST_ADD_CF.....	779
14.1.28 TRANSACTION_HIST_ADD_TP.....	782
14.1.29 TRANSACTION_HIST_ADD_SH.....	785
14.1.30 TRANSACTION_HIST_ADD_TEL_SUM.....	789
14.1.31 TRANSACTION_HIST_ADD_TEL_DT.....	792
14.1.32 TRANSACTION_HIST_ADD_CL.....	795
14.1.33 TRANSACTION_HIST_ADD_CB2C.....	798
 15 Appendix - Table list.....	 801
 16 Document history.....	 804

1 Non-disclosure notice

This document is intended for HPS collaborators and must not be disclosed to external individuals. Unauthorized access, distribution, or sharing of this document is strictly prohibited.

2 Introduction

The information that follows describes the content of tables.

Columns attributes	Description
Sequence	Identifies the column sequence number within the table.
Column name	Name of the column.
Data type	Sets the permitted format for the column: (CHAR)= Alphanumeric columnss: The CHAR data type stores fixed-length character strings. A string length (in bytes or characters) between 1 and 2000 bytes is specified for the CHAR column width. The default width for a CHAR column is 1 byte. Oracle then guarantees that: - When you insert or update a row in the table, the value for the CHAR column has the fixed length. - If you give a shorter value, then the value is blank-padded to the fixed length. - If a value is too large, Oracle Database returns an error. Oracle Database compares CHAR values using blank-padded comparison semantics. VARCHAR2 and VARCHAR The VARCHAR2 data type stores variable-length character strings. When you create a table with a VARCHAR2 column, you must specify a maximum string length (in bytes or characters) between 1 and 4000 bytes for the VARCHAR2 column. For each row, Oracle Database stores each value in the column as a variable-length column unless a value exceeds the column's maximum length, in which case Oracle Database returns an error. Using VARCHAR2 and VARCHAR saves on space used by the table. For example, assume you declare a column VARCHAR2 with a maximum size of 50 characters. In a single-byte character set, if only 10 characters are given for the VARCHAR2 column value in a particular row, the column in the row's row piece stores only the 10 characters (10 bytes), not 50. Oracle Database compares VARCHAR2 values using non-padded comparison semantics. (NUMBER) = Numeric column: The NUMBER data type stores fixed and floating-point numbers. Numbers of virtually any magnitude can be stored and are guaranteed portable among different systems operating Oracle Database, up to 38 digits of precision. The following numbers can be stored in a NUMBER column: - Positive numbers in the range 1×10^{-130} to $9.99...9 \times 10^{125}$ with up to 38 significant digits. - Negative numbers from -1×10^{-130} to $9.99...99 \times 10^{125}$ with up to 38 significant digits. - Zero. - Positive and negative infinity. - NUMBER (precision, scale): If a precision is not specified, the column stores values as given. If no scale is specified, the scale is zero. (DATE)= Date column: The DATE data type stores point-in-time values (dates and times) in a table. The DATE data type stores the year (including the century), the month, the day, the hours, the minutes, and the seconds (after midnight). Oracle Database can store dates in the Julian era, ranging from January 1, 4712 BCE through December 31, 9999 CE (Common Era, or 'AD'). Unless BCE ('BC' in the format mask) is specifically used, CE date entries are the default. Oracle Database uses its own internal format to store dates. Date data is stored in fixed-length columns of seven bytes each, corresponding to century, year, month, day, hour, minute, and second.

Columns attributes	Description
Length	Length of the column in number of positions (characters).
Scale	The number of digits to the right of the decimal point.
Column description	Explains the intended use of a specific column.

3 Add on services account

3.1 Parameter tables

3.1.1 CR_LINKED_PROD_PROFILE

The Add-on services account product comprises the management of the different products that accompany the customer account such as insurance, assistance and magazines.

This table, store the list of the add on services available by institution. These parameters are used to define the add on services billing specifications parameters as well as the customer eligibility criteria for the concerned product.

Refer to [Add-on services account product setup](#) section in UG1019 Catalogue user's guide for more details.

Each column of this table is described in detail in the next section.

3.1.1.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Financial institution of the parameter being defined. It should be defined in the 'BANK' table.
2 	PRODUCT_IDENTIFIER	CHAR	6		The internal identifier of the account add on service.
3	COVER_INDEX	CHAR	3		This column is not used in V3.5.
4	ADHERENT_AGE_MAX	NUMBER	2		Maximum age over which the client is considered as not eligible for the concerned service product.
5	DESCRIPTION	VARCHAR2	32		The detailed description of the add on service product.
6	FEES_CURRENCY_CODE	CHAR	3		Currency to use when generating the fees related to this service product. It should be defined in the 'CURRENCY_TABLE'.
7	FEES_TRANSACTION_CODE	CHAR	2		The transaction code to use when generating the fees related to this service product. It should be defined in 'CR_TRANSACTION_PARAMETER' table.
8	FEES_RATE	NUMBER	9	6	The rate to be applied to the base amount when generating the fees related to this service product. The base amount is defined by the option of CRITERIA_AMOUNT field in the 'CR_SHADOW_ACC_LINKED_PROD' table. Criteria amount option values are: 'L' = Credit Limit, 'O' = Outstanding Balance, 'C' = Closing balance, 'U' = Unpaid terms.

Seq.	Column Name	Data Type	Len	Sc	Column Description
9	FEES_FIXED	NUMBER	18	3	This is the amount that will be added to the rate result before comparing to the minimum, maximum and grace amount.
10	FEES_MINIMUM	NUMBER	18	3	This is the minimum amount that will be compared to the final result in order to bring this result in line with the minimum amount, if the final result is less than this Minimum (If the final result is less than the Minimum amount, then the final result gets the Minimum value).
11	FEES_MAXIMUM	NUMBER	18	3	This is the maximum amount that will be compared to the final result in order to bring this result in line with the maximum amount, if the final result is greater than this Maximum (If the final result is greater than the Maximum amount, then the final result gets the Maximum value).
12	FEES_GRACE	NUMBER	18	3	This is the amount under which the final result is brought to zero (If the final result is less or equal than the Grace amount, then the final result gets zero value).
13	RULE_IDENTIFIER	CHAR	3		The fee calculation rule. Possible values are: 'STD' = Standard, 'MAX' = Maximum, 'MIN' = Minimum, 'TIR' = Tiered. Note  Refer to "PowerCARD's Calculation Rules" section for detailed description of calculation rule options.
14	ROUNDED_METHOD_IDENTIFIER	CHAR	1		This is to indicate the rounding method to be applied on fee calculation result. Possible values are: 'H' = High value, 'L' = Low value, 'N' = Normal, 'E' = Exponent (Default standard method). Note  Refer to "Rounded methods" section for detailed description of rounded methods.
15	THRESHOLD_AMOUNT	NUMBER	18	3	This is the amount threshold under which the system does not undergo the fee calculation and the result is set

Seq.	Column Name	Data Type	Len	Sc	Column Description
					to zero (If the base amount is less or equal than the Threshold amount, then the final result gets zero value).
16	LINKED_PROD_FEES_BILL_EVT	CHAR	1		This is to indicate the add on services' fee billing event. Possible values are: 'M' = Subscription, 'G' = Grace Period, 'S' = Statement date.
17	LINKED_PROD_FEES_GRACE_PERIOD	NUMBER	3		Number of days before starting fees billing of the add on service product. This field is required when LINKED_PROD_FEES_BILLING_EVT = 'G' (Grace Period).
18	LINKED_PROD_FEES_BILL_PERIOD	CHAR	1		Billing period of the add on service product. Possible values are: 'M' = Month, 'Q' = Quarter, 'S' = Half-year, 'Y' = Year.
19	LINKED_PROD_FEES_BILL_DAY	NUMBER	2		This column is not used in V3.5.
20	LINKED_PROD_FEES_BILL_MONTH	NUMBER	2		This column is not used in V3.5.
21	MAX_OUTSTANDING_BALANCE	NUMBER	18	3	The maximum outstanding balance over which the Account is considered as not eligible for the add on service product.
22	USER_CREATE	VARCHAR2	15		ID of the user when record created.
23	DATE_CREATE	DATE	7		Record creation date and time.
24	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
25	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4 Boarding

4.1 Conceptual data model

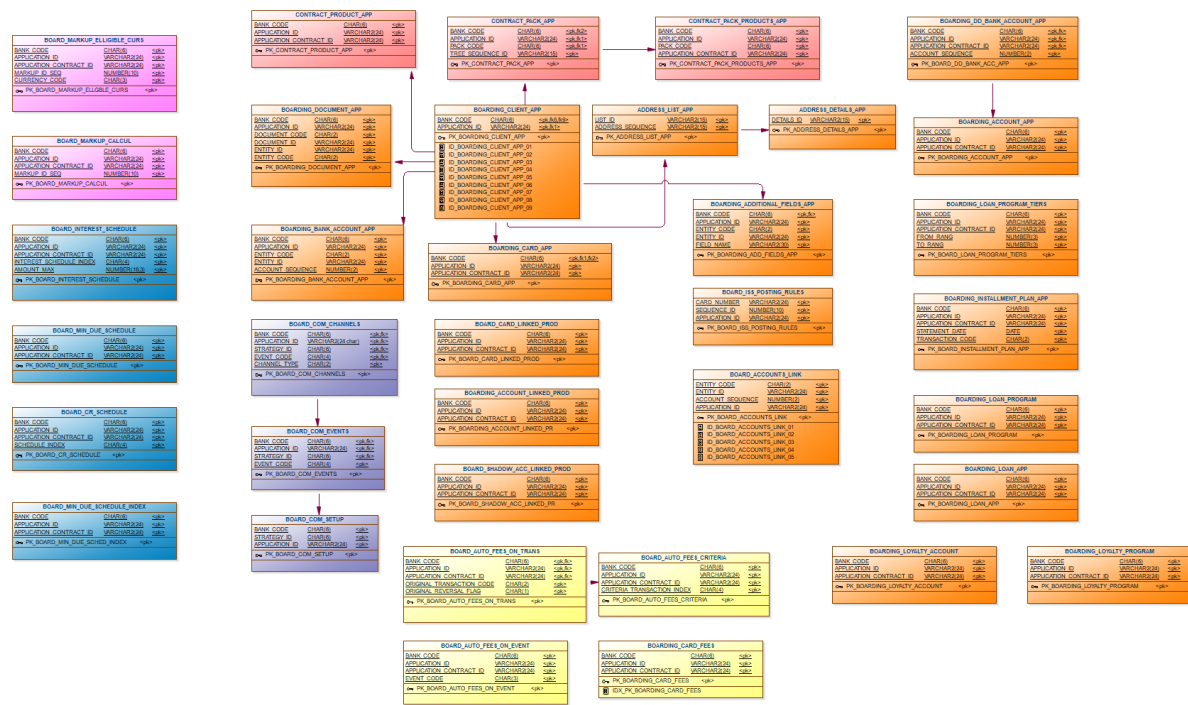


Figure 1: Boarding (CDM)

4.2 Parameter tables

4.2.1 APPLICATION_STATUS_REASON

This table is used to store the management's parameters of the application status reason. It allows the configuration of the different reasons in order to move the application from a given eligible status to another status.

Refer to "[Application status reason](#)" section in UG1022-Boarding user's guide for more details.

Each column of this table is described in detail in the next section.

4.2.1.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2	REASON_CODE	CHAR	3		Unique code identifying the reason code.
3	DESTINATION_STATUS	CHAR	1		The destination status. Possible values are: 'O' = On going (Initial and capture phase),

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'W' = Waiting validation (Capture completed and pushed for review), 'I' = Incomplete (Temporary declined application), 'R' = Ready to process (Application and contract reviewed by checker and ready for processing or for temporary rejection), 'P' = Processed (Application processed and entities created), 'D' = Declined (Application declined), 'A' = Archived (Application processed or rejected are archived automatically).
4	WORDING	VARCHAR2	32		Application status reason description.
5	ABRV_WORDING	VARCHAR2	16		Shortened description used for information, for reporting or on other screens.
6	CO_APPLICABILITY	CHAR	1		This flag indicates if the application status reason is for the Corporate. Possible values are: 'Y' = Yes, 'N' = No.
7	CH_APPLICABILITY	CHAR	1		This flag indicates if the application status reason is for the Consumer. Possible values are: 'Y' = Yes, 'N' = No.
8	USER_CREATE	VARCHAR2	15		ID of the user when record created.
9	DATE_CREATE	DATE	7		Record creation date and time.
10	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
11	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.2 APPLICATION_STATUS_REASON_TRAN

This table contains the transition between the status defined in the SOURCE_STATUS field and the DESTINATION_STATUS field for a given application status reason.

Refer to "Eligible source status section data description" of ["Application status reason"](#) section in UG1022-Boarding user's guide for more details.

Each column of this table is described in detail in the next section.

4.2.2.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					bank code should already be declared in 'BANK' table.
2 	REASON_CODE	CHAR	3		Unique code identifying the reason code. It should already be declared in 'APPLICATION_STATUS_REASON' table.
3 	DESTINATION_STATUS	CHAR	1		The destination status that is subject of transition. Possible values are: 'O' = On going (Initial and capture phase), 'W' = Waiting validation (Capture completed and pushed for review), 'I' = Incomplete (Temporary declined application), 'R' = Ready to process (Application and contract reviewed by checker and ready for processing or for temporary rejection), 'P' = Processed (Application processed and entities created), 'D' = Declined (Application declined), 'A' = Archived (Application processed or rejected are archived automatically).
4 	SOURCE_STATUS	CHAR	1		Source status that is subject of transition. Possible values are: 'O' = On going (Initial and capture phase), 'W' = Waiting validation (Capture completed and pushed for review), 'I' = Incomplete (Temporary declined application), 'R' = Ready to process (Application and contract reviewed by checker and ready for processing or for temporary rejection), 'P' = Processed (Application processed and entities created), 'D' = Declined (Application declined), 'A' = Archived (Application processed or rejected are archived automatically).
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.3 APPLICATION_TYPE

This table contains the type of applications for each institution and the controls to be applied or not for each type of application.

Refer to "[Application type](#)" section in UG1022-Boarding user's guide for more details.

Each column of this table is described in detail in the next section.

4.2.3.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. It should be present in the 'BANK' table.
2 	APPLICATION_TYPE	CHAR	1		Unique code identifying the application type.
3	WORDING	VARCHAR2	32		Description of the application type.
4	ABRV_WORDING	VARCHAR2	16		Shortened description of the application type.
5	DEDUPLICATION_CHECK	CHAR	1		This column defines if this control should be applied or not for this application type. Possible values are: 'C' = Capture, 'P' = Post-capture, 'N' = No, the control is not applied.
6	FRAUD_CHECK	CHAR	1		This column indicates whether the fraud black list screening should be applied for this application type or not. Possible values are: 'C' = Capture, 'P' = Post-capture, 'N' = No, the control is not applied.
7	POLICY_CHECK	CHAR	1		This column indicates whether the policies process should be applied for this application type or not. Possible values are: 'Y' = Yes, 'N' = No.
8	CL_CALCULATION_CHECK	CHAR	1		This column indicates if the Credit limit capture is allowed for this application type or not. Possible values are: 'C' = Capture, 'P' = Post-capture, 'N' = No, the control is not applied.
9	SCORE_CHECK	CHAR	1		This column indicates whether the score process control should be applied for this application type or not. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'Y' = Yes, 'N' = No.
10	FAST_TRACK_CHECK	CHAR	1		This column specifies if the application is fast track or normal application. Possible values are: 'Y' = Yes, 'N' = No.
11	SINGLE_USER_CHECK	CHAR	1		This column specifies if the review and validation work-flow of the application can be performed by one single user / maker or needs maker & checker. Possible values are: 'Y' = Yes, 'N' = No.
12	CLIENT_ONLY	CHAR	1		This column specifies if the application type is used to submit only customer without any contract element. Possible values are: 'Y' = Yes, 'N' = No.
13	UPGRADE_DOWNGRADE	CHAR	1		This column specifies if the application is used for product change. In this case, it will be used only for existing clients to change a Payment instrument or Account product. Possible values are: 'Y' = Yes, 'N' = No. Note When this field is set to 'Y', PRORATA field is activated.
14	PRORATA	CHAR	1		This column defines if the Prorata control should be applied or not for this application type. Possible values are: 'Y' = Yes, 'N' = No. Note This field can be used only when the UPGRADE_DOWNGRADE field is set to 'Y' (Yes).
15	EDUCATION	VARCHAR2	4		The Education level of the customer. It should be present in the 'M_EDUCATION_LIST' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
16	VIP_LEVEL	CHAR	1		The VIP level of the customer. It should be present in the 'VIP_LIST' table.
17	SOCIO_PROF_CODE	CHAR	4		The job function of the customer. It should be present in the 'SOCIOPROF_LIST' table.
18	ACTIVITY_CODE	CHAR	4		Customer activity sector code. It should be present in the 'CLIENT_ACTIVITY_SET' table.
19	CUSTOMER_SEGMENT	CHAR	3		Customer segment code. It should be present in the 'CUSTOMER_SEGMENT' table.
20	EMPLOYMENT_STATUS	CHAR	1		Professional situation of this Client. Possible values are: 'C' = Corporate or Company, 'E' = Employee, 'L' = Liberal job, 'R' = Retired, 'S' = Student, 'U' = Unemployed, 'M' = Military Job, 'N' = Not Applicable.
21	LANGUAGE_CODE	CHAR	3		Language of the customer. It should be present in the 'LANGUAGE_LIST' table.
22	DISPLAY_AUTO_LINK	CHAR	1		This column indicates if the buttons 'Auto-link contracts' and 'Auto-link existing' need to be displayed or not in the boarding screen (Step: Accounts/ Posting rules). Possible values are: 'Y' = Yes, 'N' = No.
23	PRODUCT_PACK_ELIGIBILITY	CHAR	1		This column indicates if the application type has a restricted list of eligible products and packs with which the boarding can be done. Possible values are: 'Y' = Yes, 'N' = No.
24	MANAGE_QUEUEING	CHAR	1		This column specifies if the queuing process should be applied for this application type or not. Possible values are: 'Y' = Yes, 'N' = No.
25	CAPTURE_QUEUE	VARCHAR2	6		The queue code into which all the boarding captured requests (Status: Ongoing) with this application type should be queued.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Note  It's used only when the previous MANAGE_QUEUEING column is set and It should be present in the 'QUEUE' table.
26	REVIEW_QUEUE	VARCHAR2	6		The queue code into which all the boarding requests with this application type that are subject to review (Status: Waiting validation) should be queued. Note  It's used only when the previous MANAGE_QUEUEING column is set and It should be present in the 'QUEUE' table.
27	READY_TO_PROCESS_QUEUE	VARCHAR2	6		The queue code into which all the boarding requests with this application type that are reviewed (Status: Ready to process) should be queued. Note  It's used only when the previous MANAGE_QUEUEING column is set and it should already be defined in 'QUEUE' table.
28	PROCESSED_QUEUE	VARCHAR2	6		The queue code into which all the boarding requests with this application type that are validated (Status: Processed) should be queued. Note  It's used only when the previous MANAGE_QUEUEING column is set and it should already be defined in 'QUEUE' table.
29	TEMP_REJECT_QUEUE	VARCHAR2	6		The queue code into which all the boarding requests with this application type that are temporary rejected (Status: Incomplete) should be queued. Note  It's used only when the previous MANAGE_QUEUEING column is set and it should already be defined in 'QUEUE' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
30	FINAL_REJECT_QUEUE	VARCHAR2	6		The queue code into which all the boarding requests with this application type that are rejected (Status: Declined) should be queued. Note  It's used only when the previous MANAGE_QUEUEING column is set and it should already be defined in 'QUEUE' table.
31	GET_DEMOG_FROM_HOST	CHAR	1		This column indicates if the HOST service to get demographics and addresses data should be enabled or not during boarding. When enabled, the exit function "getDemogsFromHost" will be called. By default, there is no process implemented in this exit function and it needs to be customized during project phase if required. Possible values are: 'Y' = Yes, 'N' = No.
32	CHECK_PAN_BILL_ACCOUNT	CHAR	1		This column indicates if the service to check bank account from the HOST should be enabled or not during boarding. When enabled, the exit function "CheckPANBillingAccount" will be called. By default, there is no process implemented in this exit function and it needs to be customized during project phase if required. Possible values are: 'Y' = Yes, 'N' = No.
33	GET_PAN_BNK_ACT_HOST	CHAR	1		This column indicates if the service to retrieve the list of banking accounts from HOST should be enabled or not during boarding. When enabled, the exit function "getPANBankingAccountsList" will be called. By default, there is no process implemented in this exit function and it needs to be customized during project phase if required. Possible values are: 'Y' = Yes, 'N' = No.
34	GET_DD_BNK_ACT_HOST	CHAR	1		This column indicates if the service to retrieve the list of direct debit accounts from the host should be enabled or not during boarding. When enabled, the exit function "getPANBankingAccountsList" will be called. By default, there is no process implemented in this exit

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					function and it needs to be customized during project phase if required. Possible values are: 'Y' = Yes, 'N' = No.
35	GET_CREDIT_LIMIT_HOST	CHAR	1		This column indicates if the service to retrieve the credit limit from external system and populate it in the Account contract element should be enabled or not during boarding. When enabled, the exit function "getCreditLimitFromHost" will be called. By default, there is no process implemented in this exit function and it needs to be customized during project phase if required. Possible values are: 'Y' = Yes, 'N' = No.
36	CHECK_DD_BANK_ACCOUNT	CHAR	1		This column indicates if the service to check bank account from the HOST should be enabled or not during boarding. When enabled, the exit function "CheckPANBillingAccount" will be called. By default, there is no process implemented in this exit function and it needs to be customized during project phase if required. Possible values are: 'Y' = Yes, 'N' = No.
37	USER_CREATE	VARCHAR2	15		ID of the user when record created.
38	DATE_CREATE	DATE	7		Record creation date and time.
39	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
40	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.4 BOARDING_BUILDING_BLOCKS

This table is used to indicate the building blocks that will constitute the boarding request structure and set their occurrences when applicable.

Each column of this table is described in detail in the next section.

4.2.4.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code for which the PAN boarding blocks parameters are being defined. It must be present in the 'BANK' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
2 	BOARDING_STRUCTURE_ID	CHAR	6		Boarding structure id concerned by the PAN boarding building blocks being defined.
3 	BUILDING_BLOCK_ID	CHAR	6		The unique code identifying the PAN building block.
4	OCCURRENCE	NUMBER	3		Number of times a building block can be submitted within a boarding structure request.
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.5 BOARDING_INDIVIDUAL_FIELDS

This table is used to set the presence option (Exclude, mandatory, optional or default value) of the individual fields under the building blocks and sub blocks.

Each column of this table is described in detail in the next section.

4.2.5.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code for which the PAN boarding individual fields' parameters are being defined. It must be present in the 'BANK' table.
2 	BOARDING_STRUCTURE_ID	CHAR	6		Boarding structure id concerned by the PAN boarding individual fields being defined.
3 	BLOCK_ID	CHAR	6		Unique code identifying the PAN individual fields.
4 	FIELD_ID	VARCHAR2	30		Unique identification code of the predefined individual fields.
5	INCLUDE_EXCLUDE_FLAG	CHAR	1		This column indicates whether the individual field should be excluded from the boarding structure being setup or not. Possible values are: 'Y' = Yes, 'N' = No.
6	OPTIONALITY	CHAR	1		This column indicates whether the individual field is mandatory, optional or default value in the boarding structure. Possible values are: 'M' = When set to Mandatory, it indicates that the individual field must be provided in the

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					boarding request otherwise the request will be rejected. 'O' = When set to Optional, it indicates that the individual field can be provided or not in the. boarding request, if not provided the request will not be rejected. 'N' = Not include.
7	DEFAULT_VALUE	VARCHAR2	256		Description of the selected default value.
8	USER_CREATE	VARCHAR2	15		ID of the user when record created.
9	DATE_CREATE	DATE	7		Record creation date and time.
10	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
11	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.6 BOARDING_RESP_BUILD_BLOCKS

This table is used to define the building blocks that will constitute the PAN boarding response structure.

Each column of this table is described in detail in the next section.

4.2.6.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code for which the PAN boarding response building blocks parameters are being defined. It must be present in the 'BANK' table.
2 	BOARDING_STRUCTURE_ID	CHAR	6		Boarding structure id concerned by the PAN boarding response building blocks being defined.
3 	BUILDING_BLOCK_ID	CHAR	6		Unique code identifying the PAN building block.
4	USER_CREATE	VARCHAR2	15		ID of the user when record created.
5	DATE_CREATE	DATE	7		Record creation date and time.
6	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
7	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.7 BOARDING_RESP_INDIV_FIELDS

This table is used to include or exclude the individual fields in or from the boarding response.

Each column of this table is described in detail in the next section.

4.2.7.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code for which the PAN boarding response individual fields' parameters are being defined. It must be present in the 'BANK' table.
2 	BOARDING_STRUCTURE_ID	CHAR	6		Boarding structure id concerned by the PAN boarding response individual fields being defined.
3 	BUILDING_BLOCK_ID	CHAR	6		The unique code identifying the PAN individual fields under the building blocks.
4	SUB_BUILDING_BLOCK_ID	CHAR	6		The unique code identifying the PAN individual fields under the sub-building blocks.
5 	FIELD_ID	VARCHAR2	30		Identification code of the predefined individual fields.
6	INCLUDE_EXCLUDE_FLAG	CHAR	1		This column indicates whether the individual field should be excluded from the boarding structure being setup or not. Possible values are: 'Y' = Yes, 'N' = No.
7	USER_CREATE	VARCHAR2	15		ID of the user when record created.
8	DATE_CREATE	DATE	7		Record creation date and time.
9	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
10	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.8 BOARDING_STRUCTURE_LINK

This table is used to indicates the default boarding structures by institution and product. Once a boarding structure is defined, it can be linked to a product code. Multiple structure IDs can be linked to the same product code.

Each column of this table is described in detail in the next section.

4.2.8.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code for which the default boarding structures parameters are being defined. It must be present in the 'BANK' table.
2 	PRODUCT_CODE	CHAR	6		Product concerned by the Default boarding structures being defined. It should be defined in 'CATALOGUE_PRODUCT' table.
3 	VERSION	VARCHAR2	10		Product version concerned by the Default boarding structures being

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					defined. It should be defined in 'CATALOGUE_PRODUCT' table.
4	ELIGIBILITY_INDEX	VARCHAR2	6		The eligibility identification number.
5	BOARDING_STRUCTURE_ID	CHAR	6		This field contains the code identifying the boarding structure.
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.9 BOARDING_STRUCTURE_ELIG

PowerCARD gives the possibility to assign the appropriate boarding structure for a given product. 'BOARDING_STRUCTURE_ELIG' table is used to define this eligibility.

Refer to "[Boarding structure eligibility](#)" section in UG1170-Boarding XML user guide for more details.

Each column of this table is described in detail in the next section.

4.2.9.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	BANK_CODE	CHAR	6		Financial institution code. This code must be defined in 'BANK' table.
2	PRODUCT_CODE	CHAR	6		Marketable payment instrument product for which parameters are being defined. It must be defined in 'CARD_PRODUCT' table.
3	VERSION	VARCHAR2	10		Payment instrument version for which parameters are being defined.
4	ELIGIBILITY_INDEX	VARCHAR2	6		Eligibility identification number.
5	DESCRIPTION	VARCHAR2	32		Brief description of the parameter being defined.
6	USER_MODIF	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.10 CARD_MANDATORY_ADD_PRODUCT

This table is used to configure the mandatory addresses for Cardholder during the Boarding. Refer to "[PAN Mandatory addresses](#)" section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.10.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	MAN_ADDRESS_INDEX	CHAR	6		Unique code identifying the current rule. As defined in 'CARD_MANDATORY_ADDRESSES' table.
3 	PRODUCT_CODE	CHAR	6		The catalogue product with which the Payment instrument is being created. . Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P'
4 	PRODUCT_VERSION	VARCHAR2	10		The version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.11 CARD_MANDATORY_ADDRESSES

This table is used to define the Catalogue product(s) to be used or not for the current parameter being defined. Refer to ["PAN Mandatory addresses"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.11.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	MAN_ADDRESS_INDEX	CHAR	6		The unique code identifying the current rule
3	DESCRIPTION	VARCHAR2	32		Brief description of the parameter being defined.
4	PRODUCT_IN_NOTIN	VARCHAR2	6		Payment instrument product values. Is used to include or exclude from the PAN mandatory addresses . Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P'
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.12 CARD_MANDATORY_ADDRESSES_PARAM

This table is used to define the list of mandatory addresses that will be requested to the cardholder during the boarding. Refer to ["PAN Mandatory addresses"](#) section in UG 1022 Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.12.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	SEQUENCE_ID	NUMBER	10		Sequence id of the parameter being defined.
2	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
3	PRODUCT_CODE	CHAR	3		Catalogue product for which parameters are being defined. As defined in 'CATALOGUE_PRODUCT' table
4	ADDRESS_TYPE	CHAR	2		Address type that is mandatory for the current rule.
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.13 CARD_MANDATORY_ADD_TYPE

The table is used to define the list of mandatory addresses that will be requested to the cardholder during the boarding. As well as, if the addresses are primary or mandatory or both. Refer to ["PAN Mandatory addresses"](#) section in UG 1022 Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.13.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	MAN_ADDRESS_INDEX	CHAR	6		Unique code identifying the current rule. As defined in

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'CARD_MANDATORY_ADDRESSES' table.
3 	ADDRESS_TYPE	CHAR	2		The Address type that is mandatory for the current rule.
4	IS_PRIMARY	CHAR	1		This flag indicates whether addresses are primary in case of multiple addresses or not. Possible values are: 'Y' = Yes, 'N' = No.
5	IS_MANDATORY	CHAR	1		This flag indicates whether addresses are mandatory in case of multiple addresses or not. Possible values are: 'Y' = Yes, 'N' = No.
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.14 CATALOGUE_PACK

This table is used to define the different packs that include one or several valid marketable products of the catalog to be offered for the Institution to their customers. These predefined packs will be listed when the contract element is a "Pack" in the Boarding screen.

Refer to ["Pack definition"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.14.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	PACK_CODE	CHAR	6		Identification number of the pack.
3	ABREV_WORDING	VARCHAR2	16		Shortened description used for information, for reporting or on other screens.
4	WORDING	VARCHAR2	32		Description of the pack being defined.
5	DESCRIPTION	VARCHAR2	512		This is a detailed description of the pack being defined.
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.15 CATALOGUE_PACK_ELIGIBILITY

This table is used to define the different eligibility criteria for a valid marketable pack.

Refer to ["Pack eligibility"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.15.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	PACK_CODE	CHAR	6		The identification number of the pack.
3 	ELIGIBILITY_INDEX	VARCHAR2	6		The eligibility identification number.
4	DESCRIPTION	VARCHAR2	32		Brief description of the parameter being defined.
5	BRANCH_IN_NOTIN	VARCHAR2	6		This column is used to indicates whether the value of the Branch must be included or excluded from the pack eligibility. Possible values are: 'I' = Included, 'E' = Excluded.
6	GENDER_IN_NOTIN	VARCHAR2	6		This column is used to indicates whether the value of the Gender must be included or excluded from the pack eligibility. Possible values are: 'I' = Included, 'E' = Excluded.
7	OWNER_IN_NOTIN	VARCHAR2	6		This column is used to indicates whether the value of the Owner must be included or excluded from the pack eligibility. Possible values are: 'I' = Included, 'E' = Excluded.
8	PROF_IN_NOTIN	VARCHAR2	6		This column is used to indicates whether the value of the prof must be included or excluded from the pack eligibility. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'I' = Included, 'E' = Excluded.
9	ACTIVITY_IN_NOTIN	VARCHAR2	6		This column is used to indicates whether the value of the Activity must be included or excluded from the pack eligibility. Possible values are: 'I' = Included, 'E' = Excluded.
10	SEGMENT_IN_NOTIN	VARCHAR2	6		This column is used to indicates whether the value of the Customer segment must be included or excluded from the pack eligibility. Possible values are: 'I' = Included, 'E' = Excluded.
11	VIP_IN_NOTIN	VARCHAR2	6		This column is used to indicates whether the value of the VIP level must be included or excluded from the pack eligibility. Possible values are: 'I' = Included, 'E' = Excluded.
12	MINIMUM_AGE	NUMBER	3		Minimum age to be applied for this pack eligibility.
13	MINIMUM_YEARLY_INCOME	NUMBER	15		Minimum yearly income to be applied for this pack eligibility.
14	CURRENCY_CODE	CHAR	3		Currency code. It should be defined in 'CURRENCY_TABLE'.
15	MINIMUM_SCORE	NUMBER	15		Minimum score to be applied for this pack eligibility.
16	USER_CREATE	VARCHAR2	15		ID of the user when record created.
17	DATE_CREATE	DATE	7		Record creation date and time.
18	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
19	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.16 CATALOGUE_PACK_ELIG_ACTIV

This table is used to lists the value of the Activity to be included or excluded from the pack eligibility.

Refer to "[Pack eligibility](#)" section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.16.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	PACK_CODE	CHAR	6		Identification number of the pack.
3 	ELIGIBILITY_INDEX	VARCHAR2	6		This is the eligibility identification number.
4 	ACTIVITY_CODE	CHAR	4		This is to indicate the client's activity code. It helps to categorize clients based on their professional occupation. It must be present in the 'CLIENT_ACTIVITY_SET' table.
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.17 CATALOGUE_PACK_ELIG_BRANCH

This table is used to indicate the value of the branch to be included or excluded from the pack eligibility.

Refer to "[Pack eligibility](#)" section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.17.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	PACK_CODE	CHAR	6		Identification number of the pack.
3 	BRANCH_CODE	CHAR	6		The branch within the issuer institution. This code must be defined in 'BRANCH' table.
4 	ELIGIBILITY_INDEX	VARCHAR2	6		The eligibility identification number.
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.18 CATALOGUE_PACK_ELIG_GENDER

This table is used to indicate the value of the Gender to be included or excluded from the pack eligibility.

Refer to "[Pack eligibility](#)" section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.18.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	PACK_CODE	CHAR	6		The identification number of the pack.
3 	ELIGIBILITY_INDEX	VARCHAR2	6		The eligibility identification number.
4 	GENDER	CHAR	1		Gender of the client. Possible values are: 'M' = Male 'F' = Female 'N' = Not applicable (For Company & Corporate)
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.19 CATALOGUE_PACK_ELIG_OWNER

This table is used to indicate the value of the Owner to be included or excluded from the pack eligibility.

Refer to "[Pack eligibility](#)" section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.19.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	PACK_CODE	CHAR	6		Identification number of the pack.
3 	ELIGIBILITY_INDEX	VARCHAR2	6		The eligibility identification number.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
4 	OWNER_CODE	CHAR	2		This is to define the customer type. This owner code must be defined in 'OWNER_LIST' table
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.20 CATALOGUE_PACK_ELIG_PROF

This table is used to indicate the value of the Socio-prof to be included or excluded from the pack eligibility.

Refer to "[Pack eligibility](#)" section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.20.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	PACK_CODE	CHAR	6		This field defines the identification number of the pack.
3 	SOCIO_PROF_CODE	CHAR	4		This field indicates the socio-professional code of the client. It is used for the segmentation of clients based on such criteria as job industry, and professional qualification. It must be present in the 'SOCIOPROF_LIST' table.
4 	ELIGIBILITY_INDEX	VARCHAR2	6		The eligibility identification number.
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.21 CATALOGUE_PACK_ELIG_SEGMENT

This table is used to indicate the value of the customer segment to be included or excluded from the pack eligibility.

Refer to "[Pack eligibility](#)" section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.21.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	PACK_CODE	CHAR	6		Identification number of the pack.
3 	CUSTOMER_SEGMENT	CHAR	3		Client's customer segment. This code must be defined in 'CUSTOMER_SEGMENT' table
4 	ELIGIBILITY_INDEX	VARCHAR2	6		The eligibility identification number.
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.22 CATALOGUE_PACK_ELIG_VIP

This table is used to indicate the value of the VIP to be included or excluded from the pack eligibility.

Refer to "[Pack eligibility](#)" section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.22.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	PACK_CODE	CHAR	6		The identification number of the pack.
3 	ELIGIBILITY_INDEX	VARCHAR2	6		Eligibility identification number.
4 	VIP_LEVEL	CHAR	1		The VIP level. It must be defined in 'VIP_LIST' table.
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.23 CATALOGUE_PACK_PRODUCTS

This table is used to define the different packs that include one or several valid marketable catalogue products offered to the institution for their customers.

Refer to "[Pack definition](#)" section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.23.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		The Issuer Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	PACK_CODE	CHAR	6		The identification number of the pack. It should be defined in 'CATALOGUE_PACK' Table.
3 	TREE_SEQUENCE_ID	VARCHAR2	15		Sequence ID displayed in the tree. This field is reserved for internal use.
4	TREE_PARENT_ID	VARCHAR2	15		The identification code displayed in the tree. This field is reserved for internal use.
5	PRODUCT_CODE	CHAR	6		Catalogue product identifier for which parameters are being defined. It should be defined in 'CATALOGUE_PRODUCT' Table.
6	PRODUCT_VERSION	VARCHAR2	10		Version of the product being defined. It should be defined in 'CATALOGUE_PRODUCT' Table.
7	DESCRIPTION	VARCHAR2	512		Brief description of the product.
8	PRODUCT_TYPE	VARCHAR2	10		The category of the product. Possible values are: 'P' = Payment instrument, 'A' = Account, 'N' = Loan, 'Y' = Loyalty, 'C' = Add on services account, 'I' = Add on services PI. It should be defined in 'CATALOGUE_PRODUCT' Table.
9	HIERARCHY_LEVEL	NUMBER	2		This column indicates how many hierarchy levels will be returned.
10	MANDATORY	CHAR	1		This column indicates if the product is mandatory during the initial boarding. Possible values are: 'Y' = yes 'N' = No  Note

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					If the value is set to "Y", the contract element cannot be completed until all the products set to Mandatory are filled.
11	IS_PRIMARY	CHAR	1		This column is used to indicate whether the pack products is primary or not. Possible values are: 'Y' = yes 'N' = No
12	CARD_TYPE	CHAR	2		This PAN type concerned by these parameters. Must be defined in 'CARD_TYPE' table.
13	ACCOUNT_TYPE	CHAR	2		Identification code of the account type. Possible values are: '00' = Billing Account '10' = Saving account '20' = Checking account '30' = Loan account '40' = Universal account '50' = Investment account '62' = Spending power account '80' = Merchant account '81' = Chain account '90' = Shadow account '91' = Installment loan account '92' = Real estate loan account '93' = Loyalty account It should be defined in 'ACCOUNT_TYPE_LIST' table.
14	LOAN_TYPE	CHAR	1		This column is used to differentiate between different types of loan. Possible values are: 'L' = Loan Over the Phone (LOP), the standalone loan that is provided to the customer via cash or check, 'E' = Easy Payment Plan (EPP), the conversion of an existing transaction to loan, 'B' = Balance Conversion (Forbearance), the conversion of an existing account balance to a loan. It should be defined in 'CR_LOAN' table.
15	AUXILIARY_TYPE	CHAR	2		The product type of the add-on service. Possible values are: '...' = Assistance '...' = Insurance

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'...' = Magazine
16	USER_CREATE	VARCHAR2	15		ID of the user when record created.
17	DATE_CREATE	DATE	7		Record creation date and time.
18	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
19	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.24 CATALOGUE_PROD_ELIG_GENDER

This table is used to indicate the value of the Gender to be included or excluded from the pack eligibility.

Refer to "[Pack eligibility](#)" section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.24.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	PRODUCT_CODE	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
3 	VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
4 	GENDER	CHAR	1		This is to indicate the gender of the client. Possible values are: 'M' = Male 'F' = Female 'N' = Not applicable (For Company & Corporate)
5 	ELIGIBILITY_INDEX	VARCHAR2	6		This is the eligibility identification number.
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.25 CATALOGUE_PROD_ELIGIBILITY

This table is used to define the different eligibility criteria for a valid marketable product of the catalogue. Records of this table concern the Issuer parameters. Refer to ["Product eligibility"](#) section in UG 1022 Boarding user guide for more details.

Each fields of this table are describes in detail in the next section.

4.2.25.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	PRODUCT_CODE	CHAR	6		The catalogue product for which parameters are being defined. As defined in 'CATALOGUE_PRODUCT' table
3 	VERSION	VARCHAR2	10		The catalog product version for which parameters are being defined. It must be defined in 'CATALOGUE_PRODUCT' table.
4 	ELIGIBILITY_INDEX	VARCHAR2	6		Eligibility identification number.
5	DESCRIPTION	VARCHAR2	32		Brief description of the parameter being defined.
6	BRANCH_IN_NOTIN	VARCHAR2	6		Branch value to include or exclude from the product eligibility.
7	GENDER_IN_NOTIN	VARCHAR2	6		Gender value to include or exclude from the product eligibility.
8	OWNER_IN_NOTIN	VARCHAR2	6		Owner value to include or exclude from the product eligibility.
9	PROF_IN_NOTIN	VARCHAR2	6		Prof value to include or exclude from the product eligibility.
10	ACTIVITY_IN_NOTIN	VARCHAR2	6		Activity value to include or exclude from the product eligibility.
11	SEGMENT_IN_NOTIN	VARCHAR2	6		Customer segment value to include or exclude from the product eligibility.
12	VIP_IN_NOTIN	VARCHAR2	6		VIP value to include or exclude from the product eligibility.
13	MINIMUM_AGE	NUMBER	3		Minimum age to be applied for this product eligibility.
14	MINIMUM_YEARLY_INCOME	NUMBER	15		Minimum yearly income to be applied for this product eligibility.
15	CURRENCY_CODE	CHAR	3		Currency code as defined in 'CURRENCY_TABLE'.  Note The currency should be indicated if the Minimum yearly income is not empty.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
16	MINIMUM_SCORE	NUMBER	15		Minimum score to be applied for this product eligibility.
17	USER_CREATE	VARCHAR2	15		ID of the user when record created.
18	DATE_CREATE	DATE	7		Record creation date and time.
19	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
20	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.26 CATALOGUE_PROD_ELIG_OWNER

This table is used to indicate the value of the Owner to be included or excluded from the pack eligibility.

Refer to "[Pack eligibility](#)" section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.26.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	PRODUCT_CODE	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
3 	VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
4 	ELIGIBILITY_INDEX	VARCHAR2	6		The eligibility identification number.
5 	OWNER_CODE	CHAR	2		Owner code. This owner code must be defined in 'OWNER_LIST' table
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.27 CATALOGUE_PROD_ELIG_PROF

The table is used to indicate the value of the Socio-prof to be included or excluded from the pack eligibility.

Refer to "[Pack eligibility](#)" section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.27.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	PRODUCT_CODE	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
3 	VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
4 	SOCIO_PROF_CODE	CHAR	4		The socio-professional code of the client. It is used for the segmentation of clients based on such criteria as job industry, and professional qualification. It must be present in the 'SOCIOPROF_LIST' table.
5 	ELIGIBILITY_INDEX	VARCHAR2	6		The eligibility identification number.
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.28 CATALOGUE_PROD_ELIG_SEGMENT

This table is used to indicate the value of the customer segment to be included or excluded from the pack eligibility.

Refer to "[Pack eligibility](#)" section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.28.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This institution code should already be declared in 'BANK' table.
2 	PRODUCT_CODE	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
3 	VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
4 	CUSTOMER_SEGMENT	CHAR	3		Client's segment. This code must be defined in 'CUSTOMER_SEGMENT' table

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
5 	ELIGIBILITY_INDEX	VARCHAR2	6		The eligibility identification number.
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.29 CATALOGUE_PROD_ELIG_VIP

This table is used to indicate the value of the VIP to be included or excluded from the pack eligibility.

Refer to "[Pack eligibility](#)" section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.29.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	PRODUCT_CODE	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
3 	VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
4 	ELIGIBILITY_INDEX	VARCHAR2	6		The eligibility identification number.
5 	VIP_LEVEL	CHAR	1		VIP level. It must be defined in 'VIP_LIST' table.
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.30 CLIENT_MANDATORY_ADD_OWNER

This table is used to configure the mandatory addresses for Client during the Boarding. Refer to "[Client Mandatory addresses](#)" section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.30.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This institution code should already be declared in 'BANK' table.
2 	MAN_ADDRESS_INDEX	CHAR	6		The unique code identifying the current rule. As defined in 'CLIENT_MANDATORY_ADDRESSES' table.
3 	OWNER_CODE	CHAR	2		This is to define the owner code. This owner code must be defined in 'OWNER_LIST' table
4	USER_CREATE	VARCHAR2	15		ID of the user when record created.
5	DATE_CREATE	DATE	7		Record creation date and time.
6	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
7	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.31 CLIENT_MANDATORY_ADDRESSES

This table is used to define the Customer type(s) to be used or not for the current parameter being defined. Refer to ["Client Mandatory addresses"](#) section in UG 1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.31.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This institution code should already be declared in 'BANK' table.
2 	MAN_ADDRESS_INDEX	CHAR	6		Unique code identifying the current rule.
3	DESCRIPTION	VARCHAR2	32		Brief description of the parameter being defined.
4	OWNER_IN_NOTIN	VARCHAR2	6		Customer type values to include or exclude from the client mandatory addresses.
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.32 CLIENT_MANDATORY_ADD_TYPE

This table is used to define the list of mandatory addresses that will be requested to the client during the boarding. As well as, if the addresses are primary or mandatory or both. Refer to "[Mandatory addresses section data description](#)" section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.32.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	MAN_ADDRESS_INDEX	CHAR	6		Unique code identifying the current rule. As defined in 'CLIENT_MANDATORY_ADDRESSES' table.
3 	ADDRESS_TYPE	CHAR	2		Address type that is mandatory for the current rule.
4	IS_PRIMARY	CHAR	1		This column indicates whether addresses are primary in case of multiple addresses or not. Possible values are: 'Y' = Yes, 'N' = No.
5	IS_MANDATORY	CHAR	1		This Column indicates whether addresses are mandatory in case of multiple addresses or not. Possible values are: 'Y' = Yes, 'N' = No.
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.33 CORPORATE_APPLICATION_TYPE

This table is used to define the type of corporate applications to be user for a corporate and the controls to be applied or not for each type of application.

Refer to "[Corporate application type](#)" section in UG1063-Corporate management user's guide for more details.

Each column of this table is described in detail in the next section.

4.2.33.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This institution code should already be declared in 'BANK' table.
2 	APPLICATION_TYPE	CHAR	1		Corporate application type identification. Possible values are: 'O' = Ordinary 'P' = Pre-approved 'F' = Fast track
3	WORDING	VARCHAR2	32		Description of the corporate application type.
4	ABRV_WORDING	VARCHAR2	16		Shortened description of the corporate application type.
5	FAST_TRACK_CHECK	CHAR	1		This column specifies if the application is fast track or normal application. Possible values are: 'Y' = Yes, 'N' = No.
6	SINGLE_USER_CHECK	CHAR	1		This column specifies if the review and validation work-flow of the application can be performed by one single user / maker or needs maker & checker. Possible values are: 'Y' = Yes, 'N' = No.
7	USER_CREATE	VARCHAR2	15		ID of the user when record created.
8	DATE_CREATE	DATE	7		Record creation date and time.
9	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
10	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.34 CREDIT_LIMIT_CALCUL_COMBIN

This table is used to define the appropriate credit limit assigned to the income and score and the priority selection. Refer to ["Credit limit calculation"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.34.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					bank code should already be declared in 'BANK' table.
2 	CATALOGUE_PRODUCT_CODE	CHAR	6		Catalog product for which parameters are being defined. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P' (Generic Payment Instrument)
3 	CATALOGUE_PRODUCT_VERSION	VARCHAR2	10		Version of the product being selected. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
4 	PRIORITY_SEQ	NUMBER	8		Priority level for the current credit limit calculation setup.
5	MAX_INCOME	NUMBER	18	3	The maximum income amount associated to the credit limit value.
6	MAX_SCORE	NUMBER	18	3	The maximum score associated to the credit limit value.
7	CREDIT_LIMIT	NUMBER	18	3	Credit limit value assigned based on the maximum income and score.
8	USER_CREATE	VARCHAR2	15		ID of the user when record created.
9	DATE_CREATE	DATE	7		Record creation date and time.
10	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
11	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.35 CREDIT_LIMIT_CALCUL_CRIT

This table is used to define the criteria and corresponding credit limit. Using these criteria, i.e. the customer income and score, the user can define the appropriate credit limit by product and version. Refer to "[Credit limit calculation](#)" section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.35.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	CATALOGUE_PRODUCT_CODE	CHAR	6		Catalog product for which parameters are being defined. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P' (Generic Payment Instrument)
3 	CATALOGUE_PRODUCT_VERSION	VARCHAR2	10		Version of the product being selected. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
4	WORDING	VARCHAR2	32		Description of the parameter being defined.
5	ABRV_WORDING	VARCHAR2	16		Brief description of the parameter being defined.
6	INCOME_CURRENCY	VARCHAR2	3		Currency of the income amount.
7	USER_CREATE	VARCHAR2	15		ID of the user when record created.
8	DATE_CREATE	DATE	7		Record creation date and time.
9	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
10	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.36 ELIGIBLE_DELIVERY

This table is used to define the different eligibility criteria for a valid marketable product of the delivery method.

Each column of this table is described in detail in the next section.

4.2.36.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	PRODUCT_CODE	CHAR	3		Code that uniquely identifies the product for the issuing institution.
3	CATALOGUE_PI_PRODUCT	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P' (Generic Payment Instrument)
4	CATALOGUE_PI_VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P' (Generic Payment Instrument)
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.37 ELIGIBLE_DELIVERY_METHOD

This table is used to setup the different eligibility criteria to be included on the delivery methods of the Institution.

Each column of this table is described in detail in the next section.

4.2.37.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	SEQUENCE_ID	NUMBER	10		Sequence number of the eligible delivery.
2	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
3	PRODUCT_CODE	CHAR	3		Code that uniquely identifies the product for the issuing institution.
4	DELIVERY_METHOD_CODE	CHAR	3		Unique code identifying the delivery method. It must be defined in 'DELIVERY_METHOD' table.
5	ELIGIBILITY_TYPE	CHAR	2		The eligible delivery method available. Possible values are: '...' = Recomendated letter '...' = Courier mail '...' = Ordinary mail '...' = Priority mail '...' = Domestic '...' = Europe '...' = International '...' = Airmail
6	DEFAULT_VALUE	CHAR	1		This column indicates whether the default value is activated for the available method or not. Possible values are: 'Y' = Yes 'N' = No
7	CATALOGUE_PI_PRODUCT	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P' (Generic Payment Instrument)
8	CATALOGUE_PI_VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P' (Generic Payment Instrument)
9	USER_CREATE	VARCHAR2	15		ID of the user when record created.
10	DATE_CREATE	DATE	7		Record creation date and time.
11	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
12	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.38 ELIGIBLE_DELIVERY_SUPPLIER

This table is used to setup the different eligibility criteria to be included on the delivery supplier code of the Institution.

Each column of this table is described in detail in the next section.

4.2.38.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	SEQUENCE_ID	NUMBER	10		Sequence number of the eligible delivery supplier.
2	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
3	PRODUCT_CODE	CHAR	3		Code that uniquely identifies the product for the issuing institution.
4	DELIVERY_SUPPLIER_CODE	CHAR	3		This field defines the unique code identifying the selected delivery supplier. It must be defined in 'DELIVERY_METHOD' table. Note  Selected supplier can be defaulted in case the DEFAULT_VALUE column = 'Y'.
5	ELIGIBILITY_TYPE	CHAR	2		The eligible delivery method available. Possible values are: '...' = Recomendad letter '...' = Courier mail '...' = Ordinary mail '...' = Priority mail '...' = Domestic '...' = Europe '...' = International '...' = Airmail
6	DEFAULT_VALUE	CHAR	1		This column indicates whether the default value is activated for the selected method or not. Possible values are: 'Y' = Yes 'N' = No
7	CATALOGUE_PI_PRODUCT	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P' (Generic Payment Instrument)

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
8	CATALOGUE_PI_VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P' (Generic Payment Instrument)
9	USER_CREATE	VARCHAR2	15		ID of the user when record created.
10	DATE_CREATE	DATE	7		Record creation date and time.
11	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
12	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.39 EPP_ELIGIBILITY

This table is used to define the different eligibility criteria for a valid Loan EPP (Easy payment plan) marketable product of the catalogue. Refer to ["EPP eligibility"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.39.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	PRODUCT_CODE	CHAR	6		Catalog product for which parameters are being defined. As defined in 'CATALOGUE_PRODUCT' table
3 	ELIGIBILITY_INDEX	VARCHAR2	6		The eligibility identification number.
4 	VERSION	VARCHAR2	10		The catalog product version for which parameters are being defined. It must be defined in 'CATALOGUE_PRODUCT' table.
5	DESCRIPTION	VARCHAR2	32		Brief description of the parameter being defined.
6	BRANCH_IN_NOTIN	VARCHAR2	6		Branch value to include or exclude from the product eligibility.
7	GENDER_IN_NOTIN	VARCHAR2	6		Gender value to include or exclude from the product eligibility.
8	OWNER_IN_NOTIN	VARCHAR2	6		Owner value to include or exclude from the product eligibility.
9	PROF_IN_NOTIN	VARCHAR2	6		Prof value to include or exclude from the product eligibility.
10	ACTIVITY_IN_NOTIN	VARCHAR2	6		Activity value to include or exclude from the product eligibility.
11	SEGMENT_IN_NOTIN	VARCHAR2	6		Customer segment value to include or exclude from the product eligibility.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
12	VIP_IN_NOTIN	VARCHAR2	6		VIP value to include or exclude from the product eligibility.
13	MINIMUM_AGE	NUMBER	3		Minimum age to be applied for this product eligibility.
14	MINIMUM_SCORE	NUMBER	15		Minimum score to be applied for this product eligibility.
15	ACC_PRODUCT_IN_NOTIN	VARCHAR2	6		Account product value to include or exclude from the product eligibility.
16	TRANS_CODE_IN_NOTIN	VARCHAR2	6		The transaction code value to include or exclude from the product eligibility.
17	ORIGINE_CODE_IN_NOTIN	VARCHAR2	6		The origin code value to include or exclude from the product eligibility.
18	MCC_IN_NOTIN	VARCHAR2	6		MCC value to include or exclude from the product eligibility.
19	MCC_GRP_IN_NOTIN	VARCHAR2	6		MCC group value to include or exclude from the product eligibility.
20	MERCHANT_IN_NOTIN	VARCHAR2	6		Merchant value to include or exclude from the product eligibility.
21	APP_START_DATE	DATE	7		Date from which the EPP eligibility criteria is valid.
22	APP_END_DATE	DATE	7		Validity end date.
23	USER_CREATE	VARCHAR2	15		ID of the user when record created.
24	DATE_CREATE	DATE	7		Record creation date and time.
25	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
26	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.40 EPP_ELIGIBL_ACC_PRODUCT

This table is used to lists the value of the Account product to be included or excluded from the EPP (Easy payment plan). Refer to ["EPP eligibility"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.40.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This code should already be declared in 'BANK' table.
2 	PRODUCT_CODE	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
3 	ELIGIBILITY_INDEX	VARCHAR2	6		The eligibility identification number.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
4	VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
5 	ACC_PRODUCT_CODE	CHAR	6		Code identifying the Account product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.41 EPP_ELIGIBL_ACTIVITY

This table is used to lists the value of the Activity to be included or excluded from the EPP (Easy payment plan). Refer to ["EPP eligibility"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.41.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This code should already be declared in 'BANK' table.
2 	PRODUCT_CODE	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
3 	ELIGIBILITY_INDEX	VARCHAR2	6		The eligibility identification number.
4 	VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
5 	ACTIVITY_CODE	CHAR	4		Client's activity code. It helps to categorize clients based on their professional occupation. It must be present in the 'CLIENT_ACTIVITY_SET' table.
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.42 EPP_ELIGIBL_BRANCH

This table is used to lists the value of the Branch to be included or excluded from the EPP (Easy payment plan). Refer to ["EPP eligibility"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.42.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This institution code should already be declared in 'BANK' table.
2 	PRODUCT_CODE	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
3 	BRANCH_CODE	CHAR	6		Branch within the issuer institution. This code must be defined in 'BRANCH' table.
4 	ELIGIBILITY_INDEX	VARCHAR2	6		The eligibility identification number.
5 	VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.43 EPP_ELIGIBL_GENDER

This table is used to lists the value of the Gender to be included or excluded from the EPP (Easy payment plan). Refer to ["EPP eligibility"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.43.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	PRODUCT_CODE	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
3 	GENDER	CHAR	1		Gender of the client. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'M' = Male 'F' = Female 'N' = Not applicable (For Company & Corporate)
4	ELIGIBILITY_INDEX	VARCHAR2	6		The eligibility identification number.
5	VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.44 EPP_ELIGIBL_MCC

This table is used to lists the value of the MCC to be included or excluded from the EPP (Easy payment plan). Refer to ["EPP eligibility"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.44.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This institution code should already be declared in 'BANK' table.
2	PRODUCT_CODE	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
3	ELIGIBILITY_INDEX	VARCHAR2	6		The eligibility identification number.
4	VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
5	MCC_CODE	CHAR	4		Merchant category code applicable for the parameters being defined. It must be defined in 'MCC' table.
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.45 EPP_ELIGIBL_MCC_GRP

This table is used to lists the value of the Merchant category group to be included or excluded from the EPP (Easy payment plan). Refer to ["EPP eligibility"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.45.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This institution code should already be declared in 'BANK' table.
2 	PRODUCT_CODE	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
3 	ELIGIBILITY_INDEX	VARCHAR2	6		The eligibility identification number.
4 	VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
5 	MCC_GROUP	CHAR	4		MCC group code of the parameter being defined. This field must contain a valid value that should be previously defined in the 'MCC_RANGE' table.
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.46 EPP_ELIGIBL_MERCHANT

This table is used to lists the value of the Merchant to be included or excluded from the EPP (Easy payment plan). Refer to ["EPP eligibility"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.46.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This institution code should already be declared in 'BANK' table.
2 	PRODUCT_CODE	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
3 	ELIGIBILITY_INDEX	VARCHAR2	6		The eligibility identification number.
4 	VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
5 	MERCHANT_NUMBER	VARCHAR2	15		Merchant code identifying the parameter being defined. It should be defined in 'MERCHANT' table.
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.47 EPP_ELIGIBL_ORIG_CODE

This table is used to lists the value of the Origin code to be included or excluded from the EPP (Easy payment plan). Refer to ["EPP eligibility"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.47.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	PRODUCT_CODE	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
3 	ELIGIBILITY_INDEX	VARCHAR2	6		The eligibility identification number.
4 	VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
5 	ORIGINE_CODE	CHAR	1		The origin code of the parameter being defined. Possible values are: '0' = ONUS card / local merchant '1' = ONUS card / local other bank merchant '2' = ONUS card / foreign merchant '3' = Local other bank card / local merchant '4' = Foreign card / local merchant.
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.48 EPP_ELIGIBL_OWNER

This table is used to lists the value of the Owner to be included or excluded from the EPP (Easy payment plan). Refer to ["EPP eligibility"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.48.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This code should already be declared in 'BANK' table.
2 	PRODUCT_CODE	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
3 	ELIGIBILITY_INDEX	VARCHAR2	6		Eligibility identification number.
4 	VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
5 	OWNER_CODE	CHAR	2		This is to define the customer type. This owner code must be defined in 'OWNER_LIST' table
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.49 EPP_ELIGIBL_PROF

This table is used to lists the value of the Socio-prof to be included or excluded from the EPP (Easy payment plan). Refer to ["EPP eligibility"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.49.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					institution code should already be declared in 'BANK' table.
2 	PRODUCT_CODE	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
3 	SOCIO_PROF_CODE	CHAR	4		The socio-professional code of the client. It is used for the segmentation of clients based on such criteria as job industry, and professional qualification. It must be present in the 'SOCIOPROF_LIST' table.
4 	VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
5 	ELIGIBILITY_INDEX	VARCHAR2	6		The eligibility identification number.
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.50 EPP_ELIGIBL_SEGMENT

This table is used to lists the value of the Customer segment to be included or excluded from the EPP (Easy payment plan). Refer to ["EPP eligibility"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.50.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	PRODUCT_CODE	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
3 	CUSTOMER_SEGMENT	CHAR	3		Client's customer segment. This code must be defined in 'CUSTOMER_SEGMENT' table
4 	VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
5 	ELIGIBILITY_INDEX	VARCHAR2	6		Eligibility identification number.
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.51 EPP_ELIGIBL_TRANS_CODE

This table is used to lists the value of the Transaction code to be included or excluded from the EPP (Easy payment plan). Refer to ["EPP eligibility"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.51.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	PRODUCT_CODE	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
3 	TRANSACTION_CODE	CHAR	2		The appropriate transaction code identifying the type of the transaction. It should be defined in 'TRANSACTIONS_DEFINITION' table.
4 	ELIGIBILITY_INDEX	VARCHAR2	6		The eligibility identification number.
5 	VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.52 EPP_ELIGIBL_VIP

This table is used to lists the value of the VIP to be included or excluded from the EPP (Easy payment plan). Refer to ["EPP eligibility"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.52.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					bank code should already be declared in 'BANK' table.
2 	PRODUCT_CODE	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
3 	ELIGIBILITY_INDEX	VARCHAR2	6		The eligibility identification number.
4 	VERSION	VARCHAR2	10		This field indicates the version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
5 	VIP_LEVEL	CHAR	1		VIP level. It must be defined in 'VIP_LIST' table.
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.53 MAN_DOCUMENTS_APPTYPE_PARAM

This table is used to lists the value of the Application type to be included or excluded from the Mandatory documents. Refer to ["Mandatory documents"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.53.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This institution code should already be declared in 'BANK' table.
2 	RULE_INDEX	VARCHAR2	6		Unique code identifying the current rule.
3 	APPLICATION_TYPE	CHAR	1		Unique code identifying the application type.
4	USER_CREATE	VARCHAR2	15		ID of the user when record created.
5	DATE_CREATE	DATE	7		Record creation date and time.
6	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
7	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.54 MAN_DOCUMENTS_LIST_PARAM

This table is used to lists the value of the Job title to be included or excluded from the Mandatory documents. Refer to ["Mandatory documents"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.54.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This institution code should already be declared in 'BANK' table.
2 	RULE_INDEX	VARCHAR2	6		Unique code identifying the current rule.
3 	DOCUMENT_CODE	CHAR	2		The legal identification document code identifying the client. If populated, this code must be defined in 'DOCUMENT_LIST' tables.
4	USER_CREATE	VARCHAR2	15		ID of the user when record created.
5	DATE_CREATE	DATE	7		Record creation date and time.
6	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
7	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.55 MAN_DOCUMENTS_OWNER_PARAM

This table is used to lists the value of the Owner to be included or excluded from the Mandatory documents. Refer to "[Mandatory documents](#)" section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.55.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This institution code should already be declared in 'BANK' table.
2 	RULE_INDEX	VARCHAR2	6		Unique code identifying the current rule.
3 	OWNER_CODE	CHAR	2		This is to define the customer type. This owner code must be defined in 'OWNER_LIST' table
4	USER_CREATE	VARCHAR2	15		ID of the user when record created.
5	DATE_CREATE	DATE	7		Record creation date and time.
6	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
7	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.56 MAN_DOCUMENTS_PARAM

This table is used to configure mandatory documents based on the combination of Customer type, Job title and the Application type. Refer to ["Mandatory documents"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.56.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This institution code should already be declared in 'BANK' table.
2 	RULE_INDEX	VARCHAR2	6		Unique code identifying the current rule.
3	DESCRIPTION	VARCHAR2	32		Brief description of the parameter being defined.
4	SOCIOPR_IN_NOTIN	VARCHAR2	6		The prof value to include or exclude from the mandatory documents.
5	APPTYPE_IN_NOTIN	VARCHAR2	6		The application value to include or exclude from the mandatory documents.
6	OWNER_IN_NOTIN	VARCHAR2	6		The owner value to include or exclude from the mandatory documents.
7	USER_CREATE	VARCHAR2	15		ID of the user when record created.
8	DATE_CREATE	DATE	7		Record creation date and time.
9	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
10	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.57 MAN_DOCUMENTS_SOCIO_PARAM

This table is used to lists the value of the Socio-prof to be included or excluded from the Mandatory documents. Refer to ["Mandatory documents"](#) section in UG 1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.57.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This institution code should already be declared in 'BANK' table.
2 	RULE_INDEX	VARCHAR2	6		Unique code identifying the current rule.
3 	SOCIO_PROF_CODE	CHAR	4		Socio-professional code of the client. It is used for the segmentation of clients based on such criteria as job industry, and professional qualification. It must

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					be present in the 'SOCIOPROF_LIST' table.
4	USER_CREATE	VARCHAR2	15		ID of the user when record created.
5	DATE_CREATE	DATE	7		Record creation date and time.
6	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
7	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.58 MARKUP_CALCUL

This table is used to setup the conversion fees to apply on the transactions performed by the PAN holder.

Refer to "[Transaction conversion markup group](#)" section in UG1019-Catalogue user guide for more details.

Each column of this table is described in detail in the next section.

4.2.58.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which markup fee calculation parameters are being defined. It should be defined in the 'BANK' table.
2 	MARKUP_FEE_INDEX	CHAR	3		Identification of the mark-up fee index. It should be defined in 'MARKUP_INDEX' table.
3 	MARKUP_ID_SEQ	CHAR	10		Sequence identification of the markup fee.
4	DESCRIPTION	VARCHAR2	32		Markup description.
5	CURRENCY_NOTIN	VARCHAR2	6		List of currencies that can be included in or excluded from the markup fee calculation. Possible values are: 'IN' = Included, 'NOT IN' = Excluded.
6	DEFAULT_BUYING_RATE	NUMBER	9	6	The buying rate that will be applied on the converted transaction amount.
7	DEFAULT_BUYING_FIX	NUMBER	18	3	The buying amount of fixed fee to be levied on the converted transaction amount.
8	DEFAULT_BUYING_MIN	NUMBER	18	3	The buying minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
9	DEFAULT_BUYING_MAX	NUMBER	18	3	The buying maximum amount of markup fees to charge in case the fees calculation result is greater than this maximum amount.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
10	DEFAULT_BUYING_GRACE	NUMBER	18	3	The buying Grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
11	DEFAULT_SELLING_RATE	NUMBER	9	6	The selling rate that will be applied on the converted transaction amount.
12	DEFAULT_SELLING_FIX	NUMBER	18	3	The selling amount of fixed fee to be levied on the converted transaction amount.
13	DEFAULT_SELLING_MIN	NUMBER	18	3	The selling minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
14	DEFAULT_SELLING_MAX	NUMBER	18	3	The selling maximum amount of markup fees to charge in case the fees calculation result is greater than this maximum amount.
15	DEFAULT_SELLING_GRACE	NUMBER	18	3	The selling Grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
16	CASH_BUYING_RATE	NUMBER	9	6	The cash buying rate that will be applied on the converted transaction amount.
17	CASH_BUYING_FIX	NUMBER	18	3	The cash buying amount of fixed fee to be levied on the converted transaction amount.
18	CASH_BUYING_MIN	NUMBER	18	3	The cash buying minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
19	CASH_BUYING_MAX	NUMBER	18	3	The cash buying maximum amount of markup fees to charge in case the fees calculation result is greater than this maximum amount.
20	CASH_BUYING_GRACE	NUMBER	18	3	The cash buying Grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
21	CASH_SELLING_RATE	NUMBER	9	6	The cash selling rate that will be applied on the converted transaction amount.
22	CASH_SELLING_FIX	NUMBER	18	3	The cash selling amount of fixed fee to be levied on the converted transaction amount.
23	CASH_SELLING_MIN	NUMBER	18	3	The cash selling minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
24	CASH_SELLING_MAX	NUMBER	18	3	The selling maximum amount of markup fees to charge in case the fees calculation result is greater than this maximum amount.
25	CASH_SELLING_GRACE	NUMBER	18	3	The cash selling grace amount, i.e. the amount below which no mark-up fee

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					would be charged if the fees calculation result is less than that grace amount.
26	CENTRAL_BANK_BUYING_RATE	NUMBER	9	6	The central bank buying rate that will be applied on the converted transaction amount.
27	CENTRAL_BANK_BUYING_FIX	NUMBER	18	3	The central bank buying amount of fixed fee to be levied on the converted transaction amount.
28	CENTRAL_BANK_BUYING_MIN	NUMBER	18	3	The central bank buying minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
29	CENTRAL_BANK_BUYING_MAX	NUMBER	18	3	The central bank buying maximum amount of markup fees to charge in case the fees calculation result is greater than this maximum amount.
30	CENTRAL_BANK_BUYING_GRACE	NUMBER	18	3	The central bank buying grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
31	CENTRAL_BANK_SELLING_RATE	NUMBER	9	6	The central bank selling rate that will be applied on the converted transaction amount.
32	CENTRAL_BANK_SELLING_FIX	NUMBER	18	3	The central bank selling amount of fixed fee to be levied on the converted transaction amount.
33	CENTRAL_BANK_SELLING_MIN	NUMBER	18	3	The central bank selling minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
34	CENTRAL_BANK_SELLING_MAX	NUMBER	18	3	The central bank selling maximum amount of markup fees to charge in case the fees calculation result is greater than this maximum amount.
35	CENTRAL_BANK_SELLING_GRACE	NUMBER	18	3	The central bank selling grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
36	INTER_TRANSFER_BUYING_RATE	NUMBER	9	6	The account transfer buying rate that will be applied on the converted transaction amount.
37	INTER_TRANSFER_BUYING_FIX	NUMBER	18	3	The account transfer buying amount of fixed fee to be levied on the converted transaction amount.
38	INTER_TRANSFER_BUYING_MIN	NUMBER	18	3	The account transfer buying minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
39	INTER_TRANSFER_BUYING_MAX	NUMBER	18	3	The account transfer buying maximum amount of markup fees to charge in case the fees calculation result is greater than this maximum amount.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
40	INTER_TRANSFER_BUYING_GRACE	NUMBER	18	3	The account transfer buying grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
41	INTER_TRANSFER_SELLING_RATE	NUMBER	9	6	The account transfer selling rate that will be applied on the converted transaction amount.
42	INTER_TRANSFER_SELLING_FIX	NUMBER	18	3	The account transfer selling amount of fixed fee to be levied on the converted transaction amount.
43	INTER_TRANSFER_SELLING_MIN	NUMBER	18	3	The account transfer selling minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
44	INTER_TRANSFER_SELLING_MAX	NUMBER	18	3	The account transfer selling maximum amount of markup fees to charge in case the fees calculation result is greater than this maximum amount.
45	INTER_TRANSFER_SELLING_GRACE	NUMBER	18	3	The account transfer selling grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
46	SPECIAL_BUYING_RATE	NUMBER	9	6	Individual buying rate that will be applied on the converted transaction amount.
47	SPECIAL_BUYING_FIX	NUMBER	18	3	Individual buying amount of fixed fee to be levied on the converted transaction amount.
48	SPECIAL_BUYING_MIN	NUMBER	18	3	Individual buying minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
49	SPECIAL_BUYING_MAX	NUMBER	18	3	Individual buying maximum amount of markup fees to charge in case the fees calculation result is greater than this maximum amount.
50	SPECIAL_BUYING_GRACE	NUMBER	18	3	Individual buying grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
51	SPECIAL_SELLING_RATE	NUMBER	9	6	Individual selling rate that will be applied on the converted transaction amount.
52	SPECIAL_SELLING_FIX	NUMBER	18	3	Individual selling amount of fixed fee to be levied on the converted transaction amount.
53	SPECIAL_SELLING_MIN	NUMBER	18	3	Individual selling minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
54	SPECIAL_SELLING_MAX	NUMBER	18	3	Individual selling maximum amount of markup fees to charge in case the fees calculation result is greater than this maximum amount.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
55	SPECIAL_SELLING_GRACE	NUMBER	18	3	Individual selling grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
56	RULE_IDENTIFIER	CHAR	12		The fee calculation rule as follow: 'STD' = Standard, 'MIN' = Minimum, 'MAX' = Maximum. Note  Refer to "PowerCARD's Calculation Rules" section for detailed description of calculation rule options.
57	ROUNDED_METHOD_IDENTIFIER	CHAR	4		This is to indicate the rounding method to be applied on the VISA interchange fee calculation result. Possible values are: 'H' = High value, 'L' = 'Low value, 'N' = Normal, 'E' = Exponent (Default standard method). Note  Refer to "Rounded methods" section for detailed description of rounded methods.
58	THRESHOLD_AMOUNT	NUMBER	18	3	This is the transaction threshold amount under which the system does not undergo the interchange fee calculation and the result is set to zero.
59	COUNTRY_VERIFICATION	CHAR	1		This flag indicates the address county verification. Possible values are: 'Y' = Yes, 'N' = No.
60	USER_CREATE	VARCHAR2	15		ID of the user when record created.
61	DATE_CREATE	DATE	7		Record creation date and time.
62	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
63	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.59 MARKUP_ELLIGIBLE_CURRENCIES

This table stores the currencies for which the markup fee index is eligible. The same markup fee calculation logic will apply for all the currencies defined in this table within the markup fee index. Refer to "[Transaction conversion markup group](#)" section in UG1019-Catalogue user guide for more details.

Each column of this table is described in detail in the next section.

4.2.59.1 Columns description

Seq.	Column Name	Data type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which parameters are being defined. It should be defined in the 'BANK' table.
2 	MARKUP_FEE_INDEX	CHAR	3		Identification of the mark-up fee index. It should be defined in 'MARKUP_INDEX' table.
3 	MARKUP_ID_SEQ	CHAR	10		Sequence identification of the markup fee. It should be defined in 'MARKUP_CALCUL' table.
4 	CURRENCY_CODE	CHAR	3		List of currencies that can be included in or excluded from the markup fee calculation. Possible values are: 'I' = included, 'E' = Excluded.
5	USER_CREATE	VARCHAR2	15		Used for audit trail purposes in case a user manually creates a record in the staging table.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.60 ONLINE_APP_DEDUP_COMBIN

This table is used to define the application of deduplication criteria for the application combination. Refer to UG1022-Boarding user guide.

Each column of this table is described in detail in the next section.

4.2.60.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This institution code should already be declared in 'BANK' table.
2 	CRITERIA_CODE	CHAR	3		Unique code identifying the deduplication criterion.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
3 	SEQUENCE_NBR	NUMBER			Sequence number of the parameter being defined.
4	DEDUP_SOURCE_TABLE	VARCHAR2	30		Name of the source table deduplicated.
5	DEDUP_SOURCE_FIELD	VARCHAR2	30		Name of the source field deduplicated.
6	DEDUP_DESTINATION_TABLE	VARCHAR2	30		Name of the destination table deduplicated.
7	DEDUP_DESTINATION_FIELD	VARCHAR2	30		Name of the destination field deduplicated.
8	USER_CREATE	VARCHAR2	15		ID of the user when record created.
9	DATE_CREATE	DATE	7		Record creation date and time.
10	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
11	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.61 ONLINE_APP_DEDUP_CRIT

This table is used to define deduplication criteria for the application. Refer to "[Deduplication control](#)" section in UG1022-Boarding user guide.

Each column of this table is described in detail in the next section.

4.2.61.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This institution code should already be declared in 'BANK' table.
2	CRITERIA_CODE	CHAR	3		Unique code identifying the deduplication criterion.
3	ABRV_WORDING	VARCHAR2	20		Shortened description used for information, for reporting or on other screens.
4	WORDING	VARCHAR2	80		Description of the parameter being defined.
5	ACTIVE	CHAR	1		The status of the current deduplication criterion. Possible values are: 'Y' = Active 'N' = Inactive
6	DEDUP_SOURCE_TABLE	VARCHAR2	30		Name of the source table deduplicated.
7	DEDUP_DESTINATION_TABLE	VARCHAR2	30		Name of the destination table deduplicated.
8	PRIMARY_SUPPLY	CHAR	1		Primary supply flag
9	USER_CREATE	VARCHAR2	15		ID of the user when record created.
10	DATE_CREATE	DATE	7		Record creation date and time.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
11	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
12	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.62 POLICY_COMBINATION

This table is used to define the different criteria of policy controls. Refer to ["Policy controls"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.62.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Financial institution of the parameter being defined. It should be defined in the 'BANK' table.
2 	POLICY_CODE	CHAR	3		Unique identification number of the policy criteria. As defined in 'POLICY_CRITERIA' table.
3 	SEQUENCE_NBR	NUMBER			The sequence number of the parameter being defined.
4	SOURCE_FIELD	VARCHAR2	30		Criterion name to be checked in the current policy criteria. Possible values are: • Age, • Branch, • Customer segment, • Job title, • Customer type, • Activity, • VIP, • Income, • Score, • Nationality, • Birth country, • Birth city, • Pan type (Supplementary, Primary)
5	FIRST_VALUE	VARCHAR2	30		The first value to applied on the operator.
6	SECOND_VALUE	VARCHAR2	30		The second value to applied on the operator.
7	LOGICAL_OPERATION	VARCHAR2	8		The operation value to apply or to compare on the current criteria. Possible values are: • > • >= • < • <=

Seq.	Column Name	Data Type	Len	Sc	Column Description
					= <> - Between - Null - Not null
8	USER_CREATE	VARCHAR2	15		ID of the user when record created.
9	DATE_CREATE	DATE	7		Record creation date and time.
10	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
11	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.63 POLICY_CRITERIA

This table is defined by the institution in order to control the application submitted for a given customer. The institution can define the low age, income, birth country, etc... as policy rules for each marketable product. Refer to ["Policy controls"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.63.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Financial institution of the parameter being defined. It should be defined in the 'BANK' table.
2 	POLICY_CODE	CHAR	3		Unique identification number of the policy criteria.
3	WORDING	VARCHAR2	32		Description of the parameter being defined.
4	ABRV_WORDING	VARCHAR2	16		Shortened description used for information, for reporting or on other screens.
5	CATALOGUE_PRODUCT_CODE	CHAR	6		The catalogue product for which parameters are being defined. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with PRODUCT_TYPE = 'P' (Payment instrument)
6	CATALOGUE_PRODUCT_VERSION	VARCHAR2	10		Version of the product being selected. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with PRODUCT_TYPE = 'P' (Payment instrument)
7	ACTIVE_INACTIVE	CHAR	1		Status of the current policy criteria. Possible values are: 'A' = Active , 'I' = Inactive.

Seq.	Column Name	Data Type	Len	Sc	Column Description
8	PASS_FAIL	CHAR	1		This column, indicates whether the policy control should failed or pass when the defined criteria are matching the application. Possible values are: 'Y' = Pass, 'N' = Fail.
9	USER_CREATE	VARCHAR2	15		ID of the user when record created.
10	DATE_CREATE	DATE	7		Record creation date and time.
11	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
12	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.64 PACK_ACCOUNTS_LINK

This table is used to view and maintain the link between the Account(s) contract elements and the Payment instrument(s) contract elements.

Refer to ["Account link"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.64.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	ENTITY_CODE	CHAR	2		Type of entity under process.
2 	ENTITY_ID	VARCHAR2	24		The identifier of the entity under process.
3 	ACCOUNT_SEQUENCE	NUMBER	2		Sequence number of the primary account linked to the pack under process.
4	ACCOUNT_BANK_CODE	CHAR	6		Billing account financial institution. It should be defined in 'BANK' table.
5	ACCOUNT_BRANCH_CODE	CHAR	6		Bank branch related to the billing account bank. It should be defined in 'BRANCH' table.
6 	PACK_CODE	CHAR	6		Identification number of the pack.
7	ROUTING_NUMBER	VARCHAR2	9		This column indicates the routing number.
8	ACCOUNT_NUMBER	VARCHAR2	24		The banking account number.
9	ACCOUNT_TYPE	CHAR	2		Type of the posting account destination. Possible values are: '00' = Billing account, '10' = Saving account, '20' = Checking account, '30' = Loan account,

Seq.	Column Name	Data Type	Len	Sc	Column Description
					'40' = Universal account, '50' = Investment account, '62' = Spending power account, '80' = Merchant account, '81' = Chain account, '90' = Shadow account, '91' = Instalment loan account, '92' = Real estate loan account, '93' = Loyalty account.
10	ACCOUNT_CURRENCY_CODE	CHAR	3		The bank account currency.
11	ACCOUNT_STATUS	CHAR	1		Account status. Possible values are: 'N' = Normal, 'C' = Cancelled, 'S' = Suspend, 'W' = Wait for validation, 'V' = To be sent for validation, 'R' = Rejected.
12	ACCOUNT_STATUS_REASON	CHAR	2		Current status reason of the account.
13	SETTLEMENT_MODE	CHAR	1		Settlement mode of the pack. Possible values are: 'B' = Settlement by Balance, 'T' = Settlement by Transaction, 'N' = Normal settlement.
14	POSTING_USAGE_FLAG	CHAR	1		This column indicates whether the linked account is used for posting transactions or not. Possible values are: 'Y' = Yes 'N' = No  Note The posting usage is used especially for accounts linked to the PAN entity.
15	OPERATIONS_CHOICE_USAGE_FLAG	CHAR	1		This field is reserved for future use.
16	ADDRESS_CODE	CHAR	2		In case of Client or Merchant entity, this is to indicate entity Address code associated to the account.
17	OPENING_DATE	DATE	7		The account opening date.
18	CLOSING_DATE	DATE	7		The account closing date.

Seq.	Column Name	Data Type	Len	Sc	Column Description
19	STATUS_DATE	DATE	7		Date when the current status was assigned to this Institution.
20	DIRECT_DEBIT_REFERENCE_NBR	VARCHAR2	16		Direct debit reference number in case this account is assigned to a direct debit.
21	ACCOUNT_BANK_NAME	VARCHAR2	32		Full name of the bank that manages the account under process.
22	ACCOUNT_BANK_CITY	VARCHAR2	30		City name of the bank that manages the account under process. It should be previously defined in the 'CITY' table.
23	ACCOUNT_BANK_COUNTRY	VARCHAR2	32		Country name of the bank that manages the account under process. It should be previously defined in the 'COUNTRY' table.
24	ACCOUNT_CONVERSION_IN	CHAR	1		This is a flag indicating whether the account supports the currency conversion or not. Possible values are: 'Y' = Can support currency conversion, 'N' = Cannot support currency conversion.
25	ACCOUNT_SPLIT_TRANSFER	CHAR	1		This is a flag indicating whether the account can be used for split transfer or not. Possible values are: 'Y' = Can be used for split transfer, 'N' = Cannot be used split transfer.
26	PERCENTAGE_TRANSFER	NUMBER	9	3	In case the above ACCOUNT_SPLIT_TRANSFER flag is set to 'Y', this column indicates the percentage of amount to be transferred the first time.
27	DEFAULT_FLAG	CHAR	1		This is a flag indicating the default value of the account type. Possible values are: 'Y' = Primary account, 'N' = Secondary account, 'H' = Hierarchical account.
28	REMITTANCE_GROUPING	CHAR	1		This is a flag indicating whether the account transfer should be done for all remittances grouped or not. Possible values are: (for Remittances) 'D' = Detail (Remittance by Remittance), 'E' = Aggregate by contract element, 'M' = Aggregate by merchant, 'C' = Aggregate per merchant parent chain,

Seq.	Column Name	Data Type	Len	Sc	Column Description
					'A' = Aggregate all remittance.
29	FEES_GROUPING	CHAR	1		This is a flag indicating whether the account transfer should be done for all fees grouped or not. Possible values are: (for Fees) 'D' = Detail (Remittance by Remittance), 'E' = Aggregate by contract element, 'M' = Aggregate by merchant, 'C' = Aggregate per merchant parent chain, 'A' = Aggregate all remittance
30	CHARGEBACK_GROUPING	CHAR	1		This is a flag indicating whether the account transfer should be done for all chargeback grouped or not. Possible values are: (for Chargebacks) 'D' = Detail (Remittance by Remittance), 'E' = Aggregate by contract element, 'M' = Aggregate by merchant, 'C' = Aggregate per merchant parent chain, 'A' = Aggregate all remittance.
31	BILLIABLE_ELMNT_GROUPING	CHAR	1		This is a flag indicating whether the account transfer should be done for all billing elements grouped or not. Possible values are: (for billable elements) 'D' = Detail (Remittance by Remittance), 'E' = Aggregate by contract element, 'M' = Aggregate by merchant, 'C' = Aggregate per merchant parent chain, 'A' = Aggregate all remittance
32	IBAN	VARCHAR2	34		PAN holder banking account number in IBAN format.
33	CLOSING_RAISON	VARCHAR2	2		In case of closed account, this column indicates the account closing reason. The closing reason should be previously defined in the 'STATUS_REASON_LIST'.
34	PRIVATE_DATA_1	VARCHAR2	64		This field is reserved for future use.
35	PRIVATE_DATA_2	VARCHAR2	64		This field is reserved for future use.
36	PRIVATE_DATA_3	NUMBER	18	3	This field is reserved for future use.
37	PRIVATE_DATA_4	NUMBER	18	3	This field is reserved for future use.
38	PRIVATE_DATA_5	DATE	7		This field is reserved for future use.

Seq.	Column Name	Data Type	Len	Sc	Column Description
39	PRIVATE_DATA_6	DATE	7		This field is reserved for future use.
40	REF_EXCHANGE	VARCHAR2	20		Boarding pack link exchange reference used for data exchange with other systems.
41	DEFAULT_ACCOUNT	CHAR	1		Default banking account in case of multiple accounts. Possible values are: 'Y' = Yes 'N' = No
42	SWIFT_CODE	VARCHAR2	11		SWIFT code, it is an international Institution code that identifies particular banks worldwide.
43	PAN_FROM	CHAR	1		Entity to be associated to the PAN Possible values are: 'E' = Existing 'C' = Contract
44	ACCOUNT_FROM	CHAR	1		Destination account. Possible values are: 'E' = Existing 'C' = Contract
45	USER_CREATE	VARCHAR2	15		ID of the user when record created.
46	DATE_CREATE	DATE	7		Record creation date and time.
47	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
48	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.2.65 PACK_ISS_POSTING_RULES

This table is used to add several rules for posting (currency, transaction category...) for each account link been added manually. Refer to ["Posting rules"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.2.65.1 Columns description

Seq.	Column Name	Data type	Len.	Sc.	Column Description
1 	CARD_NUMBER	VARCHAR2	24		PAN identification number. It should be defined in 'CARD' table.
2 	SEQUENCE_ID	NUMBER	10		Sequence number identifying the issuer transactions posting rule criteria.
3	BANK_CODE	CHAR	6		Financial institution code concerned by the issuer transactions posting rule criteria parameters. It should be defined in the 'BANK' table.
4	DESCRIPTION	VARCHAR2	64		Short description of the posting rule.
5 	PACK_CODE	CHAR	6		Pack product type as criterion for the transaction posting rule.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					Possible values are: 'CC' = Charge, 'CR' = Credit, 'PP' = Prepaid, 'DC' = Debit.  Note Null value indicates that all pack product types are concerned.
6	MCC	CHAR	4		Merchant Category Code as criterion for the pack posting rule. It should be defined in the 'MCC' table.  Note Null value indicates that all MCCs are applicable.
7	MCC_GROUP	CHAR	4		MCC Group code as criterion for the pack posting rule. It should be defined in 'MCC_GROUP' table.  Note Null value indicates that all MCC groups are applicable.
8	TRANSACTION_CODE	CHAR	2		The transaction code as criterion for the pack posting rule. It should be defined in 'TRANSACTIONS_DEFINITION' table.  Note Null value indicates that all transaction codes are applicable.
9	TRANSACTION_CATEGORY	NUMBER	2		This is the transaction category as criterion for the pack posting rule. Possible values are: '01' = Airline, '02' = Lodging, '03' = Rent car, '04' = Restaurant, '05' = Medical, '06' = Mail order, '07' = Purchase, '09' = Withdrawal, '10' = Quasi cash, '11' = Cash,

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					'12' = Transfer, '13' = E-commerce, '14' = T&E. Note  Null value indicates that all transaction categories are applicable.
10	TRANSACTION_CURRENCY	CHAR	3		This is the Transaction currency applicable as criterion for the pack posting rule. It should be defined in 'CURRENCY_TABLE' table. Note  Null value indicates that all currencies are applicable.
11	ACQUIRER_COUNTRY_CODE	CHAR	3		This is the Acquirer country code as criterion for the pack posting rule. It should be defined in the 'COUNTRY' table. Note  Null value indicates that all currencies are applicable
12	CURRENCY_FLAG	CHAR	1		It is to indicate the transaction currency (Local or foreign currency) as a criterion for the pack posting rule (Cross border territory). Possible values are: 'F' = Foreign currency, 'L' = Local currency. Note  Null value indicates that both Local/foreign currency indicator values are applicable.
13	COUNTRY_FLAG	CHAR	1		The country territory indicator applicable as criterion for the pack posting rule. It is to indicate whether the transaction country is a Local or foreign country. Possible values are: 'F' = Foreign country, 'L' = Local country.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					 Note Null value indicates that both Foreign/local country values are applicable.
14	LIST_PRODUCT_CODE	VARCHAR2	15		This column is not used in V3.5.
15	POSTING_DESTINATION	CHAR	2		Posting account destination Possible values are: 'CH' = Card / Account, 'CO' = Corporate.
16	CORPORATE_LEVEL	NUMBER	2		The corporate posting level when POSTING_DESTINATION is set to 'CO'.
17	POSTING_ACCOUNT_TYPE	CHAR	2		The type of the posting account destination. It should be defined in the 'ACCOUNT_TYPE_LIST' table.
18	POSTING_ACCOUNT_SEQUENCE	NUMBER	2		Sequence of the posting account for payment instruments with multiple accounts. For payment instruments with single account, the sequence default value is '00'.
19	DESTINATION_ACCOUNT_NBR	VARCHAR2	24		Posting account destination identification number.
20	PAN_FROM	CHAR	1		Pack to be associated to the PAN Possible values are: 'E' = Existing 'C' = Contract
21	ACCOUNT_FROM	CHAR	1		Destination account. Possible values are: 'E' = Existing 'C' = Contract
22	USER_CREATE	VARCHAR2	15		ID of the user when record created.
23	DATE_CREATE	DATE	7		Record creation date and time.
24	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
25	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3 Operation tables

4.3.1 ACCOUNTS_LINK_BOARDING

This table is used to view and maintain the link between the Account(s) contract elements and the Payment instrument(s) contract elements.

Refer to ["Account link"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.3.1.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	ENTITY_CODE	CHAR	2		The type of entity under process.
2 	ENTITY_ID	VARCHAR2	24		Identifier of the entity under process.
3 	ACCOUNT_SEQUENCE	NUMBER	2		Sequence number of the primary account linked to the boarding under process.
4	ACCOUNT_BANK_CODE	CHAR	6		Billing account financial institution. It should be defined in 'BANK' table.
5	ACCOUNT_BRANCH_CODE	CHAR	6		Branch institution related to the billing account institution. It should be defined in 'BRANCH' table.
6	ROUTING_NUMBER	VARCHAR2	9		Routing number.
7	ACCOUNT_NUMBER	VARCHAR2	24		Banking account number.
8	ACCOUNT_TYPE	CHAR	2		The type of the posting account destination. Possible values are: '00' = Billing account, '10' = Saving account, '20' = Checking account, '30' = Loan account, '40' = Universal account, '50' = Investment account, '62' = Spending power account, '80' = Merchant account, '81' = Chain account, '90' = Shadow account, '91' = Installment loan account, '92' = Real estate loan account, '93' = Loyalty account.
9	ACCOUNT_CURRENCY_CODE	CHAR	3		Account institution currency.
10	ACCOUNT_STATUS	CHAR	1		Account status. Possible values are: 'N' = Normal, 'C' = Canceled, 'S' = Suspend, 'W' = Wait for validation, 'V' = To be sent for validation, 'R' = Rejected.
11	ACCOUNT_STATUS_REASON	CHAR	2		Current status reason of the account.
12	SETTLEMENT_MODE	CHAR	1		Settlement mode of the pack. Possible values are: 'B' = Settlement by Balance,

Seq.	Column Name	Data Type	Len	Sc	Column Description
					'T' = Settlement by Transaction, 'N' = Normal settlement.
13	POSTING_USAGE_FLAG	CHAR	1		This column indicates whether the linked account is used for posting transactions or not. Possible values are: 'Y' = Yes 'N' = No  Note The posting usage is used especially for accounts linked to the PAN entity.
14	OPERATIONS_CHOICE_USAGE_FLAG	CHAR	1		This field is reserved for future use.
15	ADDRESS_CODE	CHAR	2		In case of Client or Merchant entity, this is to indicate entity Address code associated to the account.
16	OPENING_DATE	DATE	7		The account opening date.
17	CLOSING_DATE	DATE	7		The account closing date.
18	STATUS_DATE	DATE	7		Date when the current status was assigned to this institution.
19	DIRECT_DEBIT_REFERENCE_NBR	VARCHAR2	16		Direct debit reference number in case this account is assigned to a direct debit.
20	ACCOUNT_BANK_NAME	VARCHAR2	32		Full name of the bank that manages the account under process.
21	ACCOUNT_BANK_CITY	VARCHAR2	30		City name of the bank that manages the account under process. It should be previously defined in the 'CITY' table.
22	ACCOUNT_BANK_COUNTRY	VARCHAR2	32		Country name of the bank that manages the account under process. It should be previously defined in the 'COUNTRY' table.
23	ACCOUNT_CONVERSION_IN	CHAR	1		This is a flag indicating whether the account supports the currency conversion or not. Possible values are: 'Y' = Can support currency conversion, 'N' = Cannot support currency conversion.
24	ACCOUNT_SPLIT_TRANSFER	CHAR	1		This is a flag indicating whether the account can be used for split transfer or not. Possible values are: 'Y' = Can be used for split transfer, 'N' = Cannot be used split transfer.

Seq.	Column Name	Data Type	Len	Sc	Column Description
25	PERCENTAGE_TRANSFER	NUMBER	9	3	In case the above ACCOUNT_SPLIT_TRANSFER flag is set to 'Y', this column indicates the percentage of amount to be transferred the first time.
26	DEFAULT_FLAG	CHAR	1		This is a flag indicating the default value of the account type. Possible values are: 'Y' = Primary account, 'N' = Secondary account, 'H' = Hierarchical account.
27	REMITTANCE_GROUPING	CHAR	1		This is a flag indicating whether the account transfer should be done for all remittances grouped or not. Possible values are: (for Remittances) 'D' = Detail (Remittance by Remittance), 'E' = Aggregate by contract element, 'M' = Aggregate by merchant, 'C' = Aggregate per merchant parent chain, 'A' = Aggregate all remittance.
28	FEES_GROUPING	CHAR	1		This is a flag indicating whether the account transfer should be done for all fees grouped or not. Possible values are: (for Fees) 'D' = Detail (Remittance by Remittance), 'E' = Aggregate by contract element, 'M' = Aggregate by merchant, 'C' = Aggregate per merchant parent chain, 'A' = Aggregate all remittance
29	CHARGEBACK_GROUPING	CHAR	1		This is a flag indicating whether the account transfer should be done for all chargeback grouped or not. Possible values are: (for Chargebacks) 'D' = Detail (Remittance by Remittance), 'E' = Aggregate by contract element, 'M' = Aggregate by merchant, 'C' = Aggregate per merchant parent chain, 'A' = Aggregate all remittance.
30	BILLIABLE_ELMNT_GROUPING	CHAR	1		This is a flag indicating whether the account transfer should be done for all billing elements grouped or not.

Seq.	Column Name	Data Type	Len	Sc	Column Description
					Possible values are: (for billable elements) 'D' = Detail (Remittance by Remittance), 'E' = Aggregate by contract element, 'M' = Aggregate by merchant, 'C' = Aggregate per merchant parent chain, 'A' = Aggregate all remittance
31	IBAN	VARCHAR2	34		PAN holder banking account number in IBAN format.
32	CLOSING_RAISON	VARCHAR2	2		In case of closed account, this column indicates the account closing reason. The closing reason should be previously defined in the 'STATUS_REASON_LIST'.
33	PRIVATE_DATA_1	VARCHAR2	64		This field is reserved for future use.
34	PRIVATE_DATA_2	VARCHAR2	64		This field is reserved for future use.
35	PRIVATE_DATA_3	NUMBER	18	3	This field is reserved for future use.
36	PRIVATE_DATA_4	NUMBER	18	3	This field is reserved for future use.
37	PRIVATE_DATA_5	DATE	7		This field is reserved for future use.
38	PRIVATE_DATA_6	DATE	7		This field is reserved for future use.
39	REF_EXCHANGE	VARCHAR2	20		Boarding link exchange reference used for data exchange with other systems.
40	DEFAULT_ACCOUNT	CHAR	1		The default account institution in case of multiple accounts. Possible values are: 'Y' = Yes 'N' = No
41	SWIFT_CODE	VARCHAR2	11		SWIFT code, it is an international Institution code that identifies particular banks worldwide.
42	USER_CREATE	VARCHAR2	15		ID of the user when record created.
43	DATE_CREATE	DATE	7		Record creation date and time.
44	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
45	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.2 ADDRESS_DETAILS_BOARDING

This table allow to capture one or more addresses for the applicant.

Refer to ["Addresses"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.3.2.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1	DETAILS_ID	VARCHAR2	15		Unique identification of boarding details.
2	CARE_OF	VARCHAR2	64		The mail recipient (To: ..).
3	ADDRESS_1	VARCHAR2	64		The first address line.
4	ADDRESS_2	VARCHAR2	64		The second address line.
5	ADDRESS_3	VARCHAR2	64		The third address line.
6	ADDRESS_4	VARCHAR2	64		The fourth address line.
7	ZIP_CODE	VARCHAR2	10		Zip code for which the parameter is being defined. It should be defined in 'ZIP_CODE' table.
8	CITY_CODE	CHAR	5		City code for which the parameter is being defined. It should be defined in 'CITY' table.
9	REGION_CODE	CHAR	3		Region code representing the administrative division of the selected country. It should be defined in 'REGION' table.
10	REGION_NAME	CHAR	40		Region representing the administrative division of the selected country. It should be defined in 'REGION' table.
11	COUNTRY_CODE	CHAR	3		Country code for which the parameter is being defined. It should be defined in 'COUNTRY' table.
12	PHONE_1	VARCHAR2	20		The first contact phone number.
13	PHONE_1_TYPE	CHAR	1		The first contact phone type.
14	PHONE_2	VARCHAR2	20		The second contact phone number.
15	PHONE_2_TYPE	CHAR	1		The second contact phone type.
16	PHONE_3	VARCHAR2	20		The third contact phone number.
17	PHONE_3_TYPE	CHAR	1		The third contact phone type.
18	PHONE_4	VARCHAR2	20		The fourth contact phone number.
19	PHONE_4_TYPE	CHAR	1		The fourth contact phone type.
20	LANDMARK	VARCHAR2	128		Landmark for which the parameter is being defined.
21	PRIVATE_DATA_1	VARCHAR2	64		This field is reserved for future use.
22	PRIVATE_DATA_2	VARCHAR2	64		This field is reserved for future use.
23	PRIVATE_DATA_3	VARCHAR2	64		This field is reserved for future use.
24	PRIVATE_DATA_4	VARCHAR2	64		This field is reserved for future use.
25	FAX	VARCHAR2	20		Fax number of the person.
26	EMAIL	VARCHAR2	64		The e-mail of the contact person being defined.
27	WEB_URL	VARCHAR2	60		URL of the website.

Seq.	Column Name	Data Type	Len	Sc	Column Description
28	CITY_NAME	VARCHAR2	32		City name of the parameter being defined. It should be previously defined in the 'CITY' table.
29	REF_CHANGE	VARCHAR2	20		Boarding link exchange reference used for data exchange with other systems.
30	USER_CREATE	VARCHAR2	15		ID of the user when record created.
31	DATE_CREATE	DATE	7		Record creation date and time.
32	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
33	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.3 ADDRESS_LIST_BOARDING

The same process of address creation, is used for all entities regardless of the module where they are defined. Address data are stored in two different database tables, Address list and Address details. Address list data are stored in 'ADDRESS_LIST' table.

Standard address list data include:

- List ID,
- Address sequence,
- Address ID,
- Service ID,
- Address type,
- Default usage,
- Sending mode,
- Address owner,
- Status,
- Default address indicator.

Each column of this table is described in detail in the next section.

4.3.3.1 Columns Description

Seq.	Column Name	Data type	Len.	Sc.	Column Description
1	LIST_ID	VARCHAR2	15		Address list ID automatically generated by the system at the address creation.
2	ADDRESS_SEQUENCE	VARCHAR2	15		The address sequence in the list. Automatically generated by the system at the address creation.
3	ADDRESS_ID	VARCHAR2	15		The address identification. It should be defined in 'ADDRESS_DETAILS' table.
4	SERVICE_ID	CHAR	6		Service identification in case the address is assigned to a service.
5	ADDRESS_TYPE	CHAR	2		The address type as defined in 'ADDRESSES_TYPE_LIST' table.
6	DEFAULT_USAGE	CHAR	2		The usage of the address with 'Mail' as a default value.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					Possible values are: '01' = Mail '02' = Statement '03' = Dispute '04' = Loyalty
7	SENDING_MODE	CHAR	1		Sending mode. As defined in 'SENDING_MODE' table. Possible values are: 'M' = Mail 'F' = Fax 'E' = Email
8	ADDRESS_OWNER	CHAR	2		The entity code of the address owner. Possible values are: 'CH' = Cardholder 'MC' = Merchant 'MT' = Merchant account 'CL' = Client 'OL' = Outlet (Acceptor Point) 'CA' = Chain 'CT' = Chain account 'CO' = Corporate 'NL' = Channel 'SA' = Shadow account 'PB' = Partner brand 'TA' = Terminal ATM 'TP' = Terminal POS 'IL' = Institution 'BA' = Billing account NULL for any entity
9	STATUS	CHAR	1		The address status. Possible values are: 'P' = Ongoing 'N' = Normal 'C' = Closed
10	STATUS_START_DATE	DATE	7		Start date for active or normal address status.
11	STATUS_END_DATE	DATE	7		End date for inactive address status.
12	DEFAULT_ADDRESS_FLAG	CHAR	1		This flag indicates the default address. Possible values are: 'Y' = Yes 'N' = No
13	USER_CREATE	VARCHAR2	15		ID of the user when record created.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
14	DATE_CREATE	DATE	7		Record creation date and time.
15	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
16	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.4 APP_CHECK_FAILS_FORCING_REASON

This table is used to define the reasons that has to be captured by the user who is forcing the application if the Policy and/or the Black list controls fails during the boarding process.

Each column of this table is described in detail in the next section.

4.3.4.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	SEQUENCE_ID	NUMBER	15		Sequence number of the parameter being defined.
2	BANK_CODE	CHAR	6		Financial institution of the parameter being defined. It should be defined in the 'BANK' table.
3	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
4	APPLICATION_CONTRACT_ID	VARCHAR2	24		The application contract identification generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
5	CHECK_TYPE	CHAR	1		The application check type for which the reason is defined. Possible values are: 'B' = Blacklist 'P' = Policy 'D' = Deduplication
6	FORCING_REASON_CODE	CHAR	3		Unique code identifying the forcing reason code.
7	USER_CREATE	VARCHAR2	15		ID of the user when record created.
8	DATE_CREATE	DATE	7		Record creation date and time.
9	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
10	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.5 APPLICATION_WORKFLOW_TRAIL

This table is used to manage the workflow trail for a given contract element. Refer to ["Contract workflow trail"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.3.5.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Financial institution of the parameter being defined. It should be defined in the 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	25		Application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	SOURCE_STATUS	CHAR	1		Previous status before action.
4 	DESTINATION_STATUS	CHAR	1		Status that is subject of transition. Possible values are: 'O' = On going: Initial and capture phase, 'W' = Waiting validation: Capture completed and pushed for review, 'I' = Incomplete: Temporary declined application, 'R' = Ready to process: Application and contract reviewed by checker and ready for processing or for temporary rejection, 'P' = Processed: Application processed and entities created, 'D' = Declined: Application declined, 'A' = Archived: Application processed or rejected are archived automatically.
5	ACTION_USER	VARCHAR2	15		The user that performed the action.
6 	ACTION_DATE	DATE	7		Date on which the user has modify the status.
7	MEMO	VARCHAR2	512		The related memo for the current status modification.
8	USER_CREATE	VARCHAR2	15		ID of the user when record created.
9	DATE_CREATE	DATE	7		Record creation date and time.
10	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
11	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.6 ACCOUNTS_LINK_BOARDING

This table is used to view and maintain the link between the Account(s) contract elements and the Payment instrument(s) contract elements.

Refer to ["Account link"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.3.6.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	ENTITY_CODE	CHAR	2		The type of entity under process.
2 	ENTITY_ID	VARCHAR2	24		Identifier of the entity under process.
3 	ACCOUNT_SEQUENCE	NUMBER	2		Sequence number of the primary account linked to the boarding under process.
4	ACCOUNT_BANK_CODE	CHAR	6		Billing account financial institution. It should be defined in 'BANK' table.
5	ACCOUNT_BRANCH_CODE	CHAR	6		Branch institution related to the billing account institution. It should be defined in 'BRANCH' table.
6	ROUTING_NUMBER	VARCHAR2	9		Routing number.
7	ACCOUNT_NUMBER	VARCHAR2	24		Banking account number.
8	ACCOUNT_TYPE	CHAR	2		The type of the posting account destination. Possible values are: '00' = Billing account, '10' = Saving account, '20' = Checking account, '30' = Loan account, '40' = Universal account, '50' = Investment account, '62' = Spending power account, '80' = Merchant account, '81' = Chain account, '90' = Shadow account, '91' = Installment loan account, '92' = Real estate loan account, '93' = Loyalty account.
9	ACCOUNT_CURRENCY_CODE	CHAR	3		Account institution currency.
10	ACCOUNT_STATUS	CHAR	1		Account status. Possible values are: 'N' = Normal, 'C' = Canceled, 'S' = Suspend, 'W' = Wait for validation, 'V' = To be sent for validation, 'R' = Rejected.
11	ACCOUNT_STATUS_REASON	CHAR	2		Current status reason of the account.
12	SETTLEMENT_MODE	CHAR	1		Settlement mode of the pack. Possible values are: 'B' = Settlement by Balance,

Seq.	Column Name	Data Type	Len	Sc	Column Description
					'T' = Settlement by Transaction, 'N' = Normal settlement.
13	POSTING_USAGE_FLAG	CHAR	1		This column indicates whether the linked account is used for posting transactions or not. Possible values are: 'Y' = Yes 'N' = No  Note The posting usage is used especially for accounts linked to the PAN entity.
14	OPERATIONS_CHOICE_USAGE_FLAG	CHAR	1		This field is reserved for future use.
15	ADDRESS_CODE	CHAR	2		In case of Client or Merchant entity, this is to indicate entity Address code associated to the account.
16	OPENING_DATE	DATE	7		The account opening date.
17	CLOSING_DATE	DATE	7		The account closing date.
18	STATUS_DATE	DATE	7		Date when the current status was assigned to this institution.
19	DIRECT_DEBIT_REFERENCE_NBR	VARCHAR2	16		Direct debit reference number in case this account is assigned to a direct debit.
20	ACCOUNT_BANK_NAME	VARCHAR2	32		Full name of the bank that manages the account under process.
21	ACCOUNT_BANK_CITY	VARCHAR2	30		City name of the bank that manages the account under process. It should be previously defined in the 'CITY' table.
22	ACCOUNT_BANK_COUNTRY	VARCHAR2	32		Country name of the bank that manages the account under process. It should be previously defined in the 'COUNTRY' table.
23	ACCOUNT_CONVERSION_IN	CHAR	1		This is a flag indicating whether the account supports the currency conversion or not. Possible values are: 'Y' = Can support currency conversion, 'N' = Cannot support currency conversion.
24	ACCOUNT_SPLIT_TRANSFER	CHAR	1		This is a flag indicating whether the account can be used for split transfer or not. Possible values are: 'Y' = Can be used for split transfer, 'N' = Cannot be used split transfer.

Seq.	Column Name	Data Type	Len	Sc	Column Description
25	PERCENTAGE_TRANSFER	NUMBER	9	3	In case the above ACCOUNT_SPLIT_TRANSFER flag is set to 'Y', this column indicates the percentage of amount to be transferred the first time.
26	DEFAULT_FLAG	CHAR	1		This is a flag indicating the default value of the account type. Possible values are: 'Y' = Primary account, 'N' = Secondary account, 'H' = Hierarchical account.
27	REMITTANCE_GROUPING	CHAR	1		This is a flag indicating whether the account transfer should be done for all remittances grouped or not. Possible values are: (for Remittances) 'D' = Detail (Remittance by Remittance), 'E' = Aggregate by contract element, 'M' = Aggregate by merchant, 'C' = Aggregate per merchant parent chain, 'A' = Aggregate all remittance.
28	FEES_GROUPING	CHAR	1		This is a flag indicating whether the account transfer should be done for all fees grouped or not. Possible values are: (for Fees) 'D' = Detail (Remittance by Remittance), 'E' = Aggregate by contract element, 'M' = Aggregate by merchant, 'C' = Aggregate per merchant parent chain, 'A' = Aggregate all remittance
29	CHARGEBACK_GROUPING	CHAR	1		This is a flag indicating whether the account transfer should be done for all chargeback grouped or not. Possible values are: (for Chargebacks) 'D' = Detail (Remittance by Remittance), 'E' = Aggregate by contract element, 'M' = Aggregate by merchant, 'C' = Aggregate per merchant parent chain, 'A' = Aggregate all remittance.
30	BILLIABLE_ELMNT_GROUPING	CHAR	1		This is a flag indicating whether the account transfer should be done for all billing elements grouped or not.

Seq.	Column Name	Data Type	Len	Sc	Column Description
					Possible values are: (for billable elements) 'D' = Detail (Remittance by Remittance), 'E' = Aggregate by contract element, 'M' = Aggregate by merchant, 'C' = Aggregate per merchant parent chain, 'A' = Aggregate all remittance
31	IBAN	VARCHAR2	34		PAN holder banking account number in IBAN format.
32	CLOSING_RAISON	VARCHAR2	2		In case of closed account, this column indicates the account closing reason. The closing reason should be previously defined in the 'STATUS_REASON_LIST'.
33	PRIVATE_DATA_1	VARCHAR2	64		This field is reserved for future use.
34	PRIVATE_DATA_2	VARCHAR2	64		This field is reserved for future use.
35	PRIVATE_DATA_3	NUMBER	18	3	This field is reserved for future use.
36	PRIVATE_DATA_4	NUMBER	18	3	This field is reserved for future use.
37	PRIVATE_DATA_5	DATE	7		This field is reserved for future use.
38	PRIVATE_DATA_6	DATE	7		This field is reserved for future use.
39	REF_EXCHANGE	VARCHAR2	20		Boarding link exchange reference used for data exchange with other systems.
40	DEFAULT_ACCOUNT	CHAR	1		The default account institution in case of multiple accounts. Possible values are: 'Y' = Yes 'N' = No
41	SWIFT_CODE	VARCHAR2	11		SWIFT code, it is an international Institution code that identifies particular banks worldwide.
42	USER_CREATE	VARCHAR2	15		ID of the user when record created.
43	DATE_CREATE	DATE	7		Record creation date and time.
44	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
45	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.7 BOARD_ACCOUNTS_LINK

This table is used to preserve the link between the Account(s) contract elements and the Payment instrument(s) contract elements. the Refer to "[Accounts link](#)" section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.3.7.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	ENTITY_CODE	CHAR	2		The type of the entity under process.
2	ENTITY_ID	VARCHAR2	24		ID of the entity under process.
3	ACCOUNT_SEQUENCE	NUMBER	2		Sequence number of the primary account linked to the boarding product under process.
4	ACCOUNT_BANK_CODE	CHAR	6		The billing account financial institution. It should be defined in 'BANK' table.
5	ACCOUNT_BRANCH_CODE	CHAR	6		The branch institution related to the billing account bank. It should be defined in 'BRANCH' table.
6	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
7	ROUTING_NUMBER	VARCHAR2	9		The routing number.
8	ACCOUNT_NUMBER	VARCHAR2	24		The banking account number.
9	ACCOUNT_TYPE	CHAR	2		The type of the posting account destination. Possible values are: '00' = Billing account, '10' = Saving account, '20' = Checking account, '30' = Loan account, '40' = Universal account, '50' = Investment account, '62' = Spending power account, '80' = Merchant account, '81' = Chain account, '90' = Shadow account, '91' = Installment loan account, '92' = Real estate loan account, '93' = Loyalty account.
10	ACCOUNT_CURRENCY_CODE	CHAR	3		This is the institution account currency.
11	ACCOUNT_STATUS	CHAR	1		The account status. Possible values are: 'N' = Normal, 'C' = Cancelled, 'S' = Suspend, 'W' = Wait for validation, 'V' = To be sent for validation, 'R' = Rejected.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
12	ACCOUNT_STATUS_REASON	CHAR	2		The current status reason of the account.
13	SETTLEMENT_MODE	CHAR	1		The settlement mode of the boarding product. Possible values are: 'B' = Settlement by Balance, 'T' = Settlement by Transaction, 'N' = Normal settlement.
14	POSTING_USAGE_FLAG	CHAR	1		This column indicates whether the linked account is used for posting transactions or not. Possible values are: 'Y' = Yes 'N' = No  Note The posting usage is used especially for accounts linked to the PAN entity.
15	OPERATIONS_CHOICE_USAGE_FLAG	CHAR	1		This field is reserved for future use.
16	ADDRESS_CODE	CHAR	2		In case of Client or Merchant entity, this is to indicate entity Address code associated to the account.
17	OPENING_DATE	DATE	7		The account opening date.
18	CLOSING_DATE	DATE	7		The account closing date.
19	STATUS_DATE	DATE	7		The date when the current status was assigned to this Institution.
20	DIRECT_DEBIT_REFERENCE_NBR	VARCHAR2	16		The direct debit reference number in case this account is assigned to a direct debit.
21	ACCOUNT_BANK_NAME	VARCHAR2	32		The full name of the institution that manages the account under process.
22	ACCOUNT_BANK_CITY	VARCHAR2	30		The city name of the institution that manages the account under process. It should be previously defined in the 'CITY' table.
23	ACCOUNT_BANK_COUNTRY	VARCHAR2	32		The country name of the institution that manages the account under process. It should be previously defined in the 'COUNTRY' table.
24	ACCOUNT_CONVERSION_IN	CHAR	1		This is a flag indicating whether the account supports the currency conversion or not. Possible values are: 'Y' = Can support currency conversion, 'N' = Cannot support currency conversion.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
25	ACCOUNT_SPLIT_TRANSFER	CHAR	1		This is a flag indicating whether the account can be used for split transfer or not. Possible values are: 'Y' = Can be used for split transfer, 'N' = Cannot be used split transfer.
26	PERCENTAGE_TRANSFER	NUMBER	9	3	In case the above ACCOUNT_SPLIT_TRANSFER flag is set to 'Y', this column indicates the percentage of amount to be transferred the first time.
27	DEFAULT_FLAG	CHAR	1		This is a flag indicating the default value of the account type. Possible values are: 'Y' = Primary account, 'N' = Secondary account, 'H' = Hierarchical account.
28	REMITTANCE_GROUPING	CHAR	1		This is a flag indicating whether the account transfer should be done for all remittances grouped or not. Possible values are: (for Remittances) 'D' = Detail (Remittance by Remittance), 'E' = Aggregate by contract element, 'M' = Aggregate by merchant, 'C' = Aggregate per merchant parent chain, 'A' = Aggregate all remittance.
29	FEES_GROUPING	CHAR	1		This is a flag indicating whether the account transfer should be done for all fees grouped or not. Possible values are: (for Fees) 'D' = Detail (Remittance by Remittance), 'E' = Aggregate by contract element, 'M' = Aggregate by merchant, 'C' = Aggregate per merchant parent chain, 'A' = Aggregate all remittance
30	CHARGEBACK_GROUPING	CHAR	1		This is a flag indicating whether the account transfer should be done for all chargeback grouped or not. Possible values are: (for Chargebacks) 'D' = Detail (Remittance by Remittance), 'E' = Aggregate by contract element, 'M' = Aggregate by merchant,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'C' = Aggregate per merchant parent chain, 'A' = Aggregate all remittance.
31	BILLABLE_ELMNT_GROUPING	CHAR	1		This is a flag indicating whether the account transfer should be done for all billing elements grouped or not. Possible values are: (for billable elements) 'D' = Detail (Remittance by Remittance), 'E' = Aggregate by contract element, 'M' = Aggregate by merchant, 'C' = Aggregate per merchant parent chain, 'A' = Aggregate all remittance
32	IBAN	VARCHAR2	34		The PAN holder banking account number in IBAN format.
33	CLOSING_RAISON	VARCHAR2	2		In case of closed account, this column indicates the account closing reason. The closing reason should be previously defined in the 'STATUS_REASON_LIST'.
34	PRIVATE_DATA_1	VARCHAR2	64		This field is reserved for future use.
35	PRIVATE_DATA_2	VARCHAR2	64		This field is reserved for future use.
36	PRIVATE_DATA_3	NUMBER	18	3	This field is reserved for future use.
37	PRIVATE_DATA_4	NUMBER	18	3	This field is reserved for future use.
38	PRIVATE_DATA_5	DATE	7		This field is reserved for future use.
39	PRIVATE_DATA_6	DATE	7		This field is reserved for future use.
40	REF_EXCHANGE	VARCHAR2	20		The boarding product link exchange reference used for data exchange with other systems.
41	DEFAULT_ACCOUNT	CHAR	1		The default institution account in case of multiple accounts. Possible values are: 'Y' = Yes 'N' = No
42	SWIFT_CODE	VARCHAR2	11		SWIFT code, it is an international Institution code that identifies particular banks worldwide.
43	PAN_FROM	CHAR	1		The entity to be associated to the PAN Possible values are: 'E' = Existing 'C' = Contract
44	ACCOUNT_FROM	CHAR	1		The destination account. Possible values are: 'E' = Existing

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'C' = Contract
45	USER_CREATE	VARCHAR2	15		ID of the user when record created.
46	DATE_CREATE	DATE	7		Record creation date and time.
47	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
48	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.8 BOARD_AUTO_FEES_CRITERIA

This table is used to set up the criteria defining the calculation method, the account eligibility and the triggers for automatic fees generation.

Refer to "[Accounts link](#)" section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.3.8.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code concerned by the Automatic fees criteria index. It should be defined in the 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	APPLICATION_CONTRACT_ID	VARCHAR2	24		The application contract identification generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
4 	CRITERIA_TRANSACTION_INDEX	CHAR	4		Index identifying the transaction criteria for automatic fee generation.
3 	PROFILE_CODE	CHAR	3		Profile code concerned by the Automatic fees criteria index.
4	CARD_PRODUCT_CODE	CHAR	3		Defined the transaction PAN product code as criterion for automatic fee generation. It should be defined in the 'CARD_PRODUCT' table.
5	CHAIN_CODE	VARCHAR2	15		Defined the chain code as criterion for automatic fee generation. It should be defined in the 'CHAIN' table.
6	CUSTOMER_SEGMENT_INDEX	CHAR	3		The customer segment index as criterion for automatic fee generation. It should be defined in the 'CUSTOMER_SEGMENT' table.
7	CORPORATE_ID	VARCHAR2	15		Defined the corporate ID as criterion for automatic fee generation. It should be defined in the 'CORPORATE' table.
8	ORIGIN_CODE	CHAR	1		Defined the transaction origin code as criterion for automatic fee generation. Possible values are: '0' = ONUS card / local merchant,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'1' = ONUS card / local other bank merchant, '2' = ONUS card / foreign merchant, '3' = local other bank card / local merchant, '4' = foreign card / local merchant.
9	MCC	CHAR	4		Defined the merchant category code as criterion for automatic fee generation. It should be defined in the 'MCC' table.
10	MCC_GROUP	CHAR	4		Defined the MCC Group code as criterion for automatic fee generation. It should be defined in 'MCC_GROUP' table.
11	TRANSACTION_CODE	CHAR	2		Defined the transaction code as criterion for automatic fee generation. It should be defined in 'TRANSACTIONS_DEFINITION' table.
12	TRANSACTION_CATEGORY	NUMBER	2		Defined the transaction category as criterion for automatic fee generation. Possible values are: '01' = Airline, '02' = Lodging, '03' = Rent car, '04' = Restaurant, '05' = Medical, '06' = Mail order, '07' = Purchase, '08' = Other purchase, '09' = Withdrawal, '10' = Quasi cash, '11' = Cash, '12' = Transfer, '13' = E-commerce, '14' = T&E.
13	TRANSACTION_CURRENCY	CHAR	3		Defined the transaction currency as criterion for automatic fee generation. It should be defined in 'CURRENCY_TABLE'.
14	ACQUIRER_COUNTRY_CODE	CHAR	3		Defined the country code. As criterion for automatic fee generation. It should be defined in the 'COUNTRY' table.
15	CURRENCY_FLAG	CHAR	1		Defined the currency flag, as criterion for automatic fee generation. Possible values are: 'F' = Foreign currency, 'L' = Local currency.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
16	COUNTRY_FLAG	CHAR	1		Defined the country flag as criterion for automatic fee generation. Possible values are: 'F' = Foreign currency, 'L' = Local currency.
17	LIST_PRODUCT_CODE	VARCHAR2	15		Defined the product (Or purchase article) applicable as criterion for automatic fee generation. It should be defined in 'LIST_PRODUCT' table.
18	START_DATE	DATE	7		Date from when the defined transaction criteria index is effective for the automatic fee generation.
19	END_DATE	DATE	7		Date on when the defined transaction criteria index becomes no more valid for the automatic fee generation.
20	DESCRIPTION	VARCHAR2	60		Transaction criteria index description.
21	REV_REASON_CODE	CHAR	2		Defined the reversal reason code as criterion for automatic fee generation. It should be defined in the 'TRANS_REASON_CODE' table.
22	ACQUIRER_BANK_CODE	CHAR	6		Defined the acquirer financial institution code as criterion for automatic fee generation. It should be defined in the 'BANK' table.
23	ACQUIRER_NETWORK_CODE	CHAR	2		Defined the acquirer network code as criterion for automatic fee generation. It should be defined in the 'NETWORK' table.
24	VIP_LEVEL	CHAR	1		Defined the card VIP level as criterion for automatic fee generation. It should be defined in the 'VIP_LIST' table.
25	USER_CREATE	VARCHAR2	15		ID of the user when record created.
26	DATE_CREATE	DATE	7		Record creation date and time.
27	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
28	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.9 BOARD_AUTO_FEES_ON_EVENT

This table is used to define the calculation method of event based automatic fees.

Each column of this table is described in detail in the next section.

4.3.9.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code concerned by the Automatic fees on event index.. It should be defined in the 'BANK' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
2 	APPLICATION_ID	VARCHAR2	24		Application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	APPLICATION_CONTRACT_ID	VARCHAR2	24		Application contract identification generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
4 	EVENT_CODE	CHAR	3		The event triggering the fee generation. Possible values are: 'PB1' = Penalty fee for bucket 30 days, 'PB2' = Penalty fee for bucket 60 days, 'PB3' = Penalty fee for bucket 90 days, 'PB4' = Penalty fee for bucket 120 days, 'PB5' = Penalty fee for bucket 150 days, 'PB6' = Penalty fee for bucket 180 days, 'PB7' = Penalty fee for bucket 210 days, 'PB8' = Penalty fee for bucket 240 days, 'PB9' = Penalty fee for bucket over 240 days, 'NAC' = New account, 'OSP' = Statement processing, 'SOT' = Statement on term, 'OAQ' = Once a quarter, 'OHY' = Once a half year, 'OAY' = Once a year, 'ONY' = Once n year, 'OVP' = Overdrawn permitted, 'OVR' = Overdrawn, 'FUP' = first unpaid, 'SUP' = Second unpaid, 'TUP' = Third unpaid or more, 'IPC' = Incident of payment by cheque, 'IPD' = Incident of payment by automatic debit, 'ALT' = At least on transaction occurred, 'OT1' = Others 1, 'OT2' = Others 2, 'OT3' = Others 3, 'OT4' = Others 4, 'OT5' = Others 5.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
5	EVENT_STATUS	CHAR	1		The fee generation case status indicating whether the fee can be generated or not. Possible values are: 'N' = Normal (The system will generate the fee), 'I' = Ignore (The system will not generate the fee). (Default value = 'N').
6	EVENT_TRANSACTION_CODE	CHAR	2		Transaction code corresponding to "At least one transaction occurred" event. (Required only when EVENT_CODE = 'ALT'). It should be defined in 'CR_TRANSACTION_PARAMETER' table.
7	EVENT_REVERSAL_FLAG	CHAR	1		The event reversal flag. (Required only when EVENT_CODE = 'ALT'). Possible values are: 'N' = Normal, 'R' = Reversal.
8	PERIOD_CHECK	CHAR	1		The event based automatic fee generation period (Required only when EVENT_CODE = 'OAQ', 'OHY', 'OAY', 'NAC' or 'ONY'). Possible values are: 'S' = on start period, 'E' = on end period, 'B' = Based on reference date (When EVENT_CODE = 'NAC').
9	NUMBER_OF_YEARS	NUMBER	2		Number of years defining the period (Required only when EVENT_CODE = 'ONY').
10	REFERENCE_DATE	CHAR	3		Reference date for PERIOD_CHECK = 'B' (When EVENT_CODE = 'NAC'). Possible values are: 'OPD' = Account opening date, 'APD' = Account application date.
11	GEN_TRANSACTION_CODE	CHAR	2		This is the generated fee transaction code. It should be defined in 'CR_TRANSACTION_PARAMETER' table.
12	GEN_REVERSAL_FLAG	CHAR	1		This is the generated fee transaction reversal flag. Possible values are: 'N' = Normal, 'R' = Reversal.
13	CURRENCY_CODE	CHAR	3		Currency set for the automatic fee generation amount parameters. It should be defined in the 'CURRENCY_TABLE'.
14	RATE	NUMBER	9	6	Rate to be applied on the base amount as to generate the event based

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					automatic fee. The base amount depends on the Event code: For EVENT_CODE = 'PB1' = Penalty fee for bucket 30 days, 'PB2' = Penalty fee for bucket 60 days, 'PB3' = Penalty fee for bucket 90 days, 'PB4' = Penalty fee for bucket 120 days, 'PB5' = Penalty fee for bucket 150 days, 'PB6' = Penalty fee for bucket 180 days, 'PB7' = Penalty fee for bucket 210 days, 'PB8' = Penalty fee for bucket 240 days, 'PB9' = Penalty fee for bucket OVER 240 days. The rate is applied on the PENALTY_BASIC_AMOUNT field defined in 'CR_PROFILE' table. For EVENT_CODE = 'NAC' = New account, 'OSP' = Statement processing, 'OAQ' = Once a quarter, 'OHY' = Once a half year, 'OAY' = Once a year, 'ONY' = Once n year. The rate is applied on the Account Credit limit. For EVENT_CODE = 'OVP' = Overdrawn permitted 'OVR' = Overdrawn The rate is applied on the Account overdrawn amount. For EVENT_CODE = 'FUP' = first unpaid, 'SUP' = Second unpaid, 'TUP' = Third unpaid or more. The rate is applied on the LPF_BASIC_AMOUNT field defined in 'CR_PROFILE' table.
15	FIXE	NUMBER	18	3	This is the amount that will be added to the result before comparing to the minimum, maximum and grace amount.
16	MINIMUM	NUMBER	18	3	This is the minimum amount that will be compared to the final result in order to bring this result in line with the minimum amount, if the final result is less than

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					this Minimum (If the final result is less than the Minimum amount, then the final result gets the Minimum value).
17	MAXIMUM	NUMBER	18	3	This is the maximum amount that will be compared to the final result in order to bring this result in line with the maximum amount, if the final result is greater than this Maximum (If the final result is greater than the Maximum amount, then the final result gets the Maximum value).
18	GRACE_AMOUNT	NUMBER	18	3	This is the amount under which the final result is brought to zero (If the final result is less or equal than the Grace amount, then the final result gets zero value).
19	RULE_IDENTIFIER	CHAR	3		Event based automatic fee calculation rule. Possible values are: 'STD' = Standard, 'MIN' = Minimum, 'MAX' = Maximum. Note  Refer to "PowerCARD's Calculation Rules" section for detailed description of calculation rule options.
20	ROUNDED_METHOD_IDENTIFIER	CHAR	1		This is to indicate the rounding method to be applied on the event based automatic fee calculation result. Possible values are: 'H' = High value, 'L' = Low value, 'N' = Normal, 'E' = Exponent (Default standard method). Note  Refer to "Rounded methods" section for detailed description of rounded methods.
21	THRESHOLD_AMOUNT	NUMBER	18	3	This is the base amount threshold under which the system does not undergo the event based automatic fee calculation and the result is set to zero.
22	OVERDRAWN_CALC_OPTION	CHAR	1		The base amount used for the overdrawn event based fee calculation. Possible values are: 'F' = First overdrawn amount in the cycle,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'H' = Highest overdrawn amount in the cycle.
23	USER_CREATE	VARCHAR2	15		ID of the user when record created.
24	DATE_CREATE	DATE	7		Record creation date and time.
25	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
26	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.10 BOARD_AUTO_FEES_ON_TRANS

This table is used to define the method of calculation of boarding transaction based automatic fees for the marketable product linked accounts. These calculation formula parameters are identified by the same index.

Automatic transaction fees are the fees generated automatically as soon as a transaction fulfilling a certain number of criteria is posted to the account during the EOD Credit account management process.

Refer to "[Fees on transaction](#)" section in UG1019-Catalogue user guide for more details.

Each column of this table is described in detail in the next section.

4.3.10.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Financial institution of the parameter being defined. It should be defined in the 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	APPLICATION_CONTRACT_ID	VARCHAR2	24		The application contract identification generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
4 	ORIGINAL_TRANSACTION_CODE	CHAR	2		The original transaction triggering the fee generation. It should be defined in 'CR_TRANSACTION_PARAMETER' table.
5 	ORIGINAL_REVERSAL_FLAG	CHAR	1		The original transaction reversal flag. Possible values are: 'N' = Normal, 'R' = Reversal.
6	PROFILE_CODE	CHAR	3		Profile code concerned by the Automatic fees on transaction index. It should be defined in the 'CR_PROFILE' table.
7	INDEX_CODE	CHAR	4		Index code. It is used at the 'CR_PROFILE' table parameters level to specify the link between the account profile and its transaction-based fees. The index should be defined in

Seq.	Column Name	Data Type	Len	Sc	Column Description
					'CR_AUTO_FEES_ON_TRANS_ID' table.
8	CASE_SEQUENCE	CHAR	1		This is the sequence of the fee in case different fees are generated for the same original transaction matching the automatic fee generation criteria.
9	CASE_STATUS	CHAR	1		The fee generation case status indicating whether the fee can be generated or not. Possible values are: 'N' = Normal (The system will generate the fee), 'I' = Ignore (The system will not generate the fee). Note  This field is set by default to 'N'.
10	CRITERIA_TRANSACTION_INDEX	CHAR	4		Index of the transaction based automatic fee generation criteria. It should be defined in 'CR_AUTO_FEES_CRITERIA_PAR' table.
11	FEES_INDICATOR	CHAR	1		This column indicates whether the fee should be generated as a separate transaction or included in the original transaction billing amount. Possible values are: 'S' = Generate separately, 'I' = Include in original transaction billing amount.
12	GEN_TRANSACTION_CODE	CHAR	2		When FEES_INDICATOR is set to 'S', this column indicates the generated fee transaction code. It should be defined in 'CR_TRANSACTION_PARAMETER' table.
13	GEN_REVERSAL_FLAG	CHAR	1		When FEES_INDICATOR is set to 'S', this column indicates the fee transaction reversal flag. Possible values are: 'N' = Normal, 'R' = Reversal.
14	TRANSACTION_DATE_BAS	CHAR	1		When FEES_INDICATOR is set to 'S', this column indicates the fee transaction date based flag. Possible values are: 'T' = Transaction date of original transaction, 'B' = Business date.

Seq.	Column Name	Data Type	Len	Sc	Column Description
15	CURRENCY_CODE	CHAR	3		Currency set for the automatic fee generation amount parameters. It should be defined in the 'CURRENCY_TABLE'.
16	RATE	NUMBER	9	6	The rate to be applied on the original transaction amount as to generate the transaction based automatic fee.
17	FIXE	NUMBER	18	3	This is the amount that will be added to the result before comparing to the minimum, maximum and grace amount.
18	MINIMUM	NUMBER	18	3	This is the minimum amount that will be compared to the final result in order to bring this result in line with the minimum amount, if the final result is less than this Minimum (If the final result is less than the Minimum amount, then the final result gets the Minimum value).
19	MAXIMUM	NUMBER	18	3	This is the maximum amount that will be compared to the final result in order to bring this result in line with the maximum amount, if the final result is greater than this Maximum (If the final result is greater than the Maximum amount, then the final result gets the Maximum value).
20	GRACE_AMOUNT	NUMBER	18	3	This is the amount under which the final result is brought to zero (If the final result is less or equal than the Grace amount, then the final result gets zero value).
21	RULE_IDENTIFIER	CHAR	3		Transaction based automatic fee calculation rule as follow: 'STD' = Standard, 'MIN' = Minimum, 'MAX' = Maximum. Refer to " PowerCARD's Calculation Rules " section for detailed description of calculation rule options.
22	ROUNDED_METHOD_IDENTIFIER	CHAR	1		This is to indicate the rounding method to be applied on the transaction based automatic fee calculation result. Possible values are: 'H' = High value, 'L' = Low value, 'N' = Normal, 'E' = Exponent (Default standard method). Refer to " Rounded methods " section for detailed description of rounded methods.
23	THRESHOLD_AMOUNT	NUMBER	18	3	This is the original transaction amount threshold under which the system does not undergo the transaction based

Seq.	Column Name	Data Type	Len	Sc	Column Description
					automatic fee calculation and the result is set to zero.
24	USER_CREATE	VARCHAR2	15		ID of the user when record created.
25	DATE_CREATE	DATE	7		Record creation date and time.
26	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
27	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.11 BOARD_COM_CHANNELS

This table is used to define the channel management depend on the type of communication (Email, SMS, Mobile app).

Refer to "[Channel management](#)" section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.3.11.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Financial institution of the parameter being defined. It should be defined in the 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3	APPLICATION_CONTRACT_ID	VARCHAR2	24		The application contract identification generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
4 	STRATEGY_ID	CHAR	6		The unique code identifying the communication event.
5 	EVENT_CODE	CHAR	4		The event code to be used for the concerned entity.
6 	CHANNEL_TYPE	CHAR	2		Ctype to be used for the current event. Possible values are: 'EM' = Email 'MB' = Mobile app 'SM' = SMS 'PH' = Output file 'CS' = Case
7	CHANNEL_CONTENT	VARCHAR2	6		The notification content that will be communicated to the customer. In case the CHANNEL_TYPE = 'EM' , this column displays the predefined Email parameters list. In case the CHANNEL_TYPE = 'EM' or 'MB', this column displays the predefined SMS parameters list.

Seq.	Column Name	Data Type	Len	Sc	Column Description
					In case the CHANNEL_TYPE = 'CS', this column displays the Case type list. Note  This column is visible only if the CHANNEL_TYPE column is Case, Email, Mobile app, SMS.
8	ACTIVATED	CHAR	1		This column indicates whether the channel is activated or not for the permanent preferences of the corresponding event. Possible values are: 'Y' = Yes 'N' = No
9	TEMPORARY_ACTIVATED	CHAR	1		This column indicates if the temporary preferences are activated by default or not for the corresponding event. Possible values are: 'Y' = Yes 'N' = No
10	TMP_START_DATE	DATE	7		The initial start date of the temporary event communication preference.
11	TMP_END_DATE	DATE	7		End date of the temporary event communication preference.
12	EMAIL_TYPE	CHAR	1		The type of the email being defined.
13	EMAIL	VARCHAR2	256		The email of the contact person being defined.
14	EMAIL_TYPE_TMP	CHAR	2		The temporary type of the email being defined.
15	EMAIL_TMP	VARCHAR2	256		The temporary email of the contact person.
16	PHONE_TYPE	CHAR	2		The type of the phone being defined.
17	PHONE	VARCHAR2	30		The contact phone number.
18	PHONE_TYPE_TMP	CHAR	2		The temporary type of the phone being defined.
19	PHONE_TMP	VARCHAR2	30		The contact temporary phone number.
20	ADDRESS_FROM	CHAR	2		The address from preference
21	ADDRESS_TYPE	CHAR	2		The type of the address being defined.
22	ADDRESS_FROM_TMP	CHAR	2		TMP address from.
23	ADDRESS_TYPE_TMP	CHAR	2		The temporary type of the address being defined.
24	APP_STATUS	CHAR	1		This field indicates the application status. Possible values are:

Seq.	Column Name	Data Type	Len	Sc	Column Description
					'O' = On going (Initial and capture phase), 'W' = Waiting validation (Capture completed and pushed for review), 'I' = Incomplete (Temporary declined application), 'R' = Ready to process (Application and contract reviewed by checker and ready for processing or for temporary rejection), 'P' = Processed (Application processed and entities created), 'D' = Declined (Application declined), 'A' = Archived (Application processed or rejected are archived automatically).
25	USER_CREATE	VARCHAR2	15		ID of the user when record created.
26	DATE_CREATE	DATE	7		Record creation date and time.
27	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
28	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.12 BOARD_COM_EVENTS

This table is used to define the event management, it contains the Institution, Strategy ID and Event code based on the current communication strategy.

Refer to "[Event section data description](#)" section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.3.12.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Financial institution of the parameter being defined. It should be defined in the 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	STRATEGY_ID	CHAR	6		Unique code identifying the communication event.
4 	EVENT_CODE	CHAR	4		Code identifying the entity.
5	EVENT_TYPE	CHAR	2		The entity type. Possible values are: 'CL' = Customer 'CH' = Payment instrument 'SA' = Financial account

Seq.	Column Name	Data Type	Len	Sc	Column Description
6	ACTIVATED	CHAR	1		This column indicates whether this event is activated by default or not for the concerned strategy. Possible values are: 'Y' = Yes 'N' = No
7	APP_STATUS	CHAR	1		This field indicates the application status. Possible values are: 'O' = On going (Initial and capture phase), 'W' = Waiting validation (Capture completed and pushed for review), 'I' = Incomplete (Temporary declined application), 'R' = Ready to process (Application and contract reviewed by checker and ready for processing or for temporary rejection), 'P' = Processed (Application processed and entities created), 'D' = Declined (Application declined), 'A' = Archived (Application processed or rejected are archived automatically).
8	USER_CREATE	VARCHAR2	15		ID of the user when record created.
9	DATE_CREATE	DATE	7		Record creation date and time.
10	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
11	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.13 BOARD_COM_SETUP

This table contains all communication strategies to be used for Customers, Payment instruments and Financial accounts.

Refer to "[Communication strategy](#)" section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.3.13.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Financial institution of the parameter being defined. It should be defined in the 'BANK' table.
2 	STRATEGY_ID	CHAR	6		The unique code identifying the communication event.

Seq.	Column Name	Data Type	Len	Sc	Column Description
3	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
4	APP_STATUS	CHAR	1		This field indicates the application status. Possible values are: 'O' = On going (Initial and capture phase), 'W' = Waiting validation (Capture completed and pushed for review), 'I' = Incomplete (Temporary declined application), 'R' = Ready to process (Application and contract reviewed by checker and ready for processing or for temporary rejection), 'P' = Processed (Application processed and entities created), 'D' = Declined (Application declined), 'A' = Archived (Application processed or rejected are archived automatically).
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.14 BOARD_CORP_ACCOUNTS_LINK

This table is used to define the link between the Account(s) contract elements and the Payment instrument(s) contract elements. Refer to ["Account link"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.3.14.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1	ENTITY_CODE	CHAR	2		The type of the entity under process set by default to entity origin of the link, here "CO".
2	ENTITY_ID	VARCHAR2	24		Identifier of the entity under process set by default to entity origin of the link, here "CO".
3	ACCOUNT_SEQUENCE	NUMBER	2		As corporate entity can have only one account (Primary account) linked to it, this column indicates the sequence "1" of the primary account linked to the corporate under process.

Seq.	Column Name	Data Type	Len	Sc	Column Description
4	ACCOUNT_BANK_CODE	CHAR	6		In case the linked account is a billing account, this column defines the billing account financial institution.
5	ACCOUNT_BRANCH_CODE	CHAR	6		In case the linked account is a bank account, this column defines the billing account branch.
6 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
7	ROUTING_NUMBER	VARCHAR2	9		The routing number.
8	ACCOUNT_NUMBER	VARCHAR2	24		The account number.
9	ACCOUNT_TYPE	CHAR	2		The type of the posting account destination. Possible values are: '90' = Shadow account '00' = Billing account '20' = Checking account '91' = Installment loan account '50' = Investment account '30' = Loan account '93' = Loyalty account '92' = Real estate loan account '10' = Saving account '62' = Spending power account '40' = Universal account.
10	ACCOUNT_CURRENCY_CODE	CHAR	3		Currency of the debit account.
11	ACCOUNT_STATUS	CHAR	1		The status of the Pan-holder banking account.
12	ACCOUNT_STATUS_REASON	CHAR	2		Current status reason of the account.
13	SETTLEMENT_MODE	CHAR	1		The settlement transaction balance mode that indicates the type of settlement mode used by the corporate. Possible values are: 'B' = Settlement by Balance, 'T' = Settlement by Transaction, 'N' = Normal settlement.
14	POSTING_USAGE_FLAG	CHAR	1		This is to indicate whether the linked account is used for posting transactions or not. Possible values are: 'Y' = Yes 'N' = No

Seq.	Column Name	Data Type	Len	Sc	Column Description
					 Note The posting usage is used especially for accounts linked to the PAN entity.
15	OPERATIONS_CHOICE_USAGE_FLAG	CHAR	1		This field is reserved for internal use.
16	ADDRESS_CODE	CHAR	2		The address associated to the linked account.
17	OPENING_DATE	DATE	7		The opening date of the direct debit account.
18	CLOSING_DATE	DATE	7		The closing date of the direct debit account.
19	STATUS_DATE	DATE	7		Date when the status was last updated.
20	DIRECT_DEBIT_REFERENCE_NBR	VARCHAR2	16		In case the linked account is a bank account used for direct debit, this column defines the direct debit reference number.
21	ACCOUNT_BANK_NAME	VARCHAR2	32		In case the linked account is a bank account, this column defines the name of the domiciliation institution.
22	ACCOUNT_BANK_CITY	VARCHAR2	30		In case the linked account is a bank account, this column defines the city of the domiciliation institution.
23	ACCOUNT_BANK_COUNTRY	VARCHAR2	32		In case the linked account is a bank account, this column defines the country of the domiciliation institution.
24	ACCOUNT_CONVERSION_IN	CHAR	1		This is to indicate whether the linked account supports currency conversion or not. Possible values are: 'Y' = Yes 'N' = No
25	ACCOUNT_SPLIT_TRANSFER	CHAR	1		This column indicates whether the linked account supports split transfer or not. Possible values are: 'Y' = Yes 'N' = No  Note The split transfer is used especially for accounts linked to the Corporate entity.
26	PERCENTAGE_TRANSFER	NUMBER	9	3	The percentage portion of the amount to be transferred in case of linked account supporting split transfer.

Seq.	Column Name	Data Type	Len	Sc	Column Description
27	DEFAULT_FLAG	CHAR	1		The default flag. Possible values are: 'Y' = Yes 'N' = No
28	REMITTANCE_GROUPING	CHAR	1		The Remittance discount list of charge grouping methods available to the Corporate when defining the bank accounts. Only the first 3 characters are used, indicating by '1' (Yes) or '0' (No), whether the corresponding charge grouping method is available to the corporate or not as follow: Position 1: Detail (Batch by batch), Position 2: Aggregate all batches, Position 3: Aggregate by contract element.
29	FEES_GROUPING	CHAR	1		The fees list of charge grouping methods available to the Corporate when defining the bank accounts. Only the first 3 characters are used, indicating by '1' (Yes) or '0' (No), whether the corresponding charge grouping method is available to the corporate or not as follow: Position 1: Detail (Fee by fee), Position 2: Aggregate all fees, Position 3: Aggregate by contract element.
30	CHARGEBACK_GROUPING	CHAR	1		The chargeback list of charge grouping methods available to the corporate when defining the bank accounts. Only the first 3 characters are used, indicating by '1' (Yes) or '0' (No), whether the corresponding charge grouping method is available to the corporate or not as follow: Position 1: Detail (Chargeback by chargeback), Position 2: Aggregate all chargeback, Position 3: Aggregate by contract element.
31	BILLABLE_ELMNT_GROUPING	CHAR	1		The billable elements list of charge grouping methods available to the Corporate when defining the bank accounts. Only the first 3 characters are used, indicating by '1' (Yes) or '0' (No), whether the corresponding charge grouping method is available to the corporate or not as follow: Position 1: Detail (Billable element by billable element), Position 2: Aggregate all billable elements,

Seq.	Column Name	Data Type	Len	Sc	Column Description
					Position 3: Aggregate by contract element.
32	IBAN	VARCHAR2	34		The international institution Account number. This column defines the PAN holder banking account number in IBAN format.
33	CLOSING_RAISON	VARCHAR2	2		The closing reason of the direct debit account.
34	PRIVATE_DATA_1	VARCHAR2	64		This field is reserved for future use.
35	PRIVATE_DATA_2	VARCHAR2	64		This field is reserved for future use.
36	PRIVATE_DATA_3	NUMBER	18	3	This field is reserved for future use.
37	PRIVATE_DATA_4	NUMBER	18	3	This field is reserved for future use.
38	PRIVATE_DATA_5	DATE	7		This field is reserved for future use.
39	PRIVATE_DATA_6	DATE	7		This field is reserved for future use.
40	REF_ECHANGE	VARCHAR2	20		The exchange reference.
41	DEFAULT_ACCOUNT	CHAR	1		The default debit account in case of multiple accounts. Possible values are: 'Y' = Yes 'N' = No
42	SWIFT_CODE	VARCHAR2	11		The SWIFT code is an international bank code that identifies particular banks worldwide.
43	CORPORATE_FROM	CHAR	1		The Corporate destination. Possible values are: 'E' = Existing 'C' = Contract
44	ACCOUNT_FROM	CHAR	1		The Account destination. Possible values are: 'E' = Existing 'C' = Contract
45	USER_CREATE	VARCHAR2	15		ID of the user when record created.
46	DATE_CREATE	DATE	7		Record creation date and time.
47	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
48	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.15 BOARD_CR_SCHEDULE

This table contains all defined interest schedule indexes with their related default rate, minimum interest amount and grace interest amount.

Each column of this table is described in detail in the next section.

4.3.15.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Financial institution of the parameter being defined. It should be defined in the 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	APPLICATION_CONTRACT_ID	VARCHAR2	24		The application contract identification generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
4 	SCHEDULE_INDEX	CHAR	4		Index identifying the Interest schedule.
5	CURRENCY_CODE	CHAR	3		Schedule index currency code should be previously defined in the 'CURRENCY_TABLE'.
6	DEFAULT_INTEREST_RATE	NUMBER	9	6	The default interest rate for the schedule index. It is used when there is only one interest applied for all types of transactions.
7	MIN_INTEREST_AMOUNT	NUMBER	18	3	The minimum amount of interest charged. If the monthly interest calculated for a given account is under this minimum amount, this minimum interest amount will then apply, as long as it is above the grace amount.
8	GRACE_INTEREST_AMOUNT	NUMBER	18	3	The grace amount of interest not to be charged. If the monthly interest calculated for a given account is less than or equal to grace interest amount, no interest amount is charged.
9	USER_CREATE	VARCHAR2	15		ID of the user when record created.
10	DATE_CREATE	DATE	7		Record creation date and time.
11	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
12	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.16 BOARD_ELIG_PACK_CO

This table is used to define the Parent, Current, Sub levels availability for the Corporate. Each column of this table is described in detail in the next section.

4.3.16.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Financial institution of the parameter being defined. It should be defined in the 'BANK' table.

Seq.	Column Name	Data Type	Len	Sc	Column Description
2 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	CONTRACT_ELEMENT_ID	VARCHAR2	24		Contract element id with which the corporate has been subscribed.
4 	PACK_CODE	CHAR	6		The identification number of the pack.
5	CORPORATE_ID	VARCHAR2	15		This is the corporate identification number.
6	ABREV_WORDING	VARCHAR2	16		Shortened description used for information.
7	WORDING	VARCHAR2	32		Description of the pack.
8	DESCRIPTION	VARCHAR2	512		This field contains the full description of the pack.
9	CURRENT_LEVEL_AVAILABILITY	CHAR	1		This column indicates whether the current level is available for the corporate pack or not. Possible values are: 'Y' = Yes 'N' = No
10	SUB_LEVEL_AVAILABILITY	CHAR	1		This column indicates whether the sub level is available for the corporate pack or not. Possible values are: 'Y' = Yes 'N' = No
11	PARENT_LEVEL_AVAILABILITY	CHAR	1		This column indicates whether the parent level is available for the corporate pack or not. Possible values are: 'Y' = Yes 'N' = No
12	USER_CREATE	VARCHAR2	15		ID of the user when record created.
13	DATE_CREATE	DATE	7		Record creation date and time.
14	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
15	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.17 BOARD_ELIG_PACK_PRODUCTS_CO

This table contains Packs used for the Corporate.

Each column of this table is described in detail in the next section.

4.3.17.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Financial institution of the parameter being defined. It should be defined in the 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	CONTRACT_ELEMENT_ID	VARCHAR2	24		The contract element id with which the corporate has been subscribed.
4 	PACK_CODE	CHAR	6		Identification number of the pack.
5 	PRODUCT_CODE	CHAR	6		The code identifying the selected products for the corporate. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
6 	PRODUCT_VERSION	VARCHAR2	10		Version of the products selected for the corporate. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
7 	TREE_SEQUENCE_ID	VARCHAR2	15		This field is reserved for future use.
8	TREE_PARENT_ID	VARCHAR2	15		This field is reserved for future use.
9	CORPORATE_ID	VARCHAR2	15		The corporate identification number. It must be defined in 'CORPORATE' table.
10	PRODUCT_TYPE	CHAR	1		The product type of the product catalog. Possible values are: 'P' = Payment instrument, 'A' = Account, 'N' = Loan, 'Y' = Loyalty, 'C' = Add on services account, 'I' = Add on services PI.
11	DESCRIPTION	VARCHAR2	512		Shortened description of pack.
12	MANDATORY	CHAR	1		The mandatory flag. Possible values are: 'Y' = Yes 'N' = No
13	XML_FILE	BLOB	4000		XML value of the product catalog.
14	USER_CREATE	VARCHAR2	15		ID of the user when record created.
15	DATE_CREATE	DATE	7		Record creation date and time.
16	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
17	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.18 BOARD_ELIG_PRODUCT_CO

This table contains the eligible products offered for the Corporate.

Each column of this table is described in detail in the next section.

4.3.18.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Financial institution of the parameter being defined. It should be defined in the 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	CONTRACT_ELEMENT_ID	VARCHAR2	24		The contract element id with which the corporate has been subscribed.
4 	PRODUCT_CODE	CHAR	6		The identification number of the pack.
5 	PRODUCT_VERSION	VARCHAR2	10		Version of the product selected for the employee of the corporate. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
6	CORPORATE_ID	VARCHAR2	15		This is the corporate identification number.
7	PRODUCT_TYPE	CHAR	1		The product type of the product catalog. Possible values are: 'P' = Payment instrument, 'A' = Account, 'N' = Loan, 'Y' = Loyalty, 'C' = Add on services account, 'I' = Add on services PI.
8	DESCRIPTION	VARCHARA	40		The full description of the pack.
9	CURRENT_LEVEL_AVAILABILITY	CHAR	1		This column indicates whether the current level is available for the corporate pack or not. Possible values are: 'Y' = Yes 'N' = No
10	SUB_LEVEL_AVAILABILITY	CHAR	1		This column indicates whether the sub level is available for the corporate pack or not. Possible values are: 'Y' = Yes 'N' = No
11	PARENT_LEVEL_AVAILABILITY	CHAR	1		This column indicates whether the parent level is available for the corporate pack or not. Possible values are:

Seq.	Column Name	Data Type	Len	Sc	Column Description
					'Y' = Yes 'N' = No
12	XML_FILE	BLOB	4000		XML value of the product catalog.
13	USER_CREATE	VARCHAR2	15		ID of the user when record created.
14	DATE_CREATE	DATE	7		Record creation date and time.
15	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
16	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.19 BOARD_INTEREST_SCHEDULE

This is a staging table used to define the Interest rates applied on different account balance categories of transaction.

Each column of this table is described in detail in the next section.

4.3.19.1 Columns description

Seq.	Column Name	Data type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code concerned by the schedule index. It should be previously defined in the 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	APPLICATION_CONTRACT_ID	VARCHAR2	24		The application contract identification generated from boarding. It must be defined in 'BOARDING_CARD_APP' table
4 	INTEREST_SCHEDULE_INDEX	CHAR	4		Code identifying the interest schedule.
5 	AMOUNT_MAX	NUMBER	18	3	The maximum amount eligible for the stated rates by balance category of transactions.
6	RATE_PURCHASE	NUMBER	9	6	The purchase balance interest rate.
7	RATE_CASH	NUMBER	9	6	The cash balance interest rate.
8	RATE_TRANSFER	NUMBER	9	6	The transfer balance interest rate.
9	RATE_ECOM	NUMBER	9	6	The E-commerce balance interest rate.
10	RATE_CHEQUE	NUMBER	9	6	The cheque balance interest rate.
11	RATE_INTEREST	NUMBER	9	6	The interest balance interest rate.
12	RATE_INSTALMENT	NUMBER	9	6	The installment balance interest rate.
13	RATE_FEE	NUMBER	9	6	Free balance interest rate.
14	RATE_TAX	NUMBER	9	6	The tax balance interest rate.
15	RATE_REFUND	NUMBER	9	6	The refund balance interest rate.
16	RATE_DEPOSIT	NUMBER	9	6	The deposit balance interest rate.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
17	USER_CREATE	VARCHAR2	15		ID of the user when record created.
18	DATE_CREATE	DATE	7		Record creation date and time.
19	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
20	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.20 BOARD_ISS_POSTING_RULES

This is a staging table used to add several rules for posting (currency, transaction category...) for each account link been added manually. Refer to ["Posting rules"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.3.20.1 Columns description

Seq.	Column Name	Data type	Len.	Sc.	Column Description
1 	CARD_NUMBER	VARCHAR2	24		PAN identification number. It should be defined in 'CARD' table.
2 	SEQUENCE_ID	NUMBER	10		Sequence number identifying the issuer transactions posting rule criteria.
3	BANK_CODE	CHAR	6		Financial institution code concerned by the issuer transactions posting rule criteria parameters. It should be defined in the 'BANK' table.
4	DESCRIPTION	VARCHAR2	64		Short description of the posting rule.
5 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
6	MCC	CHAR	4		Merchant Category Code as criterion for the boarding posting rule. It should be defined in the 'MCC' table.  Note Null value indicates that all MCCs are applicable.
7	MCC_GROUP	CHAR	4		MCC Group code as criterion for the boarding posting rule. It should be defined in 'MCC_GROUP' table.  Note Null value indicates that all MCC groups are applicable.
8	TRANSACTION_CODE	CHAR	2		The transaction code as criterion for the boarding posting rule. It should be defined in 'TRANSACTIONS_DEFINITION' table.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					 Note Null value indicates that all transaction codes are applicable.
9	TRANSACTION_CATEGORY	NUMBER	2		This is the transaction category as criterion for the boarding posting rule. Possible values are: '01' = Airline, '02' = Lodging, '03' = Rent car, '04' = Restaurant, '05' = Medical, '06' = Mail order, '07' = Purchase, '09' = Withdrawal, '10' = Quasi cash, '11' = Cash, '12' = Transfer, '13' = E-commerce, '14' = T&E.  Note Null value indicates that all transaction categories are applicable.
10	TRANSACTION_CURRENCY	CHAR	3		This is the Transaction currency applicable as criterion for the boarding posting rule. It should be defined in 'CURRENCY_TABLE' table.  Note Null value indicates that all currencies are applicable.
11	ACQUIRER_COUNTRY_CODE	CHAR	3		This is the Acquirer country code as criterion for the boarding posting rule. It should be defined in the 'COUNTRY' table.  Note Null value indicates that all currencies are applicable
12	CURRENCY_FLAG	CHAR	1		It is to indicate the transaction currency (Local or foreign currency) as a criterion

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					for the boarding posting rule (Cross border territory). Possible values are: 'F' = Foreign currency, 'L' = Local currency. Note  Nul value indicates that both Local/forreign currency indicator values are applicable.
13	COUNTRY_FLAG	CHAR	1		Country territory indicator applicable as criterion for the boarding posting rule. It is to indicate whether the transaction country is a Local or foreign country. Possible values are: 'F' = Foreign country, 'L' = Local country. Note  Null value indicates that both Foreign/local country values are applicable.
14	LIST_PRODUCT_CODE	VARCHAR2	15		This column is not used in V3.5.
15	POSTING_DESTINATION	CHAR	2		Posting account destination Possible values are: 'CH' = Card / Account, 'CO' = Corporate.
16	CORPORATE_LEVEL	NUMBER	2		The corporate posting level when POSTING_DESTINATION is set to 'CO'.
17	POSTING_ACCOUNT_TYPE	CHAR	2		The type of the posting account destination. It should be defined in the 'ACCOUNT_TYPE_LIST' table.
18	POSTING_ACCOUNT_SEQUENCE	NUMBER	2		Sequence of the posting account for payment instruments with multiple accounts. For payment instruments with single account, the sequence default value is '00'.
19	DESTINATION_ACCOUNT_NBR	VARCHAR2	24		Posting account destination identification number.
20	PAN_FROM	CHAR	1		The boarding to be associated to the PAN Possible values are: 'E' = Existing 'C' = Contract
21	ACCOUNT_FROM	CHAR	1		The destination account. Possible values are:

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					'E' = Existing 'C' = Contract
22	USER_CREATE	VARCHAR2	15		ID of the user when record created.
23	DATE_CREATE	DATE	7		Record creation date and time.
24	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
25	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.21 BOARD_MARKUP_CALCUL

This table contains the boarding conversion fees by PAN application.

Each column of this table is described in detail in the next section.

4.3.21.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which boarding markup fee calculation parameters are being defined. It should be defined in the 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	APPLICATION_CONTRACT_ID	VARCHAR2	24		The ID with which the account contract will be captured during the corporate boarding.
4 	MARKUP_ID_SEQ	CHAR	10		Sequence identification of the markup fee. It should be defined in 'MARKUP_CALCUL' table.
5	DESCRIPTION	VARCHAR2	32		Markup description.
6	CURRENCY_NOTIN	VARCHAR2	6		The list of currencies that can be included in or excluded from the markup fee calculation. Possible values are: 'IN' = included, 'NOT IN' = Excluded.
7	DEFAULT_BUYING_RATE	NUMBER	9	6	The buying rate that will be applied on the converted transaction amount.
8	DEFAULT_BUYING_FIX	NUMBER	18	3	The buying amount of fixed fee to be levied on the converted transaction amount.
9	DEFAULT_BUYING_MIN	NUMBER	18	3	The buying minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
10	DEFAULT_BUYING_MAX	NUMBER	18	3	The buying maximum amount of markup fees to charge in case the fees

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					calculation result is greater than this maximum amount.
11	DEFAULT_BUYING_GRACE	NUMBER	18	3	The buying grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
12	DEFAULT_SELLING_RATE	NUMBER	9	6	The selling rate that will be applied on the converted transaction amount.
13	DEFAULT_SELLING_FIX	NUMBER	18	3	The selling amount of fixed fee to be levied on the converted transaction amount.
14	DEFAULT_SELLING_MIN	NUMBER	18	3	The selling minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
15	DEFAULT_SELLING_MAX	NUMBER	18	3	The selling maximum amount of markup fees to charge in case the fees calculation result is greater than this maximum amount.
16	DEFAULT_SELLING_GRACE	NUMBER	18	3	The selling grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
17	CASH_BUYING_RATE	NUMBER	9	6	The cash buying rate that will be applied on the converted transaction amount.
18	CASH_BUYING_FIX	NUMBER	18	3	The cash buying amount of fixed fee to be levied on the converted transaction amount.
19	CASH_BUYING_MIN	NUMBER	18	3	The cash buying minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
20	CASH_BUYING_MAX	NUMBER	18	3	The cash buying maximum amount of markup fees to charge in case the fees calculation result is greater than this maximum amount.
21	CASH_BUYING_GRACE	NUMBER	18	3	The cash buying grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
22	CASH_SELLING_RATE	NUMBER	9	6	The cash buying rate that will be applied on the converted transaction amount.
23	CASH_SELLING_FIX	NUMBER	18	3	The cash buying amount of fixed fee to be levied on the converted transaction amount.
24	CASH_SELLING_MIN	NUMBER	18	3	The cash selling minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
25	CASH_SELLING_MAX	NUMBER	18	3	The selling maximum amount of markup fees to charge in case the fees calculation result is greater than this maximum amount.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
26	CASH_SELLING_GRACE	NUMBER	18	3	The cash selling grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
27	CENTRAL_BANK_BUYING_RATE	NUMBER	9	6	The cash selling rate that will be applied on the converted transaction amount.
28	CENTRAL_BANK_BUYING_FIX	NUMBER	18	3	The cash selling amount of fixed fee to be levied on the converted transaction amount.
29	CENTRAL_BANK_BUYING_MIN	NUMBER	18	3	The central bank buying minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
30	CENTRAL_BANK_BUYING_MAX	NUMBER	18	3	The central bank buying maximum amount of markup fees to charge in case the fees calculation result is greater than this maximum amount.
31	CENTRAL_BANK_BUYING_GRACE	NUMBER	18	3	The central bank buying grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
32	CENTRAL_BANK_SELLING_RATE	NUMBER	9	6	The central bank buying rate that will be applied on the converted transaction amount.
33	CENTRAL_BANK_SELLING_FIX	NUMBER	18	3	The central bank buying amount of fixed fee to be levied on the converted transaction amount.
34	CENTRAL_BANK_SELLING_MIN	NUMBER	18	3	The central bank selling minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
35	CENTRAL_BANK_SELLING_MAX	NUMBER	18	3	The central bank selling maximum amount of markup fees to charge in case the fees calculation result is greater than this maximum amount.
36	CENTRAL_BANK_SELLING_GRACE	NUMBER	18	3	The central bank selling grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
37	INTER_TRANSFER_BUYING_RATE	NUMBER	9	6	The account transfer buying rate that will be applied on the converted transaction amount.
38	INTER_TRANSFER_BUYING_FIX	NUMBER	18	3	The account transfer buying amount of fixed fee to be levied on the converted transaction amount.
39	INTER_TRANSFER_BUYING_MIN	NUMBER	18	3	The account transfer buying minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
40	INTER_TRANSFER_BUYING_MAX	NUMBER	18	3	The account transfer buying maximum amount of markup fees to charge in case

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					the fees calculation result is greater than this maximum amount.
41	INTER_TRANSFER_BUYING_GRACE	NUMBER	18	3	The account transfer buying grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
42	INTER_TRANSFER_SELLING_RATE	NUMBER	9	6	The account transfer selling rate that will be applied.
43	INTER_TRANSFER_SELLING_FIX	NUMBER	18	3	The account transfer selling amount of fixed fee to be levied on the converted transaction amount. Like the rate, the fix is a component of the calculation's standard method.
44	INTER_TRANSFER_SELLING_MIN	NUMBER	18	3	The account transfer selling minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
45	INTER_TRANSFER_SELLING_MAX	NUMBER	18	3	The account transfer selling maximum amount of markup fees to charge in case the fees calculation result is greater than this maximum amount.
46	INTER_TRANSFER_SELLING_GRACE	NUMBER	18	3	The account transfer selling grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
47	SPECIAL_BUYING_RATE	NUMBER	9	6	The individual buying rate that will be applied on the converted transaction amount.
48	SPECIAL_BUYING_FIX	NUMBER	18	3	The individual buying amount of fixed fee to be levied on the converted transaction amount.
49	SPECIAL_BUYING_MIN	NUMBER	18	3	The individual buying minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
50	SPECIAL_BUYING_MAX	NUMBER	18	3	The individual buying maximum amount of markup fees to charge in case the fees calculation result is greater than this maximum amount.
51	SPECIAL_BUYING_GRACE	NUMBER	18	3	The individual buying grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
52	SPECIAL_SELLING_RATE	NUMBER	9	6	The individual selling rate that will be applied on the converted transaction amount.
53	SPECIAL_SELLING_FIX	NUMBER	18	3	The individual selling amount of fixed fee to be levied on the converted transaction amount.
54	SPECIAL_SELLING_MIN	NUMBER	18	3	The individual selling minimum amount of markup fees to charge in case the

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					fees calculation result is between the grace amount and this minimum amount.
55	SPECIAL_SELLING_MAX	NUMBER	18	3	The individual selling maximum amount of markup fees to charge in case the fees calculation result is greater than this maximum amount.
56	SPECIAL_SELLING_GRACE	NUMBER	18	3	The individual selling grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
57	RULE_IDENTIFIER	CHAR	12		The fee calculation rule as follow: 'STD' = Standard, 'MIN' = Minimum, 'MAX' = Maximum.
58	ROUNDED_METHOD_IDENTIFIER	CHAR	4		The rounding method to be applied on the VISA interchange fee calculation result. Possible values are: 'H' = High value, 'L' = 'Low value, 'N' = Normal, 'E' = Exponent (Default standard method).
59	THRESHOLD_AMOUNT	NUMBER	18	3	This is the transaction amount threshold under which the system does not undergo the interchange fee calculation and the result is set to zero.
60	COUNTRY_VERIFICATION	CHAR	1		This flag indicates the address county verification Possible values are: 'Y' = Yes, 'N' = No.
61	USER_CREATE	VARCHAR2	15		ID of the user when record created.
62	DATE_CREATE	DATE	7		Record creation date and time.
63	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
64	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.22 BOARD_MARKUP_ELLIGIBLE_CURS

This table stores the currencies for which the markup fee index is eligible. The same markup fee calculation logic will apply for all the currencies defined in this table within the markup fee index.

Each column of this table is described in detail in the next section.

4.3.22.1 Columns description

Seq.	Column Name	Data type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which parameters are being defined. It should be defined in the 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	APPLICATION_CONTRACT_ID	VARCHAR2	24		ID with which the account contract will be captured during the Corporate boarding.
4 	MARKUP_ID_SEQ	CHAR	10		Sequence identification of the markup fee. It should be defined in 'MARKUP_CALCUL' table.
5 	CURRENCY_CODE	CHAR	3		The currency code of the parameter being defined. It must be defined in 'CURRENCY_TABLE' table.
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.23 BOARD_MIN_DUE_SCHEDULE

Records of this table concern Minimum-due schedule parameters that are used to setup the minimum due calculation formula for each minimum due index defined. In PowerCARD standard, the Minimum due (Minimum to pay) calculation is performed according to the “rule of 5” that uses in addition to the rate by range, other parameters including Amount threshold, Fixed, Minimum, Maximum and the Grace amount.

Each column of this table is described in detail in the next section.

4.3.23.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Financial institution of the parameter being defined. It should be previously defined in the 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	APPLICATION_CONTRACT_ID	VARCHAR2	24		ID with which the account contract will be captured during the boarding.
4	AMOUNT_MAX	NUMBER	18	3	This is the maximum amount tier for which the minimum due parameters are applicable.
5	MINIMUM_DUE_RATE	NUMBER	9	6	This is the rate to apply on the base amount.

Seq.	Column Name	Data Type	Len	Sc	Column Description
6	MINIMUM_DUE_FIX	NUMBER	18	3	This is the amount that will be added to the result before comparing to the minimum, maximum and grace amount.
7	MINIMUM_DUE_MIN	NUMBER	18	3	This is the minimum amount that will be compared to the final result in order to bring this result in line with the minimum amount if the final result is less than this Minimum (If the final result is less than the minimum amount, then the final result gets the Minimum value).
8	MINIMUM_DUE_MAX	NUMBER	18	3	This is the maximum amount that will be compared to the final result in order to bring this result in line with the maximum amount if the final result is greater than this Maximum (If the final result is greater than the maximum amount, then the final result gets the Maximum value).
9	MINIMUM_DUE_GRACE	NUMBER	18	3	This is the amount under which the final result is brought to zero (If the final result is less or equal than the Grace amount, then the final result gets zero value).
10	RULE_IDENTIFIER	CHAR	3		This is the Minimum due calculation rule. Possible values are: 'STD' = Standard, 'MIN' = Minimum, 'MAX' = Maximum.
11	ROUNDED_METHOD_IDENTIFIER	CHAR	1		This is to indicate the rounding method to be applied on the Minimum due calculation result. Possible values are: 'H' = High value, 'L' = Low value, 'N' = Normal, 'E' = Exponent (Default standard method).
12	THRESHOLD_AMOUNT	NUMBER	18	3	This is the base amount threshold under which the system does not undergo the Minimum due calculation and the result is set to zero.
13	FACTOR	NUMBER	6		This column is not used in V3.5.
14	ROUNDING_VALUE	NUMBER	8		This is the rounding value on decimals. Possible values are: 10, 100.
15	DEFAULT_QUOTA	NUMBER	2		This is the default value of the quota (Number of terms a transaction payment can be deferred) when the defined method of Minimum due

Seq.	Column Name	Data Type	Len	Sc	Column Description
					calculation at the index level is set to 'QU' (Quota).
16	MAX_QUOTA	NUMBER	2		This is the maximum value of the quota when the defined method of Minimum due calculation at the index level is set to 'QU' (Quota).
17	USER_CREATE	VARCHAR2	15		ID of the user when record created.
18	DATE_CREATE	DATE	7		Record creation date and time.
19	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
20	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.24 BOARD_MIN_DUE_SCHEDULE_INDEX

Records of this table concern Minimum-due schedule index parameters that are used to set up the minimum payment or (MTP - Minimum to Pay) calculation method.

Each column of this table is described in detail in the next section.

4.3.24.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code and name concerned by the Minimum due schedule index. It should be previously defined in the 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	APPLICATION_CONTRACT_ID	VARCHAR2	24		ID with which the account contract will be captured during the boarding.
4	METHOD_CALCUL	CHAR	2		The minimum due calculation method. Possible values are: 'FO' = Full of outstanding balance (100%), 'BO' = By range of specific amount, 'QU' = Quota.
5	CURRENCY_CODE	CHAR	3		The minimum due Schedule index currency code. It should be previously defined in the 'CURRENCY_TABLE'
6	GRACE_AMOUNT	NUMBER	18	3	The grace amount of Minimum due not to be charged. If the monthly Minimum due calculated for a given account is less than or equal to grace amount, no Minimum due amount is charged.
7	USER_CREATE	VARCHAR2	15		ID of the user when record created.
8	DATE_CREATE	DATE	7		Record creation date and time.

Seq.	Column Name	Data Type	Len	Sc	Column Description
9	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
10	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.25 BOARDING_ACCOUNT_APP

This is a staging table used to edit a contract element related to an Account product.

Each column of this table is described in detail in the next section.

4.3.25.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code concerned by the parameter being defined. It should be defined in the 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	24		The application identification number with which the client has been subscribed. It should be in 'CLIENT' table.
3 	APPLICATION_CONTRACT_ID	VARCHAR2	24		The application identification number of the client's contract. It should be in 'BOARDING_ACCOUNT_APP' table.
4	PRIMARY_SHADOW_ACCOUNT_NBR	VARCHAR2	24		The Primary Shadow account identification number. If the shadow account is a secondary account, this field should contain the corresponding primary shadow account number. It should be defined in 'SHADOW_ACCOUNT' table.
5	CLIENT_CODE	VARCHAR2	24		Client identification code concerned by the Credit account. It should be defined in 'CLIENT' table.
6	CLIENT_HOST_ID	VARCHAR2	24		Client identification code at the financial institution's Host level.
7	BRANCH_CODE	CHAR	6		The branch code concerned by the Credit account. It should be defined in 'BRANCH' table.
8	CLIENT_BIRTH_DATE	DATE	7		Client birth date.
9	CLIENT_PREFERRED_STAT_ADDRESS	CHAR	2		This column is not used in V3.5.
10	CLIENT_SM_PREF_STAT_ADDRESS	CHAR	2		This column is not used in V3.5.
11	CONTRACT_NUMBER	VARCHAR2	30		This column is not used in V3.5.
12	CUSTOMER_SEGMENT	CHAR	3		Customer segment code. It should be defined in 'CUSTOMER_SEGMENT' table.
13	CORPORATE_ID	VARCHAR2	15		Corporate ID in case of corporate account. It should be defined in 'CORPORATE' table.
14	CORP_CONTRACT_ELEMENT_ID	VARCHAR2	24		The contract element id with which the corporate has been subscribed.

Seq.	Column Name	Data Type	Len	Sc	Column Description
15	LIABILITY_INDICATOR	CHAR	1		The account liability indicator. Possible values are: 'P' = Personal Liability (For personal cards), 'I' = Individual liability (Personal liability for corporate cards), 'J' = Joint (Both personal and corporate liability for corporate cards), 'F' = Full liability (Only corporation is liable).
16	CHANNEL_NUMBER	VARCHAR2	15		The concerned internal Channel identification number. It should be defined in 'CHANNEL' table.
17	TAX_IDENTIFICATION	VARCHAR2	10		Client tax identification as taxpayer, as defined in 'CLIENT' table.
18	INITIAL_PROFILE_CODE	CHAR	3		The initial account profile identification code. It should be defined in 'CR_PROFILE' table.
19	TYPE_OF_INITIAL_PROFILE_ACC	CHAR	1		The type of initial account profile. Possible values are: 'R' = Credit revolving, 'C' = Charge, 'P' = Prepaid.
20	CURRENT_PROFILE_CODE	CHAR	3		The current Account profile identification code. It should be defined in 'CR_PROFILE' table.
21	TYPE_OF_CURRENT_PROFILE_ACC	CHAR	1		The type of current account profile. Possible values are: 'R' = Credit revolving, 'C' = Charge, 'P' = Prepaid.
22	INSTALLMENT_FACILITY_IND	CHAR	1		This column indicates whether the loan (EMI) is supported for the account or not. Possible values are: 'Y' = Yes (By default), 'N' = No.
23	PRIMARY_CARD_PRODUCT_CODE	CHAR	3		Product code of primary payment instrument. It should be defined in 'CARD_PRODUCT' table.
24	SOURCE_CODE_INDICATOR	CHAR	1		The source of the account. Possible values are: 'N' = New account, 'C' = Converted account, 'T' = Transferred account.

Seq.	Column Name	Data Type	Len	Sc	Column Description
25	CURRENCY_CODE	CHAR	3		The account currency code. It should be defined in 'CURRENCY_TABLE' table.
26	CREDIT_LIMIT	NUMBER	15		Credit limit at the account level. This Credit limit prevails on the one defined at the account catalogue product level. However, this limit cannot exceed the Credit limit ceiling defined at the account catalogue product level.
27	CASH_TRANSFER_LIMIT	NUMBER	15		It indicates the temporary cash/transfer limit at the account level. This Cash/transfer limit is defined as part of the Credit limit and therefore, cannot exceed the Credit limit.
28	LOAN_LIMIT	NUMBER	15		The Loan limit at the account level. This Loan limit can be defined as a separate limit or as part of the Credit limit but cannot exceed the Credit limit in any case.
29	VIP_LEVEL	CHAR	1		The VIP level defined for the client owner. It should be defined in 'VIP_LIST' table.
30	OWNER_CODE	CHAR	2		Owner codes. It should be defined in 'OWNER_LIST' table.
31	OWNER_CATEGORY	CHAR	1		The category of the owner. Possible values are: 'I' = Individual, 'B' = Business, 'S' = Staff, 'P' = Professional, 'N' = Company, 'C' = Corporate, 'T' = Travel, 'L' = International corporate, 'R' = Procurement, 'X' = Others1, 'Y' = Others2, 'Z' = Others3.
32	FORMER_CREDIT_LIMIT	NUMBER	15		The previous Credit limit at the account level.
33	FORMER_CREDIT_LIMIT_D	DATE	7		The date on which the previous Credit limit's change to the current Credit limit occurred.
34	FORMER_CASH_TRANSFER_LIMIT	NUMBER	15		The previous Cash/Transfer limit at the account level.
35	FORMER_CASH_TRANSFER_LIMIT_D	DATE	7		The date on which the previous Cash/Transfer limit's change to the current Cash/Transfer limit occurred.

Seq.	Column Name	Data Type	Len	Sc	Column Description
36	FORMER_LOAN_LIMIT	NUMBER	15		The previous Loan limit at the account level.
37	FORMER_LOAN_LIMIT_D	DATE	7		The date on which the previous Loan limit's change to the current Credit limit occurred.
38	TD_CREDIT_LIMIT	NUMBER	15		The temporary Credit limit at the account level. This Credit limit prevails on the one defined at the account catalogue product level. However, this limit cannot exceed the Credit limit ceiling defined at the account catalogue product level.
39	TD_CASH_TRANSFER_LIMIT	NUMBER	15		It indicates the temporary Cash/transfer limit at the account level. This Cash/transfer limit is defined as part of the Temporary Credit limit and therefore, cannot exceed it.
40	TD_LOAN_LIMIT	NUMBER	15		It indicates the temporary loan limit at the account level. This Loan limit can be defined as a separate limit or as part of the Temporary Credit limit but cannot exceed it in any case.
41	TD_START_DATE	DATE	7		It indicates the effective start date of the Temporary limits including Temporary Credit limit, Temporary Cash/Transfer limit and Temporary Loan limit.
42	TD_END_DATE	DATE	7		It indicates the date on which the Temporary Credit limits including Cash/transfer and Loan limits return to their values of Permanent limits.
43	CYCLE_TASK_NAME	VARCHAR2	15		This field is reserved for internal use.
44	CYCLE_CUTOFF_CODE	CHAR	3		The account cycle cutoff code. It should be defined in 'CYCLE_CUTOFF_PARAMETERS' table.
45	LOAN_DUE_DAY	NUMBER	2		In case 'INSTALLMENT_FACILITY_IND' is set to 'Y' (Yes), this column indicates the loan installment transaction due day. Possible values are: '0' = Generate installment at loan transaction date, NULL = Generate installment at statement date, '01'-'28' = Generate installment in the specified day in the month.
46	LATE_PAYMENT_FEE_ON_OFF	CHAR	1		It indicates whether the late payment fee should be generated for the account or not. Possible values are: 'Y' = Yes, 'N' = No.

Seq.	Column Name	Data Type	Len	Sc	Column Description
47	PENALTY_FEE_ON_OFF	CHAR	1		It indicates whether the penalty fee should be generated for the account or not. Possible values are: 'Y' = Yes, 'N' = No.
48	PENALTY_FEE_NEXT_PROC_DATE	DATE	7		It indicates the penalty fee next generation date, i.e. the date when the next penalty fees will be generated for the account.
49	DEFAULT_CODE_ACTION	CHAR	3		It indicates the default authorization response code. It should be defined in 'ACTION_LIST' table. Below are few samples: '100' = Rejected, '107' = Refer to card issuer, '108' = Refer to card issuer; special condition, '115' = Function not available, '116' = No sufficient funds, '119' = Cardholder transaction not permitted, '120' = Terminal transaction not permitted, '121' = Exceeds withdrawal frequency limit, '122' = Security violation, '123' = Withdrawal frequency exceeded, '125' = Card not in service, '129' = Suspected fraud, '180' = No credit account, '181' = No cheque account, '182' = No saving Account, '200' = Rejected, Pick up card, '202' = Fraudulent, Pick up, '205' = Call security acquirer, pick up, '207' = Special conditions, Pick up, '208' = Lost card, Pick up, '209' = Stolen card, Pick up, '210' = Suspected fraud, Pick up, '299' = Pick up.
50	CURRENT_CODE_ACTION	CHAR	3		It indicates the current authorization response code. It should be defined in 'ACTION_LIST' table.
51	AD_IND	CHAR	2		This column is fixed to the value 'AD' (Administrative) for internal usage.

Seq.	Column Name	Data Type	Len	Sc	Column Description
52	ADMINISTRATIVE_STATUS	CHAR	1		It indicates the current account administrative status. It should be defined in SHADOW_ACCOUNT_STATUS table with STATUS_CATEGORY column's value set at 'AD' (Administrative).
53	ADMINISTRATIVE_STATUS_DATE	DATE	7		It indicates the current account administrative status date.
54	F_ADMINISTRATIVE_STATUS	CHAR	1		It indicates the former account administrative status.
55	F_ADMINISTRATIVE_STATUS_DATE	DATE	7		It indicates the former account administrative status date.
56	BL_IND	CHAR	2		This column is fixed to the value 'BL' (Balance) for internal usage.
57	BALANCE_STATUS	CHAR	1		It indicates the current Account balance status. It should be defined in SHADOW_ACCOUNT_STATUS table with STATUS_CATEGORY field's value set at 'BL' (Balance).
58	BALANCE_STATUS_DATE	DATE	7		It indicates the current account balance status date.
59	F_BALANCE_STATUS	CHAR	1		It indicates the former Account balance status.
60	F_BALANCE_STATUS_DATE	DATE	7		It indicates the former Account balance status date.
61	OVERDRAWN_PR_BAL_DATE	DATE	7		It indicates the date when the allowed overdrawn occurred for the first time during the current cycle
62	OVERDRAWN_NP_BAL_DATE	DATE	7		It indicates the date when the critical overdrawn occurred for the first time during the current cycle
63	UP_IND	CHAR	2		This column is fixed to the value 'UP' (Unpaid) for internal usage.
64	UNPAID_STATUS	CHAR	1		It indicates the current Account unpaid status. It should be defined in SHADOW_ACCOUNT_STATUS table with STATUS_CATEGORY column's value set at 'UP' (Unpaid).
65	UNPAID_STATUS_DATE	DATE	7		It indicates the current Account unpaid status date.
66	F_UNPAID_STATUS	CHAR	1		It indicates the former Account unpaid status.
67	F_UNPAID_STATUS_DATE	DATE	7		It indicates the former account unpaid status date.
68	FIRST_UNPAID_DATE	DATE	7		It indicates the date of the first occurred unpaid.
69	SECOND_UNPAID_DATE	DATE	7		It indicates the date of the second occurred unpaid.
70	LP_IND	CHAR	2		This column is fixed to the value 'LP' (Late payment) for internal usage.

Seq.	Column Name	Data Type	Len	Sc	Column Description
71	LATE_PAYMENT_STATUS	CHAR	1		It indicates the current Account late payment status. It should be defined in SHADOW_ACCOUNT_STATUS table with STATUS_CATEGORY column's value set at 'LP' (Late payment).
72	LATE_PAYMENT_STATUS_DATE	DATE	7		It indicates the current Account late payment status date.
73	F_LATE_PAYMENT_STATUS	CHAR	1		It indicates the former account late payment status.
74	F_LATE_PAYMENT_STATUS_DATE	DATE	7		It indicates the former account late payment status date.
75	IP_IND	CHAR	2		This column is fixed to the value 'IP' (Payment failed) for internal usage.
76	PAYMENT_FAILED_STATUS	CHAR	1		It indicates the current account payment incident status. It should be defined in SHADOW_ACCOUNT_STATUS table with STATUS_CATEGORY column's value set at 'IP' (Payment failed).
77	PAYMENT_FAILED_STATUS_DATE	DATE	7		It indicates the current account payment incident status date.
78	F_PAYMENT_FAILED_STATUS	CHAR	1		It indicates the former account payment incident status.
79	F_PAYMENT_FAILED_STATUS_DATE	DATE	7		It indicates the former account payment incident status date.
80	PAYMENT_FAILED_DATE	DATE	7		It indicates the payment failed date.
81	PAYMENT_FAILED_NUMBER	NUMBER	3		It indicates the number of times a payment incident has occurred for the account from the time it was created.
82	PP_IND	CHAR	2		This column is fixed to the value 'PP' (Payment promise) for internal usage.
83	PAYMENT_PROMISE_STATUS	CHAR	1		It indicates the current account payment promise status. It should be defined in 'SHADOW_ACCOUNT_STATUS' table with STATUS_CATEGORY column's value set at 'PP' (Payment promise).
84	PAYMENT_PROMISE_STATUS_DATE	DATE	7		It indicates the current account payment promise status date.
85	F_PAYMENT_PROMISE_STATUS	CHAR	1		It indicates the former account payment promise status.
86	F_PAYMENT_PROMISE_STATUS_DATE	DATE	7		It indicates the former account payment promise status date.
87	HIGHEST_STATUS_CATEGORY	CHAR	2		The account status category having the highest priority level. Possible values are: 'AD' = Administrative status, 'BL' = Balance status, 'LP' = Late payment status, 'UP' = Unpaid status, 'IP' = Payment incident status,

Seq.	Column Name	Data Type	Len	Sc	Column Description
					'PP' = Payment promise status.
88	HIGHEST_SEVERITY_LEVEL	NUMBER	2		The highest priority level.
89	RISK_LEVEL	NUMBER	2		The risk level of the customer as defined by the financial institution. This data (Generally evaluated outside PowerCARD using a scoring system) is stored for an information purpose.
90	COLLECTION_LEVEL	VARCHAR2	6		This column is not used in V3.5.
91	START_COLLECTION_DATE	DATE	7		When applicable, this column indicates the start collection date.
92	END_COLLECTION_DATE	DATE	7		When applicable, this column indicates the end collection date.
93	NB_TRANS_D_DURING_COL	NUMBER	6		It indicates the number of debit transactions as received during collection period.
94	NB_TRANS_C_DURING_COL	NUMBER	6		It indicates the number of credit transactions as received during collection period.
95	MINIMUM_DUE_FIXED	NUMBER	18	3	This column is not used in V3.5.
96	MIN_DUE_SCHEDULE_CRITERIA	CHAR	1		This column is not used in V3.5.
97	MIN_DUE_SCHEDULE_INDEX	CHAR	4		This column is not used in V3.5.
98	FIX_DUE_START_DATE	DATE	7		This column is not used in V3.5.
99	FIX_DUE_END_DATE	DATE	7		This column is not used in V3.5.
100	PAYMENT_MODE_AUTO_DEBIT_IND	CHAR	1		The automatic debit payment mode indicator. Possible values are: 'M' = Mandatory direct debit, 'P' = Allowed, 'F' = Closing balance.
101	PAYMENT_MODE_CHECK_IND	CHAR	1		The check payment mode indicator. Possible values are: 'P' = Allowed, 'F' = Closing balance.
102	BASE_AUTODEBIT_EFF_DATE	CHAR	1		This column is not used in V3.5.
103	OP_AUTODEBIT_EFF_DATE	CHAR	1		This column is not used in V3.5.
104	NBDAY_AUTODEBIT_EFF_DATE	NUMBER	3		This column is not used in V3.5.
105	SKIP_AUTODEBIT_EFF_DATE	CHAR	1		This column is not used in V3.5.
106	BASE_AUTODEBIT_VAL_DATE	CHAR	1		This column is not used in V3.5.
107	OP_AUTODEBIT_VAL_DATE	CHAR	1		This column is not used in V3.5.

Seq.	Column Name	Data Type	Len	Sc	Column Description
108	NBDAY_AUTODEBIT_VAL_DATE	NUMBER	3		This column is not used in V3.5.
109	SKIP_AUTODEBIT_VAL_DATE	CHAR	1		This column is not used in V3.5.
110	ELIGIBILITY_INDICATOR	CHAR	1		This column is not used in V3.5.
111	ELIGIBILITY_START_DATE	DATE	7		This column is not used in V3.5.
112	ELIGIBILITY_END_DATE	DATE	7		This column is not used in V3.5.
113	STATEMENT_SEQUENCE	NUMBER	6		It indicates the last statement sequence number.
114	LANGUAGE_CODE	CHAR	3		It indicates the last language code. It should be defined in 'LANGUAGE_LIST' table.
115	STATEMENT_CODE	CHAR	2		It indicates the statement code should be defined in 'STATEMENT_PARAMETERS' table.
116	LOAN_BALANCE	NUMBER	18	3	It indicates the loan balance.
117	OPENING_BALANCE	NUMBER	18	3	It indicates the last cycle cutoff opening balance.
118	OPENING_BALANCE_SIGN	CHAR	1		It indicates the last cycle cutoff opening balance sign.
119	CLOSING_BALANCE	NUMBER	18	3	It indicates the last cycle cutoff closing balance.
120	CLOSING_BALANCE_SIGN	CHAR	1		It indicates the last cycle cutoff closing balance sign.
121	CLOSING_BALANCE_PURCHASE	NUMBER	18	3	It indicates the last cycle cutoff closing balance purchase.
122	CLOSING_BALANCE_CASH	NUMBER	18	3	It indicates the last cycle cutoff closing balance cash.
123	CLOSING_BALANCE_TRANSFER	NUMBER	18	3	It indicates the last cycle cutoff closing balance transfer.
124	CLOSING_BALANCE_ECOM	NUMBER	18	3	It indicates the last cycle cutoff closing balance e-commerce.
125	CLOSING_BALANCE_CHEQUE	NUMBER	18	3	It indicates the last cycle cutoff closing balance cheque.
126	CLOSING_BALANCE_INTEREST	NUMBER	18	3	It indicates the last cycle cutoff closing balance interest.
127	CLOSING_BALANCE_INSTALLMENT	NUMBER	18	3	It indicates the last cycle cutoff closing balance loan installment.
128	CLOSING_BALANCE_FEES	NUMBER	18	3	It indicates the last cycle cutoff closing balance fees.
129	CLOSING_BALANCE_TAX	NUMBER	18	3	It indicates the last cycle cutoff closing balance tax.
130	CLOSING_BALANCE_REFUND	NUMBER	18	3	It indicates the last cycle cutoff closing balance refund.
131	CLOSING_BALANCE_DEPOSIT	NUMBER	18	3	It indicates the last cycle cutoff closing balance deposit.

Seq.	Column Name	Data Type	Len	Sc	Column Description
132	CLOS_BAL_SUBJECT_LATE_FEES	NUMBER	18	3	It indicates the last cycle cutoff closing balance of transactions subject to late payment fees.
133	CURRENT_BALANCE_PURCHASE	NUMBER	18	3	It indicates the current balance purchase.
134	CURRENT_BALANCE_CASH	NUMBER	18	3	It indicates the current balance cash.
135	CURRENT_BALANCE_TRANSFER	NUMBER	18	3	It indicates the current balance transfer.
136	CURRENT_BALANCE_ECOM	NUMBER	18	3	It indicates the current balance e-commerce.
137	CURRENT_BALANCE_CHEQUE	NUMBER	18	3	It indicates the current balance cheque.
138	CURRENT_BALANCE_INTEREST	NUMBER	18	3	It indicates the current balance interest.
139	CURRENT_BALANCE_INSTALLMENT	NUMBER	18	3	It indicates the current balance loan installment.
140	CURRENT_BALANCE_FEES	NUMBER	18	3	It indicates the current balance fees.
141	CURRENT_BALANCE_TAX	NUMBER	18	3	It indicates the current balance tax.
142	CURRENT_BALANCE_REFUND	NUMBER	18	3	It indicates the current balance refund.
143	CURRENT_BALANCE_DEPOSIT	NUMBER	18	3	It indicates the current balance deposit.
144	NBRTRA_CURBAL_PURCHASE	NUMBER	8		It indicates the number of transactions in current balance purchase.
145	NBRTRA_CURBAL_CASH	NUMBER	8		It indicates the number of transactions in current balance cash.
146	NBRTRA_CURBAL_TRANSFER	NUMBER	8		It indicates the number of transactions in current balance transfer.
147	NBRTRA_CURBAL_ECOM	NUMBER	8		It indicates the number of transactions in current balance e-commerce.
148	NBRTRA_CURBAL_CHEQUE	NUMBER	8		It indicates the number of transactions in current balance cheque.
149	NBRTRA_CURBAL_INTEREST	NUMBER	8		It indicates the number of transactions in current balance interest.
150	NBRTRA_CURBAL_INSTALLMENT	NUMBER	8		It indicates the number of transactions in current balance loan installment.
151	NBRTRA_CURBAL_FEES	NUMBER	8		It indicates the number of transactions in current balance fees.
152	NBRTRA_CURBAL_TAX	NUMBER	8		It indicates the number of transactions in current balance tax.
153	NBRTRA_CURBAL_REFUND	NUMBER	8		It indicates the number of transactions in current balance refund.
154	NBRTRA_CURBAL_DEPOSIT	NUMBER	8		It indicates the number of transactions in current balance deposit.
155	PENDING_AUTHORIZATION	NUMBER	18	3	It indicates the pending authorization amount.
156	PENDING_AUT_CASH_TRANSFER	NUMBER	18	3	It indicates the pending authorization cash/transfer amount.
157	PENDING_AUT_LOAN	NUMBER	18	3	It indicates the pending authorization loan amount.

Seq.	Column Name	Data Type	Len	Sc	Column Description
158	PENDING_CONV_BALANCE	NUMBER	18	3	It indicates the pending conversion balance.
159	PENDING_CONV_BALANCE_S	CHAR	1		It indicates the pending conversion balance sign.
160	PENDING_CONV_BAL_CASH_TRANSFER	NUMBER	18	3	It indicates the pending conversion cash/transfer balance.
161	PENDING_CONV_BAL_CASH_TRANSFER_S	CHAR	1		It indicates the pending conversion cash/transfer balance sign.
162	PENDING_CONV_BAL_LOAN	NUMBER	18	3	It indicates the pending conversion loan balance.
163	PENDING_CONV_BAL_LOAN_S	CHAR	1		It indicates the pending conversion loan balance sign.
164	LIVE_DEPOSIT	NUMBER	18	3	It indicates the live deposit amount.
165	CHECK_DEPOSIT_WAIT_CONFIRM	NUMBER	18	3	It indicates the check deposit waiting confirmation amount.
166	FULL_PAYMENT_BALANCE	NUMBER	18	3	It indicates the full payment balance.
167	SPECIFIC_DEBIT_ORDER_AMNT	NUMBER	18	3	It indicates the specific debit order amount.
168	SPECIFIC_DEBIT_ORDER_SD	DATE	7		It indicates the start date of specific debit order.
169	SPECIFIC_DEBIT_ORDER_ED	DATE	7		It indicates the end date of specific debit order.
170	BALANCE_AT_CANCELLATION_DATE	NUMBER	18	3	For cancelled accounts, this field indicates the balance at cancellation date.
171	BALANCE_AT_LAST_YEARLY_CUTOFF	NUMBER	18	3	It indicates the account balance at last yearly cutoff.
172	CANCELLATION_DATE	DATE	7		For cancelled accounts, this field indicates the cancellation date.
173	AGE_BUCKET_30	NUMBER	18	3	It indicates the outstanding payments (Unpaid terms) at age bucket 30 days.
174	AGE_BUCKET_60	NUMBER	18	3	It indicates the outstanding payments (Unpaid terms) at age bucket 60 days.
175	AGE_BUCKET_90	NUMBER	18	3	It indicates the outstanding payments (Unpaid terms) at age bucket 90 days.
176	AGE_BUCKET_120	NUMBER	18	3	It indicates the outstanding payments (Unpaid terms) at age bucket 120 days.
177	AGE_BUCKET_150	NUMBER	18	3	It indicates the outstanding payments (Unpaid terms) at age bucket 150 days.
178	AGE_BUCKET_180	NUMBER	18	3	It indicates the outstanding payments (Unpaid terms) at age bucket 180 days.
179	AGE_BUCKET_210	NUMBER	18	3	It indicates the outstanding payments (Unpaid terms) at age bucket 210 days.
180	AGE_BUCKET_240	NUMBER	18	3	It indicates the outstanding payments (Unpaid terms) at age bucket 240 days.

Seq.	Column Name	Data Type	Len	Sc	Column Description
181	AGE_BUCKET_OVR	NUMBER	18	3	It indicates the outstanding payments (Unpaid terms) at age bucket over 240 days.
182	AGE_BUCKET_30_SUBJECT_PENALTYNUMBER		18	3	It indicates the penalty fee generated for outstanding payments (Unpaid terms) at age bucket 30 days.
183	AGE_BUCKET_60_SUBJECT_PENALTYNUMBER		18	3	It indicates the penalty fee generated for outstanding payments (Unpaid terms) at age bucket 60 days.
184	AGE_BUCKET_90_SUBJECT_PENALTYNUMBER		18	3	It indicates the penalty fee generated for outstanding payments (Unpaid terms) at age bucket 90 days.
185	AGE_BUCKET_120_SUBJECT_PENALTYNUMBER		18	3	It indicates the penalty fee generated for outstanding payments (Unpaid terms) at age bucket 120 days.
186	AGE_BUCKET_150_SUBJECT_PENALTYNUMBER		18	3	It indicates the penalty fee generated for outstanding payments (Unpaid terms) at age bucket 150 days.
187	AGE_BUCKET_180_SUBJECT_PENALTYNUMBER		18	3	It indicates the penalty fee generated for outstanding payments (Unpaid terms) at age bucket 180 days.
188	AGE_BUCKET_210_SUBJECT_PENALTYNUMBER		18	3	It indicates the penalty fee generated for outstanding payments (Unpaid terms) at age bucket 210 days.
189	AGE_BUCKET_240_SUBJECT_PENALTYNUMBER		18	3	It indicates the penalty fee generated for outstanding payments (Unpaid terms) at age bucket 240 days.
190	AGE_BUCKET_OVR_SUBJECT_PENALTYNUMBER		18	3	It indicates the penalty fee generated for outstanding payments (Unpaid terms) at age bucket over 240 days.
191	CUM_TURNOVER_PURCHASE	NUMBER	22	3	It indicates the cumulative amount of purchase transactions since account opening date.
192	CUM_TURNOVER_CASH	NUMBER	22	3	It indicates the cumulative amount of cash transactions since account opening date.
193	CUM_TURNOVER_TRANSFER	NUMBER	22	3	It indicates the cumulative amount of transfer transactions since account opening date.
194	CUM_TURNOVER_ECOM	NUMBER	22	3	It indicates the cumulative amount of e-commerce transactions since account opening date.
195	CUM_TURNOVER_CHEQUE	NUMBER	22	3	It indicates the cumulative amount of cheque transactions since account opening date.
196	CUM_TURNOVER_INTEREST	NUMBER	22	3	It indicates the cumulative amount of interest transactions since account opening date.
197	CUM_TURNOVER_INSTALLM	NUMBER	22	3	It indicates the cumulative amount of loan installment transactions since account opening date.

Seq.	Column Name	Data Type	Len	Sc	Column Description
198	CUM_TURNOVER_FEES	NUMBER	22	3	It indicates the cumulative amount of fee transactions since account opening date.
199	CUM_TURNOVER_TAX	NUMBER	22	3	It indicates the cumulative amount of tax on transactions since account opening date.
200	CUM_TURNOVER_REFUND	NUMBER	22	3	It indicates the cumulative amount of refund transactions since account opening date.
201	CUM_TURNOVER_DEPOSIT	NUMBER	22	3	It indicates the cumulative amount of deposit transactions since account opening date.
202	CUM_NBRTRA_PURCHASE	NUMBER	10		It indicates the cumulative number of purchase transactions since account opening date.
203	CUM_NBRTRA_CASH	NUMBER	10		It indicates the cumulative number of cash transactions since account opening date.
204	CUM_NBRTRA_TRANSFER	NUMBER	10		It indicates the cumulative number of transfer transactions since account opening date.
205	CUM_NBRTRA_ECOM	NUMBER	10		It indicates the cumulative number of e-commerce transactions since account opening date.
206	CUM_NBRTRA_CHEQUE	NUMBER	10		It indicates the cumulative number of cheque transactions since account opening date.
207	CUM_NBRTRA_INTEREST	NUMBER	10		It indicates the cumulative number of interest transactions since account opening date.
208	CUM_NBRTRA_INSTALLM	NUMBER	10		It indicates the cumulative number of loan installment transactions since account opening date.
209	CUM_NBRTRA_FEES	NUMBER	10		It indicates the cumulative number of fee transactions since account opening date.
210	CUM_NBRTRA_TAX	NUMBER	10		It indicates the cumulative number of tax on transactions since account opening date.
211	CUM_NBRTRA_REFUND	NUMBER	10		It indicates the cumulative number of refund transactions since account opening date.
212	CUM_NBRTRA_DEPOSIT	NUMBER	10		It indicates the cumulative number of deposit transactions since account opening date.
213	MONTHLY_MAX_OVERLIMIT_BAL	NUMBER	18	3	It indicates the highest overdrawn in the current cycle.
214	MONTHLY_MAX_OVERLIMIT_BAL_AUTNUMBER	NUMBER	18	3	It indicates the highest over limit authorization in the current cycle.
215	MONTHLY_MAX_OVERLIMIT_DATE	DATE	7		It indicates the highest overdrawn date.

Seq.	Column Name	Data Type	Len	Sc	Column Description
216	PREV_YEARLY_TURNOVER_PURCHASE	NUMBER	22	3	It indicates the previous yearly cumulative Amount of purchase transactions.
217	PREV_YEARLY_TURNOVER_CASH	NUMBER	22	3	It indicates the previous yearly cumulative Amount of cash transactions.
218	PREV_YEARLY_TURNOVER_TRANSFER	NUMBER	22	3	It indicates the previous yearly cumulative Amount of transfer transactions.
219	PREV_YEARLY_TURNOVER_ECOM	NUMBER	22	3	It indicates the previous yearly cumulative Amount of e-commerce transactions.
220	PREV_YEARLY_TURNOVER_CHEQUE	NUMBER	22	3	It indicates the previous yearly cumulative Amount of cheque transactions.
221	PREV_YEARLY_TURNOVER_INTEREST	NUMBER	22	3	It indicates the previous yearly cumulative Amount of interest transactions.
222	PREV_YEARLY_TURNOVER_INSTALLMENT	NUMBER	22	3	It indicates the previous yearly cumulative Amount of loan installment transactions.
223	PREV_YEARLY_TURNOVER_FEES	NUMBER	22	3	It indicates the previous yearly cumulative Amount of fee transactions.
224	PREV_YEARLY_TURNOVER_TAX	NUMBER	22	3	It indicates the previous yearly cumulative Amount of tax on transactions.
225	PREV_YEARLY_TURNOVER_REFUND	NUMBER	22	3	It indicates the previous yearly cumulative Amount of refund transactions.
226	PREV_YEARLY_TURNOVER_DEPOSIT	NUMBER	22	3	It indicates the previous yearly cumulative Amount of deposit transactions.
227	CURR_YEARLY_TURNOVER_PURCHASE	NUMBER	22	3	It indicates the current yearly cumulative Amount of purchase transactions.
228	CURR_YEARLY_TURNOVER_CASH	NUMBER	22	3	It indicates the current yearly cumulative Amount of cash transactions.
229	CURR_YEARLY_TURNOVER_TRANSFER	NUMBER	22	3	It indicates the current yearly cumulative Amount of transfer transactions.
230	CURR_YEARLY_TURNOVER_ECOM	NUMBER	22	3	It indicates the current yearly cumulative Amount of e-commerce transactions.
231	CURR_YEARLY_TURNOVER_CHEQUE	NUMBER	22	3	It indicates the current yearly cumulative Amount of cheque transactions.
232	CURR_YEARLY_TURNOVER_INTEREST	NUMBER	22	3	It indicates the current yearly cumulative Amount of interest transactions.

Seq.	Column Name	Data Type	Len	Sc	Column Description
233	CURR_YEARLY_TURNOVER_INSTALLMENT	NUMBER	22	3	It indicates the current yearly cumulative Amount of loan installment transactions.
234	CURR_YEARLY_TURNOVER_FEES	NUMBER	22	3	It indicates the current yearly cumulative Amount of fee transactions.
235	CURR_YEARLY_TURNOVER_TAX	NUMBER	22	3	It indicates the current yearly cumulative Amount of tax on transactions.
236	CURR_YEARLY_TURNOVER_REFUND	NUMBER	22	3	It indicates the current yearly cumulative Amount of refund transactions.
237	CURR_YEARLY_TURNOVER_DEPOSIT	NUMBER	22	3	It indicates the current yearly cumulative Amount of deposit transactions.
238	STATUS_MONTHLY_HISTORY_ADMIN	VARCHAR2	24		It indicates the monthly account administrative status history of the last and current year (One character indicating the status level at the end of cycle for each month from January to December of last and current year).
239	STATUS_MONTHLY_HISTORY_BALANCE	VARCHAR2	24		It indicates the monthly account administrative status history of the last and current year (One character indicating the status level at the end of cycle for each month from January to December of last and current year).
240	STATUS_MONTHLY_HISTORY_UNPAID	VARCHAR2	24		It indicates the monthly account unpaid status history of the last and current year (One character indicating the status level at the end of cycle for each month from January to December of last and current year).
241	STATUS_MONTHLY_HISTORY_LATE	VARCHAR2	24		It indicates the monthly account late payment status history of the last and current year (One character indicating the status level at the end of cycle for each month from January to December of last and current year).
242	STATUS_MONTHLY_HISTORY_FAIL	VARCHAR2	24		It indicates the monthly account payment incident status history of the last and current year (One character indicating the status level at the end of cycle for each month from January to December of last and current year).
243	STATUS_MONTHLY_HISTORY_PROMISE	VARCHAR2	24		It indicates the monthly account promise payment status history of the last and current year (One character indicating the status level at the end of cycle for each month from January to December of last and current year).
244	DATE_LAST_AUT_CREDIT	DATE	7		It indicates the last Credit authorization date.
245	DATE_LAST_AUT_CASH_TRANSFER	DATE	7		It indicates the last Cash/Transfer authorization date.

Seq.	Column Name	Data Type	Len	Sc	Column Description
246	DATE_LAST_AUT_LOAN	DATE	7		It indicates the last Loan authorization date.
247	DATE_LAST_STATEMENT	DATE	7		It indicates the last statement date.
248	DATE_LAST_TRANSACTION	DATE	7		It indicates the last transaction date.
249	DATE_DAILY_CUTOFF_BD	DATE	7		It indicates the last daily cutoff business date.
250	DATE_DAILY_CUTOFF_SD	DATE	7		It indicates the last daily cutoff system date.
251	DAILY_CUTOFF_ID	VARCHAR2	8		It indicates the last daily cutoff process identification.
252	DATE_MONTHLY_CUTOFF_BD	DATE	7		It indicates the last cycle cutoff business date.
253	DATE_MONTHLY_CUTOFF_SD	DATE	7		It indicates the last cycle cutoff system date.
254	MONTHLY_CUTOFF_ID	VARCHAR2	8		It indicates the last cycle cutoff process identification.
255	LAST_YEARLY_CUTOFF_DATE	DATE	7		It indicates the last yearly cutoff date.
256	DATE_OF_LAST_FEE_ONCE_1_YEAR	DATE	7		It indicates the date of last yearly fee generated.
257	DATE_OF_LAST_FEE_ONCE_2_YEAR	DATE	7		It indicates the date of last 2 years fee generated.
258	DATE_OF_LAST_FEE_ONCE_3_YEAR	DATE	7		It indicates the date of last 3 years fee generated.
259	UNPAID_FEE_MONTH_NEXT_CAL	DATE	7		It indicates the next calculation date of monthly unpaid fee.
260	TERM_DUE_DATE	DATE	7		It indicates the term due date.
261	TERM_OVERDUE_DATE	DATE	7		It indicates the term overdue date.
262	TERMS_UNPAID_AMOUNT	NUMBER	18	3	It indicates the unpaid terms amount.
263	TERMS_UNPAID_NBR	NUMBER	2		It indicates the number of unpaid terms.
264	TERMS_LATE_AMOUNT	NUMBER	18	3	It indicates the late payment terms amount.
265	TERMS_LATE_NBR	NUMBER	2		It indicates the number of Late payment terms.
266	NOT_DUE_TERMS_AMOUNT	NUMBER	18	3	It indicates the Not due terms amount.
267	NOT_DUE_TERMS_NB	NUMBER	2		It indicates the number of Not due terms.
268	TOTAL_NBR_UNPAID_DAYS	NUMBER	15		It indicates the total number of unpaid days.
269	CREDIT_SCORE	NUMBER	6		This column is not used in V3.5.
270	CREDIT_REQUEST_FILE_NUMBER	VARCHAR2	40		This column is not used in V3.5.
271	COLLECTION_REFERENCE	VARCHAR2	40		This column is not used in V3.5.
272	CREDIT_SCORING_REFERENCE	VARCHAR2	40		This column is not used in V3.5.
273	ACCOUNTING_REFERENCE	VARCHAR2	40		This column is not used in V3.5.
274	DEBTOR_IDENTIFIER	VARCHAR2	16		This column is not used in V3.5.

Seq.	Column Name	Data Type	Len	Sc	Column Description
275	GEN_NEW_ACC_FEES_FLAG	CHAR	1		It indicates whether the new account fee has been generated or not. Possible values are: 'Y' = Yes, 'N' = No.
276	BILLING_BANK_SCORING_LEVEL	VARCHAR2	6		This column is not used in V3.5.
277	BILLING_BANK_CONTACT_DATE	DATE	7		This column is not used in V3.5.
278	PRIMARY_SHADOW_ACC_FLAG	CHAR	2		It indicates whether the concerned account is a primary or a secondary account. Possible values are: '1P' = Primary, '0S' = Secondary.
279	BALANCE_OF_TRANS_NFULL_IND	NUMBER	18	3	It indicates the total balance of transactions with NO full payment indicator.
280	BALANCE_OF_TRANS_FULL_IND	NUMBER	18	3	It indicates the total balance of transactions with full payment indicator.
281	STATUS_REASON_CODE	CHAR	2		It indicates the administrative status reason code. It should be defined in 'STATUS_REASON_LIST' table.
282	AGREEMENT_DATE	DATE	7		It indicates the account opening contract signature date.
283	APPLICATION_DATE	DATE	7		It indicates the account opening application date.
284	DEBIT_ACCOUNT_BANK_CODE	CHAR	6		It indicates the debit account bank code. It should be defined in the 'BANK' table.
285	DEBIT_ACCOUNT_BRANCH_CODE	CHAR	6		It indicates the debit account branch code. It should be defined in the 'BRANCH' table.
286	DEBIT_ACCOUNT_NUMBER	VARCHAR2	24		It indicates the debit account number.
287	DEBIT_ENTITY_CODE	CHAR	2		It indicates the debit account entity code.
288	DEBIT_ACCOUNT_SEQUENCE	NUMBER	2		It indicates the debit account sequence with regard to the account link.
289	DEBIT_ACCOUNT_TYPE	CHAR	2		It indicates the debit account type should be defined in the 'ACCOUNT_TYPE_LIST' table.
290	NB_ACCOUNTS_LINK	NUMBER	2		It indicates the number of linked accounts.
291	ENTITY_CODE	CHAR	2		It indicates the entity code. It is fixed to 'SA' (Shadow account).
292	PRIVATE_TLV_DATA_1	VARCHAR2	128		It indicates the private TLV data.
293	CHKSECURE\$2	VARCHAR2	16		It indicates the private use field.
294	UPDATE_SHADOW_ACC_ACT_FLAG	CHAR	1		This field is reserved for internal use.

Seq.	Column Name	Data Type	Len	Sc	Column Description
295	TOTAL_CURRENT_MIN_DUE_TRX	NUMBER	18	3	It indicates the total current minimum due transactions.
296	ADDITIONAL_DATA_1	VARCHAR2	32		It indicates the Private Additional data 1.
297	ADDITIONAL_DATA_2	VARCHAR2	32		It indicates the Private Additional data 2.
298	ADDITIONAL_DATA_3	VARCHAR2	32		It indicates the Private Additional data 3.
299	ADDITIONAL_DATA_4	VARCHAR2	32		It indicates the Private Additional data 4.
300	ADDITIONAL_DATA_5	VARCHAR2	32		It indicates the Private Additional data 5.
301	ADDITIONAL_DATA_6	VARCHAR2	32		It indicates the Private Additional data 6.
302	SENSITIVE_OPERATION_RECORD	CHAR	1		It indicates the sensitive operation record (Action Code) reserved for internal use. Possible values are: 'I' = Insertion, 'M' = Modification, 'C' = Cancellation, 'X' = Internal Usage.
303	WAIVER_LATE_PAYMENT_FEE	CHAR	1		This column is not used in V3.5.
304	WAIVER_INTEREST_FEE	CHAR	1		This column is not used in V3.5.
305	MONTH_FIRST_OVERLIMIT_BAL	NUMBER	18	3	It indicates the first overdraft balance during the current cycle.
306	MONTH_FIRST_OVERLIMIT_BAL_AUT	NUMBER	18	3	It indicates the first over-limit authorization balance during the current cycle.
307	MONTH_FIRST_OVERLIMIT_DATE	DATE	7		It indicates the first over-limit date during the current cycle.
308	COM_YEAR	NUMBER	3		It indicates the number of days in the commercial year ('360' to '366') used for interest calculation.
309	INTEREST_METHOD	CHAR	1		This column is not used in V3.5..
310	USING_INTEREST_INDEX_RATE_IND	CHAR	1		This column is not used in V3.5..
311	SCHEDULE_INDEX	CHAR	4		This column is not used in V3.5..
312	SCHEDULE_INDEX_SD	DATE	7		This column is not used in V3.5..
313	FORMER_SCHEDULE_INDEX	CHAR	4		This column is not used in V3.5..
314	OVERLAPPING_CHANGE_CYCLE	CHAR	1		This column is not used in V3.5.
315	SPECIAL_SCHEDULE_INDEX	CHAR	4		This column is not used in V3.5.

Seq.	Column Name	Data Type	Len	Sc	Column Description
316	SPECIAL_SCHEDULE_INDEX_SD	DATE	7		This column is not used in V3.5.
317	SPECIAL_SCHEDULE_INDEX_ED	DATE	7		This column is not used in V3.5.
318	WELCOME_SCHEDULE_INDEX	CHAR	4		This column is not used in V3.5.
319	WELCOME_SCHEDULE_INDEX_PER	NUMBER	2		This column is not used in V3.5.
320	WELCOME_SCHEDULE_INDEX_BD	CHAR	1		This column is not used in V3.5.
321	SLIPPING_RATE_FLAG	CHAR	1		This column is not used in V3.5.
322	SLIPPING_RATE_PERIOD	NUMBER	2		This column is not used in V3.5.
323	SLIPPING_AND_WELCOM_ADVANTAGE	CHAR	1		This column is not used in V3.5.
324	INTR_BASIC_AMOUNT_CRITERIA	CHAR	2		This column is not used in V3.5.
325	NO_INTEREST_CONDITION_IND	CHAR	2		This column is not used in V3.5.
326	NO_INTEREST_SPECIFIC_AMOUNT	NUMBER	15		This column is not used in V3.5.
327	RECIDIVISM_FLAG	CHAR	1		It indicates whether the account is considered as recidivist or not. Possible values are: 'Y' = Yes, when TERMS_UNPAID_NBR field's value in 'SHADOW_ACCOUNT' table is greater or equal to RECIDIVISM_UNPAID_THRESHOLD field's value in 'CR_PROFILE' table. 'N' = No.
328	DD_AMOUNT_TYPE	CHAR	2		It indicates the direct debit payment mode. Possible values are: 'FX' = Fixed amount (Fixed amount to be requested as a direct debit order. When specified, this amount overrides the debit amount request defined in the Account marketable product), 'MD' = Minimum due, 'PR' = Percentage of closing balance (Percentage value to be applied on the Account balance and then to be requested as a direct debit order. When specified, this amount override the debit amount request defined in the Account marketable product). Note Depending on the chosen value, the Fixed amount and Percentage closing balance

Seq.	Column Name	Data Type	Len	Sc	Column Description
					columns are activated or deactivated.
329	DD_CL_BAL_PERCENTAGE	NUMBER	9	6	The Percentage closing balance.
330	STATEMENT_DELIVERY_METHOD	CHAR	3		The account's statement delivery method (Secured mail, Ordinary mail, Air mail ...). It should be defined in 'DELIVERY_METHOD' table.
331	STATEMENT_DELIVERY_SUPPLIER	CHAR	3		The account's statement delivery supplier (DHL, ARAMEX, Italian Post ...). It should be defined in 'DELIVERY_SUPPLIER_CODE' table.
332	ACCEPT_ROLLUP_FLAG	CHAR	1		This is the only for primary account record. It indicates whether the Primary shadow account accepts roll-up from other secondary accounts or not. Possible values are: 'Y' = Yes, 'N' = No.
333	APPLY_FOR_ROLLUP_FLAG	CHAR	1		This column is used for secondary accounts and only when their primary account accepts roll-up. It indicates whether the secondary account can be subject to roll-up or not. Possible values are: 'Y' = Yes, 'N' = No.
334	ROLLUP_OPTION	CHAR	2		This is displayed for secondary accounts and only when their primary account accepts roll-up. When the APPLY_FOR_ROLLUP_FLAG flag of the secondary shadow account is set to 'Y', this column indicates the option of Secondary account roll-up to the Primary account. Possible values are: 'MD' = Minimum Due Roll-up (Minimum payment from the secondary account will be added to the primary account on the statement; Secondary account aging in case of missed payment will also be tracked), 'FB' = Full balance (Current cycle balance will be transferred to the primary account; Secondary account will behave like a full charge account; A debit sign transaction will be posted to the primary account with equivalent secondary account balance; The latter will be credited with the same amount), 'TT' = Transaction by transaction (Current cycle transactions will be transferred to the primary account transaction by transaction; Secondary account will behave like a full charge

Seq.	Column Name	Data Type	Len	Sc	Column Description
					account; A credit sign transaction will be posted to the secondary account to make the balance zero).
335	CATALOGUE_OFFER	CHAR	3		The code identifying the catalogue offer. As defined in 'BOARDING_ACCOUNT_APP' table.
336	CATALOGUE_PRODUCT	CHAR	6		The code identifying the Account product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
337	CATALOGUE_PRODUCT_VERSION	VARCHAR2	10		Version of the Account product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
338	CATALOGUE_PACK	CHAR	6		The unique code identifying the pack. As defined in 'CATALOGUE_PACK' table.
339	MAIN_CORP_ID	VARCHAR2	15		The corporate main id. It must be defined in 'CORPORATE' table (if any, i.e.: if the current corporate record is a sub-corporate)
340	XML_OBJECT	BLOB	4000		This column is used to store the XML object inherited from catalogue.
341	APP_CONTRACT_STATUS	CHAR	1		Contract element status. It is used to indicates where the contract element is in its contract life cycle. Possible values are: 'O' = On going, 'R' = Rejected, 'W' = Waiting for validation, 'V' = Valid, 'M' = Maintenance, 'D' = Deprecated, 'S' = Suspended, 'P' = Processed, 'T' = Closed.
342	APP_CONTRACT_STATUS_DATE	DATE	7		Date on which the user has modify the status.
343	GENERATED_SHADOW_ACCOUNT_NUMBER	VARCHAR2	24		Shadow account number generated for the current product.
344	POLICIES_MATCH_STATUS	CHAR	1		Matching status result of the current control. Possible values are: 'N' = Not executed: The policy control is disabled for the type of this Application (Application type parameter driven), 'P' = Pass: No defined policy criteria are matched with the current applicant, 'F' = Fail: One or multiple criteria are matched for the current applicant.

Seq.	Column Name	Data Type	Len	Sc	Column Description
345	CREDIT_LIMIT_CALC_STATUS	CHAR	1		The criteria of the credit limit during the Account contract element Boarding. System will auto compute the credit limit amount based on the following criteria: 'C' = Capture: The control is performed during the capture of the application. 'P' = Post capture: The control is performed during the validation of the application. 'N' = No: the control is not applied
346	COMPUTED_CREDIT_LIMIT	NUMBER	15		This is the credit limit auto computed by the system during the account contract element Boarding.
347	COMPUTED_CASH_LIMIT	NUMBER	15		This is the cash limit auto computed by the system during the account contract element Boarding. Value of the Computed cash limit is a percentage of the Computed credit limit.
348	COMPUTED_LOAN_LIMIT	NUMBER	15		This is the loan limit auto computed by the system during the account contract element Boarding. Value of the Computed loan limit is a percentage of the Computed credit limit.
349	CREDIT_LIMIT_OVERRIDE	CHAR	1		This column indicates if the user accepts the Computed limits amounts or wants to override them. Possible values are: 'Y' = Yes, 'N' = No.
350	CREDIT_LIMIT_OVERRIDE_USER	VARCHAR2	15		In case the CREDIT_LIMIT_OVERRIDE is set to 'Y'. This column indicates the account of the user who has chosen to exceed the credit limit.
351	CREDIT_LIMIT_OVERRIDE_DATE	DATE	7		Date on which the credit limit was overridden.
352	CREDIT_LIMIT_OVERRIDE_APP	CHAR	1		The overridden credit limit application type.
353	CREDIT_LIMIT_OVERRIDE_APP_USER	VARCHAR2	15		The account of the user who has chosen to exceed the credit limit under the application.
354	CREDIT_LIMIT_OVERRIDE_APP_DATE	DATE	7		Date on which the credit limit was overridden.
355	FROM_ACCOUNT_NUMBER	VARCHAR2	24		Account contract element ID derived from the existing account in the current application.
356	PDD_DEFFERMENT_DAYS	NUMBER	3		The number of delayed days after the statement date the account will be due.
357	DEFF_START_DATE	DATE	7		The date from which the deferment will start for this account.

Seq.	Column Name	Data Type	Len	Sc	Column Description
358	DEFF_END_DATE	DATE	7		The date from which the deferment will end for this account.
359	USER_CREATE	VARCHAR2	15		ID of the user when record created.
360	DATE_CREATE	DATE	7		Record creation date and time.
361	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
362	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.26 BOARDING_ACCOUNT_LINKED_PROD

This table is used to link a PAN with one or multiple accounts. A debit PAN could have several accounts; each of them are linked to the same PAN, in that case, PowerCARD maintains entries in the Accounts link table. Later on, and based on the transaction criteria, transaction might be posted to one of these accounts.

Each column of this table is described in detail in the next section.

4.3.26.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Financial institution of the parameter being defined. It should be defined in the 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	APPLICATION_CONTRACT_ID	VARCHAR2	24		The application contract identification generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
4	CATALOGUE_OFFER	CHAR	3		The code identifying the catalogue offer.
5	CATALOGUE_PRODUCT	CHAR	6		The catalogue product to which the loyalty account is associated. It must be already defined in 'CATALOGUE_PRODUCT' table
6	CATALOGUE_PRODUCT_VERSION	VARCHAR2	10		Version of the loyalty product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
7	CATALOGUE_PACK	CHAR	6		The unique code identifying the pack as defined in 'CATALOGUE_PRODUCT' table.
8	XML_OBJECT	BLOB	4000		The XML value of the product catalog.
9	APP_CONTRACT_STATUS	CHAR	1		Contract element status. It is used to indicates where the contract element is in its contract life cycle. Possible values are: 'O' = On going, 'R' = Rejected, 'W' = Waiting for validation,

Seq.	Column Name	Data Type	Len	Sc	Column Description
					'V' = Valid, 'M' = Maintenance, 'D' = Depreciated, 'S' = Suspended, 'P' = Processed, 'T' = Closed.
10	APP_CONTRACT_STATUS_DATE	DATE	7		Date on which the user has modify the status.
11	OWNER_ENTITY	CHAR	2		The entity to be associated to the PAN add-on service contract element. . Possible values are: 'CH' = Cardholder, 'SA' = Account.
					 Note - For payment instrument debit products, the OWNER_ENTITY is set to 'CH' (Cardholder), - For payment instrument credit products, the OWNER_ENTITY is set to 'SA' (Account).
12	ENTITY_ID	VARCHAR2	24		In case the OWNER_ENTITY is set to 'SA' (Account), this column displays the Credit account number (Shadow account number) identifying the Credit account. Otherwise, it's the PAN (Primary Account number) of the Payment Instrument.
13	CONTRACT_NUMBER	VARCHAR2	16		The linked product contract number.
14	SUB_CONTRACT_NUMBER	VARCHAR2	16		The sub contract number.
15	CONTRACT_DATE	DATE	7		Contract signature date.
16	SERIAL_NUMBER	VARCHAR2	32		Contract serial number.
17	CRITERIA_AMOUNT	CHAR	1		The amount criteria. Possible values are: 'L' = Credit Limit, 'O' = Outstanding Balance, 'C' = Closing balance, 'U' = Unpaid terms.
18	PERCENTAGE_AMOUNT_INSURED	NUMBER	9		This is to indicate the percentage portion of the amount to be transferred in case of linked account supporting split transfer.
19	PRIM_APPLICATION_CONTRACT_ID	VARCHAR2	24		The Primary application identification number of the client's contract. It should

Seq.	Column Name	Data Type	Len	Sc	Column Description
					be in 'BOARDING_ACCOUNT_APP' table.
20	USER_CREATE	VARCHAR2	15		ID of the user when record created.
21	DATE_CREATE	DATE	7		Record creation date and time.
22	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
23	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.27 BOARDING_ADDITIONAL_FIELDS_APP

This is a staging table used to define additional fields in the boarding operation. Sometimes Issuers requires other specific information not available in the CMS, for this reason the Additional fields functionality gives the possibility to capture extra fields required by the Institution.

It specifies the field family (the entity that request to add the extra field: Human resource, Marketing team, etc.. as predefined in the system), the field name and its type (LoV, Static list, number, date, amount or free text).

Refer to "[Additional fields](#)" section in UG1022-Boarding for more details.

Each column of this table is described in detail in the next section.

4.3.27.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code. This code must be defined in 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	ENTITY_CODE	CHAR	2		The entity type that request the extra field. Possible values are: 'CL' = Client, 'CH' = Payment instrument, 'CO' = Corporate, 'SA' = Financial account.
4 	ENTITY_ID	VARCHAR2	24		Identifier of the entity that request the extra field.
5 	FIELD_NAME	VARCHAR2	30		The additional field name that is added.
6	FIELD_VALUE	VARCHAR2	256		The value of the additional field in case of FIELD_TYPE = '4' (Free Text).
7	FIELD_CATEGORY	CHAR	1		The category of the defined additional field. Possible values are: 'I' = Input, 'O' = Output (For future use).

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
8	DATA_FAMILY_TYPE	CHAR	3		The family type of the additional field as configured in 'USER_DEFINED_FIELDS_PARAM' table (Risk, Finance, Compliance ...).
9	FIELD_TYPE	CHAR	1		Type of the concerned additional field. Possible values are: '1' = Date, '2' = Number, '3' = Amount, '4' = Free Text, '5' = Static List, '6' = Dynamic list.
10	DATE_VALUE	DATE	7		The value of the additional field in case of the FIELD_TYPE = '1' (Date).
11	NUMBER_VALUE	NUMBER	18	0	The value of the additional field in case of FIELD_TYPE = '2' (Number).
12	AMOUNT_VALUE	NUMBER	18	3	The value of the additional field in case of FIELD_TYPE = '3', (Amount).
13	CURRENCY_CODE	CHAR	3		The amount currency in case if the additional field is Amount (having the FIELD_TYPE = '3' (Amount). This code must be defined in the 'CURRENCY_TABLE' table.
14	STATIC_LIST_VALUE	VARCHAR 2	16		The value of the additional field in case of FIELD_TYPE = '5' (Static list).
15	DYNAMIC_LIST_VALUE	VARCHAR2	24		The value of the additional field in case of FIELD_TYPE = '6' (Dynamic list).
16	COLLECTION_NAME	VARCHAR2	30		The static list code in case of FIELD_TYPE = '5' (Static list).
17	USER_MODIF	VARCHAR2	15		ID of the user when record created.
18	DATE_CREATE	DATE	7		Record creation date and time.
19	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
20	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.28 BOARDING_CARD_APP

This is a staging table used to define PAN criteria to create a PAN application under the boarding parameter.

Each column of this table is described in detail in the next section.

4.3.28.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		This is the institution to which the payment instrument belongs. It must be present in the 'BANK' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
2 	APPLICATION_ID	VARCHAR2	24		Application identifier generated from boarding.
3 	APPLICATION_CONTRACT_ID	VARCHAR2	24		Application contract identification generated from boarding.
4	GENERATED_CARD_NUMBER	VARCHAR2	22		Pan number generated from the boarding.
5	CLIENT_CODE	VARCHAR2	24		Unique code of the client (the owner of the payment instrument). It must be present in the 'CLIENT' table.
6	CLIENT_HOST_ID	VARCHAR2	24		Unique identification of the customer in the institution's host, as defined in 'CLIENT' table.
7	BRANCH_CODE	CHAR	6		Branch to which the payment instrument belongs. It must be present in the 'BRANCH' table.
8	CARD_PRODUCT_CODE	CHAR	3		Current payment instrument product. It must be defined in the 'CARD_PRODUCT' table.
9	ACCOUNT_OWNER	CHAR	2		This column indicates to which entity the account number is associated. Possible values are: 'CH' = Cardholder, 'SA' = Account.  Note - For payment instrument debit products, the ACCOUNT_OWNER is set to 'CH' (Cardholder), - For payment instrument credit products, the ACCOUNT_OWNER is set to 'SA' (Account).
10	ENTITY_ID	VARCHAR2	24		Identification code of the concerned entity.
11	FORMER_PRODUCT_CODE	CHAR	3		Previous payment instrument product. The null value indicates that the product has never been changed for the payment instrument. It must be defined in 'CARD_PRODUCT' table
12	CHANGE_PRODUCT_REFERENCE	VARCHAR2	12		Reference of change product, that is the business date in the format DDMMRRHH24MISS. It is applicable only in case of product change.
13	CHANGE_PRODUCT_DATE	DATE	7		This column is used to store the Changed product date for a payment instrument.
14	PARTNER_BRAND_ID	VARCHAR2	15		Partner brand to which the payment instrument is associated. This Co-branded should be defined in 'PARTNER_BRAND' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
15	CORPORATE_ID	VARCHAR2	15		Unique corporate identification number to which the payment instrument is linked. It should be defined in 'CORPORATE' table or be NULL.
16	LIABILITY_INDICATOR	CHAR	1		This column is not used in V3.5.
17	CARD_FEES_CODE	CHAR	3		Payment instrument fee code. It must be defined in the 'CARD_FEES' table.
18	CARD_ISSUING_FEE_CURRENCY	CHAR	3		This column is not used in V3.5.
19	CARD_ISSUING_FEE_AMOUNT	NUMBER	18	3	This column is not used in V3.5.
20	BASIC_CARD_NUMBER	VARCHAR2	22		Client's Primary PAN. The primary payment instrument should already be created in the database and should be defined in the 'CARD' table.
21	OLD_CARD_NUMBER	VARCHAR2	22		Old PAN that was used before replacing it with the current PAN.
22	SPONSOR_CARD_NUMBER	VARCHAR2	22		This column is not used in V3.5.
23	PLASTIC_CODE	CHAR	3		This is to indicate the plastic to use for the payment instrument. It must be present in the 'PLASTIC_LIST' table.
24	ICC_APPLICATION_INDEX	CHAR	4		This is to define the ICC application indicator. It must be defined in 'ICC_APPLICATION_PAR_INDEX' table.
25	VIP_LEVEL	CHAR	1		VIP level of the cardholder. It must be defined in 'VIP_LIST' table.
26	OWNER_CODE	CHAR	2		This is to indicate who owns the PAN (Individual, corporate...). It must be defined in 'OWNER_LIST' table.
27	OWNER_CATEGORY	CHAR	1		The owner category. Possible values are: 'I' = Individual, 'B' = Business, 'S' = Staff, 'P' = Professional, 'N' = Company, 'C' = Corporate, 'T' = Corporate travel, 'L' = International corporate, 'R' = Procurement, 'X' = Others 1, 'Y' = Others 2, 'Z' = Others 3.
28	RELATIONSHIP_CODE	CHAR	1		The relationship between the Primary cardholder and the secondary cardholder. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'C' = Child, 'S' = Spouse, 'P' = Parent, 'F' = Family member, 'N' = Not applicable, 'O' = Others.
29	TITLE_CODE	CHAR	2		This is to indicate the title of the cardholder. It must be defined in 'TITLE_LIST' table.
30	GENDER	CHAR	1		This is to indicate the client's gender code. Possible values are: 'M' = Male, 'F' = Female, 'N' = Not applicable.
31	FAMILY_NAME	VARCHAR2	40		Client's family name.
32	FIRST_NAME	VARCHAR2	40		Client's first name.
33	EMBOSSSED_NAME	VARCHAR2	26		Client name, as it should appear embossed on the payment instrument.
34	EMBOSSSED_NAME_2	VARCHAR2	26		Second client name, as it should appear embossed on the payment instrument.
35	ENCODED_NAME	VARCHAR2	26		Client name, as it should be encoded on the ISO I track of the payment instrument.
36	BIRTH_DATE	DATE	7		Client's birth date.
37	BIRTH_CITY	VARCHAR2	30		Client's birth city.
38	BIRTH_COUNTRY	VARCHAR2	3		Client's birth country.
39	POLICIES_MATCH_STATUS	CHAR	1		Matching status result of the current control. Possible values are: 'N' = Not executed: The policy control is disabled for the type of this Application (Application type parameter driven), 'P' = Pass: No defined policy criteria are matched with the current applicant, 'F' = Fail: One or multiple criteria are matched for the current applicant.
40	DOCUMENT_CODE	CHAR	2		This column is not used in V3.5.
41	ISSUING_DOCUM_DATE	DATE	7		This column is not used in V3.5.
42	ISSUING_DOCUM_CITY	VARCHAR2	30		This column is not used in V3.5.
43	LEGAL_ID	VARCHAR2	30		Legal identification number of the guarantor.
44	NATIONALITY_CODE	CHAR	3		Client's nationality. It must be defined in 'COUNTRY' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
45	STATEMENT_CODE	CHAR	2		Statement code. It must be defined in 'STATEMENT_PARAMETERS' table.
46	LANGUAGE_CODE	CHAR	3		Client's language. It must be defined in 'LANGUAGE_LIST' table.
47	PR_CARE_OF	VARCHAR2	64		The mail recipient in the primary address (To: ..).
48	PR_LINE_1	VARCHAR2	64		The primary address line 1.
49	PR_LINE_2	VARCHAR2	64		The primary address line 2.
50	PR_LINE_3	VARCHAR2	64		The primary address line 3.
50	PR_LINE_4	VARCHAR2	64		The primary address line 4.
51	PR_ZIP_CODE	VARCHAR2	10		Zip code in the primary address. It must be defined in 'ZIP_CODE' table.
52	PR_REGION_CODE	CHAR	3		Region representing the administrative division of the country where the primary address is located. It should be defined in 'REGION' table.
53	PR_REGION_NAME	CHAR	40		Region name.
54	PR_COUNTRY_CODE	CHAR	3		Country where the primary address is located. It must be defined in 'COUNTRY' table.
55	PR_CITY_CODE	CHAR	5		City where the primary address is located.
56	PR_EMAIL	VARCHAR2	50		This is to indicate the email address of the customer.
57	PR_URL	VARCHAR2	60		URL of the client's website.
58	PR_PHONE_1	VARCHAR2	20		Client's phone number 1. It's controlled by the system to ensure they do not contain letters.
59	PR_PHONE_1_TYPE	CHAR	1		Phone type 1.
60	PR_PHONE_2	VARCHAR2	20		Client's phone number 2. It's controlled by the system to ensure they do not contain letters.
61	PR_PHONE_2_TYPE	CHAR	1		Phone type 2.
62	PR_PHONE_3	VARCHAR2	20		Client's phone number 3. It's controlled by the system to ensure they do not contain letters.
63	PR_PHONE_3_TYPE	CHAR	1		Phone type 3.
64	PR_PHONE_4	VARCHAR2	20		Client's phone number 4. It's controlled by the system to ensure they do not contain letters.
65	PR_PHONE_4_TYPE	CHAR	1		Phone type 4.
66	PR_ADDRESS_TYPE	CHAR	2		Type of the primary address. It must be defined in 'ADDRESS_TYPE_LIST' table.
67	PR_FAX	VARCHAR2	20		Client fax.
68	PR_SENDING_MODE	CHAR	1		Sending mode for communication with the client.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Possible values are: 'M' = Mail, 'E' = Email, 'F' = Fax, 'O' = Other. It should be defined in 'SENDING_MODE_LIST' table.
69	PR_CITY_NAME	VARCHAR2	32		Name of city where the primary address is located.
70	PR_DEFAULT_USAGE	CHAR	2		Usage of the primary address with 'M' as default value. Possible values are: 'M' = Mail, 'S' = Statement, 'D' = Dispute, 'L' = Loyalty.
71	PR_STATUS	CHAR	1		Primary address status.
72	PR_STATUS_START_DATE	DATE	7		Start date for active or normal primary address status.
73	PR_STATUS_END_DATE	DATE	7		End date for inactive primary address status.
74	PR_IS_MANDATORY	CHAR	1		This is to indicate that the primary address, with the assigned primary address type, is mandatory as defined in the Client Mandatory Addresses configuration. Possible values are: 'Y' (Yes) or Null.
75	ADVANCED_ADDRESS_FLAG	VARCHAR2	10		This column is not used in V3.5.
76	ADDRESS_LIST_ID	VARCHAR2	10		This column is used to link the payment instrument with its secondary address (if any).
77	SOCIO_PROF_CODE	CHAR	4		Socio-professional code of the client. It is used for the segmentation of clients based on such criteria as job industry, and professional qualification. It must be present in the 'SOCIOPROF_LIST' table.
78	ACTIVITY_CODE	CHAR	4		This is to indicate the client's activity code. It helps to categorize clients based on their professional occupation. It must be present in the 'CLIENT_ACTIVITY_SET' table.
79	STAFF_ID	VARCHAR2	20		Staff identifier of the person who signed the client contract.
80	CUSTOMER_SEGMENT_INDEX	CHAR	3		Customer segments to which the client belongs. This column is used mainly for marketing segmentation purposes.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Assignable values must be previously defined in the 'CUSTOMER_SEGMENT' table.
81	START_VAL_DATE	DATE	7		Start validity period of the card, in MMYYYY format.
82	EXPIRY_DATE	DATE	7		Expiry date of the card in MMYYYY format.
83	FORMER_EXPIRY_DATE	DATE	7		Former expiry date of the card in MMYYYY format.
84	INITIAL_SUBSCRIPTION_DATE	DATE	7		Date of the initial subscription of the client.
85	APPLICATION_DATE	DATE	7		Date of the boarding application.
86	AGREEMENT_DATE	DATE	7		Payment instrument agreement date.
87	RENEWAL_OPTION	CHAR	1		This flag defines whether the renewal is allowed or not. Possible values are: 'Y' = Renewal allowed, 'N' = Renewal not allowed.
88	RENEWAL_NUMBER	NUMBER	2		The number of times the payment instrument has been renewed.
89	RENEWAL_DELIVERY_DATE	DATE	7		Date when the last renewed payment instrument is delivered.
90	RENEWAL_ACTIVATION_FLAG	CHAR	1		This column indicates whether the renewed payment instrument has been activated or not. Possible values are: 'Y'= Yes, 'N'= No.
91	RENEWAL_ACTIVATION_DATE	DATE	7		Date when the last renewed payment instrument is activated.
92	RENEWAL_DEACTIVATION_DATE	DATE	7		Date when the last renewed payment instrument is deactivated.
93	LAST_RENEW_DATE	DATE	7		Last date in which the payment instrument has been renewed.
94	STOP_RENEWAL_REASON_CODE	CHAR	1		This column indicates the reason for which the payment instrument is stopped from renewal. Possible values are: 'S' = Card in stop list, 'B' = Balance, 'U' = Unpaid terms, 'F' = Payment failed, 'L' = Late payment, 'C' = Change address, 'H' = High Risk Country,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'D' = Debit Account cancelled.
95	DELIVERY_MODE	CHAR	1		Mode of payment instrument delivery. Possible values are: 'B' = Branch, 'P' = Processing Center, 'M' = Mail, 'C' = Customer selection.
96	DELIVERY_BRANCH	CHAR	6		Branch code where the payment instrument will be sent post production. It is applicable only when DELIVERY_MODE is set to 'B' (Branch). It must be present in 'BRANCH' table
97	FILE_NUMBER	VARCHAR2	20		In case the payment instrument application is loaded from a file, this column indicates the reference number of the payment instrument request in the file that has been loaded into PowerCARD database.
98	DELIVERY_CARD_FLAG	CHAR	1		This column indicates whether the card has been delivered to the costumer or not. In fact, the delivery flag at this level depends on the DELIVERY_FLAG column, part of 'CARD_PRODUCT' table. Possible values are: 'N' = No, 'Y' = Yes.  Note The payment instrument can be considered to have been delivered as soon as it is produced and mailed to the cardholder, or once produced it is kept in the processing center or the branch and considered to have been delivered when the client comes to collect it.
99	RENEW_DELIVERY_CARD_FLAG	CHAR	1		This column indicates whether the renewed payment instrument was delivered or not. Possible values are: 'N' = No, 'Y' = Yes.
100	DELIVERY_CARD_DATE	DATE	7		Delivery date of the payment instrument.
101	DELIVERY_PIN_MAILER_FLAG	CHAR	2		This column indicates whether the PIN code has been delivered to the cardholder or not. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'NN' = PIN not requested yet (either no pin has to be produced or the Pin not yet requested), 'WN' = PIN requested and waiting response, 'CY' = PIN delivered, 'PY' = Confirmation not managed.
102	PIN_MAILER_DELIVERY_DATE	DATE	7		Delivery date of the PIN mailer.
103	PIN_PROCESS_DATE	DATE	7		Date when the PIN mailer was processed.
104	ACTIVATION_FLAG	CHAR	1		This column indicates whether the payment instrument has been activated by the cardholder or not. Possible values are: 'Y' = Yes, 'N' = No.
105	ACTIVATION_DATE	DATE	7		Activation date of the payment instrument.
106	DEACTIVATION_DATE	DATE	7		Deactivation date of the payment instrument.
107	SERVICES_SETUP_INDEX	CHAR	4		Service setup index that defines the card supported authorization and utility payment services. It must be present in the 'P7_SERVICES_SETUP' table.
108	LIMITS_INDEXES	CHAR	4		Limit index identifying the limits applied on the payment instrument. It must be defined in 'P7_LIMITS_SETUP_TOTAL' table or NULL.
109	PERIODICITY_CODE	CHAR	3		This column is not used in V3.5.
110	IMAGE_REF_NUMBER	VARCHAR2	12		Image reference number.
111	PHOTO_REFERENCE_NUMBER	VARCHAR2	24		Internal reference number of cardholder photography.
112	PHOTO_PRINT_INDICATOR	CHAR	1		This flag indicates whether the photo must be printed or not in the payment instrument. Possible values are: 'Y' = Yes, 'N' = No.
113	MAIDEN_NAME	VARCHAR2	40		Mother's maiden name.
114	CHANNEL_NUMBER	VARCHAR2	15		This is to indicate the channel number through which the concerned cardholder's contract has been initiated. It is a distinct number of the sales channel used to attract the customer. This code must be previously defined in 'CHANNEL' table.
115	OFFER_NUMBER	VARCHAR2	15		This column is not used in V3.5.
116	ORIGINAL_DECISION_FLAG	CHAR	1		

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					This column is not used in V3.5.
117	DECISION_DATE	DATE	7		This column is not used in V3.5.
118	DECISION_USER	VARCHAR2	15		This column is not used in V3.5.
119	DECISION_DETAIL	CHAR	2		This column is not used in V3.5.
120	BLOOD_GROUP	VARCHAR2	2		This column is not used in V3.5.
121	BLOOD_RH	CHAR	1		This column is not used in V3.5.
122	DATA_DISCLOSURE	CHAR	2		This is to indicate the costumer data disclosure option. Possible values are: 'NC' = No choice, 'ND' = No disclosure, 'HI' = Handling information, 'TI' = Transmission of the information, 'HT' = Handling/Transmission of the information.
123	LAST_PROD_DATE	DATE	7		Payment instrument production date. It is updated during the payment instrument production batch processing.
124	LAST_BATCH_PROD_NUM	VARCHAR2	8		Latest production batch number where the payment instrument production details are treated. It is updated during the payment instrument production batch processing.
125	LAST_CALC_DATE	DATE	7		PIN calculation date. It is updated during the PIN calculation batch processing.
126	LAST_BATCH_CALC_NUM	VARCHAR2	8		Latest production batch number where the PIN mailer is treated. It is updated during the PIN calculation batch processing.
127	LAST_MODIF_DATE	DATE	7		This column indicates, for whatever modification action on the concerned payment instrument, the last payment instrument modification date. It is updated during the payment instrument modification batch processing.
128	LAST_BATCH_MODIF_NUM	VARCHAR2	8		This column indicates, for whatever modification action on the concerned payment instrument, the last payment instrument modification operation batch number. It is updated during the payment instrument modification batch processing.
129	LAST_BILLING_DATE	DATE	7		Date of last billing related the membership fee for the concerned PAN. It is updated with the payment instrument batch processing.
130	LAST_TRANSACTION_T_DATE	DATE	7		Date of the last transaction carried out with the payment instrument.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
131	LAST_TRANSACTION_B_DATE	DATE	7		Business date of last transaction.
132	LAST_TRANSACTION_ARN	VARCHAR2	23		Acquirer Reference Number of the last transaction carried out with the payment instrument.
133	LAST_TRANSACTION_ARN_SEQ	NUMBER	4		Microfilm reference sequence of last transaction.
134	SECURITY_CHK_DATAP_1	VARCHAR2	16		Security data for internal usage.
135	SECURITY_CHK_DATAP_2	VARCHAR2	16		Security data for internal usage.
136	SECURITY_CHK_DATAP_3	VARCHAR2	32		Security data for internal usage.
137	SECURITY_CHK_DATAP_4	VARCHAR2	64		Security data for internal usage.
138	RECORD_ORIGINE	CHAR	1		Origin record data capture code. Possible values are: 'M' = First Migration, 'O' = Bank systems, 'C' = PowerCARD Data capture.
139	STATUS_CODE	CHAR	1		Payment instrument status code. It must be present in 'STATUS_LIST' table with CH_ENTITY column's value set to 'Y' (Yes).
140	STATUS_DATE	DATE	7		Date of last modification of STATUS_CODE column.
141	STATUS_REASON	CHAR	2		Status reason. It must be present in 'STATUS_REASON_LIST' table.
142	CANCELLATION_REQUEST_DATE	DATE	7		This column is not used in V3.5.
143	CANCELLATION_LETTER_DATE	DATE	7		This column is not used in V3.5.
144	CANCELLATION_USER_CODE	VARCHAR2	15		This column is not used in V3.5.
145	RETURN_CARD_FLAG	CHAR	1		This column is not used in V3.5.
146	RETURN_ADDITIONAL_CARD_FLAG	CHAR	1		This column is not used in V3.5.
147	NB_ACCOUNT_LINKS	NUMBER	2		Number of account links with the payment instrument.
148	CARD_ADDENDUM_FLAG	CHAR	1		This column is not used in V3.5.
149	ENTITY_CODE	CHAR	2		Address entity code. It set always to 'CH' value.
150	MARKUP_CODE	CHAR	3		This is the mark-up fees code. It must be defined in 'MARKUP_INDEX' table.
151	PWRCD_INTERNAL_REFERENCE	VARCHAR2	12		PowerCARD internal loading reference. It is used in case the applications are loaded from a file.
152	PWRCD_INTERNAL_SEQUENCE	NUMBER	6		PowerCARD internal loading sequence. It is used in case the applications are loaded from a file.
153	FIRST_NAME_2	VARCHAR2	40		Client's second first name.
154	FAMILY_NAME_2	VARCHAR2	40		Client's second family name.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
155	PRIORITY_INDICATOR	CHAR	3		Priority level code with which the embossing of a payment instrument should be treated. This code must be previously defined in the 'PRIORITY_INDICATOR' table.
156	PROMOTION_CODE	CHAR	10		Promotion or the campaign to which the payment instrument belongs. When provided, it will be validated against the list defined at bank level.
157	PLASTIC_DELIVERY_METHOD	CHAR	3		The kind of mailing method used to deliver the plastic (for example: Assured mail, Ordinary mail, Airmail...). It must be defined in 'ELIGIBLE_DELIVERY_METHOD' table.
158	PIN_DELIVERY_METHOD	CHAR	3		The kind of mailing method used to deliver the PIN (for example: Assured mail, Ordinary mail, Airmail...). It must be defined in 'ELIGIBLE_DELIVERY_METHOD' table.
159	PHONE_1	VARCHAR2	30		First phone number of the client. It must be defined in 'ADDRESS_DETAILS' table.
160	PHONE_1_TYPE	CHAR	2		Phone type for the captured first phone number. Possible values are: '01' = Office phone, '02' = Mobile phone, '03' = Home phone, '04' = Private or personal phone, '05' = Others.
161	PHONE_2	VARCHAR2	30		Second phone number of the client. It must be defined in 'ADDRESS_DETAILS' table.
162	PHONE_2_TYPE	CHAR	2		Phone type for the captured second phone number. Possible values are: '01' = Office phone, '02' = Mobile phone, '03' = Home phone, '04' = Private or personal phone, '05' = Others.
163	PHONE_3	VARCHAR2	30		Third phone number of the client. It must be defined in 'ADDRESS_DETAILS' table.
164	PHONE_3_TYPE	CHAR	2		Phone type for the captured third phone number. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'01' = Office phone, '02' = Mobile phone, '03' = Home phone, '04' = Private or personal phone, '05' = Others.
165	PHONE_4	VARCHAR2	30		Fourth phone number of the client. It must be defined in 'ADDRESS_DETAILS' table.
166	PHONE_4_TYPE	CHAR	2		Phone type for the captured fourth phone number. Possible values are: '01' = Office phone, '02' = Mobile phone, '03' = Home phone, '04' = Private or personal phone, '05' = Others.
167	EMAIL_1	VARCHAR2	256		This is the Customer's 1st email address. It must be defined in 'ADDRESS_DETAILS' table.
168	EMAIL_2	VARCHAR2	256		This is the Customer's 2nd email address. It must be defined in 'ADDRESS_DETAILS' table.
169	LINK_FLAG	CHAR	1		This column is not used in V3.5.
170	LINK_ADDRESS_CLASS	CHAR	1		This column is not used in V3.5.
171	LINK_ENTITY_CODE	CHAR	2		This column is not used in V3.5.
172	LINK_LIST_ID	VARCHAR2	15		This column is not used in V3.5.
173	LINK_ADDRESS_SEQ	VARCHAR2	15		This column is not used in V3.5.
174	TRANSACTION_FEE_INDEX	VARCHAR2	7		Index of fees to apply on transaction for the debit payment instruments only. It must be defined on the 'ISS_TRANSACTION_FEES_PARAM' table.
175	CATALOGUE_OFFER	CHAR	3		This field is reserved for future use.
176	CATALOGUE_PRODUCT	CHAR	6		Catalogue product with which the Payment instrument is being created. It should be defined in 'CATALOGUE_PRODUCT' table.
177	CATALOGUE_PRODUCT_VERSION	VARCHAR2	10		Version of the payment instrument product. It should be present in the 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P' (Payment instrument).
178	APP_CONTRACT_STATUS	CHAR	1		Contract element status. It is used to indicates where the contract element is in its contract life cycle.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Possible values are: 'O' = On going, 'R' = Rejected, 'W' = Waiting for validation, 'V' = Valid, 'M' = Maintenance, 'D' = Deprecated, 'S' = Suspended, 'P' = Processed, 'T' = Closed.
179	APP_CONTRACT_STATUS_DATE	DATE	7		Date on which the user has modify the status.
180	CATALOGUE_PACK	CHAR	6		Identification number of the pack.
181	SEC_PAYINST_DISPLAY_FLAG	CHAR	1		This column indicates whether the transaction is made by Payinst or not. Possible values are: 'Y' = Yes, 'N' = No.
182	NEW_KYC_DATA_DISPLAY_FLAG	CHAR	1		This column indicates whether the KYC is applicable or not, in case the application type is set to Fast track type. Possible values are: 'Y' = Yes, 'N' = No.
183	PRIM_APPLICATION_ID	VARCHAR2	24		Primary application identification number.
184	PRIM_APPLICATION_CONTRACT_ID	VARCHAR2	24		Primary application identification number of the client's contract.
185	XML_OBJECT	BLOB	4000		This column is used to store the XML object inherited from catalogue.
186	USER_CREATE	VARCHAR2	15		ID of the user when record created.
187	DATE_CREATE	DATE	7		Record creation date and time.
188	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
189	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.
190	FROM_CARD_NUMBER	VARCHAR2	22		PAN number generated from the initial PAN.
191	OLD_CARD_ACTIVE	CHAR	1		This column is used to indicate whether the old PAN is activated in case of replacement with a new PAN. Possible values are: 'Y' = Yes, 'N' = No.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
192	FOR_N_DAYS	NUMBER	3		Number of days the old PAN kept be active. Note  This column is enabled only when the OLD_CARD_ACTIVE column is set to 'Y'
193	UPGRADE_REASON_CODE	CHAR	2		Change product reason code.
194	RECOMPUTE_EXPIRY_DATE	CHAR	1		This flag indicates whether the expiry date must be recomputed by the system or it is defaulted by the current expiry date. Possible values are: 'Y' = Yes, 'N' = No.
195	IS_MANDATORY	CHAR	1		This column indicates if the entity is mandatory in the catalog. Possible values are: 'Y' = Yes, 'N' = No.

4.3.29 BOARDING_CARD_DOMAIN_SETUP

Records of this table, concern the Boarding PAN domain setup, It is used to define criteria for PAN usage restriction at the PAN level.

Each column of this table is described in detail in the next section.

4.3.29.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code concerned by the Product domain setup parameters. It should be defined in the 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	APPLICATION_CONTRACT_ID	VARCHAR2	24		The application contract identification generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
4	DOMAIN_CTRL_QUERY	VARCHAR2	1024		The Query for PAN domain control.
5	SETTINGS_DOMAIN_CTRL_QUERY	VARCHAR2	1024		The domain control criteria, is used to define the restrictions for Conditional domain controls.
6	COUNTRY_OP	CHAR	1		The country operation flag for PAN domain control. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'0' = In (Restricted country), '1' = Not in (Not restricted country).
7	MERCHANT_OP	CHAR	1		The merchant operation flag for PAN domain control. Possible values are: '0' = In (Restricted Merchant), '1' = Not in (Not restricted Merchant).
8	MCC_OP	CHAR	1		MCC operation flag for PAN domain control. Possible values are: '0' = In (Restricted MCC), '1' = Not in (Not restricted MCC).
9	CURRENCY_OP	CHAR	1		Currency operation flag for PAN domain control. Possible values are: '0' = In (Restricted currency), '1' = Not in (Not restricted currency).
10	PROCESSING_OP	CHAR	1		The processing code operation flag for PAN domain control. Possible values are: '0' = In (Restricted processing code), '1' = Not in (Not restricted processing code).
11	ENTRY_MODE_OP	CHAR	1		The entry mode operation flag for PAN domain control. Possible values are: '0' = In (Restricted processing code), '1' = Not in (Not restricted processing code).
12	BM_DOMAINS	VARCHAR2	12		This is the Bank Consultancy Fee Per Day domain system.
13	WEEK_DAYS	CHAR	7		The days week of control configuration over the use of payment instrument.
14	TIME_PERIODS_OPT	CHAR	7		The period during the day of control configuration over the use of payment instrument.
15	USER_CREATE	VARCHAR2	15		ID of the user when record created.
16	DATE_CREATE	DATE	7		Record creation date and time.
17	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
18	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.30 BOARDING_CARD_FEES

This table contains boarding fees parameters that define a price or tariff list based on combination of different parameters or group of parameters that define the fee amount, billing method and periodicity, etc. for individuals as well as for corporate. Fees are automatically managed by the system, according to a price list code which might be applied for all Payment instrument (PI) of a defined product (standard tariff for that product) or customized for a single PI (specific price list).

Each column of this table is described in detail in the next section.

4.3.30.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being set-up. It must be present in the 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	APPLICATION_CONTRACT_ID	VARCHAR2	24		The application contract identification generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
4	ABRV_DESCRIPTION	VARCHAR2	16		Shortened description used for information and reports.
5	DESCRIPTION	VARCHAR2	32		The fee's description. It is for information only.
6	CARD_FEES_BILLING_EVT	CHAR	1		The event triggering the fees posting. Possible values are: 'M' = Manufacturing (At the payment instrument manufacture process), 'U' = First transaction (At PAN usage only), 'G' = After grace period (After a grace period if the payment instrument is not canceled), 'A' = On PAN activation (When PAN is activated). Note  'U' and 'G' options can be used in case of mass issuance on new product.
7	CARD_FEES_GRACE_PERIOD	NUMBER	3		Number of days before starting fees billing. This field is mandatory if CARD_FEES_BILLING_EVT = 'G' (After grace period).
8	CARD_FEES_BILLING_DATE	CHAR	1		The billing process is totally independent for renewal process. In case of payment instrument usage or grace period payment instrument fees generation triggers, this column enables the system to set the next billing date.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Possible values are: 'X' = Bill at period end, 'V' = Bill at period start.
9	CARD_FEES_BILLING_PERIOD	CHAR	1		The period when the Annual Membership Fee amount is charged. The following period options are offered: 'M' = Monthly, 'Q' = Quarterly, 'S' = By semester, 'Y' = Yearly.
10	NUMBER_OF_YEAR	NUMBER	1		This column is not used in V3.5.
11	CURRENCY_CODE	CHAR	3		The Subscription and periodical membership currency code in which the fees are going to be expressed. It should be defined in 'CURRENCY_TABLE' table.
12	SUBSCRIPTION_AMOUNT	NUMBER	18	3	The subscription fee paid for the first issuance of main PI and supplementary. It is not charged on annual membership fee and renewals. (Default: 0).
13	FEES_AMOUNT_FIRST	NUMBER	18	3	The periodic fee amount that is paid during the first issuance validity period of the Payment instrument (PI). This amount is not added to the subscription fee. When the PI is created, only the subscription is generated. (Default: 0).
14	FEES_AMOUNT_RENEW	NUMBER	18	3	The fee amount that is charged to the cardholder for the first renewal of the Payment instrument (PI). The renewal amount is also used to generate periodic fees for the second validity period.
15	SUBSEQUENT_RENEWAL_FEES	NUMBER	18	3	The fees amount that is charged to the cardholder for subsequent renewals of the payment instrument. It is valid for the second renewal and above. The subsequent amount is also used to generate periodic fees for the third (and subsequent) validity period.
16	PLASTIC_FEES	NUMBER	18	3	This column gives the possibility to enter in the system the cost of the payment instrument. This is appreciated in term of accounting since the system will be able to provide the payment instrument fees plastic cost excluded. These fees are added to the different amounts each time a payment instrument is produced.
17	PLASTIC_FEES_INDICATOR	CHAR	1		This column gives the possibility to hide the plastic cost to the customer or let the system show two transactions on the customer statement. In case of

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					separation, it can be coupled to the fact of not charging the service fee, only plastic fee in case on card replacement. Possible values are: 'I' = Fees included in the card fees, 'S' = Fees billed separately.
18	PHOTO_FEES	NUMBER	18	3	The cost of putting a photo on a card. This is appreciated in term of accounting since the system will be able to provide the card fees photo cost excluded. This column is automatically generated by the system with this amount and with 'F1' as transaction code.
19	PHOTO_FEES_INDICATOR	CHAR	1		This column gives the possibility to hide the photo cost to the customer or in the contrary show it on the customer statement. Possible values are: 'I' = Fees included in the card fees, 'S' = Fees billed separately.
20	PROMOTION_STARTING_DATE	DATE	7		This column is not used in V3.5.
21	PROMOTION_ENDING_DATE	DATE	7		This column is not used in V3.5.
22	PROMOTION_FEES_AMOUNT	NUMBER	18	3	This column is not used in V3.5.
23	DAMAGED_REPLACEMENT_FEES	NUMBER	18	3	The damaged replacement fees used to generate the replacement fees amount. (Default: 0).
24	ERRONEOUS_REPLACEMENT_FEES	NUMBER	18	3	The erroneous card replacement fees used to generate the replacement fees amount. (Default: 0).
25	LOST_REPLACEMENT_FEES	NUMBER	18	3	The lost card replacement fees used to generate the replacement fees amount. (Default: 0).
26	STOLEN_REPLACEMENT_FEES	NUMBER	18	3	The stolen card replacement fees used to generate the replacement fees amount. (Default: 0).
27	COUNTREFEIT_REPLACEMENT_FEES	NUMBER	18	3	The counterfeit card replacement fees used to generate the replacement fees amount. (Default: 0).
28	EMERGENCY_REPLACEMENT_FEES	NUMBER	18	3	The emergency card replacement fees used to generate the replacement fees amount. (Default: 0).
29	PIN_REPLACEMENT_FEES	NUMBER	18	3	The PIN Replacement Fees used to generate the replacement fees amount. (Default: 0).
30	OTHER_REPLACEMENT_FEES	NUMBER	18	3	The other replacement fees used to generate the replacement fees amount. (Default: 0).
31	OTHER_FEES_1	NUMBER	18	3	This column is not used in V3.5.
32	OTHER_FEES_1_INDICATOR	CHAR	1		

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					This column is not used in V3.5.
33	OTHER_FEES_2	NUMBER	18	3	This column is not used in V3.5.
34	OTHER_FEES_2_INDICATOR	CHAR	1		This column is not used in V3.5.
35	OTHER_FEES_3	NUMBER	18	3	This column is not used in V3.5.
36	OTHER_FEES_3_INDICATOR	CHAR	1		This column is not used in V3.5.
37	OTHER_FEES_4	NUMBER	18	3	This column is not used in V3.5.
38	OTHER_FEES_4_INDICATOR	CHAR	1		This column is not used in V3.5.
39	USER_CREATE	VARCHAR2	15		ID of the user when record created.
40	DATE_CREATE	DATE	7		Record creation date and time.
41	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
42	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.31 BOARDING_CLIENT_APP

This is a staging table used to maintain Client information data, i.e. update the data of existing Client. Some fields are not allowed to be modified on this screen as: Institution, Client code, Primary client code, Status and Status reason.

Refer to [Client section](#) in UG1026-Customer management for more details.

4.3.31.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code. It is the second code identifying the client. This code must be defined in 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	24		The application identification number with which the client has been subscribed.
3	APPLICATION_STATUS	CHAR	1		The application status changes. Possible values are: 'O' = On going: Initial and capture phase, 'W' = Waiting validation: Capture completed and pushed for review, 'I' = Incomplete: Temporary declined application, 'R' = Ready to process: Application and contract reviewed by checker and ready for processing or for temporary rejection, 'P' = Processed: Application processed and entities created, 'D' = Declined: Application declined,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'A' = Archived: Application processed or rejected are archived automatically.
4	APPLICATION_STATUS_DATE	DATE	7		Date on which the application status was changed.
5	APPLICATION_TYPE	CHAR	1		Application type identification. Possible values are: 'O' = Ordinary, 'P' = Pre-approved, 'F' = Fast track.
6	CLIENT_CODE	VARCHAR2	24		This is the code identifying the client.
7	PRIMARY_CLIENT_CODE	VARCHAR2	24		The identification code of the Primary client. That is, the Client to whom the Client being maintained is connected. When applicable, the primary client must have been defined in the system as being a client of the bank.
8	CLIENT_HOST_ID	VARCHAR2	24		The number identification of the client in case PowerCARD application communicates with an external HOST system.
9	BRANCH_CODE	CHAR	6		The branch within the issuer institution. This code must be defined in 'BRANCH' table.
10	CORPORATE_ID	VARCHAR2	15		In case the concerned Client is a corporate, this column indicates the corporate identification number. This code must be present in 'CORPORATE' table.
11	CONTRACT_TYPE	CHAR	1		The contract type.
12	LIABILITY_INDICATOR	CHAR	1		The liability involved in case the Client is corporate. It has to be filled only if CORPORATE_ID is filled. Possible values are: 'P' = Personal Liability (Non-corporate card, personal liability) 'I' = Individual liability (Corporate card, full individual liability) 'J' = Joint (Corporate card, joint liability). 'F' = Full (Corporate card, full corporate liability). Note • The liability indicator of a corporate card could never be set to 'P' • The liability indicator of an individual card could never be set to 'F'

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
13	CHANNEL_NUMBER	VARCHAR2	15		This is to indicate the channel through which the concerned client has been initiated. When applicable. This code must be present in 'CHANNEL' table.
14	OWNER_CODE	CHAR	2		This is to define the customer type. This owner code must be defined in 'OWNER_LIST' table.
15	OWNER_CATEGORY	CHAR	1		This is to indicate the owner category. This code must be defined in 'OWNER_LIST' table.
16	VIP_LEVEL	CHAR	1		This is to indicate the VIP level of the client. This code must be present in 'VIP_LIST' table.
17	TITLE_CODE	CHAR	2		This is to indicate the title of the client. This code must be present in 'TITLE_LIST' table.
18	FAMILY_NAME	VARCHAR2	40		The family name of the client.
19	FIRST_NAME	VARCHAR2	40		The first name of the client.
20	GENDER	CHAR	1		This is to indicate the gender of the client. Possible values are: 'M' = Male 'F' = Female 'N' = Not applicable (For Company & Corporate)
21	FAMILY_STATUS	CHAR	1		This is to indicate the marital status of the client. Possible values are: 'S' = Single 'M' = Married 'D' = Divorced 'W' = Widower 'N' = Not applicable (for Company & Corporate)
22	BIRTH_DATE	DATE	7		The birth date of the client (Creation date for Company & Corporate)
23	BIRTH_CITY	VARCHAR2	30		The client's city of birth (Location city for Company & Corporate)
24	BIRTH_COUNTRY	VARCHAR2	30		The client's country of birth (Location country for Company & Corporate)
25	DEDUP_FORCE_FLAG	CHAR	1		Decision status for the current control. Possible values are: 'W' = Waiting decision: The application is awaiting decision to force the failed controls otherwise take decision to reject the entire application,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'N' = Not Applicable: There are no controls configured for this application or matching status is "Pass", 'Y' = Forced: The deduplication failed control is forced.
26	DEDUP_MEMO	VARCHAR2	1024		The memo related to the decision being taken during the forcing of application for which the deduplication control has failed.
27	DEDUP_FORCING_USER	VARCHAR2	25		User that has forced the application for which the deduplication control is failed.
28	DEDUP_FORCING_DATE	DATE	7		Business date when the decision has been taken.
29	DEDUP_MATCH_STATUS	CHAR	1		Matching status result of the current control. Possible values are: 'N' = Not executed: The deduplication control is disable for the type of this Application (Application type parameter driven), 'P' = Pass: No deduplication defined criteria are matched with the current applicant, 'F' = Fail: One or multiple criteria are matched for the current applicant.
30	BLACK_LIST_FORCE_FLAG	CHAR	1		Decision status for the current control. Possible values are: 'W' = Waiting decision: The application is awaiting decision to force the failed controls otherwise take decision to reject the entire application, 'N' = Not Applicable: There are no controls configured for this application or matching status is "Pass", 'Y' = Forced: The black list failed control is forced.
31	BLACK_LIST_MEMO	VARCHAR2	1024		The memo related to the decision being taken during the forcing of application for which the black list control has failed.
32	BLACK_LIST_FORCING_USER	VARCHAR2	15		User that has forced the application for which the black list control is failed.
33	BLACK_LIST_FORCING_DATE	DATE	7		Business date when the decision has been taken.
34	BLACK_LIST_MATCH_STATUS	CHAR	1		Matching status result of the current control. Possible values are: 'N' = Not executed: The Black list control is disabled for the type of this application (Application type parameter driven),

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'P' = Pass: No Black list defined criteria are matched with the current applicant, 'F' = Fail: One or multiple criteria are matched for the current applicant.
35	POLICIES_FORCE_FLAG	CHAR	1		Decision status for the current control. Possible values are: 'W' = Waiting decision: The application is awaiting decision to force the failed controls otherwise take decision to reject the entire application, 'N' = Not Applicable: There are no controls configured for this application or matching status is "Pass", 'Y' = Forced: The policies failed control is forced.
36	POLICIES_MEMO	VARCHAR2	1024		The memo related to the action being taken for each contract element.
37	POLICIES_FORCING_USER	VARCHAR2	25		User that has forced the application for which the policies control is failed.
38	POLICIES_FORCING_DATE	DATE	7		Business date when the decision has been taken.
39	POLICIES_MATCH_STATUS	CHAR	1		Matching status result of the current control. Possible values are: 'N' = Not executed: The Policies control is disabled for the type of this application (Application type parameter driven), 'P' = Pass: No Policies defined criteria are matched with the current applicant, 'F' = Fail: One or multiple criteria are matched for the current applicant.
40	PR_CARE_OF	VARCHAR2	64		The mail recipient in the primary address (To: ..).
41	PR_LINE_1	VARCHAR2	64		This is the first primary address line.
42	PR_LINE_2	VARCHAR2	64		This is the second primary address line.
43	PR_LINE_3	VARCHAR2	64		This is the third primary address line.
44	PR_LINE_4	VARCHAR2	64		This is the fourth primary address line.
45	PR_ZIP_CODE	VARCHAR2	10		Zip code of client primary address. Depending on the financial institution setup, the zip code can be mandatory, optional or not managed. When indicated, this code must be existed in 'ZIP_CODE' table.
46	PR_REGION_CODE	CHAR	3		This is the code of the region representing the administrative division of the country where the Client primary address is located. This field is required. This code must be present in 'REGION' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
47	PR_REGION_NAME	VARCHAR2	40		This is the name of the region representing the administrative division of the country where the Client primary address is located.
48	PR_COUNTRY_CODE	CHAR	3		The country where the Client primary address is located. This code must be present in 'COUNTRY' table.
49	PR_CITY_CODE	CHAR	5		The city where the Client primary address is located. This code must be present in 'CITY' table.
50	PR_EMAIL	VARCHAR2	64		The email address. This field is required if the PR_SENDING_MODE = 'E'.
51	PR_URL	VARCHAR2	60		URL of the website, applies for corporate client mostly.
52	PR_PHONE_1	VARCHAR2	20		The first phone number of the client
53	PR_PHONE_1_TYPE	CHAR	1		The phone type for the captured first phone number. Possible values are: '0' = Office phone, '1' = Mobile phone, '2' = Home phone, '3' = Private or personal phone, '4' = Others,
54	PR_PHONE_2	VARCHAR2	20		The second phone number of the client.
55	PR_PHONE_2_TYPE	CHAR	1		The phone type for the captured second phone number. Possible values are: '0' = Office phone '1' = Mobile phone '2' = Home phone '3' = Private or personal phone, '4' = Others
56	PR_PHONE_3	VARCHAR2	20		The third phone number of the client.
57	PR_PHONE_3_TYPE	CHAR	1		The phone type for the captured third phone number. Possible values are: '0' = Office phone '1' = Mobile phone '2' = Home phone, '3' = Private or personal phone '4' = Others,
58	PR_PHONE_4	VARCHAR2	20		The fourth phone number of the client.
59	PR_PHONE_4_TYPE	CHAR	1		The phone type for the captured fourth phone number. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'0' = Office phone '1' = Mobile phone '2' = Home phone '3' = Private or personal phone '4' = Others
60	PR_ADDRESS_TYPE	CHAR	2		This is the type of the primary address being defined for the client. This code must present in 'ADDRESSES_TYPE_LIST' table.
61	PR_FAX	VARCHAR2	20		The fax of client primary address
62	PR_SENDING_MODE	CHAR	1		The sending mode for communication with the client. Possible values are: 'F' = Fax 'E' = Email 'M' = Courier (Default value)
63	PR_CITY_NAME	VARCHAR2	32		The name of the city where the Client primary address is located.
64	PR_DEFAULT_USAGE	CHAR	2		The usage of the primary address with '01' as default value. Possible values are: '01' = Mail '02' = Statement '03' = Dispute '04' = Loyalty
65	PR_STATUS	CHAR	1		The primary address status (field deprecated) Possible values are: 'N' = Normal 'A' = Active 'I' = Inactive
66	PR_STATUS_START_DATE	DATE	7		The start date when the PR_STATUS field gets the value 'N' or 'A'.
67	PR_STATUS_END_DATE	DATE	7		The end date when the PR_STATUS field gets the value 'I'.
68	PR_IS_MANDATORY	CHAR	1		This is to indicate that the Primary address, with the assigned primary address type, is mandatory as defined in the Client Mandatory Addresses configuration. Possible values are 'Y' (Yes) or Null
69	ADVANCED_ADDRESS_FLAG	VARCHAR2	10		This is the indicator for extra addresses management for this client Possible values are: 'Y' = Advanced address managed,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'N' = Advanced address not managed
70	ADDRESS_LIST_ID	VARCHAR2	10		In case of client having secondary addresses in addition to the primary one, this column indicates the indicator of list of the Client created addresses . This code must be defined in 'ADDRESS_LIST' table.
71	NATIONALITY_CODE	CHAR	3		The nationality of the client. This code must be defined in 'COUNTRY' table.
72	NATIONALITY	VARCHAR2	20		The eventual other nationality of the client. This field is Null if NATIONALITY_CODE is defined.
73	ORG_NATIONALITY	VARCHAR2	20		The original nationality of the client.
74	CHILD_NUMBER	NUMBER	2	0	This is to indicate the Client's number of dependent children. This field is applicable in case OWNER_CATEGORY = 'I'
75	NUMBER_OF_DEPENDANTS	NUMBER	2	0	This is to indicate the number of other Client's dependents. This field is applicable in case OWNER_CATEGORY = 'I'
76	NUMBER_OF_EMPLOYEES	NUMBER	5	0	This is to indicate the number of employees in case OWNER_CATEGORY = 'I' (Corporate for example).
77	CONTACT_NAME	VARCHAR2	40		This is to indicate the contact name in case OWNER_CATEGORY = 'I' (Corporate for example).
78	SOCIO_PROF_CODE	CHAR	4		The job title. It is used for the segmentation of clients based on such criteria as job industry, and professional qualification. It must be present in the 'SOCIOPROF_LIST' table.
79	ACTIVITY_CODE	CHAR	4		This is to indicate the client activity. It helps to categorize clients based on their professional occupation. This code must be equal to SOCIOPROF_LIST.ACTIVITY_CODE) and must be defined in 'CLIENT_ACTIVITY_SET' table.
80	CUSTOMER_SEGMENT	CHAR	3		This is to indicate the Client's customer segment. This code must be defined in 'CUSTOMER_SEGMENT' table
81	EMPLOYMENT_STATUS	CHAR	1		The professional situation of this Client. Possible values are: 'C' = Corporate or Company 'E' = Employee 'L' = Liberal job 'R' = Retired 'S' = Student 'U' = Unemployed 'M' = Military Job

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'N' = Not Applicable
82	TAKING_ON_DATE	DATE	7		The employment taking on date (if EMPLOYMENT_STATUS = 'E' or 'L') Retired date (if EMPLOYMENT_STATUS = 'R') Mandatory only when EMPLOYMENT_STATUS = 'E','L' or 'R'
83	DOCUMENT_CODE	CHAR	2		The legal identification document code identifying the client. If populated, this code must be defined in 'DOCUMENT_LIST' tables. Note  This field is no more relevant, the DOCUMENT_LIST_ID allows to define multi-documents for a given client.
84	LEGAL_ID	VARCHAR2	30		The legal identification number of the client. This can be the national identity card number, the social security number or any other official, unique and legal identification of the client.
85	LANGUAGE_CODE	CHAR	3		The language of the client. This code must be present in 'LANGUAGE_LIST' table.
86	TAX_REGISTRY_OFFICE	VARCHAR2	30		The client tax registry office identification.
87	TAX_NUMBER	VARCHAR2	30		The client tax identification as a taxpayer.
88	CURRENCY_CODE	CHAR	3		In case CUSTOMER_LIMIT_MNG_FLAG = 'Y', this column indicates the currency in which limits are expressed. This code must be present in 'CURRENCY_TABLE' table.
89	CREDIT_LIMIT	NUMBER	18	0	In case CUSTOMER_LIMIT_MNG_FLAG = 'Y', this column indicates the Client's Credit limit.
90	CREDIT_LIMIT_CASH	NUMBER	18	0	In case CUSTOMER_LIMIT_MNG_FLAG = 'Y', this column indicates the Client's Cash/transfer limit. This Cash/transfer limit is defined as part of the Credit limit and therefore, cannot exceed the CREDIT_LIMIT.
91	LOAN_LIMIT	NUMBER	18	0	In case CUSTOMER_LIMIT_MNG_FLAG = 'Y', this column indicates the Client's Loan limit. This Loan limit can be defined as a separate limit for the client or as part of the Credit limit but cannot exceed the CREDIT_LIMIT in any case.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
92	CLIENT_ADDENDUM_FLAG	CHAR	1		This column is not used in V3.5.
93	STATUS_CODE	CHAR	1		This is the client status that can get the following possible values: 'N' = Normal 'M' = Under monitoring or Emergency 'C' = Canceled This code must be defined in 'STATUS_LIST' table.
94	STATUS_DATE	DATE	7		The date of the last status update.
95	STATUS_REASON	CHAR	2		This is the client status reason code. This code must be present in 'STATUS_REASON_LIST' table
96	DATA_DISCLOSURE	CHAR	2		This is to indicate the client data disclosure option. Possible values are: 'ND' = No disclosure 'HI' = Handling information 'TI' = Transmission of the information 'HT' = Handling/Transmission of the information
97	FILE_NUMBER	VARCHAR2	40		The file number in case the Client maintenance request is received in a file.
98	ENTITY_CODE	CHAR	2		This is the type of the entity under process set by default to entity origin of the link, here 'CL' for Client.
99	STAFF_ID	VARCHAR2	20		The staff identifier of the person who signed the Client contract.
100	CUSTOMER_LIMIT_MNG_FLAG	CHAR	1		This is to indicate whether the credit limit is managed at the client level or not. Possible values are: 'Y' = Managed at client level 'N' = Not managed at client level Note  This field is referred to CREDIT_LIMIT, CREDIT_LIMIT_CASH and LOAN_LIMIT columns.
101	FIRST_NAME_2	VARCHAR2	40		This is the 2nd first name of the client.
102	FAMILY_NAME_2	VARCHAR2	40		This is the 2nd family name of the client.
103	EDUCATION	VARCHAR2	4		The education level of the client. This code must be defined in 'M_EDUCATION_LIST' table.
104	LODGING_DATE	DATE	7		The lodging date.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
105	LODGING_MODE	CHAR	1		The lodging mode of the client. Possible values are: 'N' = Not reported or not applicable 'R' = Renter 'O' = Owner 'D' = Dependent
106	NET_YEARLY_INCOME	NUMBER	15		This is the client yearly income net.
107	NYI_CURRENCY_CODE	CHAR	3		The Net yearly income currency code. This code must be defined in the CURRENCY_TABLE table.
108	EXTERNAL_IDENTIFIER	VARCHAR2	22		The external identifier of the client.
109	EMPLOYER_NAME	VARCHAR2	30		In case the customer is an employer. This column indicates the employer name
110	MAIDEN_NAME	VARCHAR2	40		This is the maiden name of the concerned client.
111	PROMOTION_CODE	CHAR	2		The code of client promotion. This code must be defined in 'PROMOTION_LIST' table.
112	PHONE_1	VARCHAR2	30		The first phone number at which the Client can be reached.
113	PHONE_1_TYPE	CHAR	2		This is the first phone type of client phone number. Possible values are: '01' = Office phone, '02' = Mobile phone, '03' = Home phone, '04' = Private or personal phone, '05' = Others.
114	PHONE_2	VARCHAR2	30		The second phone number at which the client can be reached.
115	PHONE_2_TYPE	CHAR	2		This is the second phone type of client phone number. Possible values are: '01' = Office phone, '02' = Mobile phone, '03' = Home phone, '04' = Private or personal phone, '05' = Others.
116	PHONE_3	VARCHAR2	30		The third phone number at which the client can be reached.
117	PHONE_3_TYPE	CHAR	2		This is the third phone type of client phone number. Possible values are: '01' = Office phone,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'02' = Mobile phone, '03' = Home phone, '04' = Private or personal phone, '05' = Others.
118	PHONE_4	VARCHAR2	30		The fourth phone number at which the client can be reached.
119	PHONE_4_TYPE	CHAR	2		This is the fourth phone type of client phone number. Possible values are: '01' = Office phone, '02' = Mobile phone, '03' = Home phone, '04' = Private or personal phone, '05' = Others.
120	EMAIL_1	VARCHAR2	256		This is the client's 1st email address.
121	EMAIL_2	VARCHAR2	256		This is the client's 2nd email address.
122	DOCUMENT_LIST_ID	VARCHAR2	10		The document list identifier referring the list of documents related to a given client. Those documents are stored in the 'CLIENT_DOCUMENT_LIST' tables with this ID.
123	SCORE	NUMBER	15		The score number, evaluated after success of the preliminary controls.
124	BATCH_NUMBER	CHAR	8		Identification number of the batch.
125	SINGLE_CONTRACT	CHAR	1		This column specifies if the review and validation work-flow of the application can be performed by one single contract. Possible values are: 'Y' = Yes, 'N' = No.
126	IS_MANDATORY	CHAR	1		This column indicates whether the document is mandatory or not. Possible values are: 'Y' = Yes, 'N' = No.
127	WORKING_QUEUE	CHAR	6		The Boarding application working queue.
128	WORKING_USER	VARCHAR2	15		User who is working on the Boarding application.
129	USER_CREATE	VARCHAR2	15		ID of the user when record created.
130	DATE_CREATE	DATE	7		Record creation date and time.
131	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
132	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.32 BOARDING_CORP_AUTH_SIGNATORY

This table is used to define the persons who have the authority to sign a document or contract in the organization. It allows to define several authorized signatories for a Corporate.

Each column of this table is described in detail in the next section.

4.3.32.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code. This code must be defined in 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	CONTRACT_ELEMENT_ID	VARCHAR2	24		The contract element id with which the corporate has been subscribed. It must be defined in 'CORPORATE' table.
4 	AUTHORIZED_SIGNATORY_ID	VARCHAR2	15		This is the identifier of the authorized signatory.
5	CORPORATE_ID	VARCHAR2	15		The corporate identification number. It must be defined in 'CORPORATE' table.
6	TITLE_CODE	CHAR	2		The title of the person being defined (Mr/Mrs/Miss, etc...). It must be defined in 'TITLE_LIST' table.
7	FAMILY_NAME	VARCHAR2	40		The family name of the authorized signatory.
8	FIRST_NAME	VARCHAR2	40		The first name of the authorized signatory.
9	POSITION	VARCHAR2	30		The position held by the authorized signatory within the corporate.
10	BIRTH_DATE	DATE	7		This is the birth date of the person authorized to sign.
11	LEGAL_IDENTIFIER	VARCHAR2	15		The legal identification number.
12	NATIONALITY_CODE	CHAR	3		The nationality of the concerned authorized signatory being defined. It must be defined in 'COUNTRY' table.
13	SIGNING_POWER	CHAR	2		The signing authority of the authorized signatory. Possible values are: 'S0' = Sole signing officer, 'J2' = Second joint signing officer, 'J3' = Third joint signing officer.
14	AUTHORIZED_BY	CHAR	1		This column indicates how the signature has been authorized.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Possible values are: 'A' = Authorized OECD approach, 'B' = Board resolution, 'C' = Corporate resolution (For sole signing officers), 'D' = Letter for delegation of authority, 'M' = Memorandum of agreements, 'P' = Power of attorney.
15	DELEGATION_AUTHORITY	CHAR	1		This column is used to specify if the authorized signatory needs an approval user. Possible values are: 'Y' = Yes 'N' = No.
16	AUTH_DOC_EXP_DATE	DATE	7		The date after which the authority is no longer valid.
17	STATUS_CODE	CHAR	1		The current authority status code. It must be defined in 'STATUS_LIST' table.
18	STATUS_DATE	DATE	7		The date when the status has been modified.
19	USER_MODIF	VARCHAR2	15		ID of the user when record created.
20	DATE_CREATE	DATE	7		Record creation date and time.
21	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
22	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.33 BOARDING_CORP_CONTACT_ENTITIES

This table is used to define one or several contacts linked to the concerned Corporate. It allows managing the setup of multi-contact entities data of a given corporate such as Business owner, Key contact & Recipient.

Each column of this table is described in detail in the next section.

4.3.33.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code. This code must be defined in 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	CONTRACT_ELEMENT_ID	VARCHAR2	24		ID with which the account contract will be captured during the Corporate boarding.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
4 	ENTITY_CODE	CHAR	2		This column characterizes the way that the contact represents his/her company in the organization. Possible values are: 'BO' = Business owner, 'KC' = Key contact, 'RE' = Recipient.  Note This field is mandatory.
5 	ENTITY_ID	VARCHAR2	24		The staff identifier of the contact being defined.
6	CORPORATE_ID	VARCHAR2	15		The corporate identification number. It must be defined in 'CORPORATE' table.
7	FAMILY_NAME	VARCHAR2	40		The family name of the contact.
8	FIRST_NAME	VARCHAR2	40		The first name of the contact.
9	TITLE_CODE	CHAR	2		The title of the person being defined (Mr/Mrs/Miss, etc...). It must be defined in 'TITLE_LIST' table.
10	NATIONALITY_CODE	CHAR	3		The nationality of the concerned person being defined. It must be defined in 'COUNTRY' table.
11	OWNERSHIP_STATUS	CHAR	1		In case, ENTITY_CODE = 'BO' (Business owner), this column is used to define ownership status. Possible values are: 'O' = Owner, 'S' = Shareholder, 'X' = Not applicable.
12	HIERARCHY	VARCHAR2	40		This is the position of the current contact person; like for example: CEO, manager, assistant, sales....
13	STATUS_CODE	CHAR	1		The current contact status code. It must be defined in 'STATUS_LIST' table.
14	STATUS_DATE	DATE	7		The date when the status has been modified.
15	EMAIL	VARCHAR2	50		The E-mail of the person being defined.
16	PHONE_1	VARCHAR2	20		This is the contact first phone number.
17	PHONE_1_TYPE	CHAR	1		This is the phone type of the first phone number. Possible values are: '0' = Office fixed-line phone, '1' = Office mobile phone, '2' = Home phone, '3' = Personal mobile phone,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'4' = Others.
18	PHONE_2	VARCHAR2	20		This is the contact second phone number.
19	PHONE_2_TYPE	CHAR	1		This is the phone type of the second phone number. Possible values are: '0' =Office fixed-line phone, '1' = Office mobile phone, '2' = Home phone, '3' = Personal mobile phone, '4' = Others.
20	PHONE_3	VARCHAR2	20		This is the contact third phone number.
21	PHONE_3_TYPE	CHAR	1		This is the phone type of the third phone number. Possible values are: '0' =Office fixed-line phone, '1' = Office mobile phone, '2' = Home phone, '3' = Personal mobile phone, '4' = Others.
22	PHONE_4	VARCHAR2	20		This is the contact fourth phone number.
23	PHONE_4_TYPE	CHAR	1		This is the phone type of the fourth phone number. Possible values are: '0' =Office fixed-line phone, '1' = Office mobile phone, '2' = Home phone, '3' = Personal mobile phone, '4' = Others.
24	USER_MODIF	VARCHAR2	15		ID of the user when record created.
25	DATE_CREATE	DATE	7		Record creation date and time.
26	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
27	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.34 BOARDING_CORP_FINANCIAL_FACT

This table is used to store the financial assessments information and the number of PANs. Those information are used by the system to assess the company's risk and allows the system to propose the list of hierarchies to be selected for the current application according to the eligible hierarchies predefined.

Each column of this table is described in detail in the next section.

4.3.34.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code. This code must be defined in 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3	CORPORATE_ID	VARCHAR2	15		The corporate identification number. It should be defined in 'CORPORATE' table.
4 	FISCAL_YEAR_START_DATE	DATE	7		The fiscal year start date.
5 	FIELD_YEAR_END_DATE	DATE	7		The fiscal year end date.
6	NUMBER_CARDS	NUMBER	15		Number of payment instruments that the corporate can issue.
7	CURRENCY_CODE	CHAR	3		Currency in which the amounts are expressed. This code must be present in 'CURRENCY_TABLE' table.
8	EQUITY_AMOUNT	NUMBER	18	3	The paid-up share capital and its currency.  Note When the currency value is defined in the EQUITY_AMOUNT column, the other amounts will have the same currency.
9	RESERVE_AMOUNT	NUMBER	18	3	This is the money set aside for a financial institution's day-to-day operations, or for meeting emergency liquidity problems.
10	ACCUMULATED_LOSSES_AMOUNT	NUMBER	18	3	The loss that the corporate keeps in its accounts from one accounting period to the next and adds to a new loss or takes away from a profit.
11	NET_WORTH_AMOUNT	NUMBER	18	3	The net worth amount. It is automatically calculated by taking the Equity + Reserve - Accumulated losses amounts.  Note This field is read-only.
12	TOTAL_DEBT_AMOUNT	NUMBER	18	3	The sum of all long-term liabilities and is identified on the corporate balance sheet (Loans and borrowings).
13	DEBT_EQUITY_RATIO	NUMBER	18	3	This is the debit equity ratio. It is automatically calculated by taking the Total debt / Net worth amounts.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					 Note This field is read-only.
14	CURRENT_ASSETS_AMOUNT	NUMBER	18	3	These are all resources that a company can use in the current period to purchase new assets, pay debts and expenses, or convert into cash.
15	INVENTORY_AMOUNT	NUMBER	18	3	It is the value of corporates current assets including raw materials and work in progress and finished goods.
16	QUICK_ASSETS_AMOUNT	NUMBER	18	3	The amount of quick assets. It is automatically calculated by taking the Current assets - Inventory amounts.  Note This field is read-only.
17	CURRENT_LIBILITIES_AMOUNT	NUMBER	18	3	This is the payment that the corporate must make within 12 months.
18	CURRENT_RATIO	NUMBER	18	3	This is the current ratio. It is automatically calculated by taking the Current assets / Current liabilities amounts.  Note This field is read-only.
19	QUICK_RATIO	NUMBER	18	3	This is the quick ratio. It is automatically calculated by taking the Quick assets/ Current liabilities amounts.  Note This field is read-only.
20	ANNUAL_SALS_AMOUNT	NUMBER	18	3	The annual revenue. It is the total amount of money made by the corporate in a given year before costs or expenses are taken out.
21	GROSS_PROFIT_AMOUNT	NUMBER	18	3	It is the profit that the corporate makes after deducting the costs associated with making and selling its products, or the costs associated with providing its services
22	NET_PROFIT_AMOUNT	NUMBER	18	3	The money made by a corporate or part of a corporate for a particular period after all costs, taxes, etc. have been paid.
23	COST_OF_SALES_AMOUNT	NUMBER	18	3	This is the amount that the corporate spends on manufacturing and selling

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					products in a particular financial period, for example, on wages and raw materials.
24	TOT_NET_WORTH_LIABILITIES_AM	NUMBER	18	3	The Cash Profit / (Loss).
25	USER_MODIF	VARCHAR2	15		ID of the user when record created.
26	DATE_CREATE	DATE	7		Record creation date and time.
27	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
28	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.35 BOARDING_CORP_HIERARCHY_APP

This is a staging table used to define the Account contract element that is associated to an application.

Each column of this table is described in detail in the next section.

4.3.35.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which parameters are being defined. This code must be defined in 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	CONTRACT_ELEMENT_ID	VARCHAR2	24		ID with which the account contract will be captured during the Corporate boarding.
4	HIERARCHY_CODE	CHAR	6		The unique code identifying the Hierarchy.
5	TREE_SEQUENCE_ID	VARCHAR2	15		This field is reserved for future use.
6	TREE_PARENT_ID	VARCHAR2	15		This field is reserved for internal use.
7	PRODUCT_CODE	CHAR	6		This is the code identifying the selected products. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
8	PRODUCT_VERSION	VARCHAR2	10		The version of the products selected. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
9	CORPORATE_PARENT	VARCHAR2	15		This is to indicate the identification number of the possible corporate parent. It must exist in 'CORPORATE' table if any (i.e.: if the current corporate record is a sub-corporate)
10	CORP_TYPE_CODE	CHAR	3		The type of corporate as defined in 'CORPORATE' table.
11	DESCRIPTION	VARCHAR2	64		Brief description of the parameter being defined.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
12	HIERARCHY_LEVEL	NUMBER	2		The number of degrees within the organizational structure of the corporate.
13	MANDATORY	CHAR	1		This flag indicates if this account product is mandatory or optional. Possible values are: 'Y' = Yes 'N' = No
14	ACCEPT_CARD	CHAR	1		This column defines whether this level allows PAN. Possible values are: 'Y' = Yes 'N' = No  Note Allowed PAN means that during the PAN creation, the PAN has the possibility to be directly linked to this Corporate.
15	MAX_CARDINALITY	NUMBER	2		The number of instances of corporate level can be boarded.
16	EXISTING_SUB_LEVEL	NUMBER	2		The number of sub levels existed.
17	BILLING_INDICATOR	CHAR	1		This column indicates if this corporate level will have a unique account number or will be billed individually. Possible values are: 'C' = Centrally billed, 'I' = Individually billed.  Note When its Centrally billed="C" at least one associated account is mandatory for this corporate level.
18	USER_MODIF	VARCHAR2	15		ID of the user when record created.
19	DATE_CREATE	DATE	7		Record creation date and time.
20	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
21	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.36 BOARDING_CORPORATE_APPLICATION

This table is used to create and maintain applications for new corporates hierarchy and existing ones by adding new sub corporates in multiple independent steps.

Refer to "[Boarding corporate](#)" section in UG1063-Corporate management for more details.

Each column of this table is described in detail in the next section.

4.3.36.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		This is the issuer financial institution code to which the corporate belongs. This code must be defined in 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	24		Application identification number with which the corporate has been subscribed.
3	CONTRACT_ELEMENT_ID	VARCHAR2	24		Contract element id with which the corporate has been subscribed.
4	CORP_TYPE_CODE	CHAR	3		Unique code identifying the type of corporate. It must exist in CORPORATE_TYPE table
5	APPLICATION_STATUS	CHAR	1		Status of the application. Possible values are: 'O' = On-Going: Application has been initiated for capture. 'W' = Waiting Validation: Application has been completed and was pushed for review. 'T' = Ready to process: Application has been reviewed by checker and ready for processing or for temporary rejection. 'I' = Incomplete: Application was not completed or rejected or not submitted as required 'D' = Declined: Application not accepted and has been rejected. 'P' = Processed: Application has been processed and entities created 'A' = Archived: Applications that have been processed or rejected are archived automatically.
6	APPLICATION_STATUS_DATE	DATE	7		Date of the application Boarding corporate (Set to the business date as default value).
7	APPLICATION_TYPE	CHAR	1		This column indicates which type of application the user is capturing. As defined in 'APPLICATION_TYPE' table.
8	CORPORATE_ID	VARCHAR2	15		This is the corporate identification number. This column is required.
9	CORPORATE_PARENT	VARCHAR2	15		This is to indicate the identification number of the possible corporate parent. It must exist in 'CORPORATE' table if any (i.e.: if the current corporate record is a sub-corporate)
10	CORPORATE_NAME	VARCHAR2	40		This is the corporate name.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
11	BRANCH_CODE	CHAR	6		This is the branch to which the corporate belongs. It should be defined in 'BRANCH' table.
12	EMBOSSING_LINE	VARCHAR2	40		This is the corporate name that may be embossed on the corporate Pans.
13	CORPORATE_LEVEL	NUMBER	2		Level of sub-corporate within the corporate hierarchy.
14	CORPORATE_HOST_ID	VARCHAR2	15		Identification number of the corporate in case the PowerCARD Application communicates with an external HOST system. As defined in 'CLIENT' table.
15	HIERARCHY_CODE	CHAR	6		Hierarchy code with which the corporate is subscribed/ boarded. It must exist in 'CORP_HIERARCHY_PARAM' table.
16	SOCIO_PROF_CODE	CHAR	4		Socio-professional category of the corporate. It should be present in the 'SOCIOPROF_LIST' table.
17	ACTIVITY_CODE	CHAR	4		This is to indicate the corporate client activity. It must be defined in 'CLIENT_ACTIVITY_SET' table.
18	CUSTOMER_SEGMENT	CHAR	3		This is to indicate the corporate, client segment. It must be defined in 'CUSTOMER_SEGMENT' table.
19	TAX_REGISTRY_OFFICE	VARCHAR2	30		Represents the corporate tax registry office identification.
20	TAX_NUMBER	VARCHAR2	30		Corporate tax number as taxpayer.
21	ESTABLISHED_DATE	DATE	7		This is to indicate date on which the Corporate product association contract has been established.
22	REGISTERED_STOCK	NUMBRE	18		This column is not used in V3.5.
23	CURRENT_YEAR_TRANS_VOLUM	NUMBER	18	3	This column is not used in V3.5.
24	PREVIOUS_YEAR_TRANS_VOL	NUMBER	18	3	This column is not used in V3.5.
25	INCREASE_RATE	NUMBER	9	6	This optional column indicates the expected increase rate of stock inventory in terms of Pans issued for the corporate on the subsequent year.
26	CARD_STAT_RESPONSIBLE_NAME	VARCHAR2	30		This column is not used in V3.5.
27	CARD_STAT_RESPONSIBLE_ACTIVIT	VARCHAR2	30		This column is not used in V3.5.
28	CARD_MAIL_RESPONSIBLE_NAME	VARCHAR2	30		This column is not used in V3.5.
29	CARD_MAIL_RESPONSIBLE_ACTIVIT	VARCHAR2	30		This column is not used in V3.5.
30	LIABILITY_INDICATOR	CHAR	1		Liability involved for the corporate. Possible values are: 'P' = Personal, 'I' = Individual (personal liability for corporate cards), 'J' = Joint (Both personal and corporate liability for corporate cards),

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'F' = Full (Corporation only is liable).
31	OWNER_CODE	CHAR	2		This is to define the customer type. This owner code must be defined in 'OWNER_LIST' table
32	OWNER_CATEGORY	CHAR	1		Owner category. It must be defined in 'OWNER_LIST' table.
33	PR_CARE_OF	VARCHAR2	64		Mail recipient in the primary address.
34	PR_LINE_1	VARCHAR2	64		Primary address line 1.
35	PR_LINE_2	VARCHAR2	64		Primary address line 2.
36	PR_LINE_3	VARCHAR2	64		Primary address line 3.
37	PR_LINE_4	VARCHAR2	64		Primary address line 4.
38	PR_ZIP_CODE	VARCHAR2	10		Zip code of corporate primary address. Depending on the financial institution setup, the zip code can be mandatory, optional or not managed. When indicated, this code must be defined in 'ZIP_CODE' table.
39	PR_REGION_CODE	CHAR	3		This is the region representing the administrative division of the country where the applicant primary address is located. It must be exist in 'REGION' table.
40	PR_REGION_NAME	VARCHAR2	40		This is the region representing the administrative division of the country where the applicant primary address is located. It considered as free text.
41	PR_COUNTRY_CODE	CHAR	3		Country where the corporate primary address is located. It must be exist in 'COUNTRY' table.
42	PR_CITY_CODE	CHAR	5		City where the corporate primary address is located. It must be exist in 'CITY' table.
43	PR_EMAIL	VARCHAR2	50		Email sending mode.
44	PR_URL	VARCHAR2	60		URL of the corporate website.
45	PR_PHONE_1	VARCHAR2	20		First phone number, it's controlled by the system to ensure that is not containing letters.
46	PR_PHONE_1_TYPE	CHAR	1		Phone type of the captured first phone number. Possible values are: '0' = Office phone, '1' = Mobile phone, '2' = Home phone, '3' = Private or personal phone, '4' = Others.
47	PR_PHONE_2	VARCHAR2	20		Second phone number, it's controlled by the system to ensure that is not containing letters.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
48	PR_PHONE_2_TYPE	CHAR	1		Phone type of the captured second phone number. Possible values are: '0' = Office phone, '1' = Mobile phone, '2' = Home phone, '3' = Private or personal phone, '4' = Others.
49	PR_PHONE_3	VARCHAR2	20		Third phone number, it's controlled by the system to ensure that is not containing letters.
50	PR_PHONE_3_TYPE	CHAR	1		Phone type of the captured third phone number. Possible values are: '0' = Office phone, '1' = Mobile phone, '2' = Home phone, '3' = Private or personal phone, '4' = Others.
51	PR_PHONE_4	VARCHAR2	20		Fourth phone number, it's controlled by the system to ensure that is not containing letters.
52	PR_PHONE_4_TYPE	CHAR	1		Phone type for the captured fourth phone number. Possible values are: '0' = Office phone, '1' = Mobile phone, '2' = Home phone, '3' = Private or personal phone, '4' = Others.
53	PR_ADDRESS_TYPE	CHAR	2		Type of the primary address being defined for the corporate. The primary address types must be existing in 'ADDRESSES_TYPE_LIST' table.
54	PR_FAX	VARCHAR2	20		Corporate fax.
55	PR_SENDING_MODE	CHAR	1		Sending mode for communication with the corporate. Possible values are: 'M' = Courier, 'F' = Fax, 'E' = E-mail.
56	PR_CITY_NAME	VARCHAR2	32		Name of the city where the corporate primary address is located. It must be defined in 'CITY' table.
57	PR_DEFAULT_USAGE	CHAR	2		Usage of the primary address with 'Mail' as default value.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Possible values are: '01' = Mail, '02' = Statement, '03' = Dispute, '04' = Loyalty.
58	PR_STATUS	CHAR	1		This is the primary address status.
59	PR_STATUS_START_DATE	DATE	7		Start date when the STATUS_CODE column gets the value 'N'
60	PR_STATUS_END_DATE	DATE	7		End date when the STATUS_CODE column gets the value 'S'.
61	PR_IS_MANDATORY	CHAR	1		This is to indicate that the Primary address, with the assigned primary address type, is mandatory as defined in the Client Mandatory Addresses configuration or not. 'Y' (Yes) or Null
62	ADVANCED_ADDRESS_FLAG	VARCHAR2	10		This column is not used in V3.5.
63	ADDRESS_LIST_ID	VARCHAR2	10		In case of corporate having secondary addresses in addition to the primary one, this column indicates the indicator of list of the Corporate created addresses. This code must be defined in 'ADDRESS_LIST' table.
64	NB_ACCOUNTS_LINK	NUMBER	2		This is the linked account number captured.
65	DATA_DISCLOSURE	CHAR	2		This is to indicate the corporate data disclosure option. Possible values are: 'ND' = No disclosure, 'HI' = Handling information, 'TI' = Transmission of the information, 'HT' = Handling/Transmission of the information.
66	ENTITY_CODE	CHAR	2		This is the type of the entity under process set by default to entity origin of the link, here 'CO' for Corporate.
67	STATUS_CODE	CHAR	1		Address status code. Possible values are: 'N' = Normal, 'C' = Canceled, 'S' = Suspend. It should be defined in 'STATUS_LIST' table
68	STATUS_DATE	DATE	7		Date of the last status updated.
69	STATEMENT_CODE	CHAR	2		Statement code. It should be defined in 'STATEMENT_PARAMETERS' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
70	LANGUAGE_CODE	CHAR	3		Corporate language code. It must be defined in 'LANGUAGE_LIST' table.
71	GROUP_TYPE_ID	CHAR	3		Type group identification.
72	DEFAULT_GROUP_ID	VARCHAR2	15		Identification of the Group (Individual PAN, Business card).
73	SENSITIVE_OPERATION_RECORD	CHAR	1		Sensitive operation record code. Possible values are: 'I' = Insert, 'M' = Update, 'C' = Cancel, 'D' = Delete, 'X' = Special condition.
74	AUTHORIZED_SIGNATURE	VARCHAR2	120		This column is not used in V3.5.
75	DOCUMENT_LIST_ID	VARCHAR2	10		Document list identifier referring the list of documents related to a given client. Those documents are stored in the 'CLIENT_DOCUMENT_LIST' table
76	CORPORATE_LIMIT_MNG_FLAG	CHAR	1		This column indicates whether the credit limit is managed by corporate or not. Possible values are: 'Y' = Managed by corporate, 'N' = Not managed by corporate.
77	CURRENCY_CODE	CHAR	3		In case CUSTOMER_LIMIT_MNG_FLAG = 'Y', this column indicates the currency in which limits are expressed. This code must be present in 'CURRENCY_TABLE' table
78	CREDIT_LIMIT	NUMBER	18		In case 'CORPORATE_LIMIT_MNG_FLAG' column is set to 'Y', this column is used to indicate the credit limit of the corporate.
79	CREDIT_LIMIT_CASH	NUMBER	18		In case 'CORPORATE_LIMIT_MNG_FLAG' column is set to 'Y', this column is used to indicate the cash limit of the corporate.
80	ADDITIONAL_LOAN_LIMIT	NUMBER	18		In case 'CORPORATE_LIMIT_MNG_FLAG' column is set to 'Y', this column is used to indicate the additional loan limit of the corporate.
81	APP_CONTRACT_STATUS	CHAR	1		Contract element status. It is used to indicates where the contract element is in its contract life cycle. Possible values are: 'O' = On going, 'R' = Rejected,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'W' = Waiting for validation, 'V' = Valid, 'M' = Maintenance, 'D' = Deprecated, 'S' = Suspended, 'P' = Processed, 'T' = Closed.
82	APP_CONTRACT_STATUS_DATE	DATE	7		Date on which the user has modify the status.
83	ACCEPT_CARD	CHAR	1		This column indicates if this corporate can issue directly the cards for their employees in other words if the Pans can be linked directly to this corporate or not. Possible values are: 'Y' = Yes, 'N' = No.
84	BILLING_INDICATOR	CHAR	1		This column indicates if this corporate level will have a unique account number or will be billed individually. Possible values are: 'C' = Centrally billed (there is an account associated to this corporate), 'I' = Individually billed (Accounts will be associated to employee PANs).
85	MAIN_CORP_ID_FROM	CHAR	1		Account id, that it's linked to the main corporate.
86	MAIN_CORP_ID	VARCHAR2	15		Corporate main id. It must be defined in 'CORPORATE' table (if any, i.e.: if the current corporate record is a sub-corporate)
87	MAIN_CONTRACT_ELEMENT_ID	VARCHAR2	24		Contract element id with which the main corporate has been subscribed.
88	PARENT_CORP_ID_FROM	CHAR	1		This is to indicate the identification number of the corporate parent linked account.
89	PARENT_CONTRACT_ELEMENT_ID	VARCHAR2	24		Contract element id with which the corporate parent has been subscribed.
90	ACCEPTS_SOLIDARITY	CHAR	1		This column indicates whether the current Corporate accepts solidarity or not. Possible values are: 'Y' = Yes : The Starting from unpaid column becomes mandatory 'N' = No.
91	SOLIDARITY_FROM_UNPAID_LEVEL	NUMBER	3		Number of unpaid on the employee from which the corporate will take in charge the payment on behalf its employees.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
92	USER_CREATE	VARCHAR2	15		ID of the user when record created.
93	DATE_CREATE	DATE	7		Record creation date and time.
94	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
95	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.37 BOARDING_DD_BANK_ACCOUNT_APP

This is a staging table used to define the account information, it allows to capture the corresponding banking account to be associated to the debit PAN.

Refer to "[Account information for debit accounts](#)" section in UG 1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.3.37.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code of the parameter being defined. This code should be defined in 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	APPLICATION_CONTRACT_ID	VARCHAR2	24		The contract element to be used for the link with the account. It must be defined in 'BOARDING_CARD_APP' table.
4 	ACCOUNT_SEQUENCE	NUMBER	2		The sequence number of the primary account linked to the pack under process.
5	ACCOUNT_BANK_CODE	CHAR	6		The billing account financial institution. It should be defined in 'BANK' table.
6	ACCOUNT_BRANCH_CODE	CHAR	6		The branch institution related to the billing account bank. It should be defined in 'BRANCH' table.
7	ACCOUNT_NUMBER	VARCHAR2	24		The banking account number.
8	ROUTING_NUMBER	VARCHAR2	9		The routing number.
9	ACCOUNT_CURRENCY_CODE	CHAR	3		This is the account currency institution.
10	ACCOUNT_TYPE	CHAR	2		The type of the posting account destination. Possible values are: '00' = Billing account, '10' = Saving account, '20' = Checking account, '30' = Loan account, '40' = Universal account, '50' = Investment account,

Seq.	Column Name	Data Type	Len	Sc	Column Description
					'62' = Spending power account, '80' = Merchant account, '81' = Chain account, '90' = Shadow account, '91' = Instalment loan account, '92' = Real estate loan account, '93' = Loyalty account.
11	ACCOUNT_STATUS	CHAR	1		The account status. Possible values are: 'N' = Normal, 'C' = Cancelled, 'S' = Suspend, 'W' = Wait for validation, 'V' = To be sent for validation, 'R' = Rejected.
12	START_DATE	DATE	7		The opening date of the direct debit account.
13	END_DATE	DATE	7		The closing date of the direct debit account.
14	STATUS_DATE	DATE	7		The date when the current status was assigned to this Institution.
15	STATUS_REASON_CODE	CHAR	2		The current status reason of the account.
16	DIRECT_DEBIT_REFERENCE_NBR	VARCHAR2	16		The direct debit reference number in case this account is assigned to a direct debit.
17	ACCOUNT_BANK_NAME	VARCHAR2	32		The full name of the institution that manages the account under process.
18	ACCOUNT_BANK_CITY	VARCHAR2	30		City name of the bank that manages the account under process. It should be previously defined in the 'CITY' table.
19	ACCOUNT_BANK_COUNTRY	VARCHAR2	32		The country name of the bank that manages the account under process. It should be previously defined in the 'COUNTRY' table.
20	IBAN	VARCHAR2	34		PAN holder banking account number in IBAN format.
21	SWIFT_CODE	VARCHAR2	11		SWIFT code, it is an international Institution code that identifies particular banks worldwide.
22	DEFAULT_ACCOUNT	CHAR	1		The default banking account in case of multiple accounts. Possible values are: 'Y' = Yes 'N' = No
23	USER_CREATE	VARCHAR2	15		ID of the user when record created.

Seq.	Column Name	Data Type	Len	Sc	Column Description
24	DATE_CREATE	DATE	7		Record creation date and time.
25	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
26	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.38 BOARDING_LOAN_APP

This staging table is gathering the most important information identifying the loan.

Refer to [Loan list views](#) section in UG1045 Loan management user's guide for more details.

Each column of this table is described in detail in the next section.

4.3.38.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Indicates the financial institution of the credit loan. It should be defined in the 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	24		Indicates the application identification number.
3 	APPLICATION_CONTRACT_ID	VARCHAR2	24		Indicates the application identification number of the contract.
4	CATALOGUE_OFFER	CHAR	3		Indicates the code identifying the catalog offer.
5	CATALOGUE_PRODUCT	CHAR	6		Indicates the code identifying the loan catalog product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
6	CATALOGUE_PRODUCT_VERSION	VARCHAR2	10		Indicates the version of the loan catalog product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
7	CATALOGUE_PACK	CHAR	6		Used to define the unique code identifying the pack as defined in 'CATALOGUE_PACK' table.
8	XML_OBJECT	BLOB	4000		Stores the XML object inherited from catalogue and with which the contract has been initially validated in boarding. It will be different from the one in catalogue product in case there has been a negotiation of the contract during boarding.
9	LOAN_TYPE	CHAR	1		Indicates the type of the loan. Possible values are: 'L' = Loan Over the Phone (LOP), the standalone loan that is provided to the customer via cash or check, 'E' = Easy Payment Plan (EPP), the conversion of an existing transaction to loan,

Seq.	Column Name	Data Type	Len	Sc	Column Description
					'B' = Balance Conversion (Forbearance), the conversion of an existing account balance to a loan. It must be defined in 'LOAN_PROGRAM' table.
10	LOAN_DESCRIPTION	VARCHAR2	128		Contains a description of loan type.
11	LOAN_FININCING	CHAR	1		This option indicates whether a loan under the program being defined is managed within the credit limits and credit balance or managed within the extra loan limits and extra loan balance. Possible values are: 'I' = Intra (The loan under the program being defined is managed within the Credit limits and Credit balance), 'E' = Extra (The loan under the program being defined is managed within the Extra loan limits and Extra loan balance).
12	PROGRAM_ID	VARCHAR2	8		Indicates the loan program identification. It must be present in 'LOAN_PROGRAM' table.
13	PROGRAM_ID_NAME	VARCHAR2	32		Indicates the program name for which parameters are being defined.
14	APP_CONTRACT_STATUS	CHAR	1		Contract element status. Where the contract element is, in its contract life cycle. Possible values are: 'N' = Not started, 'O' = Ongoing, 'W' = Waiting for validation, 'R' = Ready to process, 'S' = Removed, 'D' = Declined, 'P' = Processed.
15	APP_CONTRACT_STATUS_DATE	DATE	7		Date on which the user has modify the status.
16	GENERATED_ARN_NUMBER	NUMBER	23		Indicates the acquirer reference number generated for the loan.
17	GENERATED_ARN_SEQ	CHAR	4		Indicates the acquirer reference number sequence generated for the loan.
18	ACCOUNT_TYPE	CHAR	2		Indicates the type of the account being linked to the loan. Possible values are: '00' = Billing account '10' = Saving account '20' = Checking account '30' = Loan account

Seq.	Column Name	Data Type	Len	Sc	Column Description
					'40' = Universal account '50' = Investment account '62' = Spending power account '80' = Merchant account '81' = Chain account '90' = Shadow account '91' = Instalment loan account '92' = Real estate loan account '93' = Loyalty account
19	SHADOW_ACCOUNT_NBR	VARCHAR2	24		Defines the shadow account identification number.
20	CLIENT_CODE	VARCHAR2	24		Defines the client identification code concerned. It should be defined in 'CLIENT' table.
21	CARD_NUMBER	VARCHAR2	22		This is the PAN of the payment instrument concerned by the loan transaction. It should be defined in 'CARD' table.
22	CARD_NUMBER_SEQUENCE	NUMBER	3		Indicates the PAN sequence number.
23	CORPORATE_ID	VARCHAR2	15		Defines the corporate ID in case of a corporate account. It should be defined in 'CORPORATE' table.
24	ORIGINAL_TRANSACTION_CODE	CHAR	2		Indicates the transaction code of the original transaction subject to loan conversion. It should be defined in 'CR_TRANSACTION_PARAMETER' table.
25	ORIGINAL_REVERSAL_FLAG	CHAR	1		Indicates the original transaction reversal flag. Possible values are: 'N' = Normal, 'R' = Reversal.
26	TRANSACTION_SIGN	CHAR	1		Indicates the loan transaction sign. Possible values are: 'D' = Debit, 'C' = Credit.
27	TRANSACTION_DATE	DATE	7		Indicates the date on which the loan transaction occurs.
28	TRANSACTION_AMOUNT	NUMBER	18	3	Indicates the loan transaction amount expressed in transaction currency.
29	LOAN_FEES	NUMBER	18	3	Indicates the loan fees amount.
30	LOAN_AVAILABLE_BALANCE	NUMBER	18	3	Available balance amount of the concerned loan
31	TRANSACTION_CURRENCY	CHAR	3		Defines the loan transaction currency code. It should be defined in 'CURRENCY_TABLE' table.

Seq.	Column Name	Data Type	Len	Sc	Column Description
32	TRANSACTION_CURRENCY_EXP	NUMBER	1		Defines the loan transaction currency exponent.
33	INSTALLMENT_AMOUNT	NUMBER	18	3	Defines the loan installment amount to be paid off.
34	INSTALLMENT_CURRENCY	CHAR	3		Defines the installment currency code. It should be defined in 'CURRENCY_TABLE' table.
35	INSTALLMENT_PRINCIPAL_AMOUNT	NUMBER	18	3	Indicates the installment principal amount.
36	INSTALLMENT_INTEREST_AMOUNT	NUMBER	18	3	Indicates the installment interest amount.
37	INSTALLMENT_TAX1	NUMBER	18	3	Indicates the installment tax1 amount.
38	INSTALLMENT_TAX2	NUMBER	18	3	Indicates the installment tax2 (Fund tax) amount.
39	TAX_1_RATE	NUMBER	5	2	This is the first tax rate.
40	TAX_2_RATE	NUMBER	5	2	This is the second tax rate.
41	CHANGE_DIFFERENCE	NUMBER	18	3	Indicates the difference of change between first and last definitive conversion.  Note Applicable only when LOAN_TYPE = 'E' (Easy Payment Plan - EPP)
42	INSTALLMENT_MONTH_STARTED_IN	NUMBER	1		This field is reserved for internal use.
43	NUMBER_OF_TERMS	NUMBER	3		Indicates initial number of installments which means the loan period.
44	MAX_NUMBER_OF_TERMS	NUMBER	18	3	Indicates the maximum number of terms to be defined for the loan.
45	MIN_NUMBER_OF_TERMS	NUMBER	18	3	Indicates the minimum number of terms to be defined for the loan.
46	REBATE	NUMBER	9	6	When applicable, this field indicates the interest rebate rate.
47	INTEREST_RATE	NUMBER	9	6	Interest rate defined in the account product for each balance.
48	LOAN_START_DATE	DATE	7		Indicates the date when the first installment should be paid.
49	LOAN_END_DATE	DATE	7		Indicates the date when the last installment should be paid.
50	NEXT_TERM_DATE	DATE	7		Indicates the date when the next term should be paid.
51	LOAN_POSTING	CHAR	1		It indicates the loan posting indicator. Possible values are: 'P' = Posted to the account, 'W' = Waiting for posting.
52	LOAN_STATUS	CHAR	1		Contains the loan status.

Seq.	Column Name	Data Type	Len	Sc	Column Description
					Possible values are: 'O' = Ongoing, 'S' = Suspended, 'R' = Reversed, 'A' = Amortized, 'P' = Procurement, 'N' = No action, 'F' = Early settled, 'H' = Rescheduled, 'W' = Early closed.
53	TYPE_OF_INTEREST	CHAR	3		Contains the interest calculation method as defined in 'LOAN_PROGRAM' table. Possible values are: 'MFF' = Monthly fix fee, 'MFT' = Monthly fee by tier, 'EMI' = Equal monthly installment, 'EPI' = Equal principal installment.
54	CREDIT_LIMIT	NUMBER	18	3	Credit limit at the account level. This Credit limit prevails on the one defined at the Account catalogue product. However, this limit cannot exceed the Credit limit ceiling defined at the Marketable Account product.
55	CASH_LIMIT	NUMBER	18	3	Cash limit at the account level. This Cash limit is defined as part of the Credit limit and therefore, cannot exceed the Credit limit.
56	LOAN_LIMIT	NUMBER	18	3	Loan limit at the account level.
57	TOTAL_BALANCE	NUMBER	18	3	Sum of all balances (Purchase, Cash, Ecom, Transfer, Cheque, etc)
58	AVAILABLE_PURCHASE	NUMBER	18	3	Purchase available amount
59	AVAILABLE_CASH	NUMBER	18	3	Cash available amount
60	AVAILABLE_ECOM	NUMBER	18	3	E-commerce available amount
61	AVAILABLE_TRANSFER	NUMBER	18	3	Transfer available amount
62	AVAILABLE_CHEQUE	NUMBER	18	3	Cheque available amount
63	AVAILABLE_INTEREST	NUMBER	18	3	Interest available amount
64	AVAILABLE_FEE	NUMBER	18	3	Fees available amount
65	AVAILABLE_INSTALMENT	NUMBER	18	3	Instalment available amount
66	AVAILABLE_TAX	NUMBER	18	3	Tax available amount
67	PURCHASE_BALANCE_TO_CONVERT	NUMBER	18	3	Purchase balance amount converted to loan
68	CASH_BAL_TO_CONV	NUMBER	18	3	Cash balance amount converted to loan

Seq.	Column Name	Data Type	Len	Sc	Column Description
69	TRANSFER_BAL_TO_CONV	NUMBER	18	3	Transfer balance amount converted to loan
70	ECOM_BAL_TO_CONVERT	NUMBER	18	3	E-commerce balance amount converted to loan
71	CHEQUE_BAL_TO_CONV	NUMBER	18	3	Cheque balance amount converted to loan
72	INTEREST_BAL_TO_CONV	NUMBER	18	3	Interest balance amount converted to loan
73	FEE_BAL_TO_CONV	NUMBER	18	3	Fee balance amount converted to loan
74	INSTALMENT_BAL_TO_CONV	NUMBER	18	3	Instalment balance amount converted to loan
75	TAX_BAL_TO_CONV	NUMBER	18	3	Tax balance amount converted to loan
76	TOTAL_BALANCE_TO_CONV	NUMBER	18	3	Total balance amount converted to loan
77	CHECK_ALL_FLAG	CHAR	1		Check all flag allows definition of amount to convert to loan for each balances. Possible values are: 'Y' = Yes, 'N' = No.
78	PRIM_APPLICATION_CONTRACT_ID	VARCHAR2	24		Primary account contract identification.
79	USER_CREATE	VARCHAR2	15		ID of the user when record created.
80	DATE_CREATE	DATE	7		Record creation date and time.
81	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
82	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.39 BOARDING_LOY_ACCRUAL_RULES

This table is used to define all accrual formula characteristic. Refer to ["Accrual formula group"](#) section in UG1019-Catalogue for more details.

Each column of this table is described in detail in the next section.

4.3.39.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code for which the parameters are being defined. It should already be declared in 'BANK' table
2 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	APPLICATION_CONTRACT_ID	VARCHAR2	24		The application contract identification generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
4	FORMULA_SEQUENCE	NUMBER	10		The sequence identification number of the current accrual formula.
5	RULE_DESCRIPTION	VARCHAR2	50		Shortened description used for information, for reporting or on other screen.
6	LOYALTY_ACCOUNT_NBR	VARCHAR2	24		This is the loyalty account number linked to the parameter being defined.
7	TRANSACTION_CODE	CHAR	2		The transaction code (Purchase, ATM Cash, Cash Advance ...etc.) applicable for the accrual formula.
8	TRANSACTION_CATEGORY	NUMBER	2		Transaction category (Airline, Medical, Mail order, Purchase, Cash, E-com, Lodging, Rent car, Restaurant, Withdrawal, Quasi cash and T&E transactions) applicable for the parameters being defined.
9	ORIGIN_CODE	CHAR	1		The origin of the transaction applicable for the accrual formula.
10	BILLING_CURRENCY_CODE	CHAR	3		The billing currency in which the amounts of the loyalty product are being expressed.
11	TRANSACTION_CURRENCY_CODE	CHAR	3		Transaction currency applicable for the parameters being defined.
12	VIP_LEVEL	CHAR	1		The VIP level (Code and description) concerned for the parameters being defined.
13	CUSTOMER_SEGMENT_INDEX	CHAR	3		The customer segment for the parameters being defined.
14	MCC_GROUP	CHAR	4		MCC group code applicable for the parameters being defined.
15	MCC	CHAR	4		MCC code applicable for the parameters being defined.
16	CHAIN_CODE	VARCHAR2	15		Chain code applicable for the parameters being defined.
17	MERCHANT_NUMBER	VARCHAR2	15		Merchant code applicable for the parameters being defined.
18	OUTLET_NUMBER	VARCHAR2	15		Outlet number code applicable for the parameters being defined.
19	START_DATE	DATE	7		This is the date from when the formula defined is effective.
20	END_DATE	DATE	7		This is the date on when the formula defined becomes no more valid.
21	P_START_DATE	DATE	7		This is the date from when the promotional formula defined is effective.
22	P_END_DATE	DATE	7		This is the date on when the promotional formula defined becomes no more valid.
23	CURRENCY_CODE	CHAR	3		The currency code of the parameter being defined. It must be defined in 'CURRENCY_TABLE' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
24	TRANSACTION_MINIMUM_AMOUNT	NUMBER	18	3	This is the transaction minimum amount.
25	TRANSACTION_MAXIMUM_AMOUNT	NUMBER	18	3	This is the transaction maximum amount.
26	POINT_FORMULA	CHAR	1		This column indicates if the number of points to be calculated is a Multiplier or a Percent of the transaction amount. (i.e. for the Multiplier option, the loyalty points would be the multiplier of the transaction amount and the Multiplier value should be defined in the MULTIPLIER_PERCENT_NUMBER field, whereas for the Percent option the loyalty points would be the percent of the transaction amount and the Percent value should be defined in the MULTIPLIER_PERCENT_NUMBER field). Possible values are: '...' = Ceiling of transaction amount, '...' = Multiplier of transaction amount, '...' = Percent of transaction amount.
27	MULTIPLIER_PERCENT_NUMBER	NUMBER	9	6	The multiplier or percent value depending on POINT_FORMULA field option.
28	POINT_FIXED	NUMBER	9		The fixed points that would be allotted in addition to points calculated using this formula.
29	POINT_MINIMUM	NUMBER	9		This is the minimum points that should be allotted using this formula (i.e. if the computed number of points is lesser than the minimum points defined, then the system would consider the minimum points for the eligible transactions).
30	POINT_MAXIMUM	NUMBER	9		This is the maximum points that should be allotted using this formula (i.e. if the computed number of points is greater than the maximum points defined, then the system would consider the maximum points for the eligible transactions).
31	POINT_GRACE	NUMBER	9		The grace points (i.e. if the computed number of points is lesser than the grace points defined, then the calculated points or calculation result will be set to zero).
32	RULE_IDENTIFIER	CHAR	3		This is to indicate the option retained for the concerned calculation rule. Possible values are: 'STD' = Standard, 'MIN' = Minimum, 'MAX' = Maximum.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
33	ROUNDED_METHOD_IDENTIFIER	CHAR	1		This is to indicate the rounding method to be applied on the concerned calculation resulted amount. Possible values are: 'H' = High value, 'L' = Low value, 'N' = Normal, 'E' = Exponent.
34	THRESHOLD_AMOUNT	NUMBER	18	3	This column is used to set the transaction amount threshold applicable for the formula being defined. To be eligible for loyalty points accumulation based on the formula index, the transaction amount should be greater than the threshold amount defined.
35	P_CURRENCY_CODE	CHAR	3		The promotion currency code of the parameter being defined. It must be defined in 'CURRENCY_TABLE' table.
36	P_TRANSACTION_MINIMUM_AMOUNT	NUMBER	18	3	This is the promotion transaction minimum amount.
37	P_TRANSACTION_MAXIMUM_AMOUNT	NUMBER	18	3	This is the promotion transaction maximum amount.
38	P_POINT_FORMULA	CHAR	1		This column indicates if the number of points to be calculated for the promotion is a Multiplier or a Percent of the transaction amount. (i.e. for the Multiplier option, the loyalty points would be the multiplier of the transaction amount and the Multiplier value should be defined in the P_MULTIPLIER_PERCENT_NUMBER field, whereas for the Percent option the loyalty points would be the percent of the transaction amount and the Percent value should be defined in the P_MULTIPLIER_PERCENT_NUMBER field). Possible values are: '...' = Ceiling of transaction amount, '...' = Multiplier of transaction amount, '...' = Percent of transaction amount.
39	P_MULTIPLIER_PERCENT_NUMBER	NUMBER	9	6	The promotion multiplier or percent value depending on "P_POINT_FORMULA" option.
40	P_POINT_FIXED	NUMBER	9		The promotion fixed points that would be allotted in addition to points calculated using the formula.
41	P_POINT_MINIMUM	NUMBER	9		This column is used to define the promotion minimum points that should be allotted using the formula (i.e. if the computed number of points is lesser than the minimum points defined, then the system would consider

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					the minimum points for the eligible transactions).
42	P_POINT_MAXIMUM	NUMBER	9		This column is used to define the promotion maximum points that should be allotted using the formula (i.e. if the computed number of points is greater than the maximum points defined, then the system would consider the maximum points for the eligible transactions).
43	P_POINT_GRACE	NUMBER	9		This column is used to define the promotion grace points (i.e. if the computed number of points is lesser than the grace points defined, then the calculated points or calculation result will be set to zero).
44	P_RULE_IDENTIFIER	CHAR	3		This is to indicate the option retained for the concerned promotion calculation rule. Possible values are: 'STD' = Standard, 'MIN' = Minimum, 'MAX' = Maximum.
45	P_ROUNDED_METHOD_IDENTIFIER	CHAR	1		This is to indicate the rounding method to be applied on the concerned promotion calculation resulted amount. Possible values are: 'H' = High value, 'L' = Low value, 'N' = Normal, 'E' = Exponent.
46	P_THRESHOLD_AMOUNT	NUMBER	18	3	This column is used to set the transaction amount threshold applicable for the formula being defined. To be eligible for loyalty points accumulation based on the formula index, the transaction amount should be greater than the threshold amount defined.
47	USER_CREATE	VARCHAR2	15		ID of the user when record created.
48	DATE_CREATE	DATE	7		Record creation date and time.
49	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
50	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.40 BOARDING_LOYALTY_ACCOUNT

This table is used to create the Loyalty contract element for an existing customer or new customer in new application that has an account or payment instrument contracts elements. The loyalty product can be associated either to credit or debit payment instrument.

Refer to "[Loyalty contract edition](#)" section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.3.40.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code of the loyalty account. It must be declared in 'BANK' table
2 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	APPLICATION_CONTRACT_ID	VARCHAR2	24		The application contract identification generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
4	CATALOGUE_OFFER	CHAR	3		The code identifying the catalogue offer.
5	CATALOGUE_PRODUCT	CHAR	6		The code identifying the product code. Valid values must be retrieved from PRODUCT_TYPE field within 'CATALOGUE_PRODUCT' table.
6	CATALOGUE_PRODUCT_VERSION	VARCHAR2	10		The version of the product. Valid values must be retrieved from PRODUCT_TYPE field within 'CATALOGUE_PRODUCT' table.
7	CATALOGUE_PACK	CHAR	6		The unique code identifying the pack as defined in 'CATALOGUE_PRODUCT' table.
8	XML_OBJECT	BLOB	4000		XML object inherited from catalogue and with which the contract has been initially validated in boarding. It will be different from the one in catalogue product in case there has been a negotiation of the contract during boarding.
9	APP_CONTRACT_STATUS	CHAR	1		The application contract status. Possible values are: 'N' = Not started: This is the initial contract status. The product has been selected for the contract and the capture is not started. 'O' = On going: Data capture on-going for the contract. 'W' = Waiting for validation: The data capture is completed for the contract and sent for review. 'R' = Ready to Process: The contract has been reviewed by a checker and is ready for processing or for temporary rejection. 'P' = Processed: The contract has been processed and the entity is created (This status is updated automatically when the application is processed)

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'S' = Removed: The contract removed after initiating the data capture of it. 'D' = Declined: The contract is not accepted by the reviewer and is rejected.
10	APP_CONTRACT_STATUS_DATE	DATE	7		The application contract status date. The date when the status was last updated.
11	ACCOUNT_OWNER	CHAR	2		This column indicates to which entity of the boarding loyalty account number is associated. Possible values are: 'CH' = Cardholder, 'SA' = Account. Note - For payment instrument debit products, the ACCOUNT_OWNER is set to 'CH' (Cardholder), - For payment instrument credit products, the ACCOUNT_OWNER is set to 'SA' (Account).
12	ENTITY_ID	VARCHAR2	24		In case the ACCOUNT_OWNER is set to 'SA' (Account), this column displays the Credit account number (Shadow account number) identifying the Credit account. Otherwise, it's the PAN (Primary Account number) of the Payment Instrument.
13	LOYALTY_ACCOUNT_NBR	VARCHAR2	24		This is the boarding loyalty account number automatically assigned by the system to the owner. To generate the loyalty account number, the system uses the owner account number concatenated with the suffix '93' that represents the loyalty account link code within PowerCARD system, i.e. if the account owner is '123456789000' then the loyalty account number will be '12345678900093'.
14	PRIM_APPLICATION_CONTRACT_ID	VARCHAR2	24		This is the identification code of the primary current account contract element with which the customer has been subscribed to the loyalty product.
15	USER_CREATE	VARCHAR2	15		ID of the user when record created.
16	DATE_CREATE	DATE	7		Record creation date and time.
17	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
18	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.41 BOARDING_LOYALTY_PROGRAM

Programs are defined with a validity period, priority, currency reference and a status that determines whether earned points are generated based on the transaction or on the balance.

At any time, exceptional promotion multiplier may be defined for a limited period where points earned will be inflated accordingly.

Earned points may be permanent, valid for a fixed interval period or valid for a number of days. Purge of points earned from a given loyalty program is also parameter based defined at the program level.

Two options of redemption are supported, redemption with credit to merchant and redemption without credit to merchant. Redemption value can be defined by point, gift or by value of point.

Redemption charging is also set-up at the program level either by point or by value of point. This redemption charging can be shared by the Issuer, the Merchant and/or the Co-brander, up to six charge rates can then be defined for each loyalty program:

- Co-brander (both credit and debit rates are defined),
- Merchant (both credit and debit rates are defined),
- Issuer bank (both credit and debit rates are defined).
- Each column of this table is described in detail in the next section.

4.3.41.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Issuer Financial institution code for which the parameters are being defined. It should already be declared in 'BANK' table
2 	APPLICATION_ID	VARCHAR2	24		Identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	APPLICATION_CONTRACT_ID	VARCHAR2	24		Application contract identification generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
4	ABRV_PROGRAM_NAME	VARCHAR2	16		Abbreviated wording of program name.
5	PROGRAM_NAME	VARCHAR2	32		Name of loyalty program.
6	STARTING_DATE_OF_PROGRAM	DATE	7		Boarding loyalty program start date. It is the date from which the loyalty program becomes effective.
7	ENDING_DATE_OF_PROGRAM	DATE	7		This is the boarding loyalty program end date. It is the date on which the loyalty program expires.
8	CARDHOLDER_FLAG	CHAR	1		This flag indicates if this loyalty product applies for Panholders or not. Possible values are: 'Y' = Yes (By default), 'N' = No.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
9	CORPORATE_FLAG	CHAR	1		This flag indicates if this loyalty product applies for corporates or not. Possible values are: 'Y' = Yes, 'N' = No (By default).
10	CARD_CHANNEL_FLAG	CHAR	1		This flag indicates if this loyalty product applies for payment instrument's channels or not. Possible values are: 'Y' = Yes, 'N' = No (By default).
11	MERCHANT_FLAG	CHAR	1		This flag indicates if this loyalty product applies for merchants or not. Possible values are: 'Y' = Yes, 'N' = No (By default).
12	CHAIN_FLAG	CHAR	1		This flag indicates if this loyalty product applies for chains or not. Possible values are: 'Y' = Yes, 'N' = No (By default).
13	MERCHANT_CHANNEL_FLAG	CHAR	1		This flag indicates if this loyalty product applies for merchant's channels or not. Possible values are: 'Y' = Yes, 'N' = No (By default).
14	CURRENCY_CODE_REFERENCE	CHAR	3		This is the currency code of the boarding loyalty program. It must be defined in 'CURRENCY_TABLE' table.
15	MULTIPLIER_CODE	NUMBER	9	6	Boarding loyalty program multiplier value. This promotional multiplier is used for loyalty points or amount calculation within the promotional period delimited by the start and end dates defined below (If for example the multiplier value is set to '2', the points earned from this program during the promotional period is multiplied by 2).
16	MULTIPLIER_START_DATE	DATE	7		Start date of the promotional multiplier for exceptional loyalty points or amount calculation.
17	MULTIPLIER_END_DATE	DATE	7		End date of the promotional multiplier for exceptional loyalty points or amount calculation.
18	LOYALTY_EXPIRY_CODE	CHAR	1		Validity of loyalty point gained. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'P' = Permanent (the loyalty points accumulated based on this program are permanent and it will not expire), 'S' = Valid for period value (the loyalty points accumulated based on this program are valid for specific period defined by a number of days from the point earned date. When this option is selected the VALIDITY_PERIOD column below should be defined).
19	PURGE_FREQUENCY	CHAR	1		This column is not used in V3.5.
20	VALIDITY_PERIOD	NUMBER	4		This is a value indicating the number of days the loyalty point is valid. Mandatory only if LOYALTY_EXPIRY_CODE = 'S' (Valid for period value).
21	PURGE_PERIOD_1	DATE	7		This column is not used in V3.5.
22	PURGE_PERIOD_2	DATE	7		This column is not used in V3.5.
23	PURGE_PERIOD_3	DATE	7		This column is not used in V3.5.
24	PURGE_PERIOD_4	DATE	7		This column is not used in V3.5.
25	BALANCE_NEGATIVE_REV_IND	CHAR	1		This flag indicates if negative balance will be allowed in case of reversal or not. Possible values are: 'Y' = Yes, 'N' = No (By default).
26	BALANCE_NEGATIVE_PEN_IND	CHAR	1		This flag indicates if negative balance will be allowed in case of penalty or not. Possible values are: 'Y' = Yes, 'N' = No (By default).
27	PROGRAM_PRIORITY	NUMBER	2		Priority of the loyalty catalog product. In case the eligible entity account is enrolled to more than one loyalty catalog products, this priority determines which one is to be considered for points calculation.  Note Defaulted to 1.
28	PROGRAM_STATUS	CHAR	1		Boarding loyalty program status. Possible values are: 'E' = Exclusive (Program of highest priority),

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'N' = Normal by transaction (Normal cumulative loyalty program by transaction; points are generated by batch processing on daily basis), 'B' = Normal by balance (Normal cumulative loyalty program by balance; points are generated by batch processing at each End-of-Cycle), 'C' = Canceled (Loyalty program canceled).  Note Defaulted to 'N' (Normal by transaction).
29	REDEMPTION_OPTION	CHAR	1		This column indicates if redemption is supported by this loyalty program and how. Possible values are: 'N' = Redemption value not managed (Loyalty program does not support redemption), 'M' = Managed (Loyalty program supports redemption), 'C' = Managed with credit to merchant.  Note Defaulted to 'M' (Managed).
30	CHARGING_MODE	CHAR	1		Charging mode. Possible values are: 'P' = By point (By default), 'V' = By value of point.
31	CHARGING_EVENT	CHAR	1		Code specifies when the partner's will be debited in order to credit the Merchant. Possible values are: 'T' = Transaction (When transaction is processed), 'R' = Redemption (When the points are used).  Note Defaulted to 'T' (Transaction).
32	REDEMPTION_VALUE_ORIGIN	CHAR	1		Redemption type supported by this loyalty program. Possible values are: 'G' = By gift (Program supports redemption by gift),

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'R' = By point (Program supports redemption by point), 'P' = By point value (Program supports redemption by value of point).  Note Defaulted to 'R' (By point).
33	PARTNER_POSTING_D_PERCENT	NUMBER	9	6	Debit charge rate of co-brander.  Note Defaulted to '0'.
34	MERCHANT_POSTING_D_PERCENT	NUMBER	9	6	Debit charge rate of merchant.  Note Defaulted to '0'.
35	BANK_POSTING_D_PERCENT	NUMBER	9	6	Debit charge rate of issuer bank.  Note Defaulted to '0'.
36	PARTNER_POSTING_C_PERCENT	NUMBER	9	6	Credit charge rate of co-brander.  Note Defaulted to '0'.
37	MERCHANT_POSTING_C_PERCENT	NUMBER	9	6	Credit charge rate of merchant.  Note Defaulted to '0'.
38	BANK_POSTING_C_PERCENT	NUMBER	9	6	Credit charge rate of issuer bank.  Note Defaulted to '0'.
39	CYCLE_CONSUMPTION_BONUS	NUMBER	9		This column is not used in V3.5.
40	CYCLE_CONSUMPTION	NUMBER	9		This column is not used in V3.5.
41	TRX_INACTIVE_MONTH	NUMBER	2		This column is not used in V3.5.
42	LOYALTY_TYPE	CHAR	2		Type of loyalty product.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Possible values are: 'CB' = Cash back, 'FB' = Fee back, 'ML' = Miles, 'PT' = Points.
43	TRANSACTION_CODE	CHAR	2		Transaction code to post the cash-back or/and fee-back credit transaction to the customer.  Note By default, this column's value must be set to 'CB' for Cash back loyalty product and to 'FB' for Fee back loyalty product.
44	LOYALTY_TRANSACTION_CODE	CHAR	2		Transaction code to post the adjustment to the loyalty account.
45	ACCUMULATION_THRESHOLD	NUMBER	18	3	This is the amount past which the account is eligible for automatic redemption on redemption end date.
46	REDEMPTION_PERIOD	NUMBER	3		Number of months/cycles at the end of which the automatic redemption is triggered.
47	FEEDBACK_TYPE	CHAR	2		Loyalty program fee-back type. Possible values are: 'AF' = Annual fees, 'IF' = Initial fees.  Note It is applicable only when the LOYALTY_TYPE column is set to 'FB' (Fee back).
48	CASHBACK_RATE	NUMBER	9	6	Rate that will be used to calculate the cash back amount based on the converted balance point of the customer. Applicable only when the loyalty program type is Cash back.
49	CAPPING_PERIOD	CHAR	2		Period during which the points will stop getting accumulated if the total of earned points reaches or exceeds the MAXIMUM_POINTS column defined and described below. Possible values are: 'AC' = Account cycle, 'CM' = Calender month, 'CQ' = Calender quarter, 'CS' = Account semester, 'CY' = Account year.
50	MAXIMUM_POINTS	NUMBER	13		Threshold post which the accumulation will be stopped and this is within the

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					CAPPING_PERIOD column described above.
51	FR_CURRENCY_CODE	CHAR	3		Formula ISO alphabetic and numeric codes of the currency.
52	FR_POINT_FORMULA	CHAR	1		This column indicates if the number of points to be calculated is a Multiplier or a Percent of the transaction amount (i.e. for the Multiplier option, the loyalty points would be the multiplier of the transaction amount and the Multiplier value should be defined in the below column, whereas for the Percent option the loyalty points would be the percent of the transaction amount and the Percent value should be defined in the below column). Possible values are: 'POINT_FORMULA_P' = Percent of transaction amount, 'POINT_FORMULA_M' = Multiplier of transaction amount.
53	FR_MULTIPLIER_PERCENT_NUMBER	NUMBER	9	6	Multiplier or percent value depending on "FR_POINT_FORMULA" option.
54	FR_POINT_FIXED	NUMBER	9		Fixed points that would be allotted in addition to points calculated using the formula.
55	FR_POINT_MINIMUM	NUMBER	9		Minimum points that should be allotted using the formula (i.e. if the computed number of points is lesser than the minimum points defined, then the system would consider the minimum points for the eligible transactions).
56	FR_POINT_MAXIMUM	NUMBER	9		Maximum points that should be allotted using the formula (i.e. if the computed number of points is greater than the maximum points defined, then the system would consider the maximum points for the eligible transactions).
57	FR_POINT_GRACE	NUMBER	9		Grace points (i.e. if the computed number of points is lesser than the grace points defined, then the calculated points or calculation result will be set to zero).
58	FR_RULE_IDENTIFIER	CHAR	3		Option retained for the concerned calculation rule. Possible values are: 'STD' = Standard, 'MIN' = Minimum, 'MAX' = Maximum.
59	FR_ROUNDED_METHOD_IDENTIFIER	CHAR	1		Rounding method to be applied on the concerned calculation resulted amount. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'H' = High value, 'L' = Low value, 'N' = Normal, 'E' = Exponent.
60	FR_THRESHOLD_AMOUNT	NUMBER	18	3	Used to set the transaction amount threshold applicable for the formula being defined. To be eligible for loyalty points accumulation based on the formula index, the transaction amount should be greater than the threshold amount defined.
61	USER_CREATE	VARCHAR2	15		ID of the user when record created.
62	DATE_CREATE	DATE	7		Record creation date and time.
63	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
64	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.42 BOARDING_PAN_FEES_PARAM

This table is used to define the different PAN fees, billing method, periodicity, etc related to Payment instrument life cycle (first issuance fee, renewal fee, replacement fee, etc.), after being processed in the boarding.

Each column of this table is described in detail in the next section.

4.3.42.1 Columns description

Seq.	Column Name	Data type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution concerned by these parameters. Must be present in 'BANK' table
2 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	APPLICATION_CONTRACT_ID	VARCHAR2	24		The application contract identification generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
4	ABRV_WORDING	VARCHAR2	16		PAN fee abbreviated wording displayed in all subsequent screens and reports.
5	WORDING	VARCHAR2	32		PAN fee's description. It is for information only
6	FEE_TYPE	CHAR	2		This is the code identifying the boarding fee type.
7	FEE_ID	NUMBER	2		This is the code identifying the applicable boarding fee index.
8	FEE_PRIORITY	NUMBER	2		This is the Fee priority applicable to this boarding fee. The Fee priority is displayed in read-only mode fee type

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					definition parameters. It is used to limit types of boarding fee generation for the same Processing Code.
9	INC_CHECK_AVAIL	CHAR	1		This flag indicates whether the generated fee should be added to the transaction amount when checking the available, or not. Possible values are: 'Y' = Ticked, 'N' = Not ticked.
10	PROCESSING_CODE	CHAR	2		The processing code used to describe the impact of a transaction on the client and related accounts as described in the ISO8583 protocol. It should be defined in 'PROCESSING_LIST' table.
11	TRANSACTION_CODE	CHAR	2		The transaction code to use when generating the fees related to this service product. It should be defined in 'CR_TRANSACTION_PARAMETER' table.
12	VIP_LEVEL	CHAR	1		The unique code identifying the VIP level. It should be defined in 'VIP_LIST' table.
13	CUSTOMER_SEGMENT_INDEX	CHAR	3		The customer segments to which the client belongs. This column is used mainly for marketing segmentation purposes. Assignable values must be previously defined in the 'CUSTOMER_SEGMENT' table.
14	ACQUIRING_BANK_CODE	CHAR	6		Acquirer financial institution code. It should be defined in 'BANK' table.
15	ACQUIRING_NETWORK_CODE	CHAR	2		The unique code identifying the Acquirer network. It should be defined in 'NETWORK' table.
16	ACQUIRER_COUNTRY	CHAR	3		The code identifying the acquirer country . It should be defined in 'COUNTRY' table.
17	TRANSACTION_CURRENCY	CHAR	3		The transaction currency code. It should be defined in 'CURRENCY_TABLE' table.
18	MCC	CHAR	4		The unique code identifying the merchant category (MCC). It must be defined in 'MCC' table.
19	MCC_GROUP	CHAR	4		It's the MCC group for which this MCC is set. It should be already defined in the 'MCC' table.
20	ORIGIN_CODE	CHAR	1		The origin of the transaction as a criterion for this boarding fee generation. Possible values are: '0' = Onus PAN / Onus Merchant,

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					'1'= Onus PAN / Other local banks' Merchant, '2'= Onus PAN / Foreign Merchant.
21	NETWORK_REGION	CHAR	1		This is the Network region applicable to this fee. Possible values are: 'D' = Domestic, 'R' = Regional, 'F' = Foreign.
22	ACTION_FLAG	CHAR	1		Action flag. Possible values are: 'A' = Approved, 'D' = Declined, 'P' = Pickup, 'S' = Stop listed. As defined in 'ACTON_LIST' table.
23	ACTION_CODE_QUERY	VARCHAR2	256		Action code generated from Query.
24	RECEIPT_FLAG	CHAR	1		This flag indicates whether the generated fee should be added to the transaction amount when checking the available, or not. Possible values are: 'Y' = Yes (Ticked checkbox), 'N' = No (Not ticked checkbox).
25	FEES_AMOUNT_THRESHOLD	NUMBER	18	3	This is the amount threshold under which the system does not undergo the fee calculation and the result is set to zero (If the base amount is less or equal than the Threshold amount, then the final result gets zero value).
26	CURRENCY_CODE	CHAR	3		The currency in which the fees are being expressed. It should be defined in 'CURRENCY' table.
27	APP_FEES_FIX	NUMBER	18	3	This is the amount that will be added to the result before comparing to the minimum, maximum and grace amount.
28	APP_FEES_RATE	NUMBER	9	6	The rate to be applied to the base amount when generating the fees related to this service product. The base amount is defined by the option of CRITERIA_AMOUNT column in the 'CR_SHADOW_ACC_LINKED_PROD' table. Possible values are: 'L' = Credit Limit, 'O' = Outstanding Balance, 'C' = Closing balance, 'U' = Unpaid terms.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
29	APP_FEES_MIN	NUMBER	18	3	This is the minimum amount that will be compared to the final result in order to bring this result in line with the minimum amount, if the final result is less than this Minimum (If the final result is less than the Minimum amount, then the final result gets the Minimum value).
30	APP_FEES_MAX	NUMBER	18	3	This is the maximum amount that will be compared to the final result in order to bring this result in line with the maximum amount, if the final result is greater than this Maximum (If the final result is greater than the Maximum amount, then the final result gets the Maximum value).
31	APP_FEES_GRACE	NUMBER	18	3	This is the amount under which the final result is brought to zero (If the final result is less or equal than the Grace amount, then the final result gets zero value).
32	CASH_FEES_FIX	NUMBER	18	3	This is the amount that will be added to the rate result before comparing to the minimum, maximum and grace amount.
33	CASH_FEES_RATE	NUMBER	9	6	The rate to be applied to the base amount when generating the fees related to this service product. The base amount is defined by the option of CRITERIA_AMOUNT field in the 'CR_SHADOW_ACC_LINKED_PROD' table. Possible values are: 'L' = Credit Limit, 'O' = Outstanding Balance, 'C' = Closing balance, 'U' = Unpaid terms.
34	CASH_FEES_MIN	NUMBER	18	3	This is the minimum amount that will be compared to the final result in order to bring this result in line with the minimum amount, if the final result is less than this Minimum (If the final result is less than the Minimum amount, then the final result gets the Minimum value).
35	CASH_FEES_MAX	NUMBER	18	3	This is the maximum amount that will be compared to the final result in order to bring this result in line with the maximum amount, if the final result is greater than this Maximum (If the final result is greater than the Maximum amount, then the final result gets the Maximum value).
36	CASH_FEES_GRACE	NUMBER	18	3	This is the amount under which the final result is brought to zero (If the final result is less or equal than the Grace amount, then the final result gets zero value).
37	FEES_INDICATOR	CHAR	1		This column indicates whether the fee should be generated as a separate transaction or included in the original transaction billing amount. Possible values are:

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					'S' = Generate separately, 'I' = Include in original transaction billing amount.
38	RULE_IDENTIFIER	CHAR	3		The fee calculation rule. Possible values are: 'STD' = Standard, 'MAX' = Maximum, 'MIN' = Minimum, 'TIR' = Tiered. Note Refer to "PowerCARD's Calculation Rules" section for detailed description of calculation rule options.
39	ROUNDED_METHOD_IDENTIFIER	CHAR	1		This is to indicate the rounding method to be applied on fee calculation result. Possible values are: 'H' = High value, 'L' = Low value, 'N' = Normal, 'E' = Exponent (Default standard method). Note Refer to "Rounded methods" section for detailed description of rounded methods.
40	TIERED_FEES_AMOUNT	NUMBER	18	3	The tiered fees amount.
41	TIERED_FEES_RATE	NUMBER	9	3	The tiered fees rate.
42	CASHBACK_INDICATOR	CHAR	1		This column indicates whether the cashback should be generated as a separate transaction or included in the original transaction billing amount. Possible values are: 'S' = Generate separately, 'I' = Include in original transaction billing amount.
43	CASHBACK_TRANSACTION_CODE	CHAR	2		The code identifying the cashback transaction.
44	CASH_ROUNDED_METHOD_IDENTIFIER	CHAR	1		The rounding method to be applied on fee calculation result. Possible values are: 'H' = High value, 'L' = Low value, 'N' = Normal,

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					'E' = Exponent (Default standard method).  Note Refer to "Rounded methods" section for detailed description of rounded methods.
45	USER_CREATE	VARCHAR2	15		ID of the user when record created.
46	DATE_CREATE	DATE	7		Record creation date and time.
47	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
48	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.43 BOARDING_P7_PAN_LIMITS_SETUP

This table is used to define for a specific PAN, the On-us Acquirer, National network and international network, up to eight number and transaction amount limits per group and associate each of these limits to a transaction type (Processing code). For each group, limits are expressed in limits per day and limits per period and are defined according to the processing mode, that is, On-Host or Off-Host. Refer to ["Velocity group"](#) section in UG1019-Catalogue user guide.

Each column of this table is described in detail in the next section.

4.3.43.1 Columns description

Seq.	Column Name	Data type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution concerned by these parameters. Must be present in 'BANK' table
2 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	APPLICATION_CONTRACT_ID	VARCHAR2	24		The application contract identification generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
4 	LIMITS_ID	NUMBER	2		This is the Limit index identifying the standard Limits' setup defined under Stand-in authorization limit parameters.
5	ABRV_WORDING	VARCHAR2	16		Shortened description of the parameter being defined.
6	WORDING	VARCHAR2	32		Description used for information only.
7	CURRENCY_CODE	CHAR	3		This is the Currency in which the amount limit is expressed. It should be defines in 'CURRENCY_TABLE' table.
8	HOST_SCENARIO_PROCESSING	CHAR	3		The code indicating the delegation mode scenario related to the host of the issuer :

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					- If the On-Host limit is exceeded, the request shall not be directed towards HOST and shall be declined otherwise, the request shall be directed towards the Host, - If the On-Host limit is exceeded, the request shall be directed towards the Host otherwise, it shall be processed in Stand-In mode at the server level.
9	START_DATE	DATE	7		The period start time for which the payment instrument product can be used for the corresponding day being setup
10	END_DATE	DATE	7		The period end time during the corresponding day.
11	PERIOD_OPT	CHAR	1		The period option indicating whether the period is a fixed period or a shift (Sliding) period. Possible values are: '...' = Fixed, '...' = Shift.
12	NB_PERIODS	NUMBER	2		Number of Period type in the period.
13	PER1_OPT	CHAR	1		The first limit period option indicating whether the period is a fixed period or a shift (Sliding) period. Possible values are: '...' = Fixed, '...' = Shift.
14	PER1_TYPE	CHAR	1		The first limit period type. Possible values are: 'D' = Daily, 'W' = Weekly, 'M' = Monthly, 'Y' = Yearly.
15	PER1_VALUE	CHAR	2		This column is used to indicates whether the first period will be configured for Limit or transaction criteria value. Possible values are: '...' = Limit, '...' = Transaction criteria.  Note Behavior of the screen changes according to the selected value.
16	PER1_DAY_OF	CHAR	2		The first period day of depending on the value selected on the period type. Possible values are:

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					'...' = January, '...' = February, '...' = March, '...' = April, '...' = May, '...' = June, '...' = July, '...' = August, '...' = September, '...' = October, '...' = November, '...' = December.  Note This column is activated in case the PER1_TYPE column is set to 'W' (Weekly) or 'M' (Monthly) or 'Y' (Yearly).
17	PER2_OPT	CHAR	1		The second limit period option indicating whether the period is a fixed period or a shift (Sliding) period. Possible values are: '...' = Fixed, '...' = Shift.
18	PER2_TYPE	CHAR	1		The second limit period type. Possible values are: 'D' = Daily, 'W' = Weekly, 'M' = Monthly, 'Y' = Yearly.
19	PER2_VALUE	CHAR	2		This column is used to indicates whether the second period will be configured for Limit or transaction criteria value. Possible values are: '...' = Limit, '...' = Transaction criteria.  Note Behavior of the screen changes according to the selected value.
20	PER2_DAY_OF	CHAR	2		The second period day of depending on the value selected on the period type. Possible values are:

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					'...' = January, '...' = February, '...' = March, '...' = April, '...' = May, '...' = June, '...' = July, '...' = August, '...' = September, '...' = October, '...' = November, '...' = December,  Note This column is activated in case the PER2_TYPE column is set to 'W' (Weekly) or 'M' (Monthly) or 'Y' (Yearly).
21	PER3_OPT	CHAR	1		The third limit period option indicating whether the period is a fixed period or a shift (Sliding) period. Possible values are: '...' = Fixed, '...' = Shift.
22	PER3_TYPE	CHAR	1		The third limit period type. Possible values are: 'D' = Daily, 'W' = Weekly, 'M' = Monthly, 'Y' = Yearly.
23	PER3_VALUE	CHAR	2		This column is used to indicates whether the third period will be configured for Limit or transaction criteria value. Possible values are: '...' = Limit, '...' = Transaction criteria.  Note Behavior of the screen changes according to the selected value.
24	PER3_DAY_OF	CHAR	2		The third period day of depending on the value selected on the period type. Possible values are:

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					'...' = January, '...' = February, '...' = March, '...' = April, '...' = May, '...' = June, '...' = July, '...' = August, '...' = September, '...' = October, '...' = November, '...' = December,  Note This column is activated in case the PER3_TYPE column is set to 'W' (Weekly) or 'M' (Monthly) or 'Y' (Yearly).
25	PER4_OPT	CHAR	1		The fourth limit period option indicating whether the period is a fixed period or a shift (Sliding) period. Possible values are: '...' = Fixed, '...' = Shift.
26	PER4_TYPE	CHAR	1		The fourth limit period type. Possible values are: 'D' = Daily, 'W' = Weekly, 'M' = Monthly, 'Y' = Yearly.
27	PER4_VALUE	CHAR	2		This column is used to indicates whether the fourth period will be configured for Limit or transaction criteria value. Possible values are: '...' = Limit, '...' = Transaction criteria.  Note Behavior of the screen changes according to the selected value.
28	PER4_DAY_OF	CHAR	2		The fourth period day of depending on the value selected on the period type. Possible values are:

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					'...' = January, '...' = February, '...' = March, '...' = April, '...' = May, '...' = June, '...' = July, '...' = August, '...' = September, '...' = October, '...' = November, '...' = December,  Note This column is activated in case the PER4_TYPE column is set to 'W' (Weekly) or 'M' (Monthly) or 'Y' (Yearly).
29	PER1_ONUS_AMNT	NUMBER	18	3	The onus amount not to be exceeded during the concerned first period.
30	PER1_ONUS_NBR	NUMBER	4		The onus number of transaction limit not to be exceeded during the concerned first period.
31	PER1_NAT_AMNT	NUMBER	18	3	The national amount not to be exceeded during the concerned first period.
32	PER1_NAT_NBR	NUMBER	4		The national number of transaction limit not to be exceeded during the concerned first period.
33	PER1_INTERNAT_AMNT	NUMBER	18	3	The international amount not to be exceeded during the concerned first period.
34	PER1_INTERNAT_NBR	NUMBER	4		The international number of transaction limit not to be exceeded during the concerned first period.
35	PER1_TOT_AMNT	NUMBER	18	3	The total amount not to be exceeded during the concerned first period.
36	PER1_TOT_NBR	NUMBER	6		The total number of transaction limit not to be exceeded during the concerned first period.
37	PER2_ONUS_AMNT	NUMBER	18	3	The onus amount not to be exceeded during the concerned second period.
38	PER2_ONUS_NBR	NUMBER	4		The onus number of transaction limit not to be exceeded during the concerned second period.
39	PER2_NAT_AMNT	NUMBER	18	3	The national amount not to be exceeded during the concerned second period.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
40	PER2_NAT_NBR	NUMBER	4		The national number of transaction limit not to be exceeded during the concerned second period.
41	PER2_INTERNAT_AMNT	NUMBER	18	3	The international amount not to be exceeded during the concerned second period.
42	PER2_INTERNAT_NBR	NUMBER	4		The international number of transaction limit not to be exceeded during the concerned second period.
43	PER2_TOT_AMNT	NUMBER	18	3	The total amount not to be exceeded during the concerned second period.
44	PER2_TOT_NBR	NUMBER	6		The total number of transaction limit not to be exceeded during the concerned second period.
45	PER3_ONUS_AMNT	NUMBER	18	3	The onus amount not to be exceeded during the concerned third period.
46	PER3_ONUS_NBR	NUMBER	4		The onus number of transaction limit not to be exceeded during the concerned third period.
47	PER3_NAT_AMNT	NUMBER	18	3	The national amount not to be exceeded during the concerned third period.
48	PER3_NAT_NBR	NUMBER	4		The national number of transaction limit not to be exceeded during the concerned third period.
49	PER3_INTERNAT_AMNT	NUMBER	18	3	The international amount not to be exceeded during the concerned third period.
50	PER3_INTERNAT_NBR	NUMBER	4		The international number of transaction limit not to be exceeded during the concerned third period.
51	PER3_TOT_AMNT	NUMBER	18	3	The total amount not to be exceeded during the concerned third period.
52	PER3_TOT_NBR	NUMBER	6		The total number of transaction limit not to be exceeded during the concerned third period.
53	PER4_ONUS_AMNT	NUMBER	18	3	The onus amount not to be exceeded during the concerned fourth period.
54	PER4_ONUS_NBR	NUMBER	4		The onus number of transaction limit not to be exceeded during the concerned fourth period.
55	PER4_NAT_AMNT	NUMBER	18	3	The national amount not to be exceeded during the concerned fourth period.
56	PER4_NAT_NBR	NUMBER	4		The national number of transaction limit not to be exceeded during the concerned fourth period.
57	PER4_INTERNAT_AMNT	NUMBER	18	3	The international amount not to be exceeded during the concerned fourth period.
58	PER4_INTERNAT_NBR	NUMBER	4		The international number of transaction limit not to be exceeded during the concerned fourth period.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
59	PER4_TOT_AMNT	NUMBER	18	3	The total amount not to be exceeded during the concerned fourth period.
60	PER4_TOT_NBR	NUMBER	6		The total number of transaction limit not to be exceeded during the concerned fourth period.
61	USER_CREATE	VARCHAR2	15		ID of the user when record created.
62	DATE_CREATE	DATE	7		Record creation date and time.
63	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
64	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.44 CARD_BOARDING

The 'CARD' table is used to store and maintain Payment instruments data such as:

- Contract data (Payment instrument product, Application ID:, Contract element ID:...),
- Demographics (Birth date, birth city,, customer segment...),
- Contacts (Phones, emails)- Indicators (activation, delivery,expiry date...),
- Status- Indexes (Transaction fees, Authorization fees, PAN fees...),
- Embossing (Embossed name, Plastic code, Priority code...).

Refer to "[Payment instruments](#)" section in UG1020-Payment instrument user's guide for more details.

Each column of this table is described in detail in the next section.

4.3.44.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	CARD_NUMBER	VARCHAR2	22		Unique identification of the payment instrument (PAN).
2	CARD_SEQ	NUMBER	3		Sequence number of the payment instrument. It is set to '1' at the creation and increased by '+1' on every time a new payment instrument with the same PAN is produced.
3	CLIENT_CODE	VARCHAR2	24		Unique code of the client (the owner of the payment instrument). It must be present in the 'CLIENT' table.
4	CLIENT_HOST_ID	VARCHAR2	24		Unique identification of the customer in the institution's host, as defined in 'CLIENT' table.
5	BANK_CODE	CHAR	6		This is the institution to which the payment instrument belongs. It must be present in the 'BANK' tble.
6	BRANCH_CODE	CHAR	6		Branch to which the payment instrument belongs. It must be present in the 'BRANCH' table.
7	CARD_PRODUCT_CODE	CHAR	3		This is to indicate the current payment instrument product. It must be defined in the 'CARD_PRODUCT' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
8	FORMER_PRODUCT_CODE	CHAR	3		Previous payment instrument product. The null value indicates that the product has never been changed for the payment instrument. It must be defined in 'CARD_PRODUCT' table.
9	CHANGE_PRODUCT_REFERENCE	VARCHAR2	12		Reference of change product, that is the business date in the format DDMMRRHH24MISS. It is applicable only in case of product change.
10	CHANGE_PRODUCT_DATE	DATE	7		This is used to store the Changed product date for a payment instrument.
11	PARTNER_BRAND_ID	VARCHAR2	15		Partner brand to which the payment instrument is associated. This Co-branded should be defined in 'PARTNER_BRAND' table.
12	CORPORATE_ID	VARCHAR2	15		Unique corporate identification number to which the payment instrument is linked. It should be defined in 'CORPORATE' table or be NULL.
13	LIABILITY_INDICATOR	CHAR	1		This column is not used in V3.5.
14	CARD_FEES_CODE	CHAR	3		Payment instrument fee code. It must be defined in the 'CARD_FEES' table.
15	CARD_ISSUING_FEE_CURRENCY	CHAR	3		This column is not used in V3.5.
16	CARD_ISSUING_FEE_AMOUNT	NUMBER	18	3	This column is not used in V3.5.
17	BASIC_CARD_NUMBER	VARCHAR2	22		ICient's Primary PAN. The primary payment instrument should already be created in the database and should be defined in the 'CARD' table.
18	OLD_CARD_NUMBER	VARCHAR2	22		Displays the old PAN that was used before replacing it with the current PAN.
19	SPONSOR_CARD_NUMBER	VARCHAR2	22		This column is not used anymore.
20	PLASTIC_CODE	CHAR	3		Plastic to use for the payment instrument. It must be present in the 'PLASTIC_LIST' table.
21	ICC_APPLICATION_INDEX	CHAR	4		This is to define the ICC application indicator. It must be defined in 'ICC_APPLICATION_PAR_INDEX' table.
22	VIP_LEVEL	CHAR	1		VIP level of the cardholder. It must be defined in 'VIP_LIST' table.
23	OWNER_CODE	CHAR	2		This is to indicate who owns the PAN (Individual, corporate...). It must be defined in 'OWNER_LIST' table.
24	OWNER_CATEGORY	CHAR	1		Owner category. Possible values are: 'I' = Individual, 'B' = Business, 'S' = Staff, 'P' = Professional,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'N' = Company, 'C' = Corporate, 'T' = Corporate travel, 'L' = International corporate, 'R' = Procurement, 'X' = Others 1, 'Y' = Others 2, 'Z' = Others 3.
25	RELATIONSHIP_CODE	CHAR	1		Indicates the relationship between the Primary cardholder and the secondary cardholder. Possible values are: 'C' = Child, 'S' = Spouse, 'P' = Parent, 'F' = Family member, 'N' = Not applicable, 'O' = Others.
26	TITLE_CODE	CHAR	2		This is to indicate the title of the cardholder. It must be defined in 'TITLE_LIST' table.
27	GENDER	CHAR	1		This is to indicate the client's gender code. Possible values are: 'M' = Male, 'F' = Female, 'N' = Not applicable.
28	FAMILY_NAME	VARCHAR2	40		Client's family name.
29	FIRST_NAME	VARCHAR2	40		Client's first name.
30	EMBOSSSED_NAME	VARCHAR2	26		Client name, as it should appear embossed on the payment instrument.
31	ENCODED_NAME	VARCHAR2	26		Client name, as it should be encoded on the ISO I track of the payment instrument.
32	BIRTH_DATE	DATE	7		Client's birth date.
33	BIRTH_CITY	VARCHAR2	30		Client's birth city.
34	BIRTH_COUNTRY	VARCHAR2	30		Client's birth country.
35	DOCUMENT_CODE	CHAR	2		This column is not used in V3.5.
36	ISSUING_DOCUM_DATE	DATE	7		This column is not used in V3.5.
37	ISSUING_DOCUM_CITY	VARCHAR2	30		This column is not used in V3.5.
38	LEGAL_ID	VARCHAR2	30		Legal identification number of the guarantor.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
39	NATIONALITY_CODE	CHAR	3		Client's nationality. It must be defined in 'COUNTRY' table.
40	STATEMENT_CODE	CHAR	2		This is to specify the statement code. It must be defined in 'STATEMENT_PARAMETERS' table.
41	LANGUAGE_CODE	CHAR	3		Client's language. It must be defined in 'LANGUAGE_LIST' table.
42	PR_CARE_OF	VARCHAR2	64		Mail recipient in the primary address (To: ..).
43	PR_LINE_1	VARCHAR2	64		Primary address line 1.
44	PR_LINE_2	VARCHAR2	64		Primary address line 2.
45	PR_LINE_3	VARCHAR2	64		Primary address line 3.
46	PR_LINE_4	VARCHAR2	64		Primary address line 4.
47	PR_ZIP_CODE	VARCHAR2	10		Zip code in the primary address. It must be defined in 'ZIP_CODE' table.
48	PR_REGION_CODE	CHAR	3		Region representing the administrative division of the country where the primary address is located. It should be defined in 'REGION' table.
49	PR_REGION_NAME	CHAR	40		Region name.
50	PR_COUNTRY_CODE	CHAR	3		Country where the primary address is located. It must be defined in 'COUNTRY' table.
51	PR_CITY_CODE	CHAR	5		Represents the city where the primary address is located.
52	PR_EMAIL	VARCHAR2	50		This is to indicate the email address of the customer.
53	PR_URL	VARCHAR2	60		Represents the URL of the client's website.
54	PR_PHONE_1	VARCHAR2	20		Indicates the client's phone number 1. It's controlled by the system to ensure they do not contain letters.
55	PR_PHONE_1_TYPE	CHAR	1		This is used to define the phone type 1.
56	PR_PHONE_2	VARCHAR2	20		Indicates the client's phone number 2. It's controlled by the system to ensure they do not contain letters.
57	PR_PHONE_2_TYPE	CHAR	1		This is used to define the phone type 2.
58	PR_PHONE_3	VARCHAR2	20		Indicates the client's phone number 3. It's controlled by the system to ensure they do not contain letters.
59	PR_PHONE_3_TYPE	CHAR	1		This is used to define the phone type 3.
60	PR_PHONE_4	VARCHAR2	20		Indicates the client's phone number 4. It's controlled by the system to ensure they do not contain letters.
61	PR_PHONE_4_TYPE	CHAR	1		This is used to define the phone type 4.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
62	PR_ADDRESS_TYPE	CHAR	2		Indicates the type of the primary address. It must be defined in 'ADDRESS_TYPE_LIST' table.
63	PR_FAX	VARCHAR2	20		This field indicates the client fax.
64	PR_SENDING_MODE	CHAR	1		Indicates the sending mode for communication with the client. Possible values are: 'M' = Mail, 'E' = Email, 'F' = Fax, 'O' = Other. It should be defined in 'SENDING_MODE_LIST' table.
65	PR_CITY_NAME	VARCHAR2	32		Represents the name of city where the primary address is located.
66	PR_DEFAULT_USAGE	CHAR	2		Determines the usage of the primary address with 'M' as default value. Possible values are: 'M' = Mail, 'S' = Statement, 'D' = Dispute, 'L' = Loyalty.
67	PR_STATUS	CHAR	1		Indicates the primary address status.
68	PR_STATUS_START_DATE	DATE	7		Indicates the start date for active or normal primary address status.
69	PR_STATUS_END_DATE	DATE	7		Indicates the end date for inactive primary address status.
70	ADVANCED_ADDRESS_FLAG	VARCHAR2	10		This column is not used in V3.5.
71	ADDRESS_LIST_ID	VARCHAR2	10		This is used to link the payment instrument with its secondary address (if any).
72	SOCIO_PROF_CODE	CHAR	4		Indicates the socio-professional code of the client. It is used for the segmentation of clients based on such criteria as job industry, and professional qualification. It must be present in the 'SOCIOPROF_LIST' table.
73	ACTIVITY_CODE	CHAR	4		This is to indicate the client's activity code. It helps to categorize clients based on their professional occupation. It must be present in the 'CLIENT_ACTIVITY_SET' table.
74	STAFF_ID	VARCHAR2	20		Indicates the staff identifier of the person who signed the client contract.
75	CUSTOMER_SEGMENT_INDEX	CHAR	3		Specifies the customer segments to which the client belongs. This field is used mainly for marketing segmentation purposes.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Assignable values must be previously defined in the 'CUSTOMER_SEGMENT' table.
76	START_VAL_DATE	DATE	7		Defines the start validity period of the card, in MMYYYY format.
77	EXPIRY_DATE	DATE	7		Defines the expiry date of the card in MMYYYY format.
78	FORMER_EXPIRY_DATE	DATE	7		Defines the former expiry date of the card in MMYYYY format.
79	INITIAL_SUBSCRIPTION_DATE	DATE	7		Indicates the date of the initial subscription of the client.
80	APPLICATION_DATE	DATE	7		Indicates the date of the boarding application.
81	AGREEMENT_DATE	DATE	7		Indicates the payment instrument agreement date.
82	RENEWAL_OPTION	CHAR	1		This flag defines whether the renewal is allowed or not. Possible values are: 'Y' = Renewal allowed, 'N' = Renewal not allowed.
83	RENEWAL_NUMBER	NUMBER	2		Indicates the number of times the payment instrument has been renewed.
84	LAST_RENEW_DATE	DATE	7		Indicates the last date in which the payment instrument has been renewed.
85	STOP_RENEWAL_REASON_CODE	CHAR	1		Indicates the reason for which the payment instrument is stopped from renewal. Possible values are: 'S' = Card in stop list, 'B' = Balance, 'U' = Unpaid terms, 'F' = Payment failed, 'L' = Late payment, 'C' = Change address, 'H' = High Risk Country, 'D' = Debit Account cancelled.
86	DELIVERY_MODE	CHAR	1		Indicates the mode of payment instrument delivery. Possible values are: 'B' = Branch, 'P' = Processing Center, 'M' = Mail, 'C' = Customer selection.
87	DELIVERY_BRANCH	CHAR	6		Indicates the branch code where the payment instrument will be sent post production. It is applicable only when DELIVERY_MODE is set to

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'B' (Branch). It must be present in 'BRANCH' table
88	FILE_NUMBER	VARCHAR2	20		In case the payment instrument application is loaded from a file, this column indicates the reference number of the payment instrument request in the file that has been loaded into PowerCARD database.
89	DELIVERY_CARD_FLAG	CHAR	1		Indicates whether the card has been delivered to the costumer or not. In fact, the delivery flag at this level depends on the DELIVERY_FLAG field, part of 'CARD_PRODUCT' table. Possible values are: 'N' = No, 'Y' = Yes. Note The payment instrument can be considered to have been delivered as soon as it is produced and mailed to the cardholder, or once produced it is kept in the processing center or the branch and considered to have been delivered when the client comes to collect it.
90	RENEW_DELIVERY_CARD_FLAG	CHAR	1		Indicates whether the renewed payment instrument was delivered or not. Possible values are: 'N' = No, 'Y' = Yes.
91	DELIVERY_CARD_DATE	DATE	7		Indicates the delivery date of the payment instrument.
92	DELIVERY_PIN_MAILER_FLAG	CHAR	2		Indicates whether the PIN code has been delivered to the cardholder or not. Possible values are: 'NN' = PIN not requested yet (either no pin has to be produced or the Pin not yet requested), 'WN' = PIN requested and waiting response, 'CY' = PIN delivered, 'PY' = Confirmation not managed.
93	PIN_MAILER_DELIVERY_DATE	DATE	7		Indicates the delivery date of the PIN mailer.
94	PIN_PROCESS_DATE	DATE	7		Indicates the date when the PIN mailer was processed.
95	ACTIVATION_FLAG	CHAR	1		Indicates whether the payment instrument has been activated by the cardholder or not.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Possible values are: 'Y' = Yes, 'N' = No.
96	ACTIVATION_DATE	DATE	7		Indicates the activation date of the payment instrument.
97	DEACTIVATION_DATE	DATE	7		Indicates the deactivation date of the payment instrument.
98	SERVICES_SETUP_INDEX	CHAR	4		Indicates the service setup index that defines the card supported authorization and utility payment services. It must be present in the 'P7_SERVICES_SETUP' table.
99	LIMITS_INDEXES	CHAR	4		Indicates the limit index identifying the limits applied on the payment instrument. It must be defined in 'P7_LIMITS_SETUP_TOTAL' table or NULL.
100	PERIODICITY_CODE	CHAR	3		This column is not used in V3.5.
101	IMAGE_REF_NUMBER	VARCHAR2	12		Indicates the image reference number.
102	PHOTO_REFERENCE_NUMBER	VARCHAR2	24		This is used to indicate the internal reference number of cardholder photography.
103	PHOTO_PRINT_INDICATOR	CHAR	1		This flag indicates whether the photo must be printed or not in the payment instrument. Possible values are: 'Y' = Yes, 'N' = No.
104	MAIDEN_NAME	VARCHAR2	40		Indicates the Mother's maiden name.
105	CHANNEL_NUMBER	VARCHAR2	15		This is to indicate the channel number through which the concerned cardholder's contract has been initiated. It is a distinct number of the sales channel used to attract the customer. This code must be previously defined in 'CHANNEL' table.
106	OFFER_NUMBER	VARCHAR2	15		This column is not used in V3.5.
107	ORIGINAL_DECISION_FLAG	CHAR	1		This column is not used in V3.5.
108	DECISION_DATE	DATE	7		Indicates the date on which the decision has been made. This column is not used in V3.5.
109	DECISION_USER	VARCHAR2	15		This column is not used in V3.5.
110	DECISION_DETAIL	CHAR	2		This column is not used in V3.5.
111	BLOOD_GROUP	VARCHAR2	2		This column is not used in V3.5.
112	BLOOD_RH	CHAR	1		This column is not used in V3.5.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
113	DATA_DISCLOSURE	CHAR	2		This is to indicate the costumer data disclosure option. Possible values are: 'NC' = No choice, 'ND' = No disclosure, 'HI' = Handling information, 'TI' = Transmission of the information, 'HT' = Handling/Transmission of the information.
114	LAST_PROD_DATE	DATE	7		Indicates the payment instrument production date. It is updated during the payment instrument production batch processing.
115	LAST_BATCH_PROD_NUM	VARCHAR2	8		Indicates the latest production batch number where the payment instrument production details are treated. It is updated during the payment instrument production batch processing.
116	LAST_CALC_DATE	DATE	7		Indicates the PIN calculation date. It is updated during the PIN calculation batch processing.
117	LAST_BATCH_CALC_NUM	VARCHAR2	8		Defines the latest production batch number where the PIN mailer is treated. It is updated during the PIN calculation batch processing.
118	LAST_MODIF_DATE	DATE	7		Indicates, for whatever modification action on the concerned payment instrument, the last payment instrument modification date. It is updated during the payment instrument modification batch processing.
119	LAST_BATCH_MODIF_NUM	VARCHAR2	8		Indicates for whatever modification action on the concerned payment instrument, the last payment instrument modification operation batch number. It is updated during the payment instrument modification batch processing.
120	LAST_BILLING_DATE	DATE	7		Indicates the date of last billing related the membership fee for the concerned PAN. It is updated with the payment instrument batch processing.
121	LAST_TRANSACTION_T_DATE	DATE	7		Indicates the date of the last transaction carried out with the payment instrument.
122	LAST_TRANSACTION_B_DATE	DATE	7		Defines the business date of last transaction.
123	LAST_TRANSACTION_ARN	VARCHAR2	23		Indicates the Acquirer Reference Number of the last transaction carried out with the payment instrument.
124	LAST_TRANSACTION_ARN_SEQ	NUMBER	4		Defines the microfilm reference sequence of last transaction.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
125	SECURITY_CHK_DATAP_1	VARCHAR2	16		Indicates the security data for internal usage.
126	SECURITY_CHK_DATAP_2	VARCHAR2	16		Indicates the security data for internal usage.
127	SECURITY_CHK_DATAP_3	VARCHAR2	32		Indicates the security data for internal usage.
128	SECURITY_CHK_DATAP_4	VARCHAR2	64		Indicates the security data for internal usage.
129	RECORD_ORIGINE	CHAR	1		Defines the origin record data capture code. Possible values are: 'M' = First Migration, 'O' = Bank systems, 'C' = PowerCARD Data capture.
130	STATUS_CODE	CHAR	1		Indicates the payment instrument status code. It must be present in 'STATUS_LIST' table with CH_ENTITY field's value set to 'Y' (Yes).
131	STATUS_DATE	DATE	7		Defines the date of last modification of STATUS_CODE column.
132	STATUS_REASON	CHAR	2		Indicates the status reason. It must be present in 'STATUS_REASON_LIST' table.
133	CANCELLATION_REQUEST_DATE	DATE	7		This column is not used in V3.5.
134	CANCELLATION_LETTER_DATE	DATE	7		This column is not used in V3.5.
135	CANCELLATION_USER_CODE	VARCHAR2	15		This column is not used in V3.5.
136	RETURN_CARD_FLAG	CHAR	1		This column is not used in V3.5.
137	RETURN_ADDITIONAL_CARD_FLAG	CHAR	1		This column is not used in V3.5.
138	NB_ACCOUNT_LINKS	NUMBER	2		Defines the number of account links with the payment instrument.
139	CARD_ADDENDUM_FLAG	CHAR	1		This column is not used in V3.5.
140	ENTITY_CODE	CHAR	2		Indicates the address entity code. It set always to 'CH' value.
141	MARKUP_CODE	CHAR	3		This is the mark-up fees code. It must be defined in 'MARKUP_INDEX' table.
142	PWRCD_INTERNAL_REFERENCE	VARCHAR2	12		Indicates the PowerCARD internal loading reference. It is used in case the applications are loaded from a file.
143	PWRCD_INTERNAL_SEQUENCE	NUMBER	6		Indicates the PowerCARD internal loading sequence. It is used in case the applications are loaded from a file.
144	FIRST_NAME_2	VARCHAR2	40		Indicates the client's second first name.
145	FAMILY_NAME_2	VARCHAR2	40		Indicates the client's second family name.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
146	PRIVATE_DATA_1	VARCHAR2	32		Contains the PowerCARD private data element. It is reserved for future use.
147	PRIVATE_DATA_2	VARCHAR2	32		Contains the PowerCARD private data element. It is reserved for future use.
148	PRIVATE_DATA_3	VARCHAR2	32		Contains the PowerCARD private data element. It is reserved for future use.
149	PRIVATE_DATA_4	VARCHAR2	32		Contains the PowerCARD private data element. It is reserved for future use.
150	PRIVATE_DATA_5	DATE	7		Contains the PowerCARD private data element. It is reserved for future use.
151	PRIVATE_DATA_6	DATE	7		Contains the PowerCARD private data element. It is reserved for future use.
152	PRIVATE_DATA_7	DATE	7		Contains the PowerCARD private data element. It is reserved for future use.
153	PRIVATE_DATA_8	DATE	7		Contains the PowerCARD private data element. It is reserved for future use.
154	PRIVATE_DATA_9	NUMBER	18	3	Contains the PowerCARD private data element. It is reserved for future use.
155	PRIVATE_DATA_10	NUMBER	18	3	Contains the PowerCARD private data element. It is reserved for future use.
156	PRIVATE_DATA_11	NUMBER	18	3	Contains the PowerCARD private data element. It is reserved for future use.
157	PRIVATE_DATA_12	NUMBER	18	3	Contains the PowerCARD private data element. It is reserved for future use.
158	PRIVATE_TLV_DATA	VARCHAR2	250		Contains the PowerCARD private data element. It is reserved for future use.
159	PRIORITY_INDICATOR	CHAR	3		Indicates the priority level code with which the embossing of a payment instrument should be treated. This code must be previously defined in the 'PRIORITY_INDICATOR' table.
160	PROMOTION_CODE	CHAR	10		Identifies the promotion or the campaign to which the payment instrument belongs. When provided, it will be validated against the list defined at bank level.
161	PLASTIC_DELIVERY_METHOD	CHAR	3		Identifies the kind of mailing method used to deliver the plastic (for example: Assured mail, Ordinary mail, Airmail...). It must be defined in 'ELIGIBLE_DELIVERY_METHOD' table.
162	PIN_DELIVERY_METHOD	CHAR	3		Identifies the kind of mailing method used to deliver the PIN (for example: Assured mail, Ordinary mail, Airmail...). It must be defined in 'ELIGIBLE_DELIVERY_METHOD' table.
163	PHONE_1	VARCHAR2	30		Indicates the first phone number of the client. It must be defined in 'ADDRESS_DETAILS' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
164	PHONE_1_TYPE	CHAR	2		Describes the phone type for the captured first phone number. Possible values are: '01' = Office phone, '02' = Mobile phone, '03' = Home phone, '04' = Private or personal phone, '05' = Others.
165	PHONE_2	VARCHAR2	30		Indicates the second phone number of the client. It must be defined in 'ADDRESS_DETAILS' table.
166	PHONE_2_TYPE	CHAR	2		Describes the phone type for the captured second phone number. Possible values are: '01' = Office phone, '02' = Mobile phone, '03' = Home phone, '04' = Private or personal phone, '05' = Others.
167	PHONE_3	VARCHAR2	30		Indicates the third phone number of the client. It must be defined in 'ADDRESS_DETAILS' table.
168	PHONE_3_TYPE	CHAR	2		Describes the phone type for the captured third phone number. Possible values are: '01' = Office phone, '02' = Mobile phone, '03' = Home phone, '04' = Private or personal phone, '05' = Others.
169	PHONE_4	VARCHAR2	30		Indicates the fourth phone number of the client. It must be defined in 'ADDRESS_DETAILS' table.
170	PHONE_4_TYPE	CHAR	2		Describes the phone type for the captured fourth phone number. Possible values are: '01' = Office phone, '02' = Mobile phone, '03' = Home phone, '04' = Private or personal phone, '05' = Others.
171	EMAIL_1	VARCHAR2	256		This is the Customer's 1st email address. It must be defined in 'ADDRESS_DETAILS' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
172	EMAIL_2	VARCHAR2	256		This is the Customer's 2nd email address. It must be defined in 'ADDRESS_DETAILS' table.
173	LINK_FLAG	CHAR	1		This column is not used in V3.5.
174	LINK_ADDRESS_CLASS	CHAR	1		This column is not used in V3.5.
175	LINK_ENTITY_CODE	CHAR	2		This column is not used in V3.5.
176	LINK_LIST_ID	VARCHAR2	15		This column is not used in V3.5.
177	LINK_ADDRESS_SEQ	VARCHAR2	15		This column is not used in V3.5.
178	TRANSACTION_FEE_INDEX	VARCHAR2	7		Indicates the index of fees to apply on transaction for the debit payment instruments only. It must be defined on the 'ISS_TRANSACTION_FEES_PARAM' table.
179	ALIAS_PAN	VARCHAR2	22		This is used for management of token.
180	SENSITIVE_OPERATION_RECORD	CHAR			Indicates the sensitive operation record code. Possible values are: 'I' = Insertion, 'M' = Modification, 'S' = Cancellation, 'F' = Replacement with fees, 'R' = Replacement without fees, 'N' = Renewal, 'C' = PIN calculation Without Fees, 'A' = PIN calculation cancellation, 'L' = Delivery card, 'P' = Card production cancellation, 'J' = Package request, 'W' = Manual renewal request, 'X' = Internal usage, 'Y' = PIN calculation with fees.
181	USER_CREATE	VARCHAR2			ID of the user when record created.
182	DATE_CREATE	DATE			Record creation date and time.
183	USER_MODIF	VARCHAR2			ID of the last user who modified the record.
184	DATE_MODIF	DATE			Date and time when the last record modification occurred.

4.3.45 CONTRACT_PACK_APP

This table is used to define the appropriate eligible Pack under which the marketable products already defined for this pack will be displayed to initiate the contract elements edition one by one. Refer to ["Pack selection"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.3.45.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Financial institution of the parameter being defined. It should be defined in the 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	24		Application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	PACK_CODE	CHAR	6		Eligible pack for the application.
4 	TREE_SEQUENCE_ID	VARCHAR2	15		Sequence ID displayed in the tree.
5	APPLICATION_CONTRACT_ID	VARCHAR2	24		Application contract identification generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
6	TREE_PARENT_ID	VARCHAR2	15		Identification code displayed in the tree.
7	PRODUCT_CODE	CHAR	6		Products code already configured under this eligible pack.
8	PRODUCT_VERSION	VARCHAR2	10		Products version.
9	DESCRIPTION	VARCHAR2	512		Description of the product.
10	PRODUCT_TYPE	VARCHAR2	10		Product type of the catalog product. Possible values are: 'P' = Payment instrument, 'A' = Account, 'N' = Loan, 'Y' = Loyalty, 'C' = Add on services account, 'I' = Add on services PI. It should be defined in 'CATALOGUE_PRODUCT' Table.
11	HIERARCHY_LEVEL	NUMBER	2		Number of hierarchy levels will be returned.
12	MANDATORY	CHAR	1		Mandatory flag. Possible values are: 'Y' = Yes 'N' = No

Seq.	Column Name	Data Type	Len	Sc	Column Description
13	IS_PRIMARY	CHAR	1		Column used to indicate whether the pack products is primary or not. Possible values are: 'Y' = yes 'N' = No
14	CARD_TYPE	CHAR	2		PAN type concerned by these parameters. Must be defined in 'CARD_TYPE' table.
15	ACCOUNT_TYPE	CHAR	2		Identification code of the account type. Possible values are: '00' = Billing Account '10' = Saving account '20' = Checking account '30' = Loan account '40' = Universal account '50' = Investment account '62' = Spending power account '80' = Merchant account '81' = Chain account '90' = Shadow account '91' = Installment loan account '92' = Real estate loan account '93' = Loyalty account It should be defined in 'ACCOUNT_TYPE_LIST' table.
16	LOAN_TYPE	CHAR	1		This column is used to differentiate between different types of loan. Possible values are: 'L' = Loan Over the Phone (LOP), the standalone loan that is provided to the customer via cash or check, 'E' = Easy Payment Plan (EPP), the conversion of an existing transaction to loan, 'B' = Balance Conversion (Forbearance), the conversion of an existing account balance to a loan. It should be defined in 'CR_LOAN' table.
17	AUXILIARY_TYPE	CHAR	2		Product type of the add-on service. Possible values are: 'AS' = Assistance 'IS' = Insurance '...' = Magazine

Seq.	Column Name	Data Type	Len	Sc	Column Description
18	USER_CREATE	VARCHAR2	15		ID of the user when record created.
19	DATE_CREATE	DATE	7		Record creation date and time.
20	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
21	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

4.3.46 NAMELESS_CARD_ORDER

This table is used to record nameless PANs production requests. Refer to ["Nameless PAN order details"](#) section in UG1022-Boarding user guide for more details.

Each column of this table is described in detail in the next section.

4.3.46.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Financial institution of the parameter being defined. It should be defined in the 'BANK' table.
2 	BATCH_NUMBER	VARCHAR2	10		The batch number of the PAN order being requested
3	BATCH_STATUS	CHAR	1		The batch status of the PAN order being requested. Possible values are: '...' = Pending, '...' = Reject order, '...' = Reception confirmed, 'P' = Batch processed.
4	CATALOGUE_PI_PRODUCT	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P' (Generic Payment Instrument)
5	CATALOGUE_PI_VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P' (Generic Payment Instrument)
6	CATALOGUE_ACCOUNT_PRODUCT	CHAR	6		The account product for which the Nameless PANs order is being requested.
7	CATALOGUE_ACCOUNT_VERSION	VARCHAR2	10		The account version for which the Nameless PANs order is being requested.
8	STATUS_DATE	DATE	7		The default value is the business date.
9	ORDER_DATE	DATE	7		The default value is the business date

Seq.	Column Name	Data Type	Len	Sc	Column Description
10	PRODUCT_CODE	CHAR	3		The code that uniquely identifies the product for the issuing institution.
11	PLASTIC_CODE	CHAR	3		The internal code identifying the plastic uniquely for the issuing institution. As defined in 'PLASTIC_LIST' table.
12	BRANCH_CODE	CHAR	6		The branch code that is used as an identifier of the branch in PowerCARD. It is considered, with the institution code, as the record key in the database. It should be defined in 'BRANCH' table.
13	EMBOSSSED_NAME	VARCHAR2	26		Name that is embossed in the Payment instrument.
14	PROFILE_CODE	CHAR	3		The unique identifier code of the concerned Pan profile.
15	CARD_TO_CREATE	NUMBER	4		Number of PAN to be created.
16	CARD_PROCESSED	NUMBER	4		Number of PAN to be produced.
17	DUMMY_CLIENT_CODE	VARCHAR2	24		The unique code identifying the dummy client.
18	DUMMY_FAMILY_NAME	VARCHAR2	40		The family name of the dummy client.
19	DUMMY_FIRST_NAME	VARCHAR2	40		The first name of the dummy client.
20	LOAD_AMOUNT	NUMBER	18	3	The initial load amount and currency that will be credited to the prepaid payment instrument.
21	CURRENCY_CODE	CHAR	3		The load amounts' currency. It should be defined in 'CURRENCY' table.
22	REQUESTER	VARCHAR2	40		The pan order requester.
23	DESCRIPTION_MEMO	VARCHAR2	1024		Description of the memo related to the PAN order.
24	REJECT_REASON	VARCHAR2	40		The reject reason of the PAN order.
25	BRANCH_ADDRESS_FLAG	CHAR	1		This flag indicates if the order request is delivery in the concerned Branch or not. Possible values are: 'Y' = Yes, 'N' = No.
26	DUMMY_CLIENT_FLAG	CHAR	1		This flag indicates whether the dummy client entity will be used for the Nameless PAN production or not. Possible values are: 'Y' = Yes, 'N' = No.
27	USER_CREATE	VARCHAR2	15		ID of the user when record created.
28	DATE_CREATE	DATE	7		Record creation date and time.
29	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.

Seq.	Column Name	Data Type	Len	Sc	Column Description
30	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

5 Catalogue

5.1 Parameter tables

5.1.1 CATALOGUE_DEFAULTING

This table is an internal table used by PowerCARD to manage defaulting of some tables' fields created upon marketable catalog products validation.

Each column of this table is described in detail in the next section.

5.1.1.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	ENTITY_NAME	VARCHAR2	60		Entity name.
2 	FIELD_NAME	VARCHAR2	60		The field name that will be defaulted.
3 	PRODUCT_TYPE	CHAR	1		The catalog product type. Possible values are: 'P' = Payment instrument, 'A' = Account, 'N' = Loan, 'Y' = Loyalty, 'I' = PAN auxiliary product, 'C' = Account auxiliary product, 'R' = Product services, 'S' = Payment instrument switch.
4	DATA_ORIGIN	CHAR	1		This column indicates if its value will be defaulted by a static value or a dynamic value that is not present in the XML. Possible values are: 'S' = Static, 'D' = Dynamic.
5	FIELD_VALUE	VARCHAR2	60		The field value in case DATA_ORIGIN = 'S' (Static).
6	DYNAMIC_VALUE_SOURCE	VARCHAR2	60		The dynamic values source to be used in case DATA_ORIGIN = 'D' (Dynamic), it contains a variable name that will be managed in the service.
7	USER_CREATE	VARCHAR2	15		ID of the user when record created.
8	DATE_CREATE	DATE	7		Record creation date and time.
9	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
10	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

5.1.2 CATALOGUE_IDENTIFIERS

This table is an internal table used by PowerCARD to manage identifiers generation that will be used as PK of some tables created upon catalog marketable products validation. For example CARD_FEE_CODE field of 'CARD_FEES' table in case of payment instrument products.

Each column of this table is described in detail in the next section.

5.1.2.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	IDENTIFIER_CODE	VARCHAR2	60		The unique code identifies the identifier.
2	PRODUCT_TYPE	CHAR	1		The catalog product type. Possible values are: 'P' = Payment instrument, 'A' = Account, 'N' = Loan, 'Y' = Loyalty, 'I' = PAN auxiliary product, 'C' = Account auxiliary product, 'R' = Product services, 'S' = Payment instrument switch.
4	PREFIX	VARCHAR2	10		The prefix to be added in case the column's length is greater than the SEQ_LENGTH column defined in the 'CATALOGUE_SEQ' table.
5	SUFFIX	VARCHAR2	10		The suffix to be added in case the column's length is greater than the SEQ_LENGTH column defined in the 'CATALOGUE_SEQ' table.
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

5.1.3 CATALOGUE_INJECTED_PARAM

This table contains all the entities created upon a marketable catalog validation.

Each column of this table is described in detail in the next section.

5.1.3.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	SEQUENCE_ID	NUMBER	10		Sequence number of the injected catalog parameter being defined. This is a unique number identifying the records of this table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
2	BANK_CODE	CHAR	6		Financial institution of the parameter being defined. It must be defined in 'BANK' table.
3	PRODUCT_CODE	CHAR	6		The catalog product code of the injected catalog. This product code is declared in 'CATALOGUE_PRODUCT' table.
4	PROD_VERSION	VARCHAR2	10		The catalog product version. It should be already declared in 'CATALOGUE_PRODUCT' table.
5	PROD_SEQUENCE	VARCHAR2	10		The product sequence used in catalog entities creation. It should be defined in 'CATALOGUE_SEQ' table.
6	GROUP_DATA_INDEX	VARCHAR2	20		XML group data index identifying the record in case of multi-occurrences entity.
7	ENTITY_NAME	VARCHAR2	30		Name of the injected entity.
8	PK_FIELD_NAME_1	VARCHAR2	30		The name of the 1st PK field in the entity.
9	PK_FIELD_VALUE_1	VARCHAR2	256		The value of the 1st PK field.
10	PK_FIELD_NAME_2	VARCHAR2	30		The name of the 2nd PK field in the entity (when applicable).
11	PK_FIELD_VALUE_2	VARCHAR2	256		The value of the 2nd PK field (when applicable).
12	PK_FIELD_NAME_3	VARCHAR2	30		The name of the 3th PK field in the entity (when applicable).
13	PK_FIELD_VALUE_3	VARCHAR2	256		The value of the 3th PK field (when applicable).
14	PK_FIELD_NAME_4	VARCHAR2	30		The name of the 4th PK field in the entity (when applicable).
15	PK_FIELD_VALUE_4	VARCHAR2	256		The value of the 4th PK field (when applicable).
16	PK_FIELD_NAME_5	VARCHAR2	30		The name of the 5th PK field in the entity (when applicable).
17	PK_FIELD_VALUE_5	VARCHAR2	256		The value of the 5th PK field (when applicable).
18	PK_FIELD_NAME_6	VARCHAR2	30		The name of the 6th PK field in the entity (when applicable).
19	PK_FIELD_VALUE_6	VARCHAR2	256		The value of the 6th PK field (when applicable).
20	PK_FIELD_NAME_7	VARCHAR2	30		The name of the 7th PK field in the entity (when applicable).
21	PK_FIELD_VALUE_7	VARCHAR2	256		The value of the 7th PK field (when applicable).
22	PK_FIELD_NAME_8	VARCHAR2	30		The name of the 8th PK field in the entity (when applicable).
23	PK_FIELD_VALUE_8	VARCHAR2	256		The value of the 8th PK field (when applicable).

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
24	PK_FIELD_NAME_9	VARCHAR2	30		The name of the 9th PK field in the entity (when applicable).
25	PK_FIELD_VALUE_9	VARCHAR2	256		The value of the 9th PK field (when applicable).
26	PK_FIELD_NAME_10	VARCHAR2	30		The name of the 10th PK field in the entity (when applicable).
27	PK_FIELD_VALUE_10	VARCHAR2	256		The value of the 10th PK field (when applicable).
28	USER_CREATE	VARCHAR2	15		ID of the user when record created.
29	DATE_CREATE	DATE	7		Record creation date and time.
30	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
31	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

5.1.4 CATALOGUE_INJECTORS

This table is an internal table used by PowerCARD, it contains a definition of all the tables to be injected upon a marketable catalog validation.

Each column of this table is described in detail in the next section.

5.1.4.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	ENTITY_NAME	VARCHAR2	60		The entity name.
2 	MODULE_NAME	VARCHAR2	60		The server module in PowerCARD that contains the entity services.
3 	PRODUCT_TYPE	CHAR	1		The catalog product type. Possible values are: 'P' = Payment instrument, 'A' = Account, 'N' = Loan, 'Y' = Loyalty, 'I' = PAN auxiliary product, 'C' = Account auxiliary product, 'R' = Product services, 'S' = Payment instrument switch.
4	IS_MULTI_OCCUR	CHAR	1		This column indicates if the entity may have many occurrences in the XML. This is the case when we have data-grids or multi-tabs. Possible values are: 'Y' = Yes, 'N' = No.
5	IS_MANDATORY	CHAR	1		This column indicates if the entity is mandatory in the catalog.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Possible values are: 'Y' = Yes, 'N' = No.
6	MANAGE_INDEX	CHAR	1		This column indicates if the indexes in the XML will be used to identify the tables' records.(Using the index in the XML as part of the primary keys). Possible values are: 'Y' = Yes, 'N' = No.
7	INJ_ORDER	NUMBER	2		The order to use to create, update or delete data from the tables. This is to avoid dependencies issues between the tables
8	PK_FIELD_NAME_1	VARCHAR2	30		The name of the 1st PK field in the table.
9	IS_AUTO_GEN_1	CHAR	1		This column indicates if the value of the 1 st PK field is a sequence automatically generated. Possible values are: 'Y' = Yes, 'N' = No.
10	PK_FIELD_NAME_2	VARCHAR2	30		Name of the 2nd PK field in the table (when applicable).
11	IS_AUTO_GEN_2	CHAR	1		This column indicates if its value is a sequence automatically generated (when applicable). Possible values are: 'Y' = Yes, 'N' = No.
12	PK_FIELD_NAME_3	VARCHAR2	30		Name of the 3th PK field in the table (when applicable).
13	IS_AUTO_GEN_3	CHAR	1		This column indicates if its value is a sequence automatically generated (when applicable). Possible values are: 'Y' = Yes, 'N' = No.
14	PK_FIELD_NAME_4	VARCHAR2	30		Name of the 4th PK field in the table (when applicable).
15	IS_AUTO_GEN_4	CHAR	1		This column indicates if its value is a sequence automatically generated (when applicable). Possible values are: 'Y' = Yes, 'N' = No.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
16	PK_FIELD_NAME_5	VARCHAR2	30		Name of the 5th PK field in the table (when applicable).
17	IS_AUTO_GEN_5	CHAR	1		This column indicates if its value is a sequence automatically generated (when applicable). Possible values are: 'Y' = Yes, 'N' = No.
18	PK_FIELD_NAME_6	VARCHAR2	30		The name of the 6th PK field in the table (when applicable).
19	IS_AUTO_GEN_6	CHAR	1		This column indicates if its value is a sequence automatically generated (when applicable). Possible values are: 'Y' = Yes, 'N' = No.
20	PK_FIELD_NAME_7	VARCHAR2	30		The name of the 7th PK field in the table (when applicable).
21	IS_AUTO_GEN_7	CHAR	1		This column indicates if its value is a sequence automatically generated (when applicable). Possible values are: 'Y' = Yes, 'N' = No.
22	USER_CREATE	VARCHAR2	15		ID of the user when record created.
23	DATE_CREATE	DATE	7		Record creation date and time.
24	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
25	DATE_MODIF	DATE	7	3	Date and time when the last record modification occurred.

5.1.5 CATALOGUE_MAPPING

This table is an internal table used by PowerCARD to manage the mapping between XML's tags and tables' fields. It's used upon marketable catalogs validation.

Each column of this table is described in detail in the next section.

5.1.5.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	ENTITY_NAME	VARCHAR2	60		The entity name.
2 	FIELD_NAME	VARCHAR2	60		The field name to be mapped to an XML tag.
3 	PRODUCT_TYPE	CHAR	1		The catalog product type. Possible values are: 'P' = Payment instrument,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'A' = Account, 'N' = Loan, 'Y' = Loyalty, 'I' = PAN auxiliary product, 'C' = Account auxiliary product, 'R' = Product services, 'S' = Payment instrument switch.
4	TAG_ID	VARCHAR2	60		The tag ID in the XML representing the field.
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

5.1.6 CATALOGUE_NEGOC_DEFAULTING

This table is an internal table used by PowerCARD to provide default values of some tables' fields injected upon catalogs negotiation from boarding screens.

Each column of this table is described in detail in the next section.

5.1.6.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	ENTITY_NAME	VARCHAR2	60		The entity name to be negotiated.
2 	FIELD_NAME	VARCHAR2	60		The field name that needs to be defaulted.
3 	PRODUCT_TYPE	CHAR	1		The catalog product type. Possible values are: 'P' = Payment instrument, 'A' = Account, 'N' = Loan, 'Y' = Loyalty, 'I' = Add on services Payment Instrument, 'C' = Add on services Account, 'R' = Services Product, 'S' = Payment instrument switch.
4	DATA_ORIGIN	CHAR	1		This column indicates if its value will be defaulted by a static value or a dynamic value that is not present in the XML. Possible values are: 'S' = Static, 'D' = Dynamic.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
5	FIELD_VALUE	VARCHAR2	60		The field value in case DATA_ORIGIN = 'S' (Static).
6	DYNAMIC_VALUE_SOURCE	VARCHAR2	60		The dynamic value source to be used in case DATA_ORIGIN = 'D' (Dynamic). It contains a variable name that will be managed in the service.
7	USER_CREATE	VARCHAR2	15		ID of the user when record created.
8	DATE_CREATE	DATE	7		Record creation date and time.
9	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
10	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

5.1.7 CATALOGUE_NEGOC_INJECTORS

This table is an internal table used by PowerCARD to define the list of tables that are injected upon catalog product validation from boarding screens.

Each column of this table is described in detail in the next section.

5.1.7.1 Fields description

Seq.	Field Name	Data Type	Len.	Sc.	Field Description
1 	ENTITY_NAME	VARCHAR2	60		This field indicates the entity name having fields that can be negotiated.
2 	MODULE_NAME	VARCHAR2	60		This field contains the server module in PowerCARD that contains the entity service.
3 	PRODUCT_TYPE	CHAR	1		This field contains the catalog product type. Possible values are: 'P' = Payment instrument, 'A' = Account, 'N' = Loan, 'Y' = Loyalty, 'I' = PAN auxiliary product, 'C' = Account auxiliary product, 'R' = Product services, 'S' = Payment instrument switch.
4 	NEGOCIATION_PROCESS	CHAR	1		This field indicates the process where the negotiation is done. Possible values are: 'B' = Cardholder boarding, 'D' = Corporate boarding, 'C' = Corporate maintenance, 'M' = Cardholder maintenance.

Seq.	Field Name	Data Type	Len.	Sc.	Field Description
5	IS_MULTI_OCCUR	CHAR	1		This field indicates whether the entity must have many occurrences in the XML. Possible values are: 'Y' = Yes, 'N' = No.
6	INJ_ORDER	NUMBER	2		This field indicates the order to use to create, update or delete data from the tables. This is to avoid dependencies issues between the tables.
7	PK_FIELD_NAME_1	VARCHAR2	30		This field defines the name of the 1st PK field in the table.
8	IS_AUTO_GEN_1	CHAR	1		This field indicates whether the value of the 1st PK field is a sequence automatically generated. Possible values are: 'Y' = Yes, 'N' = No.
9	PK_FIELD_NAME_2	VARCHAR2	30		This field defines the name of the 2nd PK field in the table (when applicable).
10	IS_AUTO_GEN_2	CHAR	1		This field indicates whether its value is a sequence automatically generated (when applicable). Possible values are: 'Y' = Yes, 'N' = No.
11	PK_FIELD_NAME_3	VARCHAR2	30		This field defines the name of the 3th PK field in the table (when applicable).
12	IS_AUTO_GEN_3	CHAR	1		This field indicates whether its value is a sequence automatically generated (when applicable). Possible values are: 'Y' = Yes, 'N' = No.
13	PK_FIELD_NAME_4	VARCHAR2	30		This field defines the name of the 4th PK field in the table (when applicable).
14	PK_FIELD_NAME_5	VARCHAR2	30		This field defines the name of the 5th PK field in the table (when applicable).
15	PK_FIELD_NAME_6	VARCHAR2	30		This field defines the name of the 6th PK field in the table (when applicable).
16	PK_FIELD_NAME_7	VARCHAR2	30		This field defines the name of the 7th PK field in the table (when applicable).
17	PK_FIELD_NAME_8	VARCHAR2	30		This field defines the name of the 8th PK field in the table (when applicable).
18	PK_FIELD_NAME_9	VARCHAR2	30		This field defines the name of the 9th PK field in the table (when applicable).

Seq.	Field Name	Data Type	Len.	Sc.	Field Description
19	PK_FIELD_NAME_10	VARCHAR2	30		This field defines the name of the 10th PK field in the table (when applicable).
20	USER_CREATE	VARCHAR2	15		Used for audit trail purposes in case a user manually creates a record in the staging table.
21	DATE_CREATE	DATE	7		Record creation date and time.
23	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
24	DATE_MODIF	DATE	7	3	Date and time when the last record modification occurred.

5.1.8 CATALOGUE_NEGOC_MAPPING

This table is an internal table used by PowerCARD to manage the mapping between XML's tags and tables' fields. It's used upon catalogs negotiation from boarding screens.

Each column of this table is described in detail in the next section.

5.1.8.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	ENTITY_NAME	VARCHAR2	60		The entity name to be negotiated.
2 	FIELD_NAME	VARCHAR2	60		The field name to be mapped to an XML tag.
3 	PRODUCT_TYPE	CHAR	1		The catalog product type. Possible values are: 'P' = Payment instrument, 'A' = Account, 'N' = Loan, 'Y' = Loyalty, 'I' = PAN auxiliary product, 'C' = Account auxiliary product, 'R' = Product services, 'S' = Payment instrument switch.
4 	NEGOCIATION_PROCESS	CHAR	1		The process where the negotiation is done. Possible values are: 'B' = Cardholder boarding, 'D' = Corporate boarding, 'C' = Corporate maintenance, 'M' = Cardholder maintenance.
5	TAG_ID	VARCHAR2	60		The tag ID in the XML representing the field.
6	MAPPING_TYPE	CHAR	1		This field is reserved for future use.
7	USER_CREATE	VARCHAR2	15		ID of the user when record created.
8	DATE_CREATE	DATE	7		Record creation date and time.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
9	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
10	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

5.1.9 CATALOGUE_PRODUCT

This table is used to bundle the different categories of issuing product (Payment instrument, Account product, loan product,...etc) that can be used to constitute a catalog and align them with the needs of each institution.

Refer to "[PowerCARD issuing product catalogs](#)" section in UG1019-Catalog user guide for more details.

Each column of this table is described in detail in the next section.

5.1.9.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		The issuer financial institution for which the parameters are being defined. This institution code should already be declared in 'BANK' table.
2 	PRODUCT_CODE	CHAR	6		The catalog product identifier for which the parameters are being defined.
3 	PROD_VERSION	VARCHAR2	10		The version of the product being defined.
4	PRODUCT_NAME	VARCHAR2	40		The product name entered during the product definition.
5	PRODUCT_LEVEL	CHAR	1		The customization level of the product during its definition. This field is mandatory. Possible values are: 'G' = Generic, 'T' = Technical, 'C' = Customizable, 'M' = Marketable.
6	PRODUCT_TYPE	CHAR	1		The catalog product type. Possible values are: 'P' = Payment instrument, 'A' = Account, 'N' = Loan, 'Y' = Loyalty, 'I' = PAN auxiliary product, 'C' = Account auxiliary product, 'R' = Product services, 'S' = Payment instrument switch.
7	DESCRIPTION	VARCHAR2	512		Brief description of the product.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
8	PARENT_PRODUCT_BANK_CODE	CHAR	6		The parent institution code. It is inherited from the parent product during the derivation.
9	PARENT_PRODUCT_CODE	CHAR	6		The parent product code. It is inherited from the parent product during the derivation.
10	PARENT_PRODUCT_VERSION	VARCHAR2	10		The parent product version. It is inherited from the parent product during the derivation.
11	VALIDITY_START_DATE	DATE	7		The date from which the product can be used for customization or marketing.
12	VALIDITY_END_DATE	DATE	7		The date from which the product can no longer be used for customization or marketing. At this date the product will no longer be usable.
13	STATUS	CHAR	1		The status of the catalog product. Possible values are: 'D' = Deprecated, 'M' = Maintenance, 'O' = On going, 'V' = Valid, 'R' = Rejected, 'S' = Suspended, 'W' = Waiting validation. Note  This column is automatically set to 'O' (on going) and can be changed by the user.
14	STATUS_DATE	DATE	7		The date when the status has been modified.
15	DUPLICATION_ALLOWED	CHAR	1		This flag indicates if a product can be duplicated from this product or not. Possible values are: 'Y' = Yes (Allowed), 'N' = No (Not allowed). Note  This column is always defined. It is defaulted to the value of the product from which duplication or derivation is done.
16	DERIVATION_ALLOWED	CHAR	1		This flag indicates if a product can be derived from this product or not. Possible values are: 'Y' = Yes (Allowed),

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'N' = No (Not allowed). Note This column is always defined, unless: - In the case of derivation: (PRODUCT_LEVEL column's value is set to 'M' (Marketable)), this column becomes defaulted to 'N'. - In the case of duplication: (If the source PRODUCT_LEVEL column's value is set to 'M' (Marketable)), this column remains with the 'N' value.
17	UNIQUE_INDEX	VARCHAR2	20		The unique index of the product.
18	XML_FILE	CLOB	4000		XML value of the product catalog.
19	USER_CREATE	VARCHAR2	15		ID of the user when record created.
20	DATE_CREATE	DATE	7		Record creation date and time.
21	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
22	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

5.1.10 CATALOGUE_PRODUCT_TEMP

This table is an internal table used by PowerCARD to manage the temporary product generation for 'CATALOGUE_PRODUCT' table.

Each column of this table is described in detail in the next section.

5.1.10.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		The issuer financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	PRODUCT_CODE	CHAR	6		The catalog product identifier for which parameters are being defined.
3 	PROD_VERSION	VARCHAR2	10		The version of the product being defined.
4	PRODUCT_NAME	VARCHAR2	40		The product name entered during the product definition.
5	PRODUCT_LEVEL	CHAR	1		The customization level of the product being defined. Possible values are: 'G' = Generic,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'T' = Technical, 'C' = Customizable, 'M' = Marketable.
6	PRODUCT_TYPE	CHAR	1		The catalog product type. Possible values are: 'P' = Payment instrument, 'A' = Account, 'N' = Loan, 'Y' = Loyalty, 'I' = PAN auxiliary product, 'C' = Account auxiliary product, 'R' = Product services, 'S' = Payment instrument switch.
7	DESCRIPTION	VARCHAR2	512		Brief description of the product.
8	PARENT_PRODUCT_BANK_CODE	CHAR	6		The parent institution code. It is inherited from the parent product during the derivation.
9	PARENT_PRODUCT_CODE	CHAR	6		The parent product code. It is inherited from the parent product during the derivation.
10	PARENT_PRODUCT_VERSION	VARCHAR2	10		The parent product version. It is inherited from the parent product during the derivation.
11	VALIDITY_START_DATE	DATE	7		The date from which the product can be used for customization or marketing.
12	VALIDITY_END_DATE	DATE	7		The date from which the product can no longer be used for customization or marketing. At this date the product will no longer be usable.
13	STATUS	CHAR	1		The status of the catalog product. Possible values are: 'D' = Deprecated, 'M' = Maintenance, 'O' = On going, 'V' = Valid, 'R' = Rejected, 'S' = Suspended, 'W' = Waiting validation.
					 Note This column is automatically set to 'O' (on going) and can be changed by the user.
14	STATUS_DATE	DATE	7		The date when the status has been modified.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
15	DUPLICATION_ALLOWED	CHAR	1		This flag indicates if a product can be duplicated from this product or not. Possible values are: 'Y' = Yes (Allowed), 'N' = No (Not allowed). Note  This column is always defined. It is defaulted to the value of the product from which duplication or derivation is done.
16	DERIVATION_ALLOWED	CHAR	1		This flag indicates if a product can be derived from this product or not. Possible values are: 'Y' = Yes (Allowed), 'N' = No (Not allowed). Note This column is always defined, unless: - In the case of derivation: (PRODUCT_LEVEL column's value is set to 'M' (Marketable)), this column becomes defaulted to 'N'. - In the case of duplication: (If the source PRODUCT_LEVEL column's value is set to 'M' (Marketable)), this column remains with the 'N' value.
17	UNIQUE_INDEX	VARCHAR2	20		The unique index of the product.
18	XML_FILE	CLOB	4000		XML value of the product catalog.
19	USER_CREATE	VARCHAR2	15		ID of the user when record created.
20	DATE_CREATE	DATE	7		Record creation date and time.
21	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
22	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

5.1.11 CATALOGUE_SEQ

This table is an internal table used by PowerCARD to manage the sequence generation for 'CATALOGUE_PRODUCT' table.

Each column of this table is described in detail in the next section.

5.1.11.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		The Issuer Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	PRODUCT_TYPE	CHAR	1		The catalog product type. Possible values are: 'P' = Payment instrument, 'A' = Account, 'N' = Loan, 'Y' = Loyalty, 'I' = PAN auxiliary product, 'C' = Account auxiliary product, 'R' = Product services, 'S' = Payment instrument switch.
3 	LAST_SEQ_NUMBER	NUMBER	3		The sequence number used to insert the tables of the last validated catalog, it is incremented each time a new marketable catalog is validated.
4 	SEQ_LENGTH	NUMBER	2		The sequence length of the concerned catalog type.
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

5.1.12 CHANNEL

This table is used to maintain the data of an existing channel. The channel defines sales agents or organizations.

Refer to "[Channel](#)" section in UG1020-Payment instrument user's guide.

Each column of this table is described in detail in the next section.

5.1.12.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	CHANNEL_NUMBER	VARCHAR2	15		The merchant channel number.
2	CHANNEL_PARENT_NUMBER_C	VARCHAR2	15		The channel parent identification in case this is a channel in charge of PAN channel. When applicable, this channel parent should have been defined in advance as a channel with a PRODUCT_INDICATOR field set to 'C' (Card channel) or 'B' (Both) at

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					this level in It should be present in the 'CHANNEL' table.
3	CHANNEL_PARENT_NUMBER_M	VARCHAR2	15		The channel parent identification in case this is a channel in charge of merchant channel. When applicable, this Channel parent should have been defined in advance as a channel with a PRODUCT_INDICATOR field set to 'M' (Merchant channel) or 'B' (Both) at this level in It should be present in the 'CHANNEL' table.
4	ACRONYM	VARCHAR2	25		This is the acronym of the current channel.
5	ABREV_LOCATION	VARCHAR2	25		The channel location.
6	CONTACT_NAME	VARCHAR2	25		The channel contact name.
7	COUNTRY_CODE	CHAR	3		The channel country code. It should be present in the 'COUNTRY' table.
8	PRODUCT_INDICATOR	CHAR	1		This column indicates in which type of product the current channel is dealing with. Possible values are: 'C' = Card channel, 'M' = Merchant channel, 'B' = Both.
9	AGREEMENT_DATE	DATE	7		When the channel is defined as an institution, this column indicates the date of the agreement sign off with this channel.
10	CHANNEL_TYPE	CHAR	3		The code of the chosen direct marketing agent type. It should be present in the 'CHANNEL_TYPE_LIST' table.
11 	BANK_CODE	CHAR	6		The issuer institution name and code. It should be present in the 'BANK' table.
12	BRANCH_CODE	CHAR	6		The branch within the issuer financial institution. It should be present in the 'BRANCH' table.
13	CHAIN_CODE	VARCHAR2	15		The channel identification number.
14	MERCHANT_NUMBER	VARCHAR2	15		In case the channel is a merchant, this column indicates the merchant ID.
15	MER_ACCEPTOR_POINT_ID	VARCHAR2	15		The channel acceptor point internal identification number.
16	PARTNER_BRAND_ID	VARCHAR2	15		In case the channel is a co-brander, this column indicates the partner brand identification. It should be present in the 'PARTNER_BRAND' table (If applicable)
17	CORPORATE_ID	VARCHAR2	15		In case the channel is a corporate, then this column indicates the corporate ID. It should be present in the 'CORPORATE' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
18	PR_CARE_OF	VARCHAR2	64		The channel primary address recipient.
19	PR_LINE_1	VARCHAR2	64		The primary address line 1.
20	PR_LINE_2	VARCHAR2	64		The primary address line 2.
21	PR_LINE_3	VARCHAR2	64		The primary address line 3.
22	PR_LINE_4	VARCHAR2	64		The primary address line 4.
23	PR_ZIP_CODE	VARCHAR2	10		Zip code in the primary address. It should be present in the 'ZIP_CODE' table.
24	PR_REGION_CODE	CHAR	3		The region representing the administrative division of the country where the primary address is located. It should be present in the 'REGION' table.
25	PR_REGION_NAME	VARCHAR2	40		The region name.
26	PR_COUNTRY_CODE	CHAR	3		The country where the primary address is located. It should be present in the 'COUNTRY' table.
27	PR_CITY_CODE	CHAR	5		The city where the primary address is located.
28	PR_EMAIL	VARCHAR2	50		This is to indicate the email address.
29	PR_URL	VARCHAR2	60		URL of the website.
30	PR_PHONE_1	VARCHAR2	20		The phone number 1. It's controlled by the system to ensure they do not contain letters.
31	PR_PHONE_1_TYPE	CHAR	1		The phone type 1.
32	PR_PHONE_2	VARCHAR2	20		The phone number 2. It's controlled by the system to ensure they do not contain letters.
33	PR_PHONE_2_TYPE	CHAR	1		The phone type 2.
34	PR_PHONE_3	VARCHAR2	20		The phone number 3. It's controlled by the system to ensure they do not contain letters.
35	PR_PHONE_3_TYPE	CHAR	1		The phone type 3.
36	PR_PHONE_4	VARCHAR2	20		The phone number 4. It's controlled by the system to ensure they do not contain letters.
37	PR_PHONE_4_TYPE	CHAR	1		The phone type 4.
38	PR_ADDRESS_TYPE	CHAR	2		The type of the primary address. It should be present in the 'ADDRESS_TYPE_LIST' table.
39	PR_FAX	VARCHAR2	20		The client fax.
40	PR_SENDING_MODE	CHAR	1		The sending mode for communication. Possible values are: 'M' = Mail, 'E' = Email, 'F' = Fax,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'O' = Other. It should be present in the 'SENDING_MODE_LIST' table.
41	PR_CITY_NAME	VARCHAR2	32		The name of city where the primary address is located.
42	PR_DEFAULT_USAGE	CHAR	2		The usage of the primary address with 'M' as default value. Possible values are: 'M' = Mail, 'S' = Statement, 'D' = Dispute, 'L' = Loyalty.
43	PR_STATUS	CHAR	1		The primary address status. Possible values are: 'P' = Ongoing, 'N' = Normal, 'C' = Closed.
44	PR_STATUS_START_DATE	DATE	7		The start date for active or normal primary address status.
45	PR_STATUS_END_DATE	DATE	7		The end date for inactive primary address status.
46	ADVANCED_ADDRESS_FLAG	VARCHAR2	10		This flag indicates there are any secondary addresses defined or not. Possible values are: 'Y' = Yes, 'N' = No. Note  This flag is set automatically by the system to 'Y' if at least one secondary address is defined.
47	ADDRESS_LIST_ID	VARCHAR2	10		The address list ID generated automatically by the system, referencing the secondary addresses if at least one secondary address is defined.
48	TAX_REGISTRY_OFFICE	VARCHAR2	30		When the channel is defined as an institution, this column indicates the channel institution tax registry office identification
49	TAX_NUMBER	VARCHAR2	3		When the channel is defined as an institution, this column indicates the channel institution tax identification as taxpayer
50	STATUS_CODE	CHAR	1		The status of the current channel. Possible values are: 'N' = Normal,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'C' = Canceled.
51	STATUS_DATE	DATE	7		The status effective date.
52	NB_ACCOUNTS_LINK	NUMBER	2		The number of accounts linked to the PAN.
53	ENTITY_CODE	CHAR	2		The channel entity code of issuer account to which the transaction will be posted. It is always set to 'NL' (Channel).
54	STATEMENT_CODE	CHAR	2		The statement type to be sent to the Channel.
55	LANGUAGE_CODE	CHAR	3		The channel institution language. It should be present in the 'LANGUAGE_LIST' table.
56	REWARD_METHOD	CHAR	2		This column is not used in V3.5.
57	RELATED_BANK_CODE	CHAR	6		This is to indicate the concerned financial institution related with the reward.
58	SENSITIVE_OPERATION_RECORD	CHAR	1		The sensitive operation record code. Possible values are: 'I' = Insertion, 'M' = Modification, 'S' = Cancellation, 'F' = Replacement with fees, 'R' = Replacement without fees, 'N' = Renewal, 'C' = PIN calculation Without Fees, 'A' = PIN calculation cancellation, 'L' = Delivery card, 'P' = Card production cancellation, 'J' = Package request, 'W' = Manual renewal request, 'X' = Internal usage, 'Y' = PIN calculation with fees.
59	USER_CREATE	VARCHAR2	15		ID of the user when record created.
60	DATE_CREATE	DATE	7		Record creation date and time.
61	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
62	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

5.1.13 CHANNEL_TYPE_LIST

This table is used to set different type of channels. A channel is a Direct Marketing Agent.

Refer to "[Channel type](#)" section in UG1115-Issuer general parameters user's guide in its version 3.5.5.

Each column of this table is described in detail in the next section.

5.1.13.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	CHANNEL_TYPE	VAR	3		The code of the chosen direct marketing agent type.
2 	BANK_CODE	CHAR	6		The issuer institution name and code. It should be present in the 'BANK' table.
3	ABRV_WORDING	VARCHAR2	16		Shortened description of the parameter being defined used for information, for reporting or on other screens.
4	WORDING	VARCHAR2	32		Description of the parameter being defined.
5	CATEGORY	CHAR	3		The direct marketing agent category. Possible values are: 'MRC' = Merchant, 'CHN' = Chain, 'OTL' = Outlet, 'BNK' = Bank, 'BRC' = Branch, 'MKD' = Marketing department, 'OTS' = Outsourcing entity, 'PBD' = Partner brand, 'COR' = Corporate, 'ICS' = Electronic channel services 'OT1' = Others 1, 'OT2' = Others 2.
6	SENSITIVE_OPERATION_RECORD	CHAR	1		The sensitive operation record code. Possible values are: 'I' = Insertion, 'M' = Modification, 'S' = Cancellation, 'F' = Replacement with fees, 'R' = Replacement without fees, 'N' = Renewal, 'C' = PIN calculation Without Fees, 'A' = PIN calculation cancellation, 'L' = Delivery card, 'P' = Card production cancellation, 'J' = Package request, 'W' = Manual renewal request, 'X' = Internal usage,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'Y'= PIN calculation with fees.
7	USER_CREATE	VARCHAR2	15		ID of the user when record created.
8	DATE_CREATE	DATE	7		Record creation date and time.
9	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
10	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

5.2 Operation tables

5.2.1 CATALOGUE_STATUS_TRAIL

This table is an internal table used by PowerCARD to manage the status trail generation for 'CATALOGUE_PRODUCT' table.

Each column of this table is described in detail in the next section.

5.2.1.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		The Issuer Financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
2 	PRODUCT_CODE	CHAR	6		The catalog product code for which the status has been changed. It should already be declared in 'CATALOGUE_PRODUCT' table.
3 	PROD_VERSION	VARCHAR2	10		The catalog product version for which the status has been changed. It should already be declared in 'CATALOGUE_PRODUCT' table.
4 	SOURCE_STATUS	CHAR	1		The old catalog status.
5 	DESTINATION_STATUS	CHAR	1		The new catalog status.
6	ACTION_USER	VARCHAR2	15		The user that has performed the catalog status change.
7 	ACTION_DATE	DATE	7		The date the catalog status has changed.
8	MEMO	VARCHAR2	512		The memo written during the execution of the change of status.
9	USER_CREATE	VARCHAR2	15		ID of the user when record created.
10	DATE_CREATE	DATE	7		Record creation date and time.
11	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
12	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

5.2.2 CATALOGUE_TRACES

This table is an internal table used by PowerCARD to manage the traces generated during the validation of marketable catalog products.

Each column of this table is described in detail in the next section.

5.2.2.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	SEQUENCE_ID	NUMBER	10		The sequence identifying the trace.
2	TRACE_DATE	DATE	7		The date when the trace is logged.
3	BANK_CODE	CHAR	6		The issuer financial institution for which the parameters are being defined. This bank code should already be declared in 'BANK' table.
4	PRODUCT_CODE	CHAR	6		The catalog product code. This product code should be already declared in 'CATALOGUE_PRODUCT' table.
5	PRODUCT_TYPE	CHAR	1		The catalog product type. Possible values are: 'P' = Payment instrument, 'A' = Account, 'N' = Loan, 'Y' = Loyalty, 'I' = PAN auxiliary product, 'C' = Account auxiliary product, 'R' = Product services, 'S' = Payment instrument switch.
6	PRODUCT_VERSION	VARCHAR2	3		The catalog product version. It should be already declared in 'CATALOGUE_PRODUCT' table.
7	APPLICATION_ID	VARCHAR2	24		The application ID in case this trace is related to an error in negotiation process when validating an application from boarding screens.
8	APPLICATION_CONTRACT_ID	VARCHAR2	24		The contract ID in case this trace is related to an error in negotiation process when validating an application from boarding screens.
9	ENTITY_NAME	VARCHAR2	60		The name of the entity for which we are putting a trace.
10	TRACE_TYPE	VARCHAR2	30		The type of the trace. Possible values are: 'INFO' = Info, 'WARNING' = Warning, 'ERROR' = Error.
11	ERROR_CODE	CHAR	4		The error code in case the trace is of type error.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
12	TRACE_MESSAGE	VARCHAR2	512		The message that can be an information, warning or error description.
13	USER_CREATE	VARCHAR2	15		ID of the user when record created.
14	DATE_CREATE	DATE	7		Record creation date and time.
15	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
16	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

5.2.3 CATALOGUE_UPGRADE

This table is an internal table used by PowerCARD to manage the upgrade of existing catalogs in 'CATALOGUE_PRODUCT' table.

Each column of this table is described in detail in the next section.

5.2.3.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	CATALOGUE_UPGRADE_ID	NUMBER	10		ID identifying the catalog upgrade request.
2	PRODUCT_TYPE	CHAR	1		The catalog product type. Possible values are: 'P' = Payment instrument, 'A' = Account, 'N' = Loan, 'Y' = Loyalty, 'I' = PAN auxiliary product, 'C' = Account auxiliary product, 'R' = Product services, 'S' = Payment instrument switch.
3	DESCRIPTION	VARCHAR2	512		The description that defines details about the patch and impact if needed.
4	UPGRADE_ISSUANCE_DATE	DATE	7		The patch creation date.
5	INSTALLATION_STATUS	CHAR	1		The status of the upgrade execution. Possible values are: 'N' = Not yet installed, 'P' = Processed.
6	UPGRADE_INSTALLATION_DATE	DATE	7		The patch installation date on the destination environment.
7	USER_CREATE	VARCHAR2	15		ID of the user when record created.
8	DATE_CREATE	DATE	7		Record creation date and time.
9	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
10	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

5.2.4 CATALOGUE_UPGRADE_INSTRUCTION

This table is an internal table used by PowerCARD, it contains the instructions related to a catalog upgrade patch.

Each column of this table is described in detail in the next section.

5.2.4.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	CATALOGUE_UPGRADE_ID	NUMBER	10		The unique number of the catalog upgrade. It should be defined in 'CATALOGUE_UPGRADE' table.
2 	INSTRUCTION_ID	NUMBER	10		Unique ID of the different instructions part of a catalog product upgrade patch.
3	DESCRIPTION	VARCHAR2	128		Description of the instruction and changes made.
4	PARENT_ELEMENT_TYPE	VARCHAR2	256		The parent tag type of the element to be upgraded.
5	PARENT_ELEMENT_PATH	VARCHAR2	2043		The path of the element to be upgraded.
6	PARENT_ELEMENT_ID	VARCHAR2	512		The tag id of the parent of the element to be upgraded.
7	ELEMENT_TYPE	VARCHAR2	256		The type of the element to be upgraded. It can be a characteristic, group data or attribute.
8	ELEMENT_ID	VARCHAR2	512		The tag ID of the element to be upgraded.
9	OPERATION	VARCHAR2	256		The operation to be performed on this element. Possible values are: 'U' = Update, 'A' = Add, 'R' = Remove, 'M' = Move.
10	IMPACTED_ATTRIBUTE	VARCHAR2	512		This column is used when the changes is made on an attribute. Note  This column should be kept empty when the changes are made on characteristics or group data.
11	ADDITION_ELEMENT_POSITION	NUMBER	3		When the operation is add, this column is used to specify the position where this element will be added (order in the list of group Data or characteristics).

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					 Note If empty, the element will be added in the last position.
12	VALUE	CLOB	4000		The value of the added or updated element.
13	APPLY_ON_ALL_OCCURENCES	CHAR	1		In case of the element to be upgraded has occurrences, this column indicates if the changes will be applied on all occurrences or only the first one. Possible values are: 'Y' = Yes, 'N' = No.
14	DESTINATION_PATH	VARCHAR2	512		In case the OPERATION = 'M' (Move), this column indicates the destination path where the element will be removed.
15	DESTINATION_NEW_ID	VARCHAR2	128		In case the OPERATION = 'M' (Move), this column contains the new ID of the element to be removed.  Note If empty the element will keep the same old ID.
16	USER_CREATE	VARCHAR2	15		ID of the user when record created.
17	DATE_CREATE	DATE	7		Record creation date and time.
18	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
19	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

5.2.5 CATALOGUE_UPGRADE_TARGET_PRODS

This table is an internal table used by PowerCARD to define the list of catalog products for which the upgrade patch should be applied.

Each column of this table is described in detail in the next section.

5.2.5.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	CATALOGUE_UPGRADE_ID	NUMBER	10		The unique number identifying the upgrade. It should be defined in 'CATALOGUE_UPGRADE' table.
2 	BANK_CODE	CHAR	6		The issuer financial institution code. This institution code should already be declared in 'BANK' table.
3 	PRODUCT_CODE	VARCHAR2	6		The catalog product code of the catalog to be upgraded. This product

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					code should be already declared in 'CATALOGUE_PRODUCT' table.
4 	PROD_VERSION	VARCHAR2	10		The catalog product version. It should be already declared in 'CATALOGUE_PRODUCT' table.
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6 Customer

6.1 Parameter tables

6.1.1 CLIENT_ACTIVITY_SET

This table is used to define the classification of economic activity into groups which have common characteristics. It is used for information and statistic purposes.

Refer to "[Activity sector](#)" section in UG1026-Customer management user guide for more details.

Each column of this table is described in detail in the next section.

6.1.1.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code concerned by the customer activity setting parameters. It should be defined in 'BANK' table.
2 	ACTIVITY_CODE	CHAR	4		The customer activity identification code.
3	DESCRIPTION	VARCHAR2	30		The customer activity description.
4	USER_CREATE	VARCHAR2	15		ID of the user when record created.
5	DATE_CREATE	DATE	7		Record creation date and time.
6	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
7	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.1.2 CLIENT_DOCUMENT_LIST

This table is used to store the setup of multi-documents (Civil ID, passports, etc..) at the customer level. It contains the list of documents defined for a given Corporate as well as client.

Refer to "[Documents](#)" section in UG1026-Customer management user's guide for more details.

Each column of this table is described in detail in the next section.

6.1.2.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code. This code must be defined in 'BANK' table.
2 	DOCUMENT_CODE	CHAR	2		The document code that identifies the type of identification document such as Passport, National Identity Card, Driving License, etc. It must be defined in 'DOCUMENT_LIST' table.
3	DOCUMENT_ID	VARCHAR2	24		The legal identification code of the client document.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
4	ENTITY_ID	VARCHAR2	24		The internal identification number of the client entity.
5	ENTITY_CODE	CHAR	2		The type of entity for which the document is being defined. Possible values are: 'CL' = Client, 'CO' = Corporate.
6	DOCUMENT_LIST_ID	VARCHAR2	10		The unique identifier referring the list of documents related to a given client or corporate.
7	ISSUE_DATE	DATE	7		The legal identification document issuing date.
8	EXPIRY_DATE	DATE	7		The legal identification document expiry date.
9	ISSUING_CITY	VARCHAR2	24		The legal identification document issuing city. It must be defined in 'CITY' table.
10	ISSUING_COUNTRY	VARCHAR2	24		The legal identification document issuing country. It must be defined in 'COUNTRY' table.
11	PROVIDED	CHAR	1		This column indicates whether the document is provided or not. Possible values are: 'Y' = Provided, 'N' = Not provided.
12	MANDATORY	CHAR	1		This column indicates whether the document is mandatory or not. Possible values are: 'Y' = Mandatory, 'N' = Not mandatory.
13	USER_MODIF	VARCHAR2	15		ID of the user when record created.
14	DATE_CREATE	DATE	7		Record creation date and time.
15	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
16	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.1.3 CORPORATE_TYPE

This table is used to define the level description of the concerned Corporate. i.e. Company, division, department, region, service, etc. Refers to "[Corporate type](#)" section in UG1063-Corporate management user guide for more details.

Each column of this table is described in detail in the next section.

6.1.3.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which parameters are being defined. This code must be defined in 'BANK' table.
2 	CORPORATE_TYPE_CODE	CHAR	3		Unique code identifying the corporate type.
3	DESCRIPTION	VARCHAR2	64		Brief description of the parameter being defined.
4	FLEET_FLAG	CHAR	1		This flag specifies whether the corporate supports or not the PAN fleet management. Possible values are: 'Y' = Yes, 'N' = No.
5	PAYROLL_FLAG	CHAR	1		This field is reserved for internal use.
6	TRAVEL_ALL_FLAG	CHAR	1		This field is reserved for internal use.
7	DELIVERY_MODE	CHAR	1		The delivery mode for payment instruments belonging to this corporate. Possible values are: 'B' = Branch, 'P' = Processing Center, 'M' = Customer mailing address, 'C' = Customer selection, 'H' = Main corporate address, 'F' = Direct corporate address, 'G' = Pan holder address. It should be defined in 'CARD_PRODUCT' table. DE
10	USER_MODIF	VARCHAR2	15		ID of the user when record created.
11	DATE_CREATE	DATE	7		Record creation date and time.
12	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
13	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.1.4 CUSTOMER_SEGMENT

Customer segments are linked to client record and is inherited by payment instrument related records. It can be changed for each payment instrument record.

Refer to "[Customer segment](#)" section in UG1026-Customer management user's guide for more details.

Each column of this table is described in detail in the next section.

6.1.4.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6	1	Financial institution identification code of the parameter being defined. It should be defined in 'BANK' table.
2 	SEGMENT_CODE	CHAR	3	2	The segment code.
3	WORDING	VARCHAR2	12	3	Short description of the segment setup.
4	DESCRIPTION	VARCHAR2	30	4	The segment description.
5	USER_CREATE	VARCHAR2	15	6	ID of the user when record created.
6	DATE_CREATE	DATE	7	7	Record creation date and time.
7	USER_MODIF	VARCHAR2	15	8	ID of the last user who modified the record.
8	DATE_MODIF	DATE	7	9	Date and time when the last record modification occurred.

6.1.5 DOCUMENT_LIST

This table is used to store the list of documents to manage by the institution.

Refer to "[Document](#)" section in UG1008-General parameters user's guide for more details.

Each column of this table is described in detail in the next section.

6.1.5.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code of the document parameter being defined. It must be defined in 'BANK' table.
2 	DOCUMENT_CODE	CHAR	2		The document code. This code identifies the type of identification document such as Passport, National Identity Card, Driving Licence, etc.
3	ABRV_WORDING	VARCHAR2	16		Shortened description associated with the document code.
4	WORDING	VARCHAR2	32		Description associated with the document code.
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.1.6 FUEL_PROVIDER_LIST

This table is used to store the main details of the different oil companies.

Refer to "[Fuel provider](#)" section UG1165-Fleet management user's guide for more details.

Each column of this table is described in detail in the next section.

6.1.6.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution identification code of the parameter being defined. It should be present in 'BANK' table.
2 	PROVIDER_CODE	VARCHAR2	6		The fuel provider code.
3	ABRV_DESCRIPTION	VARCHAR2	32		Short description of the fuel provider.
4	DESCRIPTION	VARCHAR2	64		The full description of the fuel provider.
5	FILE_FREQUENCY	CHAR	1		The frequency of the transaction fleet file to be generated for rebate pricing. Possible values are: 'D' = Daily 'W' = Weekly 'M' = Monthly
6	DAY_OFF_METHOD	CHAR	1		The method of taking into account days off (Weekend days and official public holidays). Possible values are: 'N' = Forward 'B' = Backward 'I' = Ignore
7	COUNTRY_CODE	CHAR	3		The country code. It is used to take into consideration the days off. It must be present in the 'COUNTRY' table
8	USER_MODIF	VARCHAR2	15		ID of the user when record created.
9	DATE_CREATE	DATE	7		Record creation date and time.
10	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
11	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.1.7 FUEL_PROVIDER_MERCHANT_LINK

This table is used to stores the association of merchant numbers and oil companies. Merchant number represents the card acceptor ids and oil companies.

Each column of this table is described in detail in the next section.

6.1.7.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution identification code of the parameter being defined. It should be defined in 'BANK' table
2 	PROVIDER_CODE	VARCHAR2	6		The fuel provider code. It must be present in the 'FUEL_PROVIDER_LIST' table

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
3 	MER_ACCEPTOR_POINT_ID	VARCHAR2	15		The merchant acceptor id.
4	MERCHANT_LEGAL_ID	VARCHAR2	20		The merchant legal identification number.
5	MERCHANT_NAME	VARCHAR2	25		The merchant name.
6	COMMENTS	VARCHAR2	100		The additional details about the merchant.
7	USER_MODIF	VARCHAR2	15		ID of the user when record created.
8	DATE_CREATE	DATE	7		Record creation date and time.
9	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
10	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.1.8 FUEL_TYPE

PowerCARD offers the possibility to maintain, via this table, the list of the fuel types that will be managed for the Institution. Fuel type is used as one of the details of each vehicle setup in the system.

Refer to "[Fuel type](#)" section UG1165-Fleet management user's guide for more details.

Each column of this table is described in detail in the next section.

6.1.8.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution identification code of the fuel type parameter being defined. It should be present in 'BANK' table.
2 	FUEL_TYPE	CHAR	2		The fuel type identifier.
3	FUEL_DESCRIPTION	VARCHAR2	64		The fuel type description.
4	FUEL_REFERENCE_AMOUNT	NUMBER	18	3	The average reference amount of the fuel type.
5	CURRENCY_CODE	CHAR	3		The currency code of the fuel reference amount. It should be defined in 'CURRENCY_TABLE'.
6	FUEL_MARGIN	NUMBER	9	6	The percentage that will serve during the authorization process. For example: - A vehicle has 60-liter tank capacity and is linked to FUEL_TYPE field when its value is set to '01' (Unleaded Regular), - If the reference amount of this fuel type is for example 100 Rands and the % margin is 10%. The authorization amount should not exceed $60 \times 100 \text{ Rands} + 10\% \text{ margin} = 6600 \text{ Rands}$. PowerCARD should

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					decline authorizations exceeding this amount.
7	FUEL_CATEGORY	CHAR	1		The fuel category. Possible values are: 'P' = Petrol, 'D' = Diesel, 'O' = Others.
8	FUEL_NEW_AMOUNT	NUMBER	18	3	The new fuel reference amount.
9	EFFECTIVE_DATE	DATE	7		The effective date when the new fuel reference amount should take effect.
10	USER_MODIF	VARCHAR2	15		ID of the user when record created.
11	DATE_CREATE	DATE	7		Record creation date and time.
12	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
13	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.1.9 M_EDUCATION_LIST

This table is used to declare the parameters for the management of the Client education level.

Refer to "[Education level](#)" section in UG1026-Customer management user's guide for more details.

Each column of this table is described in detail in the next section.

6.1.9.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		The issuer institution code of the parameter being defined. It should be present in the 'BANK' table.
2 	M_EDUCATION_CODE	VARCHAR2	4		The unique code identifying the education level.
3	ABRV_WORDING	VARCHAR2	16		Shortened description of the education level.
4	WORDING	VARCHAR2	32		Description of the education level.
5	EDUCATION_LEVEL	CHAR	1		The level of education. Possible values are: 'N' = Not declared, 'P' = Primary, 'G' = Secondary, 'C' = University, 'O' = Doctorate, 'X' = Other.
6	USER_MODIF	VARCHAR2	15		ID of the user when record created.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.1.10 OWNER_LIST

This table is used to declare the parameters for the management of owners.

Each column of this table is described in detail in the next section.

6.1.10.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code of the customer type parameter being defined. It must be defined in 'BANK' table.
2 	OWNER_CODE	CHAR	2		The customer type code.
3	ABRV_WORDING	VARCHAR2	16		Shortened description associated with the customer type code.
4	WORDING	VARCHAR2	32		Description associated with the customer type code.
5	OWNER_CATEGORY	CHAR	1		The customer category. Possible values are: 'I' = Individual, 'B' = Business, 'S' = Staff, 'P' = Professional, 'N' = Company, 'C' = Corporate, 'T' = Corporate travel, 'L' = International corporate, 'R' = Procurement, 'Y' = Others 1, 'Z' = Others 2.
6	FEE_CATEGORY	CHAR	1		The payment instrument fee code to be used for a specified customer category. Possible values are: 'C' = Company, 'I' = Individual, 'S' = Staff.
7	DATA_CAPTURE_MODE	CHAR	1		This flag indicates whether this record was captured or generated by PowerCARD. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'M' = Manual data capture, 'A' = Automatic data capture.
8	USER_CREATE	VARCHAR2	15		ID of the user when record created.
9	DATE_CREATE	DATE	7		Record creation date and time.
10	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
11	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.1.11 PRIORITY_INDICATOR

This table contains the embossing priorities of the payment instruments defined in the system.

Refer to ["Priority indicator"](#) section in UG1114-Embossing user's guide for more details.

Each column of this table is described in detail in the next section.

6.1.11.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which priority indicator parameter is being defined. This code must be defined in 'BANK' table.
2 	PRIORITY_INDICATOR	CHAR	3		The code identifying the priority indicator.
3	ABRV_WORDING	VARCHAR2	16		Shortened description of priority, used for information, for reporting or on other screens.
4	WORDING	VARCHAR2	32		The priority description.
5	RESET_PRIORITY_INDICATOR	CHAR	3		The reset priority indicator value to which the priority code should be reset once the payment instrument is embossed. If not specified, the priority indicator code of the Payment instrument will be reset to blank when the payment instrument is produced.
6	USER_MODIF	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.1.12 PROMOTION_CODE_LIST

This table contains the promotions/campaigns by Institution. It can be used as criterion to split the embossing files.

Refer to ["Promotion code list"](#) section in UG1114-Embossing for more details.

Each column of this table is described in detail in the next section.

6.1.12.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		This is the financial institution for which the promotion code list parameters are being defined. It should be defined in 'BANK' table.
2 	PROMOTION_CODE	CHAR	10		Code identifying the promotion/campaign.
3	ABRV_WORDING	VARCHAR2	16		The promotion/campaign shortened description used for information, for reporting or on other screens.
4	WORDING	VARCHAR2	32		The promotion/campaign description.
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.1.13 USER_DEFINED_FIELDS_PARAM

This table is used to configure the extra fields required by the Institution for all the entities as Cardholder, Client, Credit account, Loan and Corporate.

Refer to "[Additional fields parameters](#)" section in UG1115-Issuer general parameters for more details.

Each column of this table is described in detail in the next section.

6.1.13.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code. This code must be defined in 'BANK' table.
2	GROUP_ID	CHAR	2		The field group identification code.
3 	FIELD_NAME	VARCHAR2	50		The additional field name that is added.
4	FIELD_DESCRIPTION	VARCHAR2	50		Brief description of the parameter being defined.
5	DATA_FAMILY_TYPE	CHAR	3		The family type of the additional field.
6	FIELD_TYPE	CHAR	1		The type of the concerned additional field. Possible values are: '1' = Date, '2' = Number, '3' = Amount, '4' = Free Text, '5' = Static List,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'6' = Dynamic list.
7	FIELD_LENGTH	NUMBER	4		The length of the field being defined.
8	STATIC_LIST_CODE	CHAR	6		The static list to be applied in the Additional field.
9	DYNAMIC_LIST_CODE	VARCHAR2	30		The dynamic list to be applied to the additional field.
10	EXIT_FUNCTION_FLAG	CHAR	1		This column is not used in V3.5.
11	EXIT_FUNCTION_ID	CHAR	6		The unique code identifying the exit function.
12	FUNCTION_EXECUTION	CHAR	1		This column is not used in V3.5.
13	FIELD_CATEGORY	CHAR	1		The category of the defined additional field. Possible values are: 'I' = Input, 'O' = Output (For future use).
14	GUI_FLAG	CHAR	1		This column is not used in V3.5.
15	STATEMENT_FILE_FLAG	CHAR	1		This column is not used in V3.5.
16	EMBOSSING_FILE_FLAG	CHAR	1		This column is not used in V3.5.
17	PIN_FILE_FLAG	CHAR	1		This column is not used in V3.5.
18	USER_CREATE	VARCHAR2	15		ID of the user when record created.
19	DATE_CREATE	DATE	7		Record creation date and time.
20	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
21	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.1.14 TITLE_LIST

This table is used to declare the parameters associated with the titles and genders of clients. Refer to ["Civil title"](#) section in UG1026-Customer management user's guide for more details. Each column of this table is described in detail in the next section.

6.1.14.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	TITLE_CODE	CHAR	2		The unique code identifying the civil title.
2 	BANK_CODE	CHAR	6		The issuer institution code. It must be defined in 'BANK' table.
3	ABRV_WORDING	VARCHAR2	16		Shortened description used for information, for reporting or on other screen.
4	WORDING	VARCHAR2	32		Description of civil title.
5	GENDER	CHAR	1		The gender of the current title. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'M' = Male, 'F' = Female, 'N' = Not applicable.
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.1.15 SOCIOPROF_LIST

This table is used to store different type of jobs for a variety of occupations. It is more accurate information on the customer and is under the Job title. It can be changed for each payment instrument.

Refer to ["Job title"](#) section in UG1026-Customer management user's guide for more details.

Each column of this table is described in detail in the next section.

6.1.15.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code of the social-professional parameter being defined. It should be defined in 'BANK' table.
2 	SOCIO_PROF_CODE	CHAR	4		The social-professional code identification.
3	ACTIVITY_CODE	CHAR	4		The unique code identifying the activity. This code should be defined in 'CLIENT_ACTIVITY_SET' table.
4	DESCRIPTION	VARCHAR2	30		The social-professional code description.
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.1.16 VEHICLE_BRAND_LIST

This table is used to log the brand lists that can be assigned to vehicles models.

Refer to ["Vehicle brand list"](#) section in UG1165-Fleet management user's guide for more details.

Each column of this table is described in detail in the next section.

6.1.16.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution identification code of the parameter being defined. It should be present in 'BANK' table.
2 	BRAND_CODE	VARCHAR2	15		This is the vehicle brand code.
3	ABRV_DESCRIPTION	VARCHAR2	16		Short description of the vehicle brand.
4	DESCRIPTION	VARCHAR2	32		The full description of the vehicle brand.
5	USER_MODIF	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.1.17 VEHICLE_CLASS_LIST

This table is used to log the list of classes/categories that can be assigned to vehicles in the boarding process.

Refer to "[Vehicle class list](#)" section in UG1165-Fleet management user's guide for more details.

Each column of this table is described in detail in the next section.

6.1.17.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code of the parameter being defined. It should be defined in 'BANK' table.
2 	CLASS_CODE	CHAR	2		The vehicle class/category code. Possible values are: 'A1' = Motorcycles 'A2' = Light vehicles 'B' = Small heavy vehicles 'C' = Large heavy vehicles
3	ABRV_DESCRIPTION	VARCHAR2	16		Shortened description of the vehicle class.
4	DESCRIPTION	VARCHAR2	32		A detailed description of the vehicle class.
5	USER_MODIF	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.1.18 VEHICLE_MODEL_LIST

This table is used to log models of the vehicles. Each column of this table is described in detail in the next section.

6.1.18.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution identification code of the parameter being defined. It should be defined in 'BANK' table
2 	MODEL_REFERENCE	VARCHAR2	16		The primary key of the vehicle model list.
3	MODEL_CODE	VARCHAR2	16		The code of the vehicle model list.
4	ABRV_DESCRIPTION	VARCHAR2	32		Short description of the vehicle model.
5	DESCRIPTION	VARCHAR2	64		The full description of the vehicle model.
6	BRAND_CODE	VARCHAR2	15		The band code. It must be present in the 'VEHICLE_BRAND_LIST' table.
7	CLASS_CODE	CHAR	2		The vehicle class/category code. Part of the primary key. As defined in 'VEHICLE_CLASS_LIST' table.
8	FUEL_TYPE	CHAR	2		The type of fuel. It must be present in the 'FUEL_TYPE' table.
9	FUEL_TANK_CAPACITY	NUMBER	3		The maximum fuel tank capacity of the model expressed in liters.
10	INTRODUCTION_DATE	DATE	7		The introduction date of the model.
11	REFERENCE_PRICE	NUMBER	18	3	The reference price of the model.
12	CURRENCY_CODE	CHAR	3		The Reference price of the model currency code. It must be defined in 'CURRENCY_TABLE'.
13	NUMBER_DOORS	NUMBER	2		Number of vehicle doors.
14	NUMBER_CYLINDERS	NUMBER	2		Number of vehicle cylinders.
15	NUMBER_GEAR	NUMBER	2		Number of vehicle gears.
16	NUMBER_SEATS	NUMBER	2		Number of vehicle seats.
17	AUT_MAN_INDICATOR	CHAR	1		This column is used to indicates whether the vehicle is automatic or manual. Possible values are: 'A' = Automatic 'M' = Manual
18	HYBRID_INDICATOR	CHAR	1		This flag indicates if it's a hybrid vehicle or not. Possible values are: Y = Yes (Hybrid) N = No (Not a hybrid model)
19	MODEL_TYPE	VARCHAR2	16		The vehicle model type.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
20	ENGINE_DESCRIPTION	VARCHAR2	32		Description of the engine.
21	MODEL_LENGTH	VARCHAR2	10		The vehicle model length.
22	MODEL_WIDTH	VARCHAR2	10		The vehicle model width.
23	MODEL_HEIGHT	VARCHAR2	10		The vehicle model height.
24	GROSS_VEHICLE_MASS	NUMBER	4		The vehicle mass (Gross)
25	VEHICLE_MASS	NUMBER	4		The vehicle mass.
26	ADDITIONAL_DETAILS	VARCHAR2	64		The additional details of the vehicle.
27	USER_MODIF	VARCHAR2	15		ID of the user when record created.
28	DATE_CREATE	DATE	7		Record creation date and time.
29	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
30	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.2 Operation tables

6.2.1 CLIENT

PowerCARD offers specific functions that group in a functional logic, all features relating to Client operations management.

These functions include:

- Client demographic and management information,
- Financial management,
- Address information,
- Status operation,
- Additional fields setup,
- Multi-documents setup.

This table contains all clients that can be referred as the customer who has requested to initiate a relationship (such as debit account/ loan account/credit card, etc...) with the Issuer Institution.

It is used to maintain Client information data, i.e. update the data of existing client, or create new client. Some fields are not allowed to be modified on this table as: Institution, Client code, Primary client code, Status and Status reason.

Refer to [Client](#) section in UG1026-Customer management for more details.

Each column of this table is described in detail in the next section.

6.2.1.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	CLIENT_CODE	VARCHAR2	24		This is the first code identifying the client.
2	PRIMARY_CLIENT_CODE	VARCHAR2	24		The identification code of the Primary client. That is, the Client to whom the Client being maintained is connected. When applicable, the primary client

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					must have been defined in the system as being a client of the bank.
3	CLIENT_HOST_ID	VARCHAR2	24		Number identification of the client in case PowerCARD application communicates with an external HOST system.
4 	BANK_CODE	CHAR	6		Financial institution code. It is the second code identifying the client. This code must be defined in 'BANK' table.
5	BRANCH_CODE	CHAR	6		The branch within the issuer bank. This code must be defined in 'BRANCH' table.
6	CORPORATE_ID	VARCHAR2	15		In case the concerned Client is a corporate, this column indicates the corporate identification number. This code must be present in 'CORPORATE' table.
7	APPLICATION_ID	VARCHAR2	24		The application identification number with which the client has been subscribed.
8	LIABILITY_INDICATOR	CHAR	1		The liability involved in case the Client is corporate. It has to be filled only if CORPORATE_ID is filled. Possible values are: 'P' = Personal Liability (Non-corporate card, personal liability) 'I' = Individual liability (Corporate card, full individual liability) 'J' = Joint (Corporate card, joint liability). 'F' = Full (Corporate card, full corporate liability). Note  The liability indicator of a corporate card could never be set to 'P' - The liability indicator of an individual card could never be set to 'F'
9	CHANNEL_NUMBER	VARCHAR2	15		This is to indicate the channel through which the concerned client has been initiated. When applicable. This code must be present in 'CHANNEL' table.
10	OWNER_CODE	CHAR	2		This is to define the customer type. This owner code must be defined in 'OWNER_LIST' table.
11	OWNER_CATEGORY	CHAR	1		This is to indicate the owner category. This code must be defined in 'OWNER_LIST' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
12	VIP_LEVEL	CHAR	1		This is to indicate the VIP level of the client. This code must be present in 'VIP_LIST' table.
13	TITLE_CODE	CHAR	2		This is to indicate the title of the client. This code must be present in 'TITLE_LIST' table.
14	FAMILY_NAME	VARCHAR2	40		The family name of the client.
15	FIRST_NAME	VARCHAR2	40		The first name of the client.
16	GENDER	CHAR	1		This is to indicate the gender of the client. Possible values are: 'M' = Male 'F' = Female 'N' = Not applicable (For Company & Corporate)
17	FAMILY_STATUS	CHAR	1		This is to indicate the marital status of the client. Possible values are: 'S' = Single 'M' = Married 'D' = Divorced 'W' = Widower 'N' = Not applicable (for Company & Corporate)
18	BIRTH_DATE	DATE	7		The birth date of the client (Creation date for Company & Corporate)
19	BIRTH_CITY	VARCHAR2	30		The client's city of birth (Location city for Company & Corporate)
20	BIRTH_COUNTRY	VARCHAR2	30		The client's country of birth (Location country for Company & Corporate)
21	PR_CARE_OF	VARCHAR2	64		The mail recipient in the primary address (To: ..).
22	PR_LINE_1	VARCHAR2	64		This is the first primary address line.
23	PR_LINE_2	VARCHAR2	64		This is the second primary address line.
24	PR_LINE_3	VARCHAR2	64		This is the third primary address line.
25	PR_LINE_4	VARCHAR2	64		This is the fourth primary address line.
26	PR_ZIP_CODE	VARCHAR2	10		Zip code of client primary address. Depending on the financial institution setup, the zip code can be mandatory, optional or not managed. When indicated, this code must be existed in 'ZIP_CODE' table.
27	PR_REGION_CODE	CHAR	3		This is the code of the region representing the administrative division of the country where the Client primary address is located. This column is required. This code must be present in 'REGION' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
28	PR_REGION_NAME	VARCHAR2	40		This is the name of the region representing the administrative division of the country where the Client primary address is located.
29	PR_COUNTRY_CODE	CHAR	3		The country where the Client primary address is located. This code must be present in 'COUNTRY' table.
30	PR_CITY_CODE	CHAR	5		The city where the Client primary address is located. This code must be present in 'CITY' table.
31	PR_EMAIL	VARCHAR2	64		The email address. This field is required if the PR_SENDING_MODE = 'E'.
32	PR_URL	VARCHAR2	60		URL of the website, applies for corporate client mostly.
33	PR_PHONE_1	VARCHAR2	20		The first phone number of the client
34	PR_PHONE_1_TYPE	CHAR	1		The phone type for the captured first phone number. Possible values are: '0' = Office phone, '1' = Mobile phone, '2' = Home phone, '3' = Private or personal phone, '4' = Others,
35	PR_PHONE_2	VARCHAR2	20		The second phone number of the client.
36	PR_PHONE_2_TYPE	CHAR	1		The phone type for the captured second phone number. Possible values are: '0' = Office phone '1' = Mobile phone '2' = Home phone '3' = Private or personal phone, '4' = Others
37	PR_PHONE_3	VARCHAR2	20		The third phone number of the client.
38	PR_PHONE_3_TYPE	CHAR	1		The phone for the captured third phone number. Possible values are: '0' = Office phone '1' = Mobile phone '2' = Home phone, '3' = Private or personal phone '4' = Others,
39	PR_PHONE_4	VARCHAR2	20		The fourth phone number of the client.
40	PR_PHONE_4_TYPE	CHAR	1		The phone type for the captured fourth phone number. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'0' = Office phone '1' = Mobile phone '2' = Home phone '3' = Private or personal phone '4' = Others
41	PR_ADDRESS_TYPE	CHAR	2		This is the type of the primary address being defined for the client. This code must present in 'ADDRESSES_TYPE_LIST' table.
42	PR_FAX	VARCHAR2	20		The fax of client primary address
43	PR_SENDING_MODE	CHAR	1		The sending mode for communication with the client. Possible values are: 'F' = Fax 'E' = Email 'M' = Courier (Default value)
44	PR_CITY_NAME	VARCHAR2	32		The name of the city where the Client primary address is located.
45	PR_DEFAULT_USAGE	CHAR	2		The usage of the primary address with '01' as default value. Possible values are: '01' = Mail '02' = Statement '03' = Dispute '04' = Loyalty
46	PR_STATUS	CHAR	1		The primary address status (field deprecated) Possible values are: 'N' = Normal 'A' = Active 'I' = Inactive
47	PR_STATUS_START_DATE	DATE	7		The start date when the PR_STATUS field gets the value 'N' or 'A'.
48	PR_STATUS_END_DATE	DATE	7		The end date when the PR_STATUS field gets the value 'I'.
49	PR_IS_MANDATORY	CHAR	1		This is to indicate that the Primary address, with the assigned primary address type, is mandatory as defined in the Client Mandatory Addresses configuration. Possible values are 'Y' (Yes) or Null
50	ADVANCED_ADDRESS_FLAG	VARCHAR2	10		This is the indicator for extra addresses management for this client Possible values are: 'Y' = Advanced address managed,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'N' = Advanced address not managed
51	ADDRESS_LIST_ID	VARCHAR2	10		In case of client having secondary addresses in addition to the primary one, this column indicates the indicator of list of the Client created addresses . This code must be defined in 'ADDRESS_LIST' table.
52	NATIONALITY_CODE	CHAR	3		The nationality of the client. This code must be defined in 'COUNTRY' table.
53	NATIONALITY	VARCHAR2	20		The eventual other nationality of the client. This column is Null if NATIONALITY_CODE is defined.
54	ORG_NATIONALITY	VARCHAR2	20		The original nationality of the client.
55	CHILD_NUMBER	NUMBER	2	0	This is to indicate the Client's number of dependent children. This column is applicable in case OWNER_CATEGORY = 'I'
56	NUMBER_OF_DEPENDANTS	NUMBER	2	0	This is to indicate the number of other Client's dependents. This column is applicable in case OWNER_CATEGORY = 'I'
57	NUMBER_OF_EMPLOYEES	NUMBER	5	0	This is to indicate the number of employees in case OWNER_CATEGORY = 'I' (Corporate for example).
58	CONTACT_NAME	VARCHAR2	40		This is to indicate the contact name in case OWNER_CATEGORY = 'I' (Corporate for example).
59	SOCIO_PROF_CODE	CHAR	4		The job title. It is used for the segmentation of clients based on such criteria as job industry, and professional qualification. It must be present in the 'SOCIOPROF_LIST' table.
60	ACTIVITY_CODE	CHAR	4		This is to indicate the client activity. It helps to categorize clients based on their professional occupation. This code must be equal to SOCIOPROF_LIST.ACTIVITY_CODE) and must be defined in 'CLIENT_ACTIVITY_SET' table.
61	CUSTOMER_SEGMENT	CHAR	3		This is to indicate the Client's customer segment. This code must be defined in 'CUSTOMER_SEGMENT' table
62	EMPLOYMENT_STATUS	CHAR	1		The professional situation of this Client. Possible values are: 'C' = Corporate or Company 'E' = Employee 'L' = Liberal job 'R' = Retired 'S' = Student 'U' = Unemployed 'M' = Military Job

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'N' = Not Applicable
63	TAKING_ON_DATE	DATE	7		The employment taking on date (if EMPLOYMENT_STATUS = 'E' or 'L') Retired date (if EMPLOYMENT_STATUS = 'R') Mandatory only when EMPLOYMENT_STATUS = 'E','L' or 'R'
64	DOCUMENT_CODE	CHAR	2		The legal identification document code identifying the client. If populated, this code must be defined in 'DOCUMENT_LIST' tables. Note This column is no more relevant, the DOCUMENT_LIST_ID allows to define multi-documents for a given client.
65	LEGAL_ID	VARCHAR2	30		The legal identification number of the client. This can be the national identity card number, the social security number or any other official, unique and legal identification of the client.
66	LANGUAGE_CODE	CHAR	3		The language of the client. This code must be present in 'LANGUAGE_LIST' table.
67	TAX_REGISTRY_OFFICE	VARCHAR2	30		The client tax registry office identification.
68	TAX_NUMBER	VARCHAR2	30		This field indicates the client tax identification as a taxpayer.
69	CURRENCY_CODE	CHAR	3		In case CUSTOMER_LIMIT_MNG_FLAG = 'Y', this column indicates the currency in which limits are expressed. This code must be present in 'CURRENCY_TABLE' table.
70	CREDIT_LIMIT	NUMBER	18	0	In case CUSTOMER_LIMIT_MNG_FLAG = 'Y', this column indicates the Client's Credit limit.
71	CREDIT_LIMIT_CASH	NUMBER	18	0	In case CUSTOMER_LIMIT_MNG_FLAG = 'Y', this column indicates the Client's Cash/transfer limit. This Cash/transfer limit is defined as part of the Credit limit and therefore, cannot exceed the CREDIT_LIMIT.
72	LOAN_LIMIT	NUMBER	18	0	In case CUSTOMER_LIMIT_MNG_FLAG = 'Y', this column indicates the Client's Loan limit. This Loan limit can be defined as a separate limit for the client or as part of the Credit limit but cannot exceed the CREDIT_LIMIT in any case.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
73	CLIENT_ADDENDUM_FLAG	CHAR	1		This column is not used in V3.5.
74	STATUS_CODE	CHAR	1		This is the client status that can get the following possible values: 'N' = Normal 'M' = Under monitoring or Emergency 'C' = Canceled This code must be defined in 'STATUS_LIST' table.
75	STATUS_DATE	DATE	7		The date of the last status update.
76	STATUS_REASON	CHAR	2		This is client status reason code. This code must be present in 'STATUS_REASON_LIST' table
77	DATA_DISCLOSURE	CHAR	2		This is to indicate the client data disclosure option. Possible values are: 'NC' = No choice 'ND' = No disclosure 'HI' = Handling information 'TI' = Transmission of the information 'HT' = Handling/Transmission of the information
78	FILE_NUMBER	VARCHAR2	40		The file number in case the Client maintenance request is received in a file.
79	ENTITY_CODE	CHAR	2		This is the type of the entity under process set by default to entity origin of the link, here 'CL' for Client.
80	STAFF_ID	VARCHAR2	20		The staff identifier of the person who signed the Client contract.
81	CUSTOMER_LIMIT_MNG_FLAG	CHAR	1		This is to indicate whether the credit limit is managed at the client level or not. Possible values are: 'Y' = Managed at client level 'N' = Not managed at client level Note  This column is referred to CREDIT_LIMIT, CREDIT_LIMIT_CASH and LOAN_LIMIT columns.
82	FIRST_NAME_2	VARCHAR2	40		This is the 2nd first name of the client.
83	FAMILY_NAME_2	VARCHAR2	40		This is the 2nd family name of the client.
84	EDUCATION	VARCHAR2	4		The education level of the client. This code must be defined in 'M_EDUCATION_LIST' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
85	LODGING_DATE	DATE	7		The lodging date.
86	LODGING_MODE	CHAR	1		The lodging mode of the client. Possible values are: 'N' = Not reported or not applicable 'R' = Renter 'O' = Owner 'D' = Dependent
87	NET_YEARLY_INCOME	NUMBER	15		The client yearly income net.
88	NYI_CURRENCY_CODE	CHAR	3		The Net yearly income currency code. This code must be defined in the CURRENCY_TABLE table.
89	EXTERNAL_IDENTIFIER	VARCHAR2	22		The external identifier of the client.
90	EMPLOYER_NAME	VARCHAR2	30		In case the customer is an employer. This column indicates the employer name
91	MAIDEN_NAME	VARCHAR2	40		The maiden name of the concerned client.
92	PROMOTION_CODE	CHAR	2		The code of client promotion. This code must be defined in 'PROMOTION_LIST' table.
93	PRIVATE_DATA_1	VARCHAR2	32		This field is reserved for future use.
94	PRIVATE_DATA_2	VARCHAR2	32		This field is reserved for future use.
95	PRIVATE_DATA_3	VARCHAR2	32		This field is reserved for future use.
96	PRIVATE_DATA_4	VARCHAR2	32		This field is reserved for future use.
97	PRIVATE_DATA_5	DATE	7		This field is reserved for future use.
98	PRIVATE_DATA_6	DATE	7		This field is reserved for future use.
99	PRIVATE_DATA_7	DATE	7		This field is reserved for future use.
100	PRIVATE_DATA_8	DATE	7		This field is reserved for future use.
101	PRIVATE_DATA_9	NUMBER	18	3	This field is reserved for future use.
102	PRIVATE_DATA_10	NUMBER	18	3	This field is reserved for future use.
103	PRIVATE_DATA_11	NUMBER	18	3	This field is reserved for future use.
104	PRIVATE_DATA_12	NUMBER	18	3	This field is reserved for future use.
105	PRIVATE_TLV_DATA	VARCHAR2	250		This field is reserved for future use.
106	PHONE_1	VARCHAR2	30		The first phone number at which the Client can be reached.
107	PHONE_1_TYPE	CHAR	2		This is the first phone type of client phone number. Possible values are: '01' = Office phone, '02' = Mobile phone, '03' = Home phone, '04' = Private or personal phone,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'05' = Others.
108	PHONE_2	VARCHAR2	30		The second phone number at which the client can be reached.
109	PHONE_2_TYPE	CHAR	2		This is the second phone type of client phone number. Possible values are: '01' = Office phone, '02' = Mobile phone, '03' = Home phone, '04' = Private or personal phone, '05' = Others.
110	PHONE_3	VARCHAR2	30		The third phone number at which the client can be reached.
111	PHONE_3_TYPE	CHAR	2		This is the third phone type of client phone number. Possible values are: '01' = Office phone, '02' = Mobile phone, '03' = Home phone, '04' = Private or personal phone, '05' = Others.
112	PHONE_4	VARCHAR2	30		The fourth phone number at which the client can be reached.
113	PHONE_4_TYPE	CHAR	2		This is the fourth phone type of client phone number. Possible values are: '01' = Office phone, '02' = Mobile phone, '03' = Home phone, '04' = Private or personal phone, '05' = Others.
114	EMAIL_1	VARCHAR2	256		This is the client's 1st email address.
115	EMAIL_2	VARCHAR2	256		This is the client's 2nd email address.
116	DOCUMENT_LIST_ID	VARCHAR2	10		The document list identifier referring the list of documents related to a given client. Those documents are stored in the 'CLIENT_DOCUMENT_LIST' tables with this ID.
117	SENSITIVE_OPERATION_RECORD	CHAR	1		The sensitive operation record code. Possible values are: 'I' = Insert 'M' = Update 'C' = Cancel 'D' = Delete

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'X' = Special condition
118	USER_CREATE	VARCHAR2	15		ID of the user when record created.
119	DATE_CREATE	DATE	7		Record creation date and time.
120	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
121	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.2.2 CORPORATE

This table contains the minimal elements required to identify the corporate, its parent corporate and other critical elements:

- Corporate number
- Corporate parent to denote the hierarchy
- Bank to denote the issuing bank
- Liability type
- Contact information
 - Email
 - Addresses
 - Phone number
- Etc.

Refer to "[Corporate](#)" section in UG1063-Corporate management for more details.

Each column of this table is described in detail in the next section.

6.2.2.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	CORPORATE_ID	VARCHAR2	15		This is the corporate identification number. This field is required.
2	CORPORATE_PARENT	VARCHAR2	15		This is to indicate the identification number of the possible corporate parent. It must exist in 'CORPORATE' table if any (i.e.: if the current corporate record is a sub-corporate)
3	CORPORATE_NAME	VARCHAR2	40		This is the corporate name.
4	EMBOSSING_LINE	VARCHAR2	40		This is the corporate name that may be

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					embossed on the corporate cards.
5	CORPORATE_LEVEL	NUMBER	2		Level of sub-corporate within the corporate hierarchy.
6	APPLICATION_ID	VARCHAR2	24		The application identification number with which the corporate has been subscribed.
7	CONTRACT_ELEMENT_ID	VARCHAR2	24		The contract element id with which the corporate has been subscribed.
8	MAIN_CORP_ID	VARCHAR2	15		The corporate main id. It must be defined in 'CORPORATE' table (if any, i.e.: if the current corporate record is a sub-corporate)
9	CORPORATE_HOST_ID	VARCHAR2	15		Identification number of the corporate in case the PowerCARD Application communicates with an external HOST system. As defined in 'CLIENT' table.
10	HIERARCHY_CODE	CHAR	6		Hierarchy code with which the corporate is subscribed/ boarded. It must exist in 'CORP_HIERARCHY_PARAM' table.
11	BANK_CODE	CHAR	6		Issuer financial institution code to which the corporate belongs. This code must be defined in 'BANK' table.
12	BRANCH_CODE	CHAR	6		Branch to which the corporate belongs. It should be defined in 'BRANCH' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
13	SOCIO_PROF_CODE	CHAR	4		Socio-professional category of the corporate. It should be present in the 'SOCIOPROF_LIST' table.
14	ACTIVITY_CODE	CHAR	4		This is to indicate the corporate client activity. It must be defined in 'CLIENT_ACTIVITY_SET' table.
15	CUSTOMER_SEGMENT	CHAR	3		This is to indicate the corporate, client segment. It must be defined in 'CUSTOMER_SEGMENT' table.
16	TAX_REGISTRY_OFFICE	CHAR2	30		Corporate tax registry office identification.
17	TAX_NUMBER	VARCHAR2	30		Corporate tax number as taxpayer.
18	ESTABLISHED_DATE	DATE	7		This is to indicate date on which the Corporate product association contract has been established.
19	REGISTERED_STOCK	NUMBER	18		This column is not used in V3.5.
20	CURRENT_YEAR_TRANSFER	NUMBER	18	3	This column is not used in V3.5.
21	PREVIOUS_YEAR_TRANSFER	NUMBER	18	3	This column is not used in V3.5.
22	INCREASE_RATE	NUMBER	9	6	The expected increase rate of stock inventory in terms of cards issued for the corporate on the subsequent year.
23	CARD_STAT_RESPONSIBLE_NAME	CHAR2	30		This column is not used in V3.5.
24	CARD_STAT_RESPONSIBLE_ACTIVITY	CHAR2	30		This column is not used in V3.5.
25	CARD_MAIL_RESPONSIBLE_NAME	CHAR2	30		This column is not used in V3.5.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
26	CARD_MAIL_RESPONSIBLE	CHAR	30		This column is not used in V3.5.
27	LIABILITY_INDICATOR	CHAR	1		Liability involved for the corporate. Possible values are: 'P' = Personal, 'I' = Individual (personal liability for corporate cards), 'J' = Joint (Both personal and corporate liability for corporate cards), 'F' = Full (Corporation only is liable).
28	OWNER_CODE	CHAR	2		This is to define the customer type. This owner code must be defined in 'OWNER_LIST' table
29	OWNER_CATEGORY	CHAR	1		Owner category. It must be defined in 'OWNER_LIST' table.
30	PR_CARE_OF	VARCHAR2	64		Mail recipient in the primary address.
31	PR_LINE_1	VARCHAR2	64		Primary address line 1.
32	PR_LINE_2	VARCHAR2	64		Primary address line 2.
33	PR_LINE_3	VARCHAR2	64		Primary address line 3.
34	PR_LINE_4	VARCHAR2	64		Primary address line 4.
35	PR_ZIP_CODE	VARCHAR2	10		Zip code of corporate primary address. Depending on the financial institution setup, the zip code can be mandatory, optional or not managed. When indicated, this code must be defined in

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'ZIP_CODE' table.
36	PR_REGION_CODE	CHAR	3		This is the region representing the administrative division of the country where the applicant primary address is located. It must be exist in 'REGION' table.
37	PR_REGION_NAME	VARCHAR2	40		This is the region representing the administrative division of the country where the applicant primary address is located. It considered as free text.
38	PR_COUNTRY_CODE	CHAR	3		Country where the corporate primary address is located. It must be exist in 'COUNTRY' table.
39	PR_CITY_CODE	CHAR	5		City where the corporate primary address is located. It must be exist in 'CITY' table.
40	PR_EMAIL	VARCHAR2	50		Email sending mode.
41	PR_URL	VARCHAR2	60		URL of the corporate website.
42	PR_PHONE_1	VARCHAR2	20		First phone number, it's controlled by the system to ensure that is not containing letters.
43	PR_PHONE_1_TYPE	CHAR	1		Phone type of the captured first phone number. Possible values are: '0' = Office phone, '1' = Mobile phone,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'2' = Home phone, '3' = Private or personal phone, '4' = Others.
44	PR_PHONE_2	VARCHAR2	20		Second phone number, it's controlled by the system to ensure that is not containing letters.
45	PR_PHONE_2_TYPE	CHAR	1		Phone type of the captured second phone number. Possible values are: '0' = Office phone, '1' = Mobile phone, '2' = Home phone, '3' = Private or personal phone, '4' = Others.
46	PR_PHONE_3	VARCHAR2	20		The third phone number, it's controlled by the system to ensure that is not containing letters.
47	PR_PHONE_3_TYPE	CHAR	1		Phone type of the captured third phone number. Possible values are: '0' = Office phone, '1' = Mobile phone, '2' = Home phone, '3' = Private or personal phone, '4' = Others.
48	PR_PHONE_4	VARCHAR2	20		Fourth phone number, it's controlled by the system to ensure that is not containing letters.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
49	PR_PHONE_4_TYPE	CHAR	1		Phone type for the captured fourth phone number. Possible values are: '0' = Office phone, '1' = Mobile phone, '2' = Home phone, '3' = Private or personal phone, '4' = Others.
50	PR_ADDRESS_TYPE	CHAR	1		Type of the primary address being defined for the corporate. The primary address types must be existing in 'ADDRESSES_TYPE_LIST' table.
51	PR_FAX	VARCHAR2	20		This is the corporate fax.
52	PR_SENDING_MODE	CHAR	1		Sending mode for communication with the corporate. Possible values are: 'M' = Courier, 'F' = Fax, 'E' = E-mail.
53	PR_CITY_NAME	CHAR	32		Name of the city where the corporate primary address is located. It must be defined in 'CITY' table.
54	PR_DEFAULT_USAGE	CHAR	2		This field determines the usage of the primary address with 'Mail' as default value. Possible values are: '01' = Mail, '02' = Statement,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'03' = Dispute, '04' = Loyalty.
55	PR_STATUS	CHAR	1		This is the primary address status.
56	PR_STATUS_START_DATE	DATE	7		This field indicates the start date when the STATUS_CODE field gets the value 'N'
57	PR_STATUS_END_DATE	DATE	7		This field indicates the end date when the STATUS_CODE field gets the value 'S'.
58	PR_IS_MANDATORY	CHAR	1		This is to indicate that the Primary address, with the assigned primary address type, is mandatory as defined in the Client Mandatory Addresses configuration or not. 'Y' (Yes) or Null
59	ADVANCED_ADDRESS_ASSOC_FLAG	CHAR	10		This column is not used in V3.5.
60	ADDRESS_LIST_ID	VARCHAR2	10		In case of corporate having secondary addresses in addition to the primary one, this field indicates the indicator of list of the Corporate created addresses. This code must be defined in 'ADDRESS_LIST' table.
61	NB_ACCOUNTS_LINK	NUMBER	2		This is the linked account number captured.
62	DATA_DISCLOSURE	CHAR	2		This is to indicate the corporate data disclosure option. Possible values of the disclosure flag are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'ND' = No disclosure, 'HI' = Handling information, 'TI' = Transmission of the information, 'HT' = Handling/ Transmission of the information.
63	ENTITY_CODE	CHAR	2		This is the type of the entity under process set by default to entity origin of the link, here 'CO' for Corporate.
64	STATUS_CODE	CHAR	1		This field indicates the address status code. Possible values are: 'N'= Normal, 'C'= Canceled, 'S' = Suspend. It should be defined in 'STATUS_LIST' table
65	STATUS_DATE	DATE	7		The date of the last status updated.
66	STATEMENT_CODE	CHAR	2		Statement code. It should be defined in 'STATEMENT_PARAMETERS' table.
67	LANGUAGE_CODE	CHAR	3		Corporate language code. It must be defined in 'LANGUAGE_LIST' table.
68	GROUP_TYPE_ID	CHAR	3		This field defines the type group identification.
69	BILLING_INDICATOR	CHAR	1		This column indicates if an account is associated to this corporate or not. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'C' = Centrally billed (there is an account associated to this corporate), 'I' = Individually billed (Accounts will be associated to employee PANS).
70	DEFAULT_GROUP_ID	VARCHAR2	15		The identification of the Group (Individual card, Business card).
71	SENSITIVE_OPERATION_RECORD	CHAR	1		Sensitive operation record code. Possible values are: 'I' = Insert, 'M' = Update, 'C' = Cancel, 'D' = Delete, 'X' = Special condition.
72	AUTHORIZED_SIGNATURE	VARCHAR2	120		This column is not used in V3.5.
73	DOCUMENT_LIST_ID	VARCHAR2	10		Document list identifier referring the list of documents related to a given client. Those documents are stored in the 'CLIENT_DOCUMENT_LIST' table with this ID and ENTITY_CODE = 'CO' as corporate
74	CORPORATE_LIMIT_MNG_FLAG	CHAR	1		Not used.
75	CURRENCY_CODE	CHAR	3		In case CUSTOMER_LIMIT_MNG_FLAG = 'Y', this column indicates the currency in which limits are expressed. This code must be present in 'CURRENCY_TABLE' table
76	CREDIT_LIMIT	NUMBER	18		In case 'CORPORATE_LIMIT_MNG_FLAG' column is set to

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'Y', this column is used to indicate the credit limit of the corporate.
77	CREDIT_LIMIT_CASH	NUMBER	18		In case 'CORPORATE_LIMIT_MNG_FL' column is set to 'Y', this column is used to indicate the cash limit of the corporate.
78	ADDITIONAL_LOAN	NUMBER	18		In case 'CORPORATE_LIMIT_MNG_FL' field is set to 'Y', this column is used to indicate the additional loan limit of the corporate.
79	ACCEPT_CARD	CHAR	1		This column indicates if this corporate can issue directly the cards for their employees in other words if the cards can be linked directly to this corporate or not. Possible values are: 'Y' = Yes, 'N' = No.
80	CORP_TYPE_CODE	CHAR	3		Unique code identifying the type of corporate. It must exist in CORPORATE_TYPE table
81	ACCEPTS_SOLIDARITY	CHAR	1		This column indicates whether the corporate accepts solidarity or not. Possible values are: 'Y' = Yes 'N' = No
82	SOLIDARITY_FROM	NUMBER	3		Number of unpaid on the employee from which the corporate will take in charge the payment on behalf its employees. This column becomes

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					mandatory in case the ACCEPTS_SOLIDARITY column is set to 'Y'.
83	USER_CREATE	VARCHAR2	15		ID of the user when record created.
84	DATE_CREATE	DATE	7		Record creation date and time.
85	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
86	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.2.3 CORP_AUTH_SIGNATORY

This table is used to define the persons who have the authority to sign a document or contract in the organization. It allows to define several authorized signatories for a Corporate.

Refer to '[Authorized signatories](#)' section in UG1063-Corporate management for more details.

Each column of this table is described in detail in the next section.

6.2.3.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code. This code must be defined in 'BANK' table.
2 	CORPORATE_ID	VARCHAR2	15		Corporate identification number. It must be defined in 'CORPORATE' table.
3 	AUTHORIZED_SIGNATORY_ID	VARCHAR2	15		Identifier of the authorized signatory.
4	TITLE_CODE	CHAR	2		Title of the person being defined (Mr/ Mrs/Miss, etc...). It must be defined in 'TITLE_LIST' table.
5	FAMILY_NAME	VARCHAR2	40		Family name of the authorized signatory.
6	FIRST_NAME	VARCHAR2	40		The first name of the authorized signatory.
7	POSITION	VARCHAR2	30		The position held by the authorized signatory within the corporate.
8	BIRTH_DATE	DATE	7		This is the birth date of the person authorized to sign.
9	LEGAL_IDENTIFIER	VARCHAR2	15		Legal identification number.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
10	NATIONALITY_CODE	CHAR	3		The nationality of the concerned authorized signatory being defined. It must be defined in 'COUNTRY' table.
11	SIGNING_POWER	CHAR	2		The signing authority of the authorized signatory. Possible values are: 'S0' = Sole signing officer, 'J2' = Second joint signing officer, 'J3' = Third joint signing officer.
12	AUTHORIZED_BY	CHAR	1		How the signature has been authorized. Possible values are: 'A' = Authorized OECD approach, 'B' = Board resolution, 'C' = Corporate resolution (For sole signing officers), 'D' = Letter for delegation of authority, 'M' = Memorandum of agreements, 'P' = Power of attorney.
13	DELEGATION_AUTHORITY	CHAR	1		This column is used to specify if the authorized signatory needs an approval user. Possible values are: 'Y' = Yes 'N' = No.
14	AUTH_DOC_EXP_DATE	DATE	7		The date after which the authority is no longer valid.
15	STATUS_CODE	CHAR	1		The current authority status code. It must be defined in 'STATUS_LIST' table.
16	STATUS_DATE	DATE	7		The date when the status has been modified.
17	USER_MODIF	VARCHAR2	15		ID of the user when record created.
18	DATE_CREATE	DATE	7		Record creation date and time.
19	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
20	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.2.4 CORP_CONTACT_ENTITIES

This table is used to define one or several contacts linked to the concerned Corporate. It allows managing the setup of multi-contact entities data of a given corporate such as Business owner, Key contact & Recipient.

Refer to '[Corporate contacts](#)' section in UG1063-Corporate management for more details.

Each column of this table is described in detail in the next section.

6.2.4.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code. This code must be defined in 'BANK' table.
2 	CORPORATE_ID	VARCHAR2	15		The corporate identification number. It must be defined in 'CORPORATE' table.
3 	ENTITY_CODE	CHAR	2		This column characterizes the way that the contact represents his/her company in the organization. Possible values are: 'BO' = Business owner, 'KC' = Key contact, 'RE' = Recipient.  Note This field is mandatory.
4 	ENTITY_ID	VARCHAR2	24		The staff identifier of the contact being defined.
5	FAMILY_NAME	VARCHAR2	40		The family name of the contact.
6	FIRST_NAME	VARCHAR2	40		The first name of the contact.
7	TITLE_CODE	CHAR	2		Title of the person being defined (Mr/ Mrs/Miss, etc...). It must be defined in 'TITLE_LIST' table.
8	NATIONALITY_CODE	CHAR	3		The nationality of the concerned person being defined. It must be defined in 'COUNTRY' table.
9	OWNERSHIP_STATUS	CHAR	1		In case, ENTITY_CODE = 'BO' (Business owner), this is used to define ownership status. Possible values are: 'O' = Owner, 'S' = Shareholder, 'X' = Not applicable.
10	HIERARCHY	VARCHAR2	40		The position of the current contact person; like for example: CEO, manager, assistant, sales....
11	STATUS_CODE	CHAR	1		The current contact status code. It must be defined in 'STATUS_LIST' table.
12	STATUS_DATE	DATE	7		The date when the status has been modified.
13	EMAIL	VARCHAR2	50		The E-mail of the person being defined.
14	PHONE_1	VARCHAR2	20		This is the contact first phone number.
15	PHONE_1_TYPE	CHAR	1		This is the phone type of the first phone number. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'0' =Office fixed-line phone, '1' = Office mobile phone, '2' = Home phone, '3' = Personal mobile phone, '4' = Others.
16	PHONE_2	VARCHAR2	20		This is the contact second phone number.
17	PHONE_2_TYPE	CHAR	1		This is the phone type of the second phone number. Possible values are: '0' =Office fixed-line phone, '1' = Office mobile phone, '2' = Home phone, '3' = Personal mobile phone, '4' = Others.
18	PHONE_3	VARCHAR2	20		This is the contact third phone number.
19	PHONE_3_TYPE	CHAR	1		This is the phone type of the third phone number. Possible values are: '0' =Office fixed-line phone, '1' = Office mobile phone, '2' = Home phone, '3' = Personal mobile phone, '4' = Others.
20	PHONE_4	VARCHAR2	20		This is the contact fourth phone number.
21	PHONE_4_TYPE	CHAR	1		This is the phone type of the fourth phone number. Possible values are: '0' =Office fixed-line phone, '1' = Office mobile phone, '2' = Home phone, '3' = Personal mobile phone, '4' = Others.
22	USER_MODIF	VARCHAR2	15		ID of the user when record created.
23	DATE_CREATE	DATE	7		Record creation date and time.
24	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
25	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.2.5 CORP_FINANCIAL_FACT

This table is used to store the corporate financial assessments information and the number of PANs for the main corporate. Those information are used by the system to assess the company's risk and allows the system to propose the list of hierarchies to be selected for the current application according to the eligible hierarchies predefined.

Refer to '[Financial assessment section data description](#)' in UG1063-Corporate management for more details.

Each column of this table is described in detail in the next section.

6.2.5.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code. This code must be defined in 'BANK' table.
2 	CORPORATE_ID	VARCHAR2	15		The corporate identification number. It should be defined in 'CORPORATE' table.
3 	FISCAL_YEAR_START_DATE	DATE	7		The fiscal year start date.
4 	FIELD_YEAR_END_DATE	DATE	7		The fiscal year end date.
5	NUMBER_CARDS	NUMBER	15		Number of payment instruments that the corporate can issue.
6	CURRENCY_CODE	CHAR	3		The currency in which the amounts are expressed. This code must be present in 'CURRENCY_TABLE' table.
7	EQUITY_AMOUNT	NUMBER	18	3	The paid-up share capital and its currency.  Note When the currency value is defined in the EQUITY_AMOUNT field, the other amounts will have the same currency.
8	RESERVE_AMOUNT	NUMBER	18	3	The money set aside for a financial institution's day-to-day operations, or for meeting emergency liquidity problems.
9	ACCUMULATED_LOSSES_AMOUNT	NUMBER	18	3	The loss that the corporate keeps in its accounts from one accounting period to the next and adds to a new loss or takes away from a profit.
10	NET_WORTH_AMOUNT	NUMBER	18	3	The net worth amount. It is automatically calculated by taking the Equity + Reserve - Accumulated losses amounts.  Note This field is read-only.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
11	TOTAL_DEBT_AMOUNT	NUMBER	18	3	The sum of all long-term liabilities and is identified on the corporate balance sheet (Loans and borrowings).
12	DEBT_EQUITY_RATIO	NUMBER	18	3	This is the debt equity ratio. It is automatically calculated by taking the Total debt / Net worth amounts.  Note This field is read-only.
13	CURRENT_ASSETS_AMOUNT	NUMBER	18	3	These are all resources that a company can use in the current period to purchase new assets, pay debts and expenses, or convert into cash.
14	INVENTORY_AMOUNT	NUMBER	18	3	It is the value of corporates current assets including raw materials and work in progress and finished goods.
15	QUICK_ASSETS_AMOUNT	NUMBER	18	3	The amount of quick assets. It is automatically calculated by taking the Current assets - Inventory amounts.  Note This field is read-only.
16	CURRENT_LIBILITIES_AMOUNT	NUMBER	18	3	The payment that the corporate must make within 12 months.
17	CURRENT_RATIO	NUMBER	18	3	This is the current ratio. It is automatically calculated by taking the Current assets / Current liabilities amounts.  Note This field is read-only.
18	QUICK_RATIO	NUMBER	18	3	This is the quick ratio. It is automatically calculated by taking the Quick assets/ Current liabilities amounts.  Note This field is read-only.
19	ANNUAL_SALS_AMOUNT	NUMBER	18	3	The annual revenue. It is the total amount of money made by the corporate in a given year before costs or expenses are taken out.
20	GROSS_PROFIT_AMOUNT	NUMBER	18	3	It is the profit that the corporate makes after deducting the costs associated with making and selling its products, or the costs associated with providing its services

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
21	NET_PROFIT_AMOUNT	NUMBER	18	3	The money made by a corporate or part of a corporate for a particular period after all costs, taxes, etc. have been paid.
22	COST_OF_SALES_AMOUNT	NUMBER	18	3	The amount that the corporate spends on manufacturing and selling products in a particular financial period, for example, on wages and raw materials.
23	TOT_NET_WORTH_LIABILITIES_AM	NUMBER	18	3	The Cash Profit / (Loss).
24	USER_MODIF	VARCHAR2	15		ID of the user when record created.
25	DATE_CREATE	DATE	7		Record creation date and time.
26	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
27	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.2.6 ELIGIBLE_PACKS_CORP

This table contains the Packs offered for the employees of the Corporate.

Refer to "[Packs selection](#)" section under the Employee products/packs selection in UG1063-Corporate management user's guide for more details.

Each column of this table is described in detail in the next section.

6.2.6.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters of eligible pack for the corporate are being defined. This code must be defined in 'BANK' table.
2 	CORPORATE_ID	CHAR	15		The corporate identification number. It must be defined in 'CORPORATE' table.
3 	PACK_CODE	CHAR	6		The eligible pack for the corporate. It must be defined in 'CATALOGUE_PACK' table.
4	ABRV_WORDING	VARCHAR2	16		Abbreviation wording of the pack.
5	WORDING	VARCHAR2	32		The pack wording.
6	DESCRIPTION	VARCHAR2	512		Shortened description of pack.
7	CURRENT_LEVEL_AVAILABILITY	CHAR	1		This flag indicates if corporate allows the boarding with the selected pack. Possible values are: 'Y' = Yes, 'N' = No.
8	SUB_LEVEL_AVAILABILITY	CHAR	1		This flag indicates if the corporate allows its sub level corporates to board with the selected pack. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'Y' = Yes, 'N' = No.
9	PARENT_LEVEL_AVAILABILITY	CHAR	1		This flag reflects the value of 'SUB_LEVEL_AVAILABILITY' field set by the parent corporate. Possible values are: 'Y' = Yes, 'N' = No.
10	USER_MODIF	VARCHAR2	15		ID of the user when record created.
11	DATE_CREATE	DATE	7		Record creation date and time.
12	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
13	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.2.7 ELIGIBLE_PACKS_PRODUCTS_CORP

This table contains Catalogue products (either Payment instrument, Account, Loan, Loyalty, Add-on services, Services) or Packs used for the employees of the Corporate. Refers to ["Employee products/packs selection"](#) section in UG1063-Corporate management userguide for more details.

Each column of this table is described in detail in the next section.

6.2.7.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code. This code must be defined in 'BANK' table.
2 	CORPORATE_ID	VARCHAR2	15		The corporate identification number. It must be defined in 'CORPORATE' table.
3 	PACK_CODE	CHAR	6		The eligible pack for the corporate. It must be defined in 'CATALOGUE_PRODUCT' table.
4 	PRODUCT_CODE	CHAR	6		Code identifying the selected products for the employee. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
5 	PRODUCT_VERSION	VARCHAR2	10		Version of the products selected for the employee of the corporate. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
6 	TREE_SEQUENCE_ID	VARCHAR2	15		This field is reserved for internal use.
7	TREE_PARENT_ID	VARCHAR2	15		This field is reserved for internal use.
8	PRODUCT_TYPE	CHAR	1		The product type of the product catalog. Possible values are: 'P' = Payment instrument, 'A' = Account,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'N' = Loan, 'Y' = Loyalty, 'C' = Add on services account, 'I' = Add on services PI.
9	DESCRIPTION	VARCHAR2	512		Shortened description of pack.
10	MANDATORY	CHAR	1		Mandatory flag. Possible values are: 'Y' = Yes 'N' = No
11	XML_FILE	CLOB	4000		XML value of the product catalog.
12	USER_MODIF	VARCHAR2	15		ID of the user when record created.
13	DATE_CREATE	DATE	7		Record creation date and time.
14	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
15	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.2.8 ELIGIBLE_PRODUCTS_CORP

This table contains the Catalogue products offered for the employees of the Corporate.

Refer to ["Products selection"](#) section under the Employee products/packs selection in UG1063-Corporate management for more details.

Each column of this table is described in detail in the next section.

6.2.8.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code. This code must be defined in 'BANK' table.
2 	CORPORATE_ID	VARCHAR2	15		The corporate identification number. It must be defined in 'CORPORATE' table.
3 	PRODUCT_CODE	CHAR	6		Code identifying the selected product for the employee. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
4 	PRODUCT_VERSION	VARCHAR2	10		Version of the product selected for the employee of the corporate. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
5	PRODUCT_TYPE	CHAR	1		The product type of the product catalog. Possible values are: 'P' = Payment instrument, 'A' = Account, 'N' = Loan, 'Y' = Loyalty,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'C' = Add on services account, 'I' = Add on services PI.
6	DESCRIPTION	VARCHAR2	40		Description of the product.
7	CURRENT_LEVEL_AVAILABILITY	CHAR	1		This flag indicates if corporate allows the boarding with the selected product. Possible values are: 'Y' = Yes, 'N' = No.
8	SUB_LEVEL_AVAILABILITY	CHAR	1		This flag indicates if the corporate allows its sub level corporates to board with the selected product. Possible values are: 'Y' = Yes, 'N' = No.
9	PARENT_LEVEL_AVAILABILITY	CHAR	1		This flag reflects the value of 'SUB_LEVEL_AVAILABILITY' set by the parent corporate. Possible values are: 'Y' = Yes, 'N' = No.
10	XML_FILE	CLOB	4000		XML value of the product catalog.
11	USER_MODIF	VARCHAR2	15		ID of the user when record created.
12	DATE_CREATE	DATE	7		Record creation date and time.
13	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
14	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.2.9 FLEET_DRIVER

Drivers can be boarded for a given corporate without being linked to a vehicle. This will allow the fleet corporate to capture driver details independently from the PAN boarding process. All these details are stored in this table.

Refer to "[Fleet driver](#)" section in UG1063-Corporate management for more details.

Each column of this table is described in detail in the next section.

6.2.9.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code. It must be present in the 'BANK' table
2 	CORPORATE_ID	VARCHAR2	15		The corporate id to which the driver is associated. It should be defined in 'CORPORATE' table.
3 	DRIVER_STAFF_ID	VARCHAR2	20		The driver staff id number.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
4	DRIVER_ID_NUMBER	VARCHAR2	20		The identification number of the driver staff.
5	TITLE_CODE	CHAR	2		The driver title code. It must be defined in 'TITLE_LIST' table.
6	NAME	VARCHAR2	20		The driver's first and last name.
7	BIRTH_DATE	DATE	7		The driver's date of birth.
8	LICENSE_NUMBER	VARCHAR2	20		The driver's license number.
9	LICENSE_ISSUING_DATE	DATE	7		The driver license issuing date.
10	LICENSE_EXPIRY_DATE	DATE	7		The driver license expiry date.
11	LICENSE_ISSUING_COUNTRY	VARCHAR2	32		The driver license issuing country.
12	LICENSE_ISSUING_CITY	VARCHAR2	32		The driver license issuing city.
13	STATUS_CODE	CHAR	1		Status of the driver. It must be already defined in 'STATUS_LIST' table.
14	STATUS_DATE	DATE	7		Date in which the event of a driver status change.
15	STATUS_REASON	CHAR	2		The reason why the status of the driver is being changed. It must be already defined in 'STATUS_REASON_LIST' table.
16	PHONE_NUMBER	VARCHAR2	20		The driver phone number. It is used to communicate the driver id number to the driver.
17	USER_MODIF	VARCHAR2	15		ID of the user when record created.
18	DATE_CREATE	DATE	7		Record creation date and time.
19	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
20	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.2.10 FLEET_VEHICLE_DRIVER_LINK

Vehicles can be boarded for a given corporate without being linked to a driver. This will allow the fleet corporate to capture vehicles details independently from the PAN boarding process. All these details are stored in this table.

Refer to "[Fleet vehicle](#)" section in UG1063-Corporate management for more details.

Each column of this table is described in detail in the next section.

6.2.10.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution identification code of the parameter being defined. It should be present in 'BANK' table.
2 	CORPORATE_ID	VARCHAR2	15		The corporate identification code. This represents the sub corporate id . It must be present in the 'CORPORATE' table

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
3 	REGISTRATION_NUMBER	VARCHAR2	20		It is a unique number that identifies the vehicle.
4	VIN_NUMBER	VARCHAR2	40		The vehicle identification number.
5	MODEL_REFERENCE	VARCHAR2	16		The model reference. Must be present in the 'VEHICLE_MODEL_LIST' table.
6	CAPTURE_DATE	DATE	7		The date when the vehicle has been boarded.
7	ODOMETER	NUMBER	18		The Odometer in kilometers.
8	SUPPLEMENTARY_LITERS	NUMBER	3		The supplementary quantity expressed in liters.
9	COLOR_CODE	VARCHAR2	6		The vehicle color.
10	NEGO_FUEL_MARGIN	NUMBER	9		The negotiated fuel margin.
11	STATUS_CODE	CHAR	1		The status code. It must be already defined in 'STATUS_LIST' table.
12	STATUS_DATE	DATE	7		The date when the status of the fleet vehicle has been last changed.
13	STATUS_REASON	CHAR	2		The reason why the status of the fleet vehicle has been changed. It must be already defined in 'STATUS_REASON_LIST' table.
14	FLEET_NUMBER	VARCHAR2	8		The fleet number.
15	USER_MODIF	VARCHAR2	15		ID of the user when record created.
16	DATE_CREATE	DATE	7		Record creation date and time.
17	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
18	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.2.11 FLEET_VEHICLE_DRIVER_LINK

A corporate vehicle can be associated to 1 or multiple drivers. This table is used to maintain the link between the vehicle and the driver.

Refer to ["Fleet vehicle/driver link"](#) section in UG1063-Corporate management for more details.

Each column of this table is described in detail in the next section.

6.2.11.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code. It must be present in the 'BANK' table
2 	CORPORATE_ID	VARCHAR2	15		The corporate internal identification to which the vehicle and the driver are linked. It should be defined in 'FLEET_VEHICLE' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
3 	REGISTRATION_NUMBER	VARCHAR2	20		The vehicle registration plate number. It is a unique number that identifies the vehicle.
4 	DRIVER_STAFF_ID	VARCHAR2	20		The driver staff id number.
5	USER_MODIF	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.2.12 FUEL_PROVIDER_CORP_DTLS

This table is used to store the relationship between the corporate and the fuel provider/oil company and store the rebate option that applies to this partnership (corporate, fuel provider/oil company).

Refer to "[Fuel provider agreement](#)" section in UG1063-Corporate management for more details.

Each column of this table is described in detail in the next section.

6.2.12.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution identification code of the parameter being defined. It should be present in 'BANK' table.
2 	CORPORATE_ID	VARCHAR2	15		The primary key of the Fuel provider corporate. It must be present in the 'CORPORATE' table.
3 	PROVIDER_CODE	VARCHAR2	6		The fuel provider or oil company such as Shell, Total, Exxon, etc. who has signed an agreement with the corporate. It must be defined in 'FUEL_PROVIDER_LIST' table.
4	REBATE_OPTION	CHAR	1		The rebate option. Possible values are: 'A' = Send to oil company for price rebate, 'B' = Price rebate at point of sale.
5	USER_MODIF	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.2.13 USER_DEFINED_FIELDS

In case the Issuers requires other specific information not available in the CMS, the additional fields table gives the possibility to store extra fields required by the institution without changing the structure of database. This functionality is available for Customer, Corporate, Payment Instrument and Account entities.

Refer to "[Additional fields](#)" section in UG1063-Customer management for more details.

Each column of this table is described in detail in the next section.

6.2.13.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code. This code must be defined in 'BANK' table.
2 	ENTITY_CODE	CHAR	2		Entity code. Possible values are: 'CL' = Client, 'CH' = Payment instrument, 'CO' = Corporate, 'SA' = Financial account.
3 	ENTITY_ID	VARCHAR2	24		The identifier of the concerned entity. For example: it refers to the client code in case of ENTITY_CODE = 'CL' (Client). The PAN in case of ENTITY_CODE = 'CH' (Payment instrument).
4 	FIELD_NAME	VARCHAR2	30		The additional field name that is added.
5	FIELD_VALUE	VARCHAR2	256		The value of the additional field in case of FIELD_TYPE = '4' (Free Text).
6	FIELD_CATEGORY	CHAR	1		The category of the defined additional field. Possible values are: 'I' = Input, 'O' = Output (For future use).
7	DATA_FAMILY_TYPE	CHAR	3		The family type of the additional field as configured in 'USER_DEFINED_FIELDS_PARAM' table (Risk, Finance, Compliance).
8	FIELD_TYPE	CHAR	1		The type of the concerned additional field. Possible values are: '1' = Date, '2' = Number, '3' = Amount, '4' = Free Text, '5' = Static List, '6' = Dynamic list.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
9	DATE_VALUE	DATE	7		The value of the additional field in case of the FIELD_TYPE = '1' (Date).
10	NUMBER_VALUE	NUMBER	18	0	The value of the additional field in case of FIELD_TYPE = 2 (Number).
11	AMOUNT_VALUE	NUMBER	18	3	The value of the additional field in case of FIELD_TYPE = '3', (Amount).
12	CURRENCY_CODE	CHAR	3		The amount currency in case if the additional field is Amount (having the FIELD_TYPE = '3' (Amount). This code must be defined in the 'CURRENCY_TABLE' table.
13	STATIC_LIST_VALUE	VARCHAR 2	16		The value of the additional field in case of FIELD_TYPE = '5' (Static list).
14	DYNAMIC_LIST_VALUE	VARCHAR2	24		The value of the additional field in case of FIELD_TYPE = '6' (Dynamic list).
15	COLLECTION_NAME	VARCHAR2	30		The static list code in case of FIELD_TYPE = '5' (Static list).
16	USER_MODIF	VARCHAR2	15		ID of the user when record created.
17	DATE_CREATE	DATE	7		Record creation date and time.
18	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
19	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

6.2.14 NEGOC_CORP_POSTING_RULES

This table is used to store negotiated custom posting rules for transactions performed by a given corporate's PANs.

Each column of this table is described in detail in the next section.

6.2.14.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	CORPORATE_ID	VARCHAR2	15		The corporate ID as criterion for the negotiated corporate transaction posting rule. It should be defined in the 'CORPORATE' table.
2 	SEQUENCE_ID	NUMBER	10		Sequence number identifying the negotiated corporate transaction posting rule criteria parameters.
3	BANK_CODE	CHAR	6		Financial institution for which parameters are being defined. This code must be defined in 'BANK' table.
4	DESCRIPTION	VARCHAR2	64		Shortened description of the negotiated corporate transaction posting rule.
5	MCC	CHAR	4		The merchant category code and description. It must be defined in 'MCC' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
6	MCC_GROUP	CHAR	4		The merchant category group Code. It should be defined in 'MCC_RANGE' table.
7	TRANSACTION_CODE	CHAR	2		The transaction code (Purchase, ATM Cash, Cash Advance ... etc.). It should be defined in 'TRANSACTIONS_DEFINITION' table.
8	TRANSACTION_CATEGORY	NUMBER	2		The transaction category. Possible values are: '1' = Airline, '2' = Lodging, '3' = Rent car, '4' = Restaurant, '5' = Medical, '6' = Mail order, '7' = Purchase, '8' = Other purchase, '9' = Withdrawal, '10' = Quasi cash, '11' = Cash, '12' = Transfer, '13' = E-com, '14' = T&E.
9	TRANSACTION_CURRENCY	CHAR	3		The transaction currency applicable for this negotiated rule. It should be defined in 'CURRENCY_TABLE' table.
10	ACQUIRER_COUNTRY_CODE	CHAR	3		The Local/foreign country indicator applicable as criterion for the negotiated corporate transaction posting rule. It should be defined in 'COUNTRY' table.
11	CURRENCY_FLAG	CHAR	1		The transaction currency (Local or foreign currency) as a criterion for the negotiated corporate transaction posting rule (Cross border territory). Possible values are: 'F' = Foreign currency, 'L' = Local currency, Or NULL for any currency.
12	COUNTRY_FLAG	CHAR	1		The country territory indicator applicable as criterion for the negotiated corporate transaction posting rule. It is to indicate whether the transaction acquiring country is a local or foreign country. Possible values are: 'F' = Foreign country, 'L' = Local country,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Or NULL for any country.
13	LIST_PRODUCT_CODE	VARCHAR2	15		This column is not used in V3.5.
14	POSTING_DESTINATION	CHAR	2		This column is not used in V3.5.
15	CORPORATE_LEVEL	NUMBER	2		This column is not used in V3.5.
16	POSTING_ACCOUNT_TYPE	CHAR	2		This column is not used in V3.5.
17	POSTING_ACCOUNT_SEQUENCE	NUMBER	2		This column is not used in V3.5.
18	DESTINATION_ACCOUNT_NBR	VARCHAR2	24		The account number where transaction are going to be posted.
19	USER_MODIF	VARCHAR2	15		ID of the user when record created.
20	DATE_CREATE	DATE	7		Record creation date and time.
21	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
22	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

7 Corporate management

7.1 Parameter tables

7.1.1 CORP_HIERARCHY_PARAM

This table is used to define the possible corporate hierarchy supported by the institution, it's a kind of template that institutions can offer to their customers (Corporate) taking into consideration the volume of the corporate.

Different types of hierarchies are possible:

- Small Companies, with one level for example, only a main corporate is required and all the cardholders will be linked to this corporate
- Medium-sized companies, with two levels for example, the first level represents the main corporate under which there are 3 sub-corporate/divisions at the second level. Cardholders can be linked either to the main corporate or/and to other sub-corporate
- Large companies, with 3 levels or more. Except of the first level representing the main corporate, several sub corporates can be configured at the second level, third levels... etc

Refer to "[Corporate hierarchy](#)" section in UG1063-Corporate management user's guide for more details.

Each column of this table is described in detail in the next section.

7.1.1.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which parameters are being defined. This code must be defined in 'BANK' table.
2 	HIERARCHY_CODE	CHAR	6		Unique code identifying the Hierarchy.
3	ABREV_WORDING	VARCHAR2	16		Shortened description used for information, for reporting or on other screens.
4	WORDING	VARCHAR2	32		Description used for information, for reporting or on other screens.
5	DESCRIPTION	VARCHAR2	512		Brief description of the hierarchy being defined.
6	USER_MODIF	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8 Embossing

8.1 Parameter tables

8.1.1 DELIVERY_METHOD

This table is used to setup the possible elements to be included on the delivery methods of the Institution.

Refer to ["Delivery method"](#) section in UG1114-Embossing user's guide for more details.

Each column of this table is described in detail in the next section.

8.1.1.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code of the parameter being defined. It should be present in 'BANK' table.
2 	DELIVERY_METHOD_CODE	CHAR	3		Unique code identifying the delivery method.
3	ABRV_WORDING	VARCHAR 2	16		Shortened description used for information, for reporting or on other screens.
4	WORDING	VARCHAR 2	32		Description of the parameter being defined.
5	PLASTIC_FLAG	CHAR	1		Plastic should be part of the delivery method or not. Possible values are: 'Y' = Yes 'N' = No
6	PIN_FLAG	CHAR	1		This column indicates if the PIN should be part of the delivery method or not. Possible values are: 'Y' = Yes 'N' = No
7	STATEMENT_FLAG	CHAR	1		This column indicates if the Statement should be part of the delivery method or not. Possible values are: 'Y' = Yes 'N' = No
8	USER_CREATE	VARCHAR2	15		ID of the user when record created.
9	DATE_CREATE	DATE	7		Record creation date and time.
10	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
11	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.2 DELIVERY_SUPPLIER_CODE

This table is used to setup the possible elements to be included on the delivery supplier code of the Institution.

Refer to "[Delivery supplier code](#)" section in UG1114-Embossing user's guide for more details.

Each column of this table is described in detail in the next section.

8.1.2.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code of the parameter being defined. It should be present in 'BANK' table.
2 	DELIVERY_SUPPLIER_CODE	CHAR	3		Unique code identifying the delivery supplier code.
3	ABRV_WORDING	VARCHAR 2	16		Shortened description used for information, for reporting or on other screens.
4	WORDING	VARCHAR 2	32		Description of the parameter being defined.
5	PLASTIC_FLAG	CHAR	1		This column indicates if the Plastic should be part of the delivery supplier or not. Possible values are: 'Y' = Yes 'N' = No
6	PIN_FLAG	CHAR	1		This column indicates if the PIN should be part of the delivery supplier or not. Possible values are: 'Y' = Yes 'N' = No
7	STATEMENT_FLAG	CHAR	1		This column indicates if the Statement should be part of the delivery supplier or not. Possible values are: 'Y' = Yes 'N' = No
8	USER_CREATE	VARCHAR2	15		ID of the user when record created.
9	DATE_CREATE	DATE	7		Record creation date and time.
10	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
11	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.3 EMB_CARD_CARRIER

This table is used to define the PAN carrier parameters that are used to indicate whether the 'PAN carrier' XML elements should be generated or not in the embossing file. These

parameters are also used to configure the details of the following elements that compose the PAN carrier:

- Carrier details,
- Mail delivery information,
- Attachments,
- Articles,
- Letter lines.

Refer to "[PAN carrier](#)" section in UG1114-Embossing for more details.

Each column of this table is described in detail in the next section.

8.1.3.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	SEQUENCE_ID	NUMBER	10		Sequence identification number.
2	BANK_CODE	CHAR	6		Issuer financial institution code of the parameter being defined. It should be present in 'BANK' table.
3	PRIORITY_INDICATOR	CHAR	3		A code to indicate the priority level with which the embossing of a PAN should be treated. Its should be defined in 'PRIORITY_INDICATOR' table.
4	PROMOTION_CODE	CHAR	10		The code to indicate the promotion to which the financial institution is registered. Its should be defined in 'PRIORITY_INDICATOR' table.
5	DELIVERY_METHOD_CODE	CHAR	3		The code to indicate the type of PAN delivery method (secured mail, ordinary mail, air mail ...).
6	BIN	CHAR	6		PAN bank identification number.
7	RANGE_START	VARCHAR2	22		The first PAN number of the PAN range. The RANGE_START field's value should be always less or equal to RANGE_END field's value.
8	RANGE_END	VARCHAR2	22		The last PAN number of the PAN range. The RANGE_END field's value should be always less or equal to RANGE_START field's value.
9	PRODUCT_CODE	CHAR	3		The PAN product type as defined in the 'CARD_PRODUCT' table.
10	ISSUING_TYPE	CHAR	1		The types of PAN issuing that can be ticked. Possible values are: 'N' = New card, 'R' = Renewal, 'L' = Lost/Stolen Replacement, 'O' = Other Replacement (Other than lost stolen).

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					 Note This will provide the possibility to split in distinct files sub sets of Issuing Types.
11	PRESENCE_FLAG	CHAR	1		This column indicates whether the PAN carrier should be generated or not in the embossing file for PANs matching the above criteria, or not. Possible values are: 'Y' = Yes, 'N' = No.
12	MAIL_DEL_INFO_OPTIONALITY	CHAR	1		This column indicates whether the mail delivery information block is required in the embossing file, optional or should not be included. Possible values are: 'M' = Mandatory (The mail delivery information block is required in the embossing file. When no data are found, the PAN will not be embossed and will be queued with the related error for recycling), 'O' = Optional (The Mail delivery information block will be populated in the embossing file if at least one of the following fields is defined (DEST_ADDRESS_VALUE, EXP_MODE_VALUE or DELIVERY_SUPPLIER_CODE). Otherwise, it won't be populated), 'N' = Not include (The Mail delivery information block will not be included in the embossing file).
13	ATTACHEMENT_OPTIONALITY	CHAR	1		The optionality of an individual attachment record. Possible values are: 'M' = Mandatory (When no value is returned or can be retrieved, the card will not be embossed and will be queued with the related error for recycling), 'O' = Optional (The field will be populated in the embossing file only if a value is present), 'N' = Not include (The field will not be included in the embossing file).
14	ARTICLE_OPTIONALITY	CHAR	1		This column indicates whether the individual article record is required in the embossing file, optional or should not be included. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'M' = Mandatory (The individual article record is required in the embossing file. When no data are found, the card will not be embossed and will be queued with the related error for recycling), 'O' = Optional (The individual article record will be populated in the embossing file if the fields article type and article code are present. Otherwise, it won't be populated), 'N' = Not include (The individual article code record should not be included in the embossing file regardless whether the attachment is specified or not).
15	LETTER_LINE_OPTIONALITY	CHAR	1		This column indicates whether the individual Letter line record is required in the embossing file, optional or should not be included. Possible values are: 'M' = Mandatory (The individual Letter line record is required in the embossing file. When no data are found, the card will not be embossed and will be queued with the related error for recycling), 'O' = Optional (The individual Letter line record will be populated in the embossing file if the Letter line value is present. Otherwise, it won't be populated), 'N' = Not include (The individual Letter line will not be included in the embossing file regardless whether the value is specified or not).
16	CARRIER_CODE_VALUE	VARCHAR2	32		The carrier code to send in the embossing file. Note  This column becomes mandatory when CARRIER_OPTIONALITY is set to 'M' (Mandatory).
17	CARRIER_OPTIONALITY	CHAR	1		The requiring option of the carrier code. Possible values are: 'M' = Mandatory (The Carrier code is required in the embossing file. When no data are found, the PAN will not be embossed and will be queued with the related error for recycling), 'O' = Optional (The Carrier code will be populated in the embossing file if the CARRIER_CODE_VALUE column is NOT NULL. Otherwise, it won't be populated),

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'N' = Not include (The Carrier code won't be included in the embossing file regardless whether the CARRIER_CODE_VALUE column is specified or not).
18	TEXT_CODE_VALUE	VARCHAR2	32		The text code to send in the embossing file. Note  This column becomes mandatory when TEXT_OPTIONALITY is set to 'M' (Mandatory).
19	TEXT_OPTIONALITY	CHAR	1		The requiring option of the text code. Possible values are: 'M' = Mandatory (The text code is required in the embossing file. When no data are found, the PAN will not be embossed and will be queued with the related error for recycling), 'O' = Optional (The Text code will be populated in the embossing file if the TEXT_CODE_VALUE column is NOT NULL. Otherwise, it won't be populated), 'N' = Not include (The Text code won't be included in the embossing file regardless whether the TEXT_CODE_VALUE column is specified or not).
20	BARCODE_VALUE	VARCHAR2	32		The Barcode value.
21	BARCODE_VALUE_TYPE	CHAR	1		This column indicates how the PAN carrier barcode value can be retrieved. Possible values are: 'F' = Fixed (In this case a free text should be captured in the BARCODE_VALUE column). 'S' = System (In this case the value should be picked up from a database column as it is). 'E' = Exit function (In this case the value should be retrieved using a PL/SQL function).
22	BARCODE_OPTIONALITY	CHAR	1		This column indicates whether the PAN carrier barcode is required in the embossing file, optional or should not be included. Possible values are: 'M' = Mandatory (The PAN carrier barcode is required in the embossing file. When no data are found, the PAN will not be embossed and will be queued with the related error for recycling),

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'O' = Optional (The PAN carrier barcode will be populated in the embossing file if BARCODE_VALUE column is NOT NULL. Otherwise, it won't be populated), 'N' = Not include (The PAN carrier barcode won't be included in the embossing file regardless whether the value is specified or not).
23	ENVELOPE_CODE_VALUE	VARCHAR2	32		The envelope code sent in the embossing file for the card carrier.
24	ENVELOPE_OPTIONALITY	CHAR	1		This column indicates whether the PAN envelope is required in the embossing file or should not be included. Possible values are: 'M' = Mandatory (The Envelope code is required in the embossing file. When no data are found, the PAN won't be embossed and will be queued with the related error for recycling), 'O' = Optional (The Envelope code will be populated in the embossing file if ENVELOPE_CODE_VALUE column is NOT NULL. Otherwise, it won't be populated), 'N' = Not include (The Envelope code will not be included in the embossing file regardless whether the value is specified or not).
25	DELIVERY_OPTIONALITY	CHAR	1		This column indicates whether the mail delivery information block is required in the embossing file, optional or should not be included. Possible values are: 'M' = Mandatory (When no value is returned or can be retrieved, the card won't be embossed and will be queued with the related error for recycling), 'O' = Optional (the column will be populated in the embossing file only if a value is present), 'N' = Not include (The column won't be included in the embossing file).
26	DEST_ADDRESS_VALUE	CHAR	1		The address used for the PAN carrier delivery. Possible values are: 'C' = PANholder address, 'B' = Branch address, 'D' = Delivery center address.
27	DEST_ADDRESS_OPTIONALITY	CHAR	1		The optionality of destination address field. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'M' = Mandatory (The destination address is required in the embossing file. When no data are found, the PAN won't be embossed and will be queued with the related error for recycling), 'O' = Optional (The destination address is required in the embossing file. When no data are found, the PAN won't be embossed and will be queued with the related error for recycling), 'N' = Not include (The destination address won't be included in the embossing file regardless whether the value is specified or not).
28	EXP_MODE_VALUE	VARCHAR2	32		This is a free text used to capture the expedition mode to send in the embossing file. Note  This column becomes mandatory when EXP_MODE_OPTIONALITY is set to 'M' (Mandatory).
29	EXP_MODE_OPTIONALITY	CHAR	1		The optionality of expedition mode field. Possible values are: 'M' = Mandatory (The expedition mode is required in the embossing file. When no data are found, the PAN won't be embossed and will be queued with the related error for recycling), 'O' = Optional (The expedition mode will be populated in the embossing file if the expedition mode value is present. Otherwise, it won't be populated), 'N' = Not include (The expedition mode won't be included in the embossing file regardless whether the value is specified or not).
30	DELIVERY_SUPPLIER_CODE	CHAR	3		This is a code used to identify what courier is used to deliver the card carrier (for example: DHL, ARAMEX, Italian Post ...). Note  This column becomes mandatory when DELIVERY_SUPP_CODE_OPTIONALITY is set to 'M' (Mandatory).
31	DELIVERY_SUPP_CODE_OPTIONALITY	CHAR	1		The optionality of delivery supplier code field. Possible values are: 'M' = Mandatory (The delivery supplier code is required in the embossing file.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					When no data are found, the PAN won't be embossed and will be queued with the related error for recycling), 'O' = Optional (The delivery supplier code will be populated in the embossing file if the delivery supplier code value is present. Otherwise, it won't be populated), 'N' = Not include (The delivery supplier code won't be included in the embossing file regardless whether the value is specified or not).
32	CATALOGUE_PI_PRODUCT	CHAR	6		Code identifying the marketable payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P' (Payment Instrument).
33	CATALOGUE_PI_VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P' (Payment Instrument).
34	BARCODE_EXIT_FUNCTION_ID	CHAR	6		In case the BARCODE_VALUE_TYPE = 'E', this column is used to indicate the name of the Barcode value's concerned PL/SQL Exit function.
35	USER_CREATE	VARCHAR2	15		ID of the user when record created.
36	DATE_CREATE	DATE	7		Record creation date and time.
37	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
38	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.4 EMB_CHIP_APPL_PARAM

This table is used to define the list of the EMV applications. Refer to ["Chip application"](#) section in UG1114-Embossing user guide.

Each column of this table is described in detail in the next section.

8.1.4.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	SEQUENCE_ID	NUMBER	10		Sequence identification number of the parameter being defined.
2	CHIP_PROF_PARAM_ID	NUMBER	10		Unique code identifying the chip profile.
3	APP_INDEX_VAL	VARCHAR2	32		The chip application unique ID within the Chip profile.
4	APP_NAME_VAL	VARCHAR2	32		The chip application name.
5	APPLICATION_OPTIONALITY	CHAR	1		This column indicates whether the individual application is required in the

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					embossing file, optional or should not be included. Possible values are: 'M' = Mandatory _ The individual Application is required in the embossing file with at least one Sub-block with tags. When no data are found, the PAN will not be embossed and will be queued with the related error for recycling. 'O' = Optional _ The individual Application will be populated in the embossing file if at least one Application Sub-block with tags is present. Otherwise, it won't be populated. 'N' = Not include _ The individual Application will not be included in the embossing file regardless whether the Application Tags are specified or not.
6	CONTACT_OPTIONALITY	CHAR	1		This column indicates whether the contact application interface sub-block with its security keys is required in the embossing file, optional or should not be included. Possible values are: 'M' = Mandatory _ The Application's interface sub-block with its security keys is required in the embossing file with at least one tag. When no data are found, the PAN will not be embossed and will be queued with the related error for recycling. 'O' = Optional _ The Application's interface sub-block with its security keys will be populated in the embossing file if at least one tag is present. Otherwise, it won't be generated. 'N' = Not include _ The Application's interface sub-block with its security keys will not be included in the embossing file regardless whether the Application's contact interface tags are specified or not.
7	CONTACTLESS_OPTIONALITY	CHAR	1		This column indicates whether the contactless application interface sub-block with its security keys is required in the embossing file, optional or should not be included. Possible values are: 'M' = Mandatory _ The Application's interface sub-block with its security keys is required in the embossing file with at least one tag. When no data are found, the PAN will not be embossed and will be queued with the related error for recycling.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'O' = Optional _ The Application's interface sub-block with its security keys will be populated in the embossing file if at least one tag is present. Otherwise, it won't be generated. 'N' = Not include _ The Application's interface sub-block with its security keys will not be included in the embossing file regardless whether the Application's contact interface tags are specified or not.
8	SHARED_OPTIONALITY	CHAR	1		This column indicates whether the shared application interface sub-block with its security keys is required in the embossing file, optional or should not be included. Possible values are: 'M' = Mandatory _ The Application's interface sub-block with its security keys is required in the embossing file with at least one tag. When no data are found, the PAN will not be embossed and will be queued with the related error for recycling. 'O' = Optional _ The Application's interface sub-block with its security keys will be populated in the embossing file if at least one tag is present. Otherwise, it won't be generated. 'N' = Not include _ The Application's interface sub-block with its security keys will not be included in the embossing file regardless whether the Application's contact interface tags are specified or not.
9	CL_ACTIVATION_FLAG	CHAR	1		Client activation flag.
10	USER_CREATE	VARCHAR2	15		ID of the user when record created.
11	DATE_CREATE	DATE	7		Record creation date and time.
12	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
13	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.5 EMB_CHIP_PROFILE_PARAM

This table is used to indicate according to various criteria, whether the EMV data must be generated or not in the embossing file. These parameters are also used to define the chip profile to use with its related applications and tags. Refer to "[Chip profile](#)" section in UG1114- Embossing user guide.

Each column of this table is described in detail in the next section.

8.1.5.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	SEQUENCE_ID	NUMBER	10		Sequence identification number of the parameter being defined.
2	BANK_CODE	CHAR	6		Issuer institution name and code. It should be defined in 'BANK' table.
3	BIN	CHAR	6		PAN bank identification number.
4	RANGE_START	VARCHAR2	22		The start value of the PAN range.
5	RANGE_END	VARCHAR2	22		The end value of the PAN range.
6	PRODUCT_CODE	CHAR	3		The PAN product type as defined in the 'CARD_PRODUCT' table.
7	CHIP_OPTIONALITY	CHAR	1		This column indicates whether the mail delivery information block is required in the embossing file, optional or should not be included. Possible values are: 'M' = Mandatory – The Chip profile is required in the embossing file with at least one Application/Sub-block with Tags. When no data are found, the PAN will not be embossed and will be queued with the related error for recycling. 'O' = Optional – The Chip profile will be populated in the embossing file if at least one Application/Sub-block with Tags is present. Otherwise, it won't be populated. 'N' = Not include – The Chip profile will not be included in the embossing file regardless whether the EMV data are specified or not.
8	PROFILE_NAME	VARCHAR2	32		The chip profile name.
9	PROFILE_VERSION	VARCHAR2	32		The chip profile version.
10	PROFILE_MNEMONIC_CODE	VARCHAR2	32		The chip profile mnemonic.
11	CATALOGUE_PI_PRODUCT	VARCHAR2	6		Code identifying the marketable payment instrument product code. Valid values must be retrieved from PowerCARD 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P'
12	CATALOGUE_PI_VERSION	CHAR	10		Version of the payment instrument product. Valid values must be retrieved from PowerCARD 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P'
13	USER_CREATE	VARCHAR2	15		ID of the user when record created.
14	DATE_CREATE	DATE	7		Record creation date and time.
15	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
16	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.6 EMB_DELIVERY_CENTER

This table contains the different delivery centers and their address details for each processing Institution.

Refer to "[Delivery center](#)" section in UG1114-Embossing for more details.

Each column of this table is described in detail in the next section.

8.1.6.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	DELIVER_CENTER_ID	CHAR	6		Code that identifies the delivery center.
2 	BANK_CODE	CHAR	6		Financial institution for which parameters are being defined. It should be defined in 'BANK' table.
3	DELIVER_CENTER_NAME	VARCHAR2	32		Description of the parameter being defined.
4	DELIVER_CENTER_ABREV_NAME	VARCHAR2	16		Shortened description used for information, for reporting or on other screens.
5	LINE_1	VARCHAR2	64		The first address line.
6	LINE_2	CHAR	64		The second address line.
7	LINE_3	CHAR	64		The third address line.
8	LINE_4	VARCHAR2	64		The fourth address line.
9	CONTRY_CODE	CHAR	3		Country of the parameter being defined. It must be defined in 'COUNTRY' table.
10	ZIP_CODE	VARCHAR2	10		Zip of the parameter being defined. It must be defined in 'ZIP_CODE' table.
11	REGION_CODE	CHAR	3		The region representing the administrative division of the selected country. It must be defined in 'REGION' table.
12	CITY_CODE	CHAR	5		City of the parameter being defined. It must be defined in 'CITY' table.
13	REGION_FREE_TEXT	VARCHAR2	30		The city free text.  Note In case of forcing the region free text can be captured without having to choose a value in the predefined list.
14	CITY_FREE_TEXT	VARCHAR2	32		The city free text.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					 Note In case of forcing the city free text can be captured without having to choose a value in the predefined list.
15	USER_CREATE	VARCHAR2	15		ID of the user when record created.
16	DATE_CREATE	DATE	7		Record creation date and time.
17	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
18	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.7 EMB_LETTER_LINE

This table is used to specify the PAN carrier letter lines that can be generated in the embossing file. Refer to ["Lettre lines"](#) section in UG1114-Embossing user guide.

Each column of this table is described in detail in the next section.

8.1.7.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	SEQUENCE_ID	NUMBER	10		Sequence number of the parameter being defined.
2	CARD_CARRIER_ID	NUMBER	10		The identification number of the PAN carrier.
3	LINE_NUMBER	NUMBER	3		The letter printing line number. The line number is the value that will be populated in the embossing file for the attribute 'RecordId' under the XML block Line for Front and Rear (Ex:). 3 numeric characters.
4	PRINTING_COLOR	CHAR	1		Letter line printing color. Possible values are: '1' = Black, '2' = Silver, '3' = Gold, '4' = White, '5' = Green, '6' = Yellow, '7' = Red, '8' = Blue.
5	OPTIONALITY	CHAR	1		This column indicates whether the individual letter line record is required in the embossing file, optional or should not be included. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'M' = Mandatory: The individual Letter line record is required in the embossing file. When no data are found, the card will not be embossed and will be queued with the related error for recycling. 'O' = Optional : The individual Letter line record will be populated in the embossing file if the Letter line value is present. Otherwise, it won't be populated. 'N' = Not include: The individual Letter line will not be included in the embossing file regardless whether the value is specified or not.
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.8 EMB_LETTER_LINE_COMP

This table contain the list of already defined Letter line components. To add a new record. Refer to ["Letter lines composition"](#) section in UG1114-Embossing user guide.

Each column of this table is described in detail in the next section.

8.1.8.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	SEQUENCE_ID	NUMBER	10		Sequence number of the parameter being defined.
2	EMB_LETTER_LINE_ID	NUMBER	10		The letter printing line number. The line number is the value that will be populated in the embossing file for the attribute 'RecordId' under the XML block Line for Front and Rear. It should be defined in 'EMB_PRINTING_LINE' table.
3	START_POSITION	NUMBER	10		The start position of the component value in the letter line.
4	VALUE_TYPE	CHAR	1		How the component value can be retrieved. Possible values are: 'F' = Fixed: The value is fixed by the user and the column 'Component value' is required, 'S' = System: The value should be retrieved from a database field as it is, in this case the fields 'Table name' and 'Field name' are required,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'E' = Exit function: The value should be retrieved using a PL/SQL function, in this case the field 'Exit function' is required.
5	VALUE	VARCHAR2	32		In case the VALUE_TYPE = 'F'; This is used to indicate the letter line component value.
6	EXIT_FUNCTION_ID	CHAR	6		In case the VALUE_TYPE = 'E'; This is used to indicate the name of the component value's concerned PL/SQL Exit function.
7	TABLE_NAME	VARCHAR2	30		The table name from where the value is retrieved.
8	FIELD_NAME	VARCHAR2	30		The field name from where the value is retrieved.
9	USER_CREATE	VARCHAR2	15		ID of the user when record created.
10	DATE_CREATE	DATE	7		Record creation date and time.
11	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
12	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.9 EMB_PLASTIC_LAYOUT_PARAM

The plastic layout consists of the printing lines to emboss on the plastic. It contains plastic layout parameters that indicate whether the 'Plastic layout' XML elements should be generated or not in the embossing file. These parameters are also used for printing lines composition dynamic setup.

Refer to "[Plastic layout](#)" section in UG1114-Embossing for more details.

Each column of this table is described in detail in the next section.

8.1.9.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	SEQUENCE_ID	NUMBER	10		Sequence number of the plastic layout parameter being defined.
2	BANK_CODE	CHAR	6		The issuer institution name and code of the parameter being defined. It should be defined in 'BANK' table.
3	BIN	CHAR	6		The PAN bin.
4	RANGE_START	VARCHAR2	22		The start value of the PAN range.  Note The RANGE_START field's value should be less or equal to RANGE_END column's value. When the BIN is indicated, the first sixth digit of

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					the RANGE_START should be equal to the BIN.
5	RANGE_END	VARCHAR2	22		The end value of the PAN range. Note  The RANGE_END field's value should be greater or equal to RANGE_START column's value. When the BIN is indicated, the first sixth digit of the RANGE_END should be equal to the BIN.
6	PLASTIC_CODE	CHAR	3		The code of the plastic.
7	PRODUCT_CODE	CHAR	3		The PAN product code.
8	PRESENCE_FLAG	CHAR	1		This column indicates whether the Plastic layout element should be generated in the embossing file for PANs matching the above criteria, or not. Possible values are: 'Y' = Yes, 'N' = No.
9	F_OPTIONALITY	CHAR	1		This column indicates whether the front plastic printing lines' block is required, optional or should not be included in the embossing file. Possible values are: 'M' = Mandatory (The side's printing lines' block is required in the embossing file with at least one side's printing line record. When no data are found, the card won't be embossed and will be queued with the related error for recycling), 'O' = Optional (The side's printing lines' block will be populated in the embossing file if at least one side's printing line record is present, otherwise, the side's printing lines' block won't be generated in the file), 'N' = Not include (The side's printing lines' block should not be included in the embossing file).
10	R_OPTIONALITY	CHAR	1		This column indicates whether the rear plastic printing lines' block is required, optional or should not be included in the embossing file. Possible values are: 'M' = Mandatory (The side's printing lines' block is required in the embossing file with at least one side's printing line record. When no data are found,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					the card won't be embossed and will be queued with the related error for recycling), 'O' = Optional (The side's printing lines' block will be populated in the embossing file if at least one side's printing line record is present, otherwise, the side's printing lines' block won't be generated in the file), 'N' = Not include (The side's printing lines' block should not be included in the embossing file).
11	CATALOGUE_PI_PRODUCT	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P' (Payment Instrument)
12	CATALOGUE_PI_VERSION	VARCHAR2	10		Version of the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P' (Payment Instrument).
13	USER_CREATE	VARCHAR2	15		ID of the user when record created.
14	DATE_CREATE	DATE	7		Record creation date and time.
15	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
16	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.10 EMB_PRINT_LINE_COMP

This table is used to defined the printing lines composition. Refer to ["Printing lines composition section data description"](#) section in UG1114-Embossing user guide.

Each column of this table is described in detail in the next section.

8.1.10.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	SEQUENCE_ID	NUMBER	10		Sequence number of the parameter being defined.
2	EMB_PRINTING_LINE_ID	NUMBER	10		The printing line number. The line number is the value that will be populated in the embossing file for the attribute 'RecordId' under the XML block Line for Front and Rear. It should be defined in 'EMB_PRINTING_LINE' table.
3	START_POSITION	NUMBER	3		The start position of the component value in the printing line.
4	VALUE_TYPE	CHAR	1		How the component value can be retrieved.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Possible values are: 'F' = Fixed: The value is fixed by the user and the field 'Printing line value' is required, 'E' = Exit function: The value should be retrieved using a PL/SQL function, in this case the field 'Exit function' is required.
5	VALUE	VARCHAR2	30		In case the VALUE_TYPE = 'F'; This is used to indicate the print component value.
6	EXIT_FUNCTION_ID	CHAR	6		In case the VALUE_TYPE = 'E'; This defines the name of the component value's concerned PL/SQL Exit function.
7	TABLE_NAME	VARCHAR2	30		The table name from where the value is retrieved.
8	FIELD_NAME	VARCHAR2	30		The field name from where the value is retrieved.
9	USER_CREATE	VARCHAR2	15		ID of the user when record created.
10	DATE_CREATE	DATE	7		Record creation date and time.
11	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
12	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.11 EMB_TRACK_COMPOSITION

This table is used to dynamically setup the composition of tracks for magnetic stripe, chip and contactless payment instruments. These parameters are setup according to the Institution, the BIN and/or the range of the PAN. Refer to ["Tracks layout"](#) section in UG1114-Embossing user guide.

Each column of this table is described in detail in the next section.

8.1.11.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	SEQUENCE_ID	NUMBER	10		Sequence number of the parameter being defined.
2	TRACK_LAYOUT_ID	NUMBER	10		The track layout number. The layout number is the value that will be populated in the embossing file for the attribute 'RecordId' under the XML block Line for Front and Rear. It should be defined in 'EMB_PRINTING_LINE' table.
3	TECHNOLOGIE_TYPE	CHAR	3		The type of technologie (Magstripe, Chip and Contactless PANs).
4	TRACK_TYPE	CHAR	1		The type of technology. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'...' = Track1 '...' = Track2
5	START_POSITION	NUMBER	3		The start position of the component value in the track layout.
6	VALUE_TYPE	CHAR	1		How the track component value can be retrieved. Possible values are: 'F' = Fixed: The value is fixed by the user and the field 'Value' is required, 'E' = Exit function: The value should be retrieved using a PL/SQL function.
7	VALUE	VARCHAR2	30		In case the VALUE_TYPE = 'F'; This is used to indicate the track component value.
8	EXIT_FUNCTION_ID	CHAR	6		In case the VALUE_TYPE = 'E'; This is used to indicate the name of the component value's concerned PL/SQL Exit function.
9	USER_CREATE	VARCHAR2	15		ID of the user when record created.
10	DATE_CREATE	DATE	7		Record creation date and time.
11	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
12	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.12 EMB_TRACK_LAYOUT

According to the bank, the bin and/or the range of the card, the tracks layout can be dynamically setup for magnetic stripe, chip and contactless cards. This table is used to specify the tracks layout according to the card type.

Each column of this table is described in detail in the next section.

8.1.12.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	SEQUENCE_ID	NUMBER	10		Sequence identification number.
2	BANK_CODE	CHAR	6		The Issuer financial institution code of the parameter being defined. It should be present in 'BANK' table.
3	BIN	CHAR	6		The institution identification number of card.
4	RANGE_START	VARCHAR2	22		The first PAN number of the PAN range. The 'RANGE_START' should be always less or equal to 'RANGE_END' field.
5	RANGE_END	VARCHAR2	22		The last PAN number of the PAN range. The 'RANGE_END' should be always less or equal to 'RANGE_START' field.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.13 EMBOSSING_ADDRESSES_PARAM

This table allows to specify if the branch address and the delivery center address should be present or not according to multiple criteria.

Each column of this table is described in detail in the next section.

8.1.13.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	SEQUENCE_ID	NUMBER	10		Sequence id of the parameter being defined.
2 	BANK_CODE	CHAR	6		Issuer financial institution identification code of the parameter being defined. It should be present in 'BANK' table.
3	PRIORITY_INDICATOR	CHAR	3		A code to indicate the priority level with which the embossing of a card should be treated. Its should be defined in 'PRIORITY_INDICATOR' table.
4	PROMOTION_CODE	CHAR	10		A code to indicate the promotion the card is subject of. This code should be defined in 'PROMOTION_LIST' table.
5	DELIVERY_METHOD_CODE	CHAR	3		A code to indicate the type of card delivery method (secured mail, ordinary mail, air mail ...)
6	BIN	CHAR	6		Institution identification number of card..
7	RANGE_START	VARCHAR2	22		The first PAN number of the PAN range. The 'RANGE_START' should be always less or equal to 'RANGE_END' field.
8	RANGE_END	VARCHAR2	22		The last PAN number of the PAN range. The 'RANGE_END' should be always less or equal to 'RANGE_START' field..
9	PRODUCT_CODE	CHAR	3		The card product type as defined in the 'CARD_PRODUCT' table.
10	ISSUING_TYPE	CHAR	1		The type of card issuing. Possible values are: 'N' = New card 'R' = Renewal 'L' = Lost stolen Replacement 'O' = Other Replacement (Other than lost stolen)

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
11	CARDHOLDER_PRES_ADRESS_FLAG	CHAR	1		Always defaulted to Yes. This field is not editable.
12	BRANCH_PRES_ADRESS_FLAG	CHAR	1		This column indicates if the address of the card branch should be generated in the embossing file or not. Possible values are: 'Y' = Yes 'N' = No
13	DELIVERY_PRES_CENTER_FLAG	CHAR	1		This column indicates if the address of the logistic delivery center should be generated in the embossing file or not. Possible values are: 'Y' = Yes 'N' = No
14	DELIVER_CENTER_ID	CHAR	6		To indicate the logistic delivery center that will be used. The values should be predefined in the delivery center definition parameter. This column becomes mandatory when the field Present is set to Yes.
15	PRESENCE_FLAG	CHAR	1		This flag indicates if Addresses block should be generated in the embossing file or not. Possible values are: 'Y' = Yes 'N' = No
16	CATALOGUE_PI_PRODUCT	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P'
17	CATALOGUE_PI_VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P'
18	USER_CREATE	VARCHAR2	15		ID of the user when record created.
19	DATE_CREATE	DATE	7		Record creation date and time.
20	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
21	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.14 FEMBOSSING_ARTICLES

This table contains the various PAN carrier's articles that can be generated in the embossing file.

Refer to ["Articles"](#) section in UG1114-Embossing for more details.

Each column of this table is described in detail in the next section.

8.1.14.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	SEQUENCE_ID	NUMBER	10		Sequence number of the parameter being defined.
2	CARD_CARRIER_ID	NUMBER	10		PAN carrier identification number.
3	ARTICLE_TYPE	VARCHAR2	32		This is a free text identifying the article type to be linked to the PAN carrier. Note  This field is required when OPTIONALITY = 'M' (Mandatory). Otherwise, it is optional.
4	ARTICLE_CODE	VARCHAR2	32		This is a free text identifying the article type to be linked to the PAN carrier. Note  This field is required when OPTIONALITY = 'M' (Mandatory). Otherwise, it is optional.
5	OPTIONALITY	CHAR	1		This column indicates whether the individual article record is required in the embossing file, optional or should not be included. Possible values are: 'M' = Mandatory (The individual article record is required in the embossing file. When no data are found, the card will not be embossed and will be queued with the related error for recycling), 'O' = Optional (The individual article record will be populated in the embossing file if the fields article type and article code are present. Otherwise, it won't be populated), 'N' = Not include (The individual article code record should not be included in the embossing file regardless whether the attachment is specified or not).
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.15 EMBOSSING_ATTACHMENT

This table contains the various PAN carrier's attachments that can be generated in the embossing file.

Refer to "[Attachment](#)" section in UG1114-Embossing user's guide for more details.

Each column of this table is described in detail in the next section.

8.1.15.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	SEQUENCE_ID	NUMBER	10		Sequence number of the parameter being defined.
2	CARD_CARRIER_ID	NUMBER	10		The PAN carrier identification number.
3	ATTACHEMENT_CODE	VARCHAR2	32		This is a free text identifying the attachment to be linked to the PAN carrier. Note  This field is required when OPTIONALITY = 'M' (Mandatory). Otherwise, it is optional.
4	OPTIONALITY	CHAR	1		This column indicates whether the individual attachment record is required in the embossing file, optional or should not be included. Possible values are: 'M' = Mandatory (The individual attachment record is required in the embossing file. When no data are found, the PAN will not be embossed and will be queued with the related error for recycling), 'O' = Optional (The individual attachment record will be populated in the embossing file if the attachment code is present. Otherwise, it won't be populated), 'N' = Not include (The individual attachment record should not be included in the embossing file regardless whether the attachment code is specified or not).
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.16 EMBOSSING_BARCODE

This table is used to configure the barcode block as materials included in PAN data.

Refer to "[Barcodes](#)" section in UG1114-Embossing for more details.

Each column of this table is described in detail in the next section.

8.1.16.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	SEQUENCE_ID	NUMBER	10		Sequence number of the parameter being defined.
2	EMB_CARD_MATERIALS_ID	NUMBER	10		The embossing PAN materials identification number. It should be present in 'EMBOSSING_CARD_MATERIALS' table.
3	BARCODE_COLOR	CHAR	1		The color of barcode on the plastic. Possible values are: '1' = Black, '2' = Silver, '3' = Gold, '4' = White, '5' = Green, '6' = Yellow, '7' = Red, '8' = Blue.
4	BARCODE_TYPE	VARCHAR2	8		Code that identifies the barcode type (Including size, font, technology, position on plastic). When specified, this value should be agreed between the processor and embosser.
5	BARCODE_VALUE_TYPE	CHAR	1		How the value of the barcode can be retrieved. Possible values are: 'F' = Fixed (The value is fixed by the user and the BARCODE_VALUE field is required), 'E' = Exit function (The value should be retrieved using a PL/SQL function).
6	BARCODE_VALUE	VARCHAR2	32		The value of the barcode. Note It is required only when VALUE_TYPE = 'F' (Fixed). Otherwise, this column is optional. When specified, this column should be agreed between the processor and embosser.
7	BARCODE_OPTIONALITY	CHAR	1		This column indicates whether the individual barcode record is required in the embossing file, optional or should not be included. Possible values are: 'M' = Mandatory (The individual barcode record is required in the embossing file. When no data are found, the card will

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					not be embossed and will be queued with the related error for recycling), 'O' = Optional (The individual barcode record will be populated in the embossing file if the barcode code is present. Otherwise, it won't be populated), 'N' = Not include (The individual barcode will not be included in the embossing file regardless whether the value is specified or not).
8	BARCODE_EXIT_FUNCTION_ID	CHAR	6		When VALUE_TYPE = 'E' (Exit function), this is used to indicate the name of the Barcode value's concerned PL/SQL Exit function.
9	USER_CREATE	VARCHAR2	15		ID of the user when record created.
10	DATE_CREATE	DATE	7		Record creation date and time.
11	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
12	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.17 EMBOSsing_CARD_DATA

This table allows to indicate if the CardData XML element can be generated or not in the embossing file.

Each column of this table is described in detail in the next section.

8.1.17.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	SEQUENCE_ID	NUMBER	10		Sequence identification number.
2	BANK_CODE	CHAR	6		Issuer financial institution identification code of the parameter being defined. It should be present in 'BANK' table.
3	PRIORITY_INDICATOR	CHAR	3		A code to indicate the priority level with which the embossing of a card should be treated. Its should be defined in 'PRIORITY_INDICATOR' table.
4	BIN	CHAR	6		Institution identification number of card.
5	RANGE_START	VARCHAR2	22		The first PAN number of the PAN range. This RANGE_START field's value should be always less or equal to RANGE_END field's value.
6	RANGE_END	VARCHAR2	22		The last PAN number of the PAN range. The RANGE_END field's value should be always less or equal to RANGE_START field's value.
7	PRODUCT_CODE	CHAR	3		The card product type as defined in the 'CARD_PRODUCT' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
8	PRESENCE_FLAG	CHAR	1		This column indicates if the XML element CardData of the embossing file should be generated or not. Possible values are: 'Y' = Yes, 'N' = No.
9	CARD_NUMBER_FORMAT	VARCHAR2	38		The format with which the card number should be displayed. This column will manage format for card length up to 22. The format should represent the card number digits with the symbol asterisk "*". The separator will be used as specified. When the format is not specified, the card number will be used as is (without format).
10	BIN_FIGURE	NUMBER	1		Number of the first digits of the card that should be displayed in the embossing file for BIN field . Note  When this BIN_FIGURE column is not specified, the BIN column will be defaulted to the card number first 6 digits.
11	CATALOGUE_PI_PRODUCT	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with PRODUCT_TYPE = 'P' (Payment Instrument).
12	CATALOGUE_PI_VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with PRODUCT_TYPE = 'P' (Payment Instrument).
13	CVV_EXIT_FUNCTION	CHAR	6		The Exit function to be used for CVV calculation during embossing file processing.
14	ICVV_EXIT_FUNCTION	CHAR	6		The Exit function to be used for ICVV calculation during embossing file processing.
15	CVV2_EXIT_FUNCTION	CHAR	6		The Exit function to be used for CVV2 calculation during embossing file processing.
16	USER_CREATE	VARCHAR2	15		ID of the user when record created.
17	DATE_CREATE	DATE	7		Record creation date and time.
18	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
19	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.18 EMBOSSING_CARD_MATERIALS

This table is used to configure the different materials involved in PAN data.

- Stock,
- Stickers,
- Barcodes,
- Pictures,
- Logos.

Refer to ["PAN materials"](#) section in UG1114-Embossing for more details.

Each column of this table is described in detail in the next section.

8.1.18.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	SEQUENCE_ID	NUMBER	10		Sequence identification number of the parameter being defined.
2	BANK_CODE	CHAR	6		Issuer financial institution code of the parameter being defined. It should be present in 'BANK' table.
3	PRIORITY_INDICATOR	CHAR	3		Code to indicate the priority level with which the embossing of a PAN should be treated. It should be defined in 'PRIORITY_INDICATOR' table.
4	PROMOTION_CODE	CHAR	10		Code to indicate the promotion the PAN is subject of.
5	DELIVERY_METHOD_CODE	CHAR	3		Code to indicate the type of PAN delivery method (secured mail, ordinary mail, air mail ...)
6	BIN	CHAR	6		Institution identification number of PAN.
7	RANGE_START	VARCHAR2	22		The first PAN number of the PAN range. The RANGE_START field's value should be always less or equal to RANGE_END column's value.
8	RANGE_END	VARCHAR2	22		The last PAN number of the PAN range. The RANGE_END column's value should be always less or equal to RANGE_START column's value.
9	PRODUCT_CODE	CHAR	3		PAN product type as defined in the 'CARD_PRODUCT' table.
10	ISSUING_TYPE	CHAR	1		The type of PAN issuing. Possible values are: 'N' = New card, 'R' = Renewal, 'L' = Lost stolen Replacement,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'O' = Other Replacement (Other than lost stole).
11	CARD_STOCK_CODE	VARCHAR2	30		This is a free text to specify the PAN stock code. This is a free text value to be agreed between the processor and embosser.
12	F_PRINTING_METHOD	VARCHAR2	32		The method used to print the front picture on the PAN plastic. Possible values are: '0' = Embossing, '1' = Infilling, '2' = Termography, '3' = Engraving.
13	F_VALUE_TYPE	CHAR	1		How the value of the front picture reference can be retrieved. Possible values are: 'F' = Fixed (The value is fixed by the user and the next F_REF_NUMBER column is required), 'E' = Exit function (The value should be retrieved using a PL/SQL function).
14	F_REF_NUMBER	VARCHAR2	32		Code that specifies the reference number of the cardholder's front photo. Note  This column is required only when F_VALUE_TYPE = 'F' (Fixed). Otherwise, it is optional. When specified, this value should be agreed between the processor and embosser.
15	F_PICTURE_OPTIONALITY	CHAR	1		This column indicates whether the front picture record is required in the embossing file, optional or should not be included. Possible values are: 'M' = Mandatory (The front picture record is required in the embossing file. When no data are found, the card will not be embossed and will be queued with the related error for recycling), 'O' = Optional (The front picture record will be populated in the embossing file if the picture reference is present. Otherwise, it won't be populated), 'N' = Not include (The front picture will not be included in the embossing file regardless whether the value is specified or not).

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
16	F_LOGO_OPTIONALITY	CHAR	1		This column indicates whether the front logos block is required, optional or should not be included in the embossing file. Possible values are: 'M' = Mandatory (The front logo block is required in the embossing file with at least one front logo record. When no data are found, the PAN will not be embossed and will be queued with the related error for recycling), 'O' = Optional (The front logo block will be populated in the embossing file if at least one front logo record is present, otherwise, the front logo block will not be generated in the file), 'N' = Not include (The front logo block should not be included in the embossing file).
17	R_PRINTING_METHOD	VARCHAR2	32		The method used to print the rear picture on the PAN plastic. Possible values are: '0' = Embossing, '1' = Infilling, '2' = Termography, '3' = Engraving.
18	R_VALUE_TYPE	CHAR	1		How the value of the rear picture reference can be retrieved. Possible values are: 'F' = Fixed (The value is fixed by the user and the next F_REF_NUMBER field is required), 'E' = Exit function (The value should be retrieved using a PL/SQL function).
19	R_REF_NUMBER	VARCHAR2	32		Code that specifies the reference number of the cardholder's rear photo.  Note This column is required only when R_VALUE_TYPE = 'F' (Fixed). Otherwise, it is optional. When specified, this value should be agreed between the processor and embosser.
20	R_PICTURE_OPTIONALITY	CHAR	1		This column indicates whether the rear picture record is required in the embossing file, optional or should not be included. Possible values are: 'M' = Mandatory (The rear picture record is required in the embossing file).

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					When no data are found, the card will not be embossed and will be queued with the related error for recycling), 'O' = Optional (The rear picture record will be populated in the embossing file if the picture reference is present. Otherwise, it won't be populated), 'N' = Not include (The rear picture will not be included in the embossing file regardless whether the value is specified or not).
21	R_LOGO_OPTIONALITY	CHAR	1		This column indicates whether the rear logos block is required, optional or should not be included in the embossing file. Possible values are: 'M' = Mandatory (The rear logo block is required in the embossing file with at least one rear logo record. When no data are found, the PAN will not be embossed and will be queued with the related error for recycling), 'O' = Optional (The rear logo block will be populated in the embossing file if at least one rear logo record is present, otherwise, the rear logo block will not be generated in the file), 'N' = Not include (The rear logo block should not be included in the embossing file).
22	CARD_STOCK_OPTIONALITY	CHAR	1		This column indicates whether the PAN stock code is required in the embossing file or should not be included. Possible values are: 'M' = Mandatory (PAN stock code is required in the embossing file), 'N' = Not include (PAN stock code should not be included in the embossing file).
23	PRODUCT_MNEMONIC_CODE	VARCHAR2	30		This is a free text to specify the product mnemonic code. When specified, the product mnemonic code value should be agreed between the processor and embosser. Note  This column is required when PRODUCT_MNEMONIC_OPTIONALITY = 'M' (Mandatory).
24	PRODUCT_MNEMONIC_OPTIONALITY	CHAR	1		This column indicates whether the product mnemonic code is required in the embossing file or should not be included. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'M' = Mandatory (Product mnemonic code is required in the embossing file), 'N' = Not include (Product mnemonic code should not be included in the embossing file).
25	STICKERS_OPTIONALITY	CHAR	1		This column indicates whether the sticker block is required, optional or should not be included in the embossing file. Possible values are: 'M' = Mandatory (The sticker block is required in the embossing file with at least one sticker record. When no data are found, the card will not be embossed and will be queued with the related error for recycling), 'O' = Optional (The sticker block will be populated in the embossing file if at least one sticker record is present, otherwise, the sticker block will not be generated in the file), 'N' = Not include (The sticker block should not be included in the embossing file).
26	BARCODE_OPTIONALITY	CHAR	1		This column indicates whether the individual barcode record is required in the embossing file, optional or should not be included. Possible values are: 'M' = Mandatory (The individual barcode record is required in the embossing file. When no data are found, the card will not be embossed and will be queued with the related error for recycling), 'O' = Optional (The individual barcode record will be populated in the embossing file if the barcode code is present. Otherwise, it won't be populated), 'N' = Not include (The individual barcode will not be included in the embossing file regardless whether the value is specified or not).
27	PICTURES_OPTIONALITY	CHAR	1		This column indicates whether the picture block is required, optional or should not be included in the embossing file. Possible values are: 'M' = Mandatory (The picture block is required in the embossing file with at least one picture record. When no data are found, the card will not be embossed and will be queued with the related error for recycling), 'O' = Optional (The picture block will be populated in the embossing file if

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					at least one picture record is present, otherwise, the picture block will not be generated in the file), 'N' = Not include (The picture block should not be included in the embossing file).
28	OPTIONALITY	CHAR	1		This column indicates whether the PAN data materials block is required in the embossing file or should not be included. Possible values are: 'M' = Mandatory (PAN data materials block is required in the embossing file with at least one material record available (PAN stock code, Product mnemonic code, Stickers, Barcodes, Pictures or Logos)), 'N' = Not include (PAN data materials block should not be included in the embossing file).
29	CATALOGUE_PI_PRODUCT	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with PRODUCT_TYPE = 'P' (Payment instrument).
30	CATALOGUE_PI_VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P' (Payment instrument).
31	F_EXIT_FUNCTION_ID	CHAR	6		When R_VALUE_TYPE = 'E' (Exit function), this is used to indicate the name of the Picture value's concerned PL/SQL Exit function.
32	R_EXIT_FUNCTION_ID	CHAR	6		When R_VALUE_TYPE = 'E' (Exit function), this is used to indicate the name of the Picture value's concerned PL/SQL Exit function.
33	USER_CREATE	VARCHAR2	15		ID of the user when record created.
34	DATE_CREATE	DATE	7		Record creation date and time.
35	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
36	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.19 EMBOSSING_ERROR

This table is used to define errors related to the PAN materials (Stickers, Barcodes, Pictures, Logos and Plastic layout) not embossed .

Each column of this table is described in detail in the next section.

8.1.19.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	ERROR_CODE	CHAR	4		Unique code identifying the error related to the concerned PAN materiel.
2	ERROR_DESC	VARCHAR2	255		Description of the error's nature related to the concerned PAN materiel.
3	USER_CREATE	VARCHAR2	15		ID of the user when record created.
4	DATE_CREATE	DATE	7		Record creation date and time.
5	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
6	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.20 EMBOSsing_LOGO

This table is used to configure the Logos block as materials included in PAN data. Logos parameters are defined with two separate Logo blocks for Front and Rear plastic sides.

Refer to "[Logos](#)" section in UG1114-Embossing for more details.

Each column of this table is described in detail in the next section.

8.1.20.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	SEQUENCE_ID	NUMBER	10		Sequence number of the parameter being defined.
2	EMB_CARD_MATERIALS_ID	NUMBER	10		The embossing PAN materials identification number. It should be present in 'EMBOSsing_CARD_MATERIALS' table.
3	LOGO_TYPE	VARCHAR2	32		Code that identifies the logo type. When specified, this value should be agreed between the processor and embosser.
4	LOGO_SIDE	CHAR	1		The plastic side for which, the logo should be defined. Possible values are: 'F' = Front, 'R' = Rear.
5	LOGO_VALUE_TYPE	CHAR	1		How the value of the logo can be retrieved. Possible values are: 'F' = Fixed (The value is fixed by the user and the LOGO_VALUE field is required), 'E' = Exit function (The value should be retrieved using a PL/SQL function).
6	LOGO_VALUE	VARCHAR2	32		Code that identifies the logo to be printed on the PAN plastic.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Note  It is required only when VALUE_TYPE = 'F' (Fixed). Otherwise, it is optional. When specified, this column value should be agreed between the processor and embosser.
7	LOGO_OPTIONALITY	CHAR	1		This column indicates whether the individual logo record is required in the embossing file, optional or should not be included. Possible values are: 'M' = Mandatory (The individual logo record is required in the embossing file. When no data are found, the card will not be embossed and will be queued with the related error for recycling), 'O' = Optional (The individual logo record will be populated in the embossing file if the logo code is present. Otherwise, it won't be populated), 'N' = Not include (The individual logo will not be included in the embossing file regardless whether the value is specified or not).
8	LOGO_EXIT_FUNCTION_ID	CHAR	6		When VALUE_TYPE = 'E' (Exit function) , this is used to indicate the name of the Logo value's concerned PL/SQL Exit function.
9	USER_CREATE	VARCHAR2	15		ID of the user when record created.
10	DATE_CREATE	DATE	7		Record creation date and time.
11	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
12	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.21 EMBOSSING_SPLITTING_PARAMETER

This table is used to define the splitting criteria of the embossing file.

Each column of this table is described in detail in the next section.

8.1.21.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	SEQUENCE_ID	NUMBER	10		Sequence identification number.
2	BANK_CODE	CHAR	6		Issuer financial institution identification code of the parameter being defined. It should be present in 'BANK' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
3	PRIORITY_INDICATOR	CHAR	3		Code to indicate the priority level with which the embossing of a PAN should be treated. It should be defined in 'PRIORITY_INDICATOR' table.
4	PROMOTION_CODE	CHAR	10		Code to indicate the promotion to which the financial institution is registered. It should be defined in 'PRIORITY_INDICATOR' table.
5	DELIVERY_METHOD_CODE	CHAR	3		Code to indicate the type of PAN delivery method (secured mail, ordinary mail, air mail ...)
6	BIN	CHAR	6		Institution identification number of PAN.
7	RANGE_START	VARCHAR2	22		The first PAN number of the PAN range. The 'RANGE_START' should be always less or equal to 'RANGE_END' field.
8	RANGE_END	VARCHAR2	22		The last PAN number of the PAN range. The 'RANGE_END' should be always less or equal to 'RANGE_START' field.
9	PRODUCT_CODE	CHAR	3		PAN product type as defined in the 'CARD_PRODUCT' table.
10	ISSUING_TYPE	CHAR	4		The types of PAN issuing that can be ticked. Possible values are: 'N' = New card 'R' = Renewal 'L' = Lost/Stolen Replacement 'O' = Other Replacement (Other than lost stolen). This will provide the possibility to split in distinct files sub sets of issuing types.
11	FLOWID_PREFIXE	CHAR	5		The flowed prefixed value. This value will be used as is in the embossing file.
12	FLOWID_FLOW_TYPE	CHAR	7		The fixed value determining the type of flow (mnemonic, i.e. CPGCHIP). This value will be used as is in the embossing file
13	FLOWID_ISSUING_PRIORITY	CHAR	1		The flow issuing priority fixed value.
14	ISSUER_CODE	VARCHAR2	5		The issuer institution code. This value will be sent in the header of the embossing file.  Note This value is different from bank code since some institutions could be processing for some others.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
15	ISSUER_NAME	VARCHAR2	32		The issuer institution name. This value will be sent in the header of the embossing file.
16	SENDER_CODE	VARCHAR2	5		Code of the sender of the embossing file. This value will be sent in the header of the embossing file.
17	SENDER_NAME	VARCHAR2	32		The name of the sender of the embossing file. This value will be sent in the header of the embossing file.
18	RECEIVER_CODE	VARCHAR2	5		Code of the intermediate receiver of the embossing file. This value will be sent in the header of the embossing file.
19	RECEIVER_NAME	VARCHAR2	32		The name of the intermediate receiver of the embossing file. This value will be sent in the header of the embossing file.
20	DESTINATION_CODE	VARCHAR2	5		Code of the code of the final receiver of the embossing file. This value will be sent in the header of the embossing file.
21	DESTINATION_NAME	VARCHAR2	32		The name of the final receiver of the embossing file. This value will be sent in the header of the embossing file.
22	EMBOSSING_DELAY_DAYS	NUMBER	3		The number of days with which the embossing of cards should be delayed. This will be represented in the embossing file with the field Date Expected in the header. Date Expected = Embossing file business date + Delay in days.  Note This column should be interpreted and managed by the embosser to warehouse embossing requests securely.
23	MAX_NUMBER_OF_CARDS	NUMBER	6		The maximum number of PANs that can be generated in an embossing file. When this value is not indicated then there will be no control on the number of cards to generate in the embossing file. If the number is indicated, extra number of cards will be put in a physical file with an increased file sequence.
24	FILENAME_FLOW_ID	CHAR	1		This column specifies whether the flow id generated per file should be part of the physical file name. Possible values are: 'Y' = Yes, part of the file name

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'N' = No, not part of the file name.  Note Flow ID is mandatory in the file name composition. By default, this column will be always ticked and will not be editable.
25	FILENAME_ISSUER	CHAR	1		This column indicates whether the issuer code specified for the file should be part of the physical file name. Possible values are: 'Y' = Yes, part of the file name 'N' = No, not part of the file name
26	FILENAME_SENDER	CHAR	1		This column indicates whether the sender code specified for the file should be part of the physical file name. Possible values are: 'Y' = Yes, part of the file name 'N' = No, not part of the file name
27	FILENAME_RECEIVER	CHAR	1		This column indicates whether the receiver code specified for the file should be part of the physical file name. Possible values are: 'Y' = Yes, part of the file name 'N' = No, not part of the file name
28	FILENAME_DESTINATION	CHAR	1		This column indicates whether the destination code specified for the file should be part of the physical file name. Possible values are: 'Y' = Yes, part of the file name 'N' = No, not part of the file name
29	FILENAME_PLASTIC_PRIORITY_ID	CHAR	1		This column specifies whether the Priority code of the PAN should be part of the physical file name. Possible values are: 'Y' = Yes, part of the file name 'N' = No, not part of the file name  Note This field cannot be ticked if not used as a splitting criterion.
30	FILENAME_BIN	CHAR	1		This column specifies whether the Bin of the PAN (6 first digits of the card) should be part of the physical file name.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Possible values are: 'Y' = Yes, part of the file name 'N' = No, not part of the file name  Note This column cannot be ticked if not used as a splitting criterion.
31	FILENAME_PRODUCT_CODE	CHAR	1		This column specifies whether the Product code of the PAN should be part of the physical file name. Possible values are: 'Y' = Yes, part of the file name 'N' = No, not part of the file name  Note This column cannot be ticked if not used as a splitting criterion.
32	FILENAME_PROMOTYPE	CHAR	1		This column specifies whether the promotion type of the PAN should be part of the physical file name. Possible values are: 'Y' = Yes, part of the file name 'N' = No, not part of the file name  Note This column cannot be ticked if not used as a splitting criterion.
33	FILENAME_MAIL_CODE	CHAR	1		This column specifies whether the delivery method of the PAN plastic should be part of the physical file name. Possible values are: 'Y' = Yes, part of the file name 'N' = No, not part of the file name  Note This column cannot be ticked if not used as a splitting criterion.
34	FILENAME_ISSUING_TYPE	CHAR	1		This column specifies whether the issuing types ticked in the splitting

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					criteria should be part of the physical file name. Possible values are: 'Y' = Yes, part of the file name 'N' = No, not part of the file name  Note The Issuing Type in the file name will be handled as a 4-char long fields, padded with zero on the left.
35	FIRST_SORTING_ORDER	CHAR	2		The first sorted order (PAN) in the embossing file.
36	SECOND_SORTING_ORDER	CHAR	2		The second sorted order (PAN) in the embossing file.
37	THIRD_SORTING_ORDER	CHAR	2		The third sorted order (PAN) in the embossing file.
38	FOURTH_SORTING_ORDER	CHAR	2		The fourth sorted order (PAN) in the embossing file.
39	FIFTH_SORTING_ORDER	CHAR	2		The fifth sorted order (PAN) in the embossing file.
40	SIXTH_SORTING_ORDER	CHAR	2		The sixth sorted order (PAN) in the embossing file.
41	SEVENTH_SORTING_ORDER	CHAR	2		The seventh sorted order (PAN) in the embossing file.
42	EIGHTH_SORTING_ORDER	CHAR	2		The eighth sorted order (PAN) in the embossing file.
43	NINTH_SORTING_ORDER	CHAR	2		The ninth sorted order (PAN) in the embossing file.
44	TENTH_SORTING_ORDER	CHAR	2		The tenth sorted order (PAN) in the embossing file.
45	ELEVENTH_SORTING_ORDER	CHAR	2		The eleventh sorted order (PAN) in the embossing file.
46	CATALOGUE_PI_PRODUCT	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P'
47	CATALOGUE_PI_VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P'
48	USER_CREATE	VARCHAR2	15		ID of the user when record created.
49	DATE_CREATE	DATE	7		Record creation date and time.
50	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
51	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.22 EMBOSsing_STICKER

This table is used to configure Stickers block as materials included in PAN data.

Refer to "[Stickers](#)" section in UG1114-Embossing user's guide for more details.

Each column of this table is described in detail in the next section.

8.1.22.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	SEQUENCE_ID	NUMBER	10		Sequence number of the parameter being defined.
2	EMB_CARD_MATERIALS_ID	NUMBER	10		The embossing PAN materials identification number. It should be present in 'EMBOSSING_CARD_MATERIALS' table.
3	STICKER_CODE	VARCHAR2	20		This is a free text to specify the sticker code. When specified, this value should be agreed between the processor and embosser. Note  This column is required when STICKER_OPTIONALITY = 'M' (Mandatory). Otherwise, it is optional.
4	STICKER_OPTIONALITY	CHAR	1		This column indicates whether the individual sticker record is required in the embossing file, optional or should not be included. Possible values are: 'M' = Mandatory (The individual sticker record is required in the embossing file. When no data are found, the card will not be embossed and will be queued with the related error for recycling), 'O' = Optional (The individual sticker record will be populated in the embossing file if the sticker code is present), 'N' = Not include (The individual sticker should not be included in the embossing file).
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.23 EMBOSSING_TAG

This table is used to specify the Application's interface tags to be generated in the embossing file. Refer to ["Tag setup section data description"](#) section in UG1114-Embossing user guide.

Each column of this table is described in detail in the next section.

8.1.23.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	SEQUENCE_ID	NUMBER	10		Sequence number of the parameter being defined.
2	CHIP_APPL_PARAM_ID	NUMBER	10		Chip application unique ID number.
3	TAG_ID	CHAR	6		EMV tag identification name as defined the 'EMBOSSING_TAG_REF' tabe.
4	TAG_LENGTH	VARCHAR2	32		Tag length.
5	TAG_USE_TYPE	CHAR	4		The interface to which the tag is linked. Possible values are: 'SHIT' = Shared interface 'CTIT' = Contact interface 'CLIT' = Contactless interface
6	TAG_VALUE_TYPE	CHAR	1		How the tag value can be retrieved. Possible values are: 'F' = Fixed: The value is fixed by the user and the field 'Tag value' is required, 'E' = Exit function: The value should be retrieved using a PL/SQL function, in this case the field 'Exit function' is required.
7	VAUE	VARCHAR2	512		Tag value to be used by the system for the current tag.  Note When the VALUE_TYPE = 'F' value, this column is required.
8	EXIT_FUNCTION_ID	CHAR	6		When the Value VALUE_TYPE = 'E' , this column is used to indicate the function name that will be executed automatically by the system to calculate the Value of the current tag.
9	TABLE_NAME	VARCHAR2	30		This column is not used in V3.5.
10	FIELD_NAME	VARCHAR2	30		This column is not used in V3.5.
11	OPTIONALITY	CHAR	1		This column indicates whether the individual application's interface tag is required in the embossing file, optional or should not be included. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'M' = Mandatory: The individual Application's contact interface tag is required in the embossing file with at least one tag. When no data are found, the card will not be embossed and will be queued with the related error for recycling. 'O' = Optional: The individual Application's contact interface tag will be populated in the embossing file only if the tag value is specified. Otherwise, it won't be generated. 'N' = Not include: The individual Application's contact interface tag will not be included in the embossing file regardless whether the tag value is specified or not.
12	USER_CREATE	VARCHAR2	15		ID of the user when record created.
13	DATE_CREATE	DATE	7		Record creation date and time.
14	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
15	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.24 EMBOSsing_TAG_REF

This table contains the dictionary of EMV Tags. Each tag is referenced with its Tag ID, Tag name, Wording and Abbreviated wording.

Refer to "[Embossing tag referential](#)" section in UG1114-Embossing for more details.

Each column of this table is described in detail in the next section.

8.1.24.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	TAG_ID	CHAR	6		The tag identifier.
2	TAG_NAME	VARCHAR2	6		The tag name as described in ISO/IEC 7816.
3	TAG_DESCRIPTION	VARCHAR2	32		The tag description.
4	TAG_ABREV_DESC	VARCHAR2	16		Shortened description used for information, for reporting or on other screens.
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.25 Functional description

This table is used for CVC1/CVV1 and MCVC/ICVV calculation during embossing file processing.

Refer to ["Exit functions source"](#) section in UG1115-Issuer general parameters user guide.

Each column of this table is described in detail in the next section.

8.1.25.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	EXIT_FUNCTION_ID	CHAR	10		Unique code identifying the exit function.
2	EXIT_FUNCTION_WORDING	VARCHAR2	32		Description of the function.
3	EXIT_FUNCTION_ABREV_WORDING	VARCHAR2	16		Shortened description used for information, for reporting or on other screens.
4	FUNCTION_NAME	VARCHAR2	200		The name of the component value's concerned PL/SQL Exit function.
5	FUNCTION_CATEGORY	VARCHAR2	8		The function category for the parameter being defined. Possible values are: '...' = CVV, '...' = ICVV, '...' = CVV2, '...' = Others.
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.26 FOURTH_LINE_EMBOSSING

This table is used to define by product what should be the content of the fourth embossing line.

Each column of this table is described in detail in the next section.

8.1.26.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution of the parameter being defined. It should be defined in 'BANK' table.
2 	PRODUCT_CODE	CHAR	3		PAN product linked to the Fourth Line Embossing option. It should be defined in 'CARD_PRODUCT' table.
3	FOURTH_L_EMBOSS	CHAR	2		The content of the fourth embossing line.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Possible values are: '...' = Account number, '...' = Corporate name, '...' = Card Value - Gift card
4	USER_CREATE	VARCHAR2	15		ID of the user when record created.
5	DATE_CREATE	DATE	7		Record creation date and time.
6	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
7	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.27 PIN_MAILER_FORMAT

This table defines the content and the format of the PIN or CVV2 mailer. It is used to indicate to PowerCARD the information that should be printed on the PIN or CVV2 mailer as well their start printing position (Line/Column).

Records of 'PIN_MAILER_FORMAT' table concerns the payment instrument parameters setup, part of PowerCARD issuer system.

Refer to ["PIN mailer format"](#) section in UG1020-Payment instrument for more details.

Each column of this table is described in detail in the next section.

8.1.27.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	PIN_FORMAT_CODE	CHAR	3		The internal code identifying the format uniquely for the platform.
2	DESCRIPTION	VARCHAR2	32		PIN mailer format description.
3	PIN_L	NUMBER	2		This is used to enter the Line number on which the payment instrument's PIN will be printed on the PIN mailer.
4	PIN_R	NUMBER	3		This is used to enter the Column number on which the payment instrument's PIN will be printed on the PIN mailer.
5	PAN_L	NUMBER	2		This is used to enter the Line number on which the payment instrument's PAN (or the hidden PAN) will be printed on the PIN mailer.
6	PAN_R	NUMBER	3		This is used to enter the Column number on which the payment instrument's PAN (or the hidden PAN) will be printed on the PIN mailer.
7	PIN_MAILER_REF_NUM_L	NUMBER	2		This is used to enter the Line number on which the payment instrument's PIN mailer reference number will be printed on the PIN mailer.
8	PIN_MAILER_REF_NUM_R	NUMBER	3		This is used to enter the Column number on which the payment instrument's PIN mailer reference

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					number will be printed on the PIN mailer.
9	CVV_L	NUMBER	2		This is used to enter the Line number on which the payment instrument's CVV will be printed on the PIN mailer.
10	CVV_R	NUMBER	3		This is used to enter the Column number on which the payment instrument's CVV will be printed on the PIN mailer.
11	CVV_MAILER_REF_NUM_L	NUMBER	2		This is used to enter the Line number on which the payment instrument's CVV mailer reference number will be printed on the PIN mailer.
12	CVV_MAILER_REF_NUM_R	NUMBER	3		This is used to enter the Column number on which the payment instrument's CVV mailer reference number will be printed on the PIN mailer.
13	MAILER_OPTION	CHAR	1		This option is used to indicate whether the format being setup is for PIN or CVV. Possible values are: 'P' = PIN mailer, 'C' = CVV mailer (for CVV2) used for virtual payment instruments which don't need any embossing or encoding.
14	KEY_DOCUMENT_L	NUMBER	2		This is used to enter the Line number on which the payment instrument's key document will be printed on the PIN mailer.
15	KEY_DOCUMENT_R	NUMBER	3		This is used to enter the Column number on which the payment instrument's key document will be printed on the PIN mailer.
16	FAMILY_NAME_L	NUMBER	2		This is used to enter the Line number on which the family name of the payment instrument's holder will be printed on the PIN mailer.
17	FAMILY_NAME_R	NUMBER	3		This is used to enter the Column number on which the family name of the payment instrument's holder will be printed on the PIN mailer.
18	FIRST_NAME_L	NUMBER	2		This is used to enter the Line number on which the first name of the payment instrument's holder will be printed on the PIN mailer.
19	FIRST_NAME_R	NUMBER	3		This is used to enter the Column number on which the first name of the payment instrument's holder will be printed on the PIN mailer.
20	TITLE_L	NUMBER	2		This is used to enter the Line number on which the title of the payment instrument's holder will be printed on the PIN mailer.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
21	TITLE_R	NUMBER	3		This is used to enter the Column number on which the title of the payment instrument's holder will be printed on the PIN mailer.
22	ADDRESS1_L	NUMBER	2		This is used to enter the Line number on which the 1st line of the address of the payment instrument's holder will be printed on the PIN mailer.
23	ADDRESS1_R	NUMBER	3		This is used to enter the Column number on which the 1st line of the address of the payment instrument's holder will be printed on the PIN mailer.
24	ADDRESS2_L	NUMBER	2		This is used to enter the Line number on which the 2nd line of the address of the payment instrument's holder will be printed on the PIN mailer.
25	ADDRESS2_R	NUMBER	3		This is used to enter the Column number on which the 2nd line of the address of the payment instrument's holder will be printed on the PIN mailer.
26	ADDRESS3_L	NUMBER	2		This is used to enter the Line number on which the 3rd line of the address of the payment instrument's holder will be printed on the PIN mailer.
27	ADDRESS3_R	NUMBER	3		This is used to enter the Column number on which the 3rd line of the address of the payment instrument's holder will be printed on the PIN mailer.
28	ADDRESS4_L	NUMBER	2		This is used to enter the Line number on which the 4th line of the address of the payment instrument's holder will be printed on the PIN mailer.
29	ADDRESS4_R	NUMBER	3		This is used to enter the Column number on which the 4th line of the address of the payment instrument's holder will be printed on the PIN mailer.
30	CITY_L	NUMBER	2		This is used to enter the Line number on which the city name of the payment instrument's holder will be printed on the PIN mailer.
31	CITY_R	NUMBER	3		This is used to enter the Column number on which the city name of the payment instrument's holder will be printed on the PIN mailer.
32	COUNTRY_L	NUMBER	2		This is used to enter the Line number on which the country name of the payment instrument's holder will be printed on the PIN mailer.
33	COUNTRY_R	NUMBER	3		This is used to enter the Column number on which the country name of the payment instrument's holder will be printed on the PIN mailer.
34	LIB_REGION_CODE_L	NUMBER	2		This is used to enter the Line number on which the region code of the

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					payment instrument's holder will be printed on the PIN mailer.
35	LIB_REGION_CODE_R	NUMBER	3		This is used to enter the Column number on which the region code of the payment instrument's holder will be printed on the PIN mailer.
36	ZIP_CODE_L	NUMBER	2		This is used to enter the Line number on which the ZIP code of the payment instrument's holder will be printed on the PIN mailer.
37	ZIP_CODE_R	NUMBER	3		This is used to enter the Column number on which the ZIP code of the payment instrument's holder will be printed on the PIN mailer.
38	OTHER1_L	NUMBER	2		This is used to enter the Line number on which the Payment instrument's first other information will be printed on the PIN mailer.
39	OTHER1_R	NUMBER	3		This is used to enter the Column number on which the payment instrument's first other information will be printed on the PIN mailer.
40	OTHER1_T	VARCHAR2	20		This is used to enter the text of the payment instrument's first additional information that will be printed on the PIN mailer.
41	OTHER2_L	NUMBER	2		This is used to enter the Line number on which the payment instrument's second other information will be printed on the PIN mailer.
42	OTHER2_R	NUMBER	3		This is used to enter the Column number on which the payment instrument's second other information will be printed on the PIN mailer.
43	OTHER2_T	VARCHAR2	20		This is used to enter the text of the payment instrument's second additional information that will be printed on the PIN mailer.
44	OTHER3_L	NUMBER	2		This is used to enter the Line number on which the payment instrument's third other information will be printed on the PIN mailer.
45	OTHER3_R	NUMBER	3		This is used to enter the Column number on which the payment instrument's third other information will be printed on the PIN mailer.
46	OTHER3_T	VARCHAR2	20		This is used to enter the text of the payment instrument's third additional information that will be printed on the PIN mailer.
47	OTHER4_L	NUMBER	2		This is used to enter the Line number on which the payment instrument's fourth other information will be printed on the PIN mailer.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
48	OTHER4_R	NUMBER	3		This is used to enter the Column number on which the payment instrument's fourth other information will be printed on the PIN mailer.
49	OTHER4_T	VARCHAR2	20		This is used to enter the text of the payment instrument's fourth additional information that will be printed on the PIN mailer.
50	OTHER5_L	NUMBER	2		This is used to enter the Line number on which the payment instrument's fifth other information will be printed on the PIN mailer.
51	OTHER5_R	NUMBER	3		This is used to enter the Column number on which the payment instrument's fifth other information will be printed on the PIN mailer.
52	OTHER5_T	VARCHAR2	20		This is used to enter the text of the payment instrument's fifth additional information that will be printed on the PIN mailer.
53	OTHER6_L	NUMBER	2		This is used to enter the Line number on which the payment instrument's sixth other information will be printed on the PIN mailer.
54	OTHER6_R	NUMBER	3		This is used to enter the Column number on which the payment instrument's sixth other information will be printed on the PIN mailer.
55	OTHER6_T	VARCHAR2	20		This field is used to enter the Column number on which the payment instrument's sixth other information will be printed on the PIN mailer.
56	FORMAT_SCRIPT	VARCHAR2	200		The format code as it will be sent to the HSM
57	FIRST_NAME_2	VARCHAR2	40		The 2nd first name.
58	FAMILY_NAME_2	VARCHAR2	40		The 2nd family name.
59	PRIVATE_DATA_1	VARCHAR2	32		This field is reserved for future use.
60	PRIVATE_DATA_2	VARCHAR2	32		This field is reserved for future use.
61	PRIVATE_DATA_3	VARCHAR2	32		This field is reserved for future use.
62	PRIVATE_DATA_4	VARCHAR2	32		This field is reserved for future use.
63	PRIVATE_DATA_5	DATE	7		This field is reserved for future use.
64	PRIVATE_DATA_6	DATE	7		This field is reserved for future use.
65	PRIVATE_DATA_7	DATE	7		This field is reserved for future use.
66	PRIVATE_DATA_8	DATE	7		This field is reserved for future use.
67	PRIVATE_DATA_9	NUMBER	18	3	This field is reserved for future use.
68	PRIVATE_DATA_10	NUMBER	18	3	This field is reserved for future use.
69	PRIVATE_DATA_11	NUMBER	18	3	This field is reserved for future use.
70	PRIVATE_DATA_12	NUMBER	18	3	This field is reserved for future use.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
71	PRIVATE_TLV_DATA	VARCHAR2	250		The internal PowerCARD private data.
72	USER_CREATE	VARCHAR2	15		ID of the user when record created.
73	DATE_CREATE	DATE	7		Record creation date and time.
74	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
75	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.28 STK_INVENTORY_ITEM_RULE

This table is used to define the rule criteria used during the batch processes (production and pin mailer) to decrease the number of available items. It is defined for rule definition and allows linking each inventory item to a specific product, bank, plastic and card operation.

Each column of this table is described in detail in the next section.

8.1.28.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which parameters are being defined. This code should be defines in 'BANK' table.
2 	PRODUCT_CODE	CHAR	3		Code uniquely identifies the product for the issuing institution.
3 	PLASTIC_CODE	CHAR	3		The plastic code used to parametrize the different rules for items of the inventory.
4 	OPERATION_CODE	CHAR	1		The operation code used to parametrize the different rules for items of the inventory. Possible values are: 'I' = Insertion, 'M' = Modification, 'S' = Cancellation, 'F' = Replacement with fees, 'R' = Replacement without fees, 'N' = Renewal, 'C' = PIN calculation Without Fees, 'A' = PIN calculation cancellation, 'L' = Delivery card, 'P' = Card production cancellation, 'J' = Package request, 'W' = Manual renewal request, 'X' = Internal usage, 'Y' = PIN calculation with fees.
5 	ITEM_CODE	CHAR	6		The item code used to parametrize the different rules for items of the inventory.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
6 	BATCH	CHAR	1		This column is used to define in which batch the rule will be used. Possible values are: 'C' = Pan production 'P' = Pin mailer
7	NBR_DECREASE_STOCK	NUMBER	6		The number of item that the operation will use. This number will be decreased from the available of the item stock.
8	CATALOGUE_PI_VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P' (Generic Payment Instrument)
9	CATALOGUE_PI_PRODUCT	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P' (Generic Payment Instrument)
10	USER_CREATE	VARCHAR2	15		ID of the user when record created.
11	DATE_CREATE	DATE	7		Record creation date and time.
12	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
13	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.1.29 STK_INVENTORY_ITEM_DESC

This table is used to define the different items required for PAN embossing and pin mailer generation. It is used also to view the current status of each item.

Each column of this table is described in detail in the next section.

8.1.29.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which parameters are being defined. This code should be defined in 'BANK' table.
2 	ITEM_CODE	VARCHAR2	6		Unique code to define a specific item.
3	ABRV_WORDING	VARCHAR2	16		Shortened description used for information, for reporting or on other screen.
4	WORDING	VARCHAR2	32		Description used for information, for reporting or on another screen.
5	THRESHOLD_LIMIT	NUMBER	6		The number of available items threshold, which an alert case will be triggered.
6	AVAILABLE	NUMBER	6		Number of available items.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
7	REASON_CODE	VARCHAR2	4		The case reason code of the generated case when the available become smaller than the threshold limit.
8	USER_CREATE	VARCHAR2	15		ID of the user when record created.
9	DATE_CREATE	DATE	7		Record creation date and time.
10	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
11	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.2 Operation tables

8.2.1 CARD_PRODUCTION

This table contains the required data for PAN personalization and PIN mailer generation, such as:

- Payment instrument related data: Embossed name, encoded name, address details...
- PIN related data: Print options, format...
- Keys references
- Personalization file name
- PIN file name

Refer to [PAN production parameters](#) section in UG1020-Payment instrument user's guide for more details.

Each column of this table is described in detail in the next section.

8.2.1.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	CARD_NUMBER	VARCHAR2	22		Unique identification number of the payment instrument: PAN. It must match with the ISO 7812 norm.
2	CARD_SEQ_NUM	NUMBER	3		PAN sequence number. This code is set to '1' at the PAN creation and increased by 1 at each production of a new payment instrument with the same PAN.
3	CARD_PRODUCT_CODE	CHAR	3		The payment instrument product. It should be present in the 'CARD_PRODUCT' table.
4	BANK_CODE	CHAR	6		The issuer institution to which the payment instrument is linked. It should be present in the 'BANK' table.
5	BRANCH_CODE	CHAR	6		This is the branch to which the payment instrument belongs. It should be present in the 'BRANCH' table.
6	DELIVERY_BRANCH	CHAR	6		The branch code where the payment instrument will be sent post production. It should be present in the 'BRANCH' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					 Note It is applicable only when DELIVERY_MODE column is set to 'B' (Branch) at 'CARD' table.
7	ACCOUNT_NUMBER	VARCHAR2	24		The first account linked to the payment instrument. It could be: - A shadow account in case of non Debit PANs. In this case, it must exist in 'SHADOW_ACCOUNT' table. - Or an account institution in case of Debit PANs.
8	NETWORK_CODE	CHAR	2		The System or international network code, to which the payment instrument product belongs. This information will make the system ask for payment system specific code. It should be present in the 'NETWORK' table.
9	NETWORK_CARD_CLASS	CHAR	2		The network classification of the payment instrument product (classic, silver, gold, premium etc.). It should be present in the 'CARD_CLASS' table.
10	CLIENT_CODE	VARCHAR2	24		Unique code identifying the client. It should be present in the 'CLIENT' table.
11	CORPORATE_ID	VARCHAR2	15		This is the corporate identification number. It should be present in the 'CORPORATE' table.
12	VIP_LEVEL	CHAR	1		This is to indicate the VIP level of the cardholder. It should be present in the table 'VIP_LIST'.
13	OWNER_CODE	CHAR	2		This is to indicate who owns the payment instrument (Individual, corporate...). It should be present in the 'OWNER_LIST' table.
14	LIMITS_INDEXES	CHAR	4		The limit index identifying the limits applied on the PAN. These limits may be either set at the card level or at the account level.
15	PERIODICITY_CODE	CHAR	4		This column is not used in V3.5.
16	START_VAL_DATE	DATE	7		The start validity period of the payment instrument. (MMYYYY).
17	EXPIRY_DATE	DATE	7		The expiry date of the payment instrument. (MMYYYY).
18	EMBOSSING_OPTION	CHAR	1		This column indicates whether the payment instrument production should be automatically performed upon the triggering request (First issuance,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					renewal, replacement) or should wait for a manual confirmation. Possible values are: 'A' = Automatic, 'M' = Manual operation required.
19	EMBOSSSED_NAME	VARCHAR2	26		The cardholder name as it should be embossed on the payment instrument.
20	EMBOSSING_LOCATION	VARCHAR2	30		This column is not used in V3.5.
21	ENCODED_NAME	VARCHAR2	26		The cardholder name, as it should be encoded on the ISO I track of the payment instrument.
22	SERVICE_CODE	CHAR	3		The service code in accordance ISO/CEI 7813 standard. First digit (Position 1) '1' = International, '2' = International other technology, '5' = National, '6' = National other technology, '7' = Private (Invalid for Visa & MCI). Second digit (Position 2) '0' = normal risk level, '1' = Low risk level (Invalid for Visa & MCI), '2' = Positive authorization required, '3' = High risk level (Invalid for Visa & MCI), '4' = Required issuer authorization or stand-in in case of specific agreement (Invalid for Visa and MCI, Valid for Cirrus and Maestro). Third digit (Position 3) '0' = No restriction, Pin required, '1' = No restriction, '2' = Retail only [1], '3' = Withdrawal only, Pin required, '4' = Withdrawal only (Invalid for Visa & MCI), '5' = Retail only, Pin required, '6' = No restriction, Pin required if PINPAD, '7' = Retail only, Pin required if PINPAD, [1] This value is not used for cards issued from October 1st 1994.
23	LANGUAGE_CODE	CHAR	3		The language of the cardholder. It should be present in the 'LANGUAGE_LIST' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
24	CARD_TYPE	CHAR	2		The payment instrument type that contains a set of information, such as the interchange class (Visa: Gold, Classic, Electron, MCI, Gold, Classic, Maestro, Etc.), the class level (Credit, Debit, Prepaid) and the group (Individual, Business). It should be present in the 'CARD_TYPE' table.
25	CARD_FEES_CODE	CHAR	3		The fee code to which the payment instrument applies. It should be present in the 'CARD_FEES' table.
26	CARRIER_CODE	CHAR	2		This column is not used in V3.5.
27	CARRIER_WORDING	VARCHAR2	64		This column is not used in V3.5.
28	WELCOME_PACK_TYPE	CHAR	2		This column is not used in V3.5.
29	WELCOME_PACK_TYPE_WORDING	VARCHAR2	64		This column is not used in V3.5.
30	LETTER_CODE	VARCHAR2	6		This column is not used in V3.5.
31	LAST_BATCH_PROD_NUM	VARCHAR2	8		The latest production batch number where the payment instrument production details are treated. It is updated during the payment instrument production batch processing.
32	LAST_BATCH_CALC_NUM	VARCHAR2	8		The latest production batch number where the PIN mailer is treated. It is updated during the PIN calculation batch processing.
33	PROD_ADDRESS_1	VARCHAR2	64		This is the First line of the cardholder address.
34	PROD_ADDRESS_2	VARCHAR2	64		This is the Second line of the cardholder address.
35	PROD_ADDRESS_3	VARCHAR2	64		This is the Third line of the cardholder address.
36	PROD_ADDRESS_4	VARCHAR2	64		This is the fourth line of the cardholder address.
37	PROD_CITY_CODE	CHAR	5		The city code of the preferred payment instrument address of the cardholder. It should be present in the 'CITY' table.
38	PROD_CITY_NAME	VARCHAR2	30		The City name of the preferred payment instrument address of the cardholder. It should be present in the 'CITY' table.
39	PROD_COUNTRY_CODE	CHAR	3		The country code of the preferred payment instrument address of the cardholder. It should be present in the 'COUNTRY' table.
40	PROD_COUNTRY_NAME	VARCHAR2	32		The country name of the preferred payment instrument address of the cardholder. It should be present in the 'COUNTRY' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
41	PROD_ZIP_CODE	VARCHAR2	10		Zip code of the preferred payment instrument address of the cardholder. It should be present in the 'ZIP_CODE' table
42	PROD_CARE_OF	VARCHAR2	64		The mail recipient in the preferred payment instrument address (To:.) of the cardholder. It should be present in the 'ADDRESSES_LIST' table.
43	PIN_ADDRESS_1	VARCHAR2	64		This is the first line of the cardholder PIN address.
44	PIN_ADDRESS_2	VARCHAR2	64		This is the second line of the cardholder PIN address.
45	PIN_ADDRESS_3	VARCHAR2	64		This is the third line of the cardholder PIN address.
46	PIN_ADDRESS_4	VARCHAR2	64		This is the fourth line of the cardholder PIN address.
47	PIN_CITY_CODE	CHAR	5		The city code of the preferred PIN address of the cardholder. It should be present in the 'CITY' table.
48	PIN_CITY_NAME	VARCHAR2	30		The city name of the preferred PIN address of the cardholder. It should be present in the 'CITY' table.
49	PIN_COUNTRY_CODE	CHAR	3		The country code of the preferred PIN address of the cardholder. It should be present in the 'COUNTRY' table.
50	PIN_COUNTRY_NAME	VARCHAR2	32		The country name of the preferred PIN address of the cardholder. It should be present in the 'COUNTRY' table.
51	PIN_ZIP_CODE	VARCHAR2	10		Zip code of the preferred PIN address of the cardholder. It should be present in the 'ZIP_CODE' table.
52	PIN_CARE_OF	VARCHAR2	64		The mail recipient in the preferred PIN address (To: ..) of the cardholder. It should be present in the 'ADDRESSES_LIST' table.
53	NUMBER_OF_CARDS	NUMBER	4	0	Number of payment instruments for the same client.
54	COMPANY_NAME	VARCHAR2	40		The FAMILY_NAME column's value from the 'CLIENT' table. It is applicable only when the OWNER_CATEGORY column's value from the 'CLIENT' table is one of the below values: 'B'= Business, 'N' = Company, 'C' = Corporate, 'T' = Corporate travel, 'L' = International corporate,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'R' = Procurement.
55	TITLE_CODE	CHAR	2		The title code of cardholder. It should be present in the 'TITLE_LIST' table.
56	FAMILY_NAME	VARCHAR2	40		The family name of the cardholder.
57	FIRST_NAME	VARCHAR2	40		The first name of the cardholder.
58	FILE_NAME_PROD	VARCHAR2	40		The name of the personalization file.
59	PREFIX_PROD	VARCHAR2	3		This column is used to enter the prefix indicator of the personalization file.
60	SUFFIX_PROD	VARCHAR2	3		This column is used to enter the suffix indicator of the personalization.
61	PLASTIC_CODE	CHAR	3		The Plastic code of the payment instrument. It should be present in the 'PLASTIC_LIST' table.
62	PLASTIC_ABRV_WORDING	VARCHAR2	20		The abbreviate wording of plastic. It should be present in the 'PLASTIC_LIST' table.
63	PLASTIC_PRODUCTION_IND	CHAR	1		Code to be passed in specific command to the embossing/encoding machine. Possible values are: 'EE' = Embossing & encoding, 'PE' = Printing & encoding.
64	SM_PREFERRED_CARD_ADDRESS	CHAR	2		The sending mode of preferred payment instrument address. It should be present in the 'SENDING_MODE_LIST' table.
65	INITIAL_SUBSCRIPTION_DATE	DATE	7		The date of the initial subscription of the client.
66	IMAGE_REF_NUMBER	VARCHAR2	12		The image reference number of the cardholder.
67	PHOTO_REFERENCE_NUMBER	VARCHAR2	24		The internal reference number of cardholder photography.
68	PIN_MAILER_ON_HSM	CHAR	1		The way by which the PIN mailer will be printed. Possible values are: 'H' = HSM (in case the administrator does not want to print pin mailer), 'F' = File (to request the system to print PIN mailer). Note  If PIN_MAILER_ON_HSM = 'F' (File), PIN_FORMAT_SEND_FLAG and FORMAT_PIN_MAILER_CODE fields are not used.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
69	FILE_NAME_PIN	VARCHAR2	40		The name of the PIN mailer file used only when PIN_MAILER_ON_HSM = 'F' (File). Note This column is used to compose the generated spool file name by the system as follows "PTextS" where P = PREFIX_PIN, Text = FILE_NAME_PIN and S = SUFFIX_PIN. For Example, PRFileProduct001 means that P = 'PR', Text = 'FileProduct' and S = '001'.
70	PREFIX_PIN	VARCHAR2	3		This column is used to enter the prefix indicator of the PIN Mailer file. It is used only when PIN_MAILER_ON_HSM = 'F' (File). Note This column is used to compose the generated spool file name by the system as follows "PTextS" where P = PREFIX_PIN, Text = FILE_NAME_PIN and S = SUFFIX_PIN. For Example, PRFileProduct001 means that P = 'PR', Text = 'FileProduct' and S = '001'.
71	SUFFIX_PIN	VARCHAR2	3		This column is used to enter the suffix indicator of the PIN Mailer file. It is used only when PIN_MAILER_ON_HSM = 'F' (File). Note This column is used to compose the generated spool file name by the system as follows "PTextS" where P = PREFIX_PIN, Text = FILE_NAME_PIN and S = SUFFIX_PIN. For Example, PRFileProduct001 means that P = 'PR', Text = 'FileProduct' and S = '001'.
72	PIN_FORMAT_SEND_FLAG	CHAR	1		This column defines if the system should send the PIN Mailer format to the HSM and how. Possible values are: 'N' = Never (PIN Mailer format will never be sent to the HSM. In this case,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					FORMAT_PIN_MAILER_CODE field is not used), 'E' = For each product (PIN Mailer format will be linked to the product. The HSM will use the format indicated by the FORMAT_PIN_MAILER_CODE field described below), 'T' = One time (The HSM will always use the PIN format once received the first time).
73	FORMAT_PIN_MAILER_CODE	CHAR	3		The Pin mailer format. This code is used when PIN_FORMAT_SEND_FLAG = 'N' (Never). It should be present in the 'PIN_MAILER_FORMAT' table.
74	PVKA_KEY	VARCHAR2	512		This is the HSM PVKA actual type of key. It should be present in the 'HSM_KEY_MEMBER' table with the issuing bank code and the primary PIN key number.
75	PVKB_KEY	VARCHAR2	16		This is the HSM PVKB actual type of key. It should be present in the 'HSM_KEY_MEMBER' table with the issuing bank code and the primary PIN key number.
76	PVKI_KEY	NUMBER	1	0	This is the HSM PVKI key. It is the Index of PVKA and PVKB corresponding to the card range.
77	CVKA_KEY	VARCHAR2	512		This is the HSM CVKA actual type of key. It should be present in the 'HSM_KEY_MEMBER' table with the issuing bank code and the primary CVV key number.
78	CVKB_KEY	VARCHAR2	16		This is the HSM CVKB actual type of key. It should be present in the 'HSM_KEY_MEMBER' table with the issuing bank code and the primary CVV key number.
79	CVKI_KEY	NUMBER	1		This is the HSM CVKI actual type of key. It should be present in the 'HSM_KEY_MEMBER' table with the issuing bank code and the primary CVV key number.
80	DKI_KEY	NUMBER	3		This is the HSM DKI actual type of key. It should be present in the 'HSM_KEY_MEMBER' table with the issuing bank code and the primary CVV key number.
81	PVV	NUMBER	4	0	The PIN Verification Value, used to verify the PIN (VISA method).
82	CVC1	NUMBER	3	0	Card Verification value 1, used to verify the integrity of the card. (Track I or track II is present).

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
83	CVC2	NUMBER	3	0	Card Verification value 2, used to verify the integrity of the card. (Both track I and track II are not present).
84	LMK_ID	CHAR	2		This is the HSM LMK actual type of key. It should be present in the 'HSM_KEY_MEMBER' table with the issuing bank code and the primary CVV key number.
85	PROD_PIN_OFFSET_PVV	CHAR	3		This flag indicates if the PIN control uses PVV or OFFSET method. Possible values are: 'NCP' = No PIN, 'PVV' = PVV Method, 'OFS' = Offset Method.
86	PROD_CVV1	CHAR	1		This flag indicates if the CVV1 should be calculated. Possible values are: 'Y' = Yes, 'N' = No.
87	PROD_CVV2	CHAR	1		This flag indicates if the CVV2 should be calculated. Possible values are: 'Y' = Yes, 'N' = No.
88	PROD_ENCOD_ISO1	CHAR	1		This column is not used in V3.5.
89	PROD_ENCOD_ISO2	CHAR	1		This column is not used in V3.5.
90	PROD_ENCOD_ISO3	CHAR	1		This column is not used in V3.5.
91	PRODUCTION_FLAG	CHAR	1		This column indicates if the payment instrument need to be personalized along with the PIN mailer generation or one of them. Possible values are: 'C' = Only to produce the payment instrument, 'P' = Only to print the PIN, 'B' = Produce the payment instrument and print the PIN.
92	CARD_PRODUCED_FLAG	VARCHAR2	8		This column indicates whether the payment instrument personalization has been treated or not yet. Possible values are: 'Not Sent' = Personalization not yet processed,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'Canceled' = Personalization aborted To CHAR (SYSDATE, 'DDMMYYHH'): Personalization treated on SYSDATE.
93	PIN_PRINTED_FLAG	VARCHAR2	8		This column indicates whether the PIN mailer generation has been done or not yet. Possible values are: 'Not Sent' = PIN mailer not yet processed, 'Canceled' = PIN mailer aborted To CHAR (SYSDATE, 'DDMMYYHH'): PIN mailer treated on SYSDATE.
94	OFF_LINE_ATM_PERIOD	CHAR	3		This column is not used in V3.5.
95	OFF_LINE_ATM_LIMIT_ONUS	NUMBER	18	0	This column is not used in V3.5.
96	OFF_LINE_ATM_LIMIT_OFFUS	NUMBER	18	0	This column is not used in V3.5.
97	ON_LINE_ATM_LIMIT	NUMBER	18	0	This column is not used in V3.5.
98	ROT_MEM_OPTION	CHAR	1		This column is not used in V3.5.
99	ROT_MEM_CTRL_LIMIT	CHAR	1		This column is not used in V3.5.
100	ROT_MEM_CTRL_AVAILABLE	CHAR	1		This column is not used in V3.5.
101	ROT_MEM_SCANF_ISO2_ISO3	CHAR	1		This column is not used in V3.5.
102	ROT_MEM_LAST_USAGE_DATE	CHAR	1		This column is not used in V3.5.
103	ISO3_SMART_PROC_MODE	CHAR	7		This column is not used in V3.5.
104	ISO3_SMART_OPTION	CHAR	1		Possible values are: This column is not used in V3.5.
105	OTHERS_ISO1	VARCHAR2	8		This column is not used in V3.5.
106	OTHERS_ISO2	VARCHAR2	13		This column is not used in V3.5.
107	PIN_RETRY_NUMBER	NUMBER	1	0	The maximum PIN retry number.
108	FREE_TEXT_1	VARCHAR2	32		The fixed text printed in front of the payment instrument. It should be present in the 'PLASTIC_LIST' table.
109	FREE_TEXT_POSITION_1	CHAR	2		The position where FREE_TEXT_1 has to be printed.
110	FREE_TEXT_2	VARCHAR2	32		The fixed text printed on back of the payment instrument. It should be present in the 'PLASTIC_LIST' table.
111	FREE_TEXT_POSITION_2	CHAR	2		The position where FREE_TEXT_2 has to be printed.
112	ADDITIONAL_CARD_CODE_1	VARCHAR2	22		This column is not used in V3.5.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
113	ADDITIONAL_CARD_CODE_2	VARCHAR2	22		This column is not used in V3.5.
114	ADDITIONAL_CARD_CODE_3	VARCHAR2	22		This column is not used in V3.5.
115	ADDITIONAL_CARD_CODE_4	VARCHAR2	22		This column is not used in V3.5.
116	ADDITIONAL_CARD_CODE_5	VARCHAR2	22		This column is not used in V3.5.
117	ADDITIONAL_CARD_CODE_6	VARCHAR2	22		This column is not used in V3.5.
118	ADDRESS_NAME	VARCHAR2	40		This column is not used in V3.5.
119	SM_ADDRESS_1	VARCHAR2	30		This column is not used in V3.5.
120	SM_ADDRESS_2	VARCHAR2	30		This column is not used in V3.5.
121	SM_ADDRESS_3	VARCHAR2	30		This column is not used in V3.5.
122	SM_ZIP_CODE	VARCHAR2	10		This column is not used in V3.5.
123	SM_CITY_CODE	CHAR	5		This column is not used in V3.5.
124	SM_CITY_NAME	VARCHAR2	30		This column is not used in V3.5.
125	SM_COUNTRY_CODE	CHAR	3		This column is not used in V3.5.
126	SM_COUNTRY_NAME	VARCHAR2	32		This column is not used in V3.5.
127	DIVERT_CODE	VARCHAR2	10		This column is not used in V3.5.
128	OPERATION_TYPE	CHAR	2		The operation that triggered the payment instrument production. Possible values are: 'IS' = First issuance, 'RN' = Renewal, 'RP' = Replacement.
129	CARD_ISSUING_TYPE	CHAR	1		The operation that triggered the payment instrument production. Possible values are: 'N' = New PAN, 'R' = Renewal, 'L' = Lost/Stolen Replacement, 'O' = Other Replacement (Other than lost/stolen).
130	CDC_VALIDITY_FLAG	CHAR	1		This column indicates whether the payment instrument is national or international. The values are derived from SERVICE_CODE field at 'CARD_PRODUCT' table. Possible values are: '0' = National (When the first digit of SERVICE_CODE is set to '5' or '6'), '1' = International (When the first digit of SERVICE_CODE is set to '1').

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
131	CHANNEL_NUMBER	VARCHAR2	15		The channel identification number. It should be present in the 'CHANNEL' table.
132	FILE_NUMBER	VARCHAR2	20		The file identification number used to submit the payment instrument creation request in the boarding file.
133	FIRST_NAME_2	VARCHAR2	40		This is the 2nd first name.
134	FAMILY_NAME_2	VARCHAR2	40		This is the 2nd family name.
135	ISSUER_CODE	VARCHAR2	5		The issuer institution as defined in the 'EMBOSSING_SPLITTING_PARAMETER' table. This value can be different from the BANK_CODE column's one since some institutions could be processing for some others.
136	SENDER_CODE	VARCHAR2	5		The embossing file's sender code as defined in the 'EMBOSSING_SPLITTING_PARAMETER' table.
137	RECEIVER_CODE	VARCHAR2	5		Code of the intermediate party that will receive the embossing file before sending it to the final destination as defined in the 'EMBOSSING_SPLITTING_PARAMETER' table.
138	DESTINATION_CODE	VARCHAR2	5		Code of the embossing file's destination code as defined in the 'EMBOSSING_SPLITTING_PARAMETER' table.
139	ISSUING_TYPE	CHAR	4		This column refers to ISSUING_TYPE column in 'EMBOSSING_SPLITTING_PARAMETER' table.
140	PRIORITY_INDICATOR	CHAR	3		The priority level with which the embossing of the payment instrument should be processed. It will be retrieved from the 'CARD' table and It should be present in the 'PRIORITY_INDICATOR' table.
141	PROMOTION_CODE	CHAR	10		Code of promotion to which the institution is registered. It will be retrieved from the 'CARD' table and It should be present in the 'PROMOTION_LIST' table.
142	PLASTIC_DELIVERY_METHOD	CHAR	3		The plastic delivery method (Secured mail, Ordinary mail, Air mail ...). It should be present in the 'DELIVERY_METHOD' table.
143	PIN_DELIVERY_METHOD	CHAR	3		The PIN delivery method (Secured mail, Ordinary mail, Air mail ...). It should be present in the 'DELIVERY_METHOD' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
144	SPLITTING_ID	NUMBER	10		This column refers to the 'EMBOSSING_SPLITTING_PARAMETER' record. It contains the value of the SEQUENCE_ID field.
145	EMBOSSING_STATUS	CHAR	1		This column is used to indicate if the payment instrument is sent in the production file or recycled. Possible values are: 'N' = Normal status, 'C' = Partially recycled, 'R' = Recycled. Note  This status is used to specify the payment instrument records concerned with the batch depending on the selected batch processing mode.
146	PROD_REGION_CODE	CHAR	3		The region code of the preferred address of the cardholder. It should be present in the 'REGION' table.
147	PROD_REGION_NAME	VARCHAR2	32		The region name of the preferred address of the cardholder. It should be present in the 'REGION' table.
148	PIN_REGION_CODE	CHAR	3		The region code of the preferred PIN address of the cardholder. It should be present in the 'REGION' table.
149	PIN_REGION_NAME	VARCHAR2	32		The region name of the preferred PIN address of the cardholder. It should be present in the 'REGION' table.
150	PRIVATE_DATA_1	VARCHAR2	32		PowerCARD private data element.
151	PRIVATE_DATA_2	VARCHAR2	32		PowerCARD private data element.
152	PRIVATE_DATA_3	VARCHAR2	32		PowerCARD private data element.
153	PRIVATE_DATA_4	VARCHAR2	32		PowerCARD private data element.
154	PRIVATE_DATA_5	DATE	7		PowerCARD private data element.
155	PRIVATE_DATA_6	DATE	7		PowerCARD private data element.
156	PRIVATE_DATA_7	DATE	7		PowerCARD private data element.
157	PRIVATE_DATA_8	DATE	7		This field contains the PowerCARD private data element.
158	PRIVATE_DATA_9	NUMBER	18	3	PowerCARD private data element.
159	PRIVATE_DATA_10	NUMBER	18	3	PowerCARD private data element.
160	PRIVATE_DATA_11	NUMBER	18	3	PowerCARD private data element.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
161	PRIVATE_DATA_12	NUMBER	18	3	PowerCARD private data element.
162	PRIVATE_TLV_DATA	VARCHAR2	250		The internal private TLV PowerCARD data.
163	ALIAS_PAN	VARCHAR2	22		This is an Alias generated for the PAN.
164	SENSITIVE_OPERATION_RECORD	CHAR	1		The related action code. Possible values are: 'I' = Insertion, 'F' = Replacement with fees, 'R' = Replacement without fees, 'N' = Renewal, 'C' = PIN calculation Without Fees, 'A' = PIN calculation cancellation, 'P' = Card production cancellation, 'W' = Manual renewal request, 'Y' = PIN calculation with Fees.
165	USER_CREATE	VARCHAR2	15		ID of the user when record created.
166	DATE_CREATE	DATE	7		Record creation date and time.

8.2.2 CARD_PRODUCTION_HIST

This table is used to define the different operations (such as manual renewal, PAN reissue, PIN request ...) that have taken place during the life cycle of the Payment instrument.

Refer to "[Operations history](#)" section in UG1020-Payment instrument user's guide for more details.

Each column of this table is described in detail in the next section.

8.2.2.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	BANK_CODE	CHAR	6		Issuer institution to which the payment instrument is linked. It must be present in the 'BANK' table.
2	CARD_NUMBER	VARCHAR2	22		Unique identification number of the payment instrument: PAN. It must match with the ISO 7812 norm.
3	OPERATION_TYPE	CHAR	1		The type of operation that has been requested. Possible values are: 'C' = Creation, '...' = Automatic renewal, '...' = Manual renewal, '...' = Same PAN reissue, 'A' = New PAN reissue, '...' = PIN request.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
4	OPERATION_STATUS	CHAR	1		The operation status. Possible values are: '...' = Captured, '...' = Ongoing, '...' = Done, 'P' = Purged.
5	PAN_PERSO_STATUS	CHAR	1		PAN perso status. Possible values are: 'N/A' = N/A, 'P' = Pending, '...' = Done.
6	PIN_PERSO_STATUS	CHAR	1		PIN perso status. Possible values are: '...' = N/A, 'P' = Pending, '...' = Done.
7	PIN_DELAYED	CHAR	1		PIN delayed. Possible values are: 'Y' = Yes, 'N' = No.
8	USER_CREATE	VARCHAR2	15		ID of the user when record created.
9	DATE_CREATE	DATE	7		Record creation date and time.

8.2.3 EMB_RECYCLING

This table is used to view these PANs and release their embossing post correcting the setup that causes the rejection. Refer to ["Embossing recycle"](#) section in UG1020-Payment instrument user guide.

Each column of this table is described in detail in the next section.

8.2.3.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	CARD_NUMBER	VARCHAR2	22		Unique identifying the PAN number of the parameter being defined.
2	BANK_CODE	CHAR	6		Financial institution for which parameters are being defined. This code should be defines in 'BANK' table.
3	BRANCH_CODE	CHAR	6		The branch within the issuer bank. I must be defined in 'BRANCH' table.
4	PRODUCT_CODE	CHAR	3		The marketable catalogue product linked to the PAN. The PAN of the payment instrument rejected for the embossing.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
5	FIRST_NAME	VARCHAR2	40		The first name of the client owner of the PAN.
6	LAST_NAME	VARCHAR2	40		The family name of the client owner of the PAN.
7	RECYCLE_FLAG	CHAR	1		The errors that caused the PAN embossing failure. Possible values are: '...' = Error code '...' = Error description
8	SENSITIVE_OPERATION_RECORD	CHAR	1		This flag indicates if it's a sensitive operation or not. Possible values are: 'Y' = Sensitive operation, 'N' = Not Sensitive operation.
9	USER_CREATE	VARCHAR2	15		ID of the user when record created.
10	DATE_CREATE	DATE	7		Record creation date and time.
11	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
12	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.2.4 EMBOSSING_ERROR

This table is used to define errors related to PAN not embossed.

Each column of this table is described in detail in the next section.

8.2.4.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	CARD_NUMBER	VARCHAR2	22		Code identifying the PAN number.
2 	ERROR_CODE	CHAR	4		Unique code identifying the error related to the concerned PAN.
3	ERROR_DESC	VARCHAR2	255		Description of the error's nature related to the concerned PAN.
4	USER_CREATE	VARCHAR2	15		ID of the user when record created.
5	DATE_CREATE	DATE	7		Record creation date and time.
6	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
7	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.2.5 NEGOC_EMV_TAGS

This table is used to stores the link between an negotiated EMV application of a catalogue product and its EMV tags.

Each column of this table is described in detail in the next section.

8.2.5.1 Columns description

Seq.	Column Name	Data type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which parameters are being defined. It should be defined in the 'BANK' table.
2 	APPLICATION_ID	VARCHAR2	24		The application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
3 	APPLICATION_CONTRACT_ID	VARCHAR2	24		The application contract identification generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
4 	PRODUCT_CODE	CHAR	3		This is the payment instrument Product code for which the EMV tags parameters are being defined. It should be defined in 'CARD_PRODUCT' table.
5 	ICC_APPLICATION_ID	CHAR	4		The unique code identifying the ICC application. It should be defined in the 'EMV_ICC_APPLICATION_IDENTIFIER' table.
6 	TAG_ID	CHAR	6		EMV tag identification. It should be defined in 'EMBOSSING_TAG_REF' table.
7 	TAG_USE_TYPE	CHAR	4		The interface to which the tag is linked. Possible values are: 'SHIT' = Shared interface 'CTIT' = Contact interface 'CLIT' = Contactless interface
8	TAG_LENGTH	VARCHAR2	32		The length of the tag's value.
9	TAG_VALUE_TYPE	CHAR	1		How the value of the Tag can be retrieved. Possible values are: 'F' = Fixed: In this case the user have to capture the Tag value related, 'E' = Exit function: In this case the user should specify the function name. The value of the current tag will be automatically calculated based on the function selected.
10	VALUE	VARCHAR2	512		Tag value to be used by the system for the current tag.  Note This field is applicable only if TAG_VALUE_TYPE = 'F'
11	EXIT_FUNCTION_ID	CHAR	6		In case TAG_VALUE_TYPE = 'E', this column defines the code identifying the function that will be executed to calculate the value of

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					the current tag. It must be defined in 'EXIT_FUNCTIONS_SOURCE' table.
12	TABLE_NAME	VARCHAR2	30		This column is not used in V3.5.
13	FIELD_NAME	VARCHAR2	30		This column is not used in V3.5.
14	USER_CREATE	VARCHAR2	15		ID of the user when record created.
15	DATE_CREATE	DATE	7		Record creation date and time.
16	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
17	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

8.2.6 STK_INVENTORY_MAINTENANCE

This table is used to manage items involved in the PAN embossing and Pin mailer process. Each column of this table is described in detail in the next section.

8.2.6.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	SEQUENCE_NUMBER	NUMBER	10		Sequence number of the parameter being defined.
2	BANK_CODE	CHAR	6		Financial institution for which parameters are being defined. This code should be defined in 'BANK' table.
3	ITEM_CODE	VARCHAR2	6		Unique code to define a specific item.
4	OPERATION_CODE	CHAR	1		The operation code used to parametrize the different rules for items of the inventory. Possible values are: 'I' = Insertion, 'M' = Modification, 'S' = Cancellation, 'F' = Replacement with fees, 'R' = Replacement without fees, 'N' = Renewal, 'C' = PIN calculation Without Fees, 'A' = PIN calculation cancellation, 'L' = Delivery card, 'P' = Card production cancellation, 'J' = Package request, 'W' = Manual renewal request, 'X' = Internal usage, 'Y' = PIN calculation with fees.
5	NBR_OF_ITEMS	NUMBER	6		The inventory items number for PAN embossing will be updated during the

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					PAN Production and Pin Mailer batch, according to the settings defined in 'STK_INVENTORY_ITEM_RULE' table.
6	REASON	VARCHAR2	64		The case reason code of the generated case when the available become smaller than the threshold limit.
7	USER_CREATE	VARCHAR2	15		ID of the user when record created.
8	DATE_CREATE	DATE	7		Record creation date and time.
9	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
10	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

- Once every N years.

Refer to "[Fees on event](#)" section in UG 1019-Catalogue user guide for more details.

Each column of this table is described in detail in the next section.

9.2.1.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Financial institution of the parameter being defines. It should be defined in the 'BANK' table.
2 	PROFILE_CODE	CHAR	3		Profile code concerned by the Automatic fees on event index. It should be defined in the 'CR_PROFILE' table.
3 	INDEX_CODE	CHAR	4		The index code. It is used at the 'CR_PROFILE' table parameters level to specify the link between the account profile and its transaction-based fees. The index should be defined in 'CR_AUTO_FEES_ON_TRANS_ID' table.
4 	EVENT_CODE	CHAR	3		The event triggering the fee generation. Possible values are: 'CLC' = Credit limit increase, 'LLC' = Credit limit decrease, 'INC' = Inactive period, 'NAC' = New account, 'OAY' = Once a year, 'ONY' = Once n year, 'OVP' = Overdrawn permitted, 'OVR' = Overdrawn, 'FUP' = first unpaid, 'SUP' = Second unpaid, 'TUP' = Third unpaid or more, 'ALT' = At least on transaction occurred.
5 	EVENT_SEQUENCE	CHAR	1		This is the sequence of the fee in case different fees are generated for the same event.
6	ABRV_WORDING	VARCHAR2	16		The automatic fees on event case abbreviated wording.
7	WORDING	VARCHAR2	32		The automatic fees on event case wording.
8	EVENT_STATUS	CHAR	1		The fee generation case status indicating whether the fee can be generated or not. Possible values are: 'N' = Normal (The system will generate the fee), 'I' = Ignore (The system will not generate the fee).

Seq.	Column Name	Data Type	Len	Sc	Column Description
					 Note This column is set by default to 'N'.
9	EVENT_TRANSACTION_CODE	CHAR	2		The transaction code when EVENT_CODE = 'ALT' (At least on transaction occurred). It should be defined in 'CR_TRANSACTION_PARAMETER' table.
10	EVENT_REVERSAL_FLAG	CHAR	1		The event reversal flag. Possible values are: 'N' = Normal, 'R' = Reversal.  Note It is required only when EVENT_CODE = 'ALT' (At least on transaction occurred).
11	CRITERIA_TRANSACTION_INDEX	CHAR	4		This is the index of the automatic fee generation criteria. It should be defined in 'CR_AUTO_FEES_CRITERIA_PAR' table.  Note It is required only when EVENT_CODE = 'ALT' (At least on transaction occurred).
12	PERIOD_CHECK	CHAR	1		The event based automatic fee generation period. Possible values are: 'S' = On start period, 'E' = On end period, 'B' = Based on reference date (When EVENT_CODE = 'NAC').  Note This column is required only when EVENT_CODE = 'OAY' (Once a year), 'NAC' (New account) or 'ONY' (Once n year).
13	NUMBER_OF_YEARS	NUMBER	2		Number of years defining the period.  Note It is required only when EVENT_CODE = 'ONY' (Once n year).

Seq.	Column Name	Data Type	Len	Sc	Column Description
14	REFERENCE_DATE	CHAR	3		The reference date for PERIOD_CHECK = 'B' (Based on reference date) Possible values are: 'OPD' = Account opening date, 'APD' = Account application date.
15	GEN_TRANSACTION_CODE	CHAR	2		This is the generated fee transaction code. It should be defined in 'CR_TRANSACTION_PARAMETER' table.
16	GEN_REVERSAL_FLAG	CHAR	1		This is the generated fee transaction reversal flag. Possible values are: 'N' = Normal, 'R' = Reversal.
17	CURRENCY_CODE	CHAR	3		The currency set for the automatic fee generation amount parameters. It should be defined in the 'CURRENCY_TABLE'.
18	RATE	NUMBER	9	6	This is the rate to be applied on the base amount as to generate the event based automatic fee. The base amount depends on the Event code: For EVENT_CODE = 'NAC' (New account), 'OAY' (Once a year) or 'ONY' (Once n year), the rate is applied on the Account Credit limit. For EVENT_CODE = 'OVP' (Overdrawn permitted) or 'OVR' (Overdrawn), the rate is applied on the Account overdrawn amount. For EVENT_CODE = 'FUP' (First unpaid), 'SUP' (Second unpaid) or 'TUP' (Third unpaid or more), the rate is applied on the basic amount calculated based on LPF_BASIC_AMOUNT field value defined in 'CR_PROFILE' table.
19	FIXE	NUMBER	18	3	This is the amount that will be added to the result before comparing to the minimum, maximum and grace amount.
20	MINIMUM	NUMBER	18	3	This is the minimum amount that will be compared to the final result in order to bring this result in line with the minimum amount, if the final result is less than this Minimum (If the final result is less than the minimum amount, then the final result gets the Minimum value).
21	MAXIMUM	NUMBER	18	3	This is the maximum amount that will be compared to the final result in order to bring this result in line with the maximum amount, if the final result is greater than this Maximum (If the final result is greater than the maximum amount, then the final result gets the Maximum value).

Seq.	Column Name	Data Type	Len	Sc	Column Description
22	GRACE_AMOUNT	NUMBER	18	3	This is the amount under which the final result is brought to zero (If the final result is less or equal than the Grace amount, then the final result gets zero value).
23	RULE_IDENTIFIER	CHAR	3		The event based automatic fee calculation rule as follow: 'STD' = Standard, 'MIN' = Minimum, 'MAX' = Maximum. Refer to "PowerCARD's Calculation Rules" section for detailed description of calculation rule options.
24	ROUNDED_METHOD_IDENTIFIER	CHAR	1		This is to indicate the rounding method to be applied on the event based automatic fee calculation result. Possible values are: 'H' = High value, 'L' = Low value, 'N' = Normal, 'E' = Exponent (Default standard method). Refer to "Rounded methods" section for detailed description of rounded methods.
25	THRESHOLD_AMOUNT	NUMBER	18	3	This is the base amount threshold under which the system does not undergo the event based automatic fee calculation and the result is set to zero.
26	OVERDRAWN_CALC_OPTION	CHAR	1		The base amount used for the overdrawn event based fee calculation. Possible values are: 'F' = First overdrawn amount in the cycle, 'H' = Highest overdrawn amount in the cycle.
27	PRORATE_FLAG	CHAR	1		This column indicates whether the statement fees generated in the prorate will be calculated on number of days or not. Possible values are: 'Y' = Yes (fee will be calculated on number of days), 'N' = Not (fees will be calculated on the full cycle coefficient).
28	USER_CREATE	VARCHAR2	15		ID of the user when record created.
29	DATE_CREATE	DATE	7		Record creation date and time.
30	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
31	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

9.2.2 CR_AUTO_FEES_ON_TRANS

Records of this table, concern automatic fee on transaction parameters. These parameters are used to define the method of calculation of transaction based automatic fees for the marketable product linked accounts. These calculation formula parameters are identified by the same index defined at the '[CR_AUTO_FEES_ON_TRANS_ID](#)' table.

Automatic transaction fees are the fees generated automatically as soon as a transaction fulfilling a certain number of criteria is posted to the account during the EOD Credit account management process.

Refer to "[Fees on transaction](#)" section in UG 1019-Catalogue user guide for more details.

Each column of this table is described in detail in the next section.

9.2.2.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Financial institution of the parameter being defined. It should be defined in the 'BANK' table.
2 	PROFILE_CODE	CHAR	3		The profile code concerned by the Automatic fees on transaction index. It should be defined in the 'CR_PROFILE' table.
3 	INDEX_CODE	CHAR	4		The index code. It is used at the 'CR_PROFILE' table parameters level to specify the link between the account profile and its transaction-based fees. The index should be defined in 'CR_AUTO_FEES_ON_TRANS_ID' table.
4 	ORIGINAL_TRANSACTION_CODE	CHAR	2		The original transaction triggering the fee generation. It should be defined in 'CR_TRANSACTION_PARAMETER' table.
5 	ORIGINAL_REVERSAL_FLAG	CHAR	1		The original transaction reversal flag. Possible values are: 'N' = Normal, 'R' = Reversal.
6 	CASE_SEQUENCE	CHAR	1		This is the sequence of the fee in case different fees are generated for the same original transaction matching the automatic fee generation criteria.
7	ABRV_WORDING	VARCHAR2	16		The automatic fees on transaction case abbreviated wording.
8	WORDING	VARCHAR2	32		The automatic fees on transaction case wording.
9	CASE_STATUS	CHAR	1		The fee generation case status indicating whether the fee can be generated or not. Possible values are:

Seq.	Column Name	Data Type	Len	Sc	Column Description
					'N' = Normal (The system will generate the fee), 'I' = Ignore (The system will not generate the fee).  Note This field is set by default to 'N'.
10	CRITERIA_TRANSACTION_INDEX	CHAR	4		The index of the transaction based automatic fee generation criteria. It should be defined in 'CR_AUTO_FEES_CRITERIA_PAR' table.
11	FEES_INDICATOR	CHAR	1		This column indicates whether the fee should be generated as a separate transaction or included in the original transaction billing amount. Possible values are: 'S' = Generate separately, 'I' = Include in original transaction billing amount.
12	GEN_TRANSACTION_CODE	CHAR	2		When FEES_INDICATOR is set to 'S' (Generate separately), this column indicates the generated fee transaction code. It should be defined in 'CR_TRANSACTION_PARAMETER' table.
13	GEN_REVERSAL_FLAG	CHAR	1		When FEES_INDICATOR is set to 'S' (Generate separately), this column indicates the fee transaction reversal flag. Possible values are: 'N' = Normal, 'R' = Reversal.
14	TRANSACTION_DATE_BAS	CHAR	1		When FEES_INDICATOR is set to 'S' (Generate separately), this column indicates the fee transaction date based flag. Possible values are: 'T' = Transaction date of original transaction, 'B' = Business date.
15	CURRENCY_CODE	CHAR	3		The currency set for the automatic fee generation amount parameters. It should be defined in the 'CURRENCY_TABLE'.
16	RATE	NUMBER	9	6	The rate to be applied on the original transaction amount as to generate the transaction based automatic fee.

Seq.	Column Name	Data Type	Len	Sc	Column Description
17	FIXE	NUMBER	18	3	This is the amount that will be added to the result before comparing to the minimum, maximum and grace amount.
18	MINIMUM	NUMBER	18	3	This is the minimum amount that will be compared to the final result in order to bring this result in line with the minimum amount, if the final result is less than this Minimum (If the final result is less than the Minimum amount, then the final result gets the Minimum value).
19	MAXIMUM	NUMBER	18	3	This is the maximum amount that will be compared to the final result in order to bring this result in line with the maximum amount, if the final result is greater than this Maximum (If the final result is greater than the Maximum amount, then the final result gets the Maximum value).
20	GRACE_AMOUNT	NUMBER	18	3	This is the amount under which the final result is brought to zero (If the final result is less or equal than the Grace amount, then the final result gets zero value).
21	RULE_IDENTIFIER	CHAR	3		The transaction based automatic fee calculation rule as follow: 'STD' = Standard, 'MIN' = Minimum, 'MAX' = Maximum. Refer to " PowerCARD's Calculation Rules " section for detailed description of calculation rule options.
22	ROUNDED_METHOD_IDENTIFIER	CHAR	1		This is to indicate the rounding method to be applied on the transaction based automatic fee calculation result. Possible values are: 'H' = High value, 'L' = Low value, 'N' = Normal, 'E' = Exponent (Default standard method). Refer to " Rounded methods " section for detailed description of rounded methods.
23	THRESHOLD_AMOUNT	NUMBER	18	3	This is the original transaction amount threshold under which the system does not undergo the transaction based automatic fee calculation and the result is set to zero.
24	USER_CREATE	VARCHAR2	15		ID of the user when record created.
25	DATE_CREATE	DATE	7		Record creation date and time.

Seq.	Column Name	Data Type	Len	Sc	Column Description
26	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
27	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

9.2.3 CR_AUTO_FEES_ON_TRANS_ID

Automatic fees definition parameters are used to set up indexes defining the management of automatic fees generation that can be linked to either a transaction type or an event. In either case these indexes will be linked to the Account Profile. Automatic transaction fees are the fees generated automatically as soon as a transaction fulfilling a certain number of criteria is posted to the account (End of Day processing). Event fees are generated whenever the concerned event occurs.

Records of this table concern Automatic fees by transaction index parameters which are used to define the indexes identifying or grouping the transaction-based fees for each profile, generated during the Account management process.

Each transaction based fees type is identified by an index code set at the 'Account Profile' level in order to specify the transaction based fees generation method for the profile linked accounts.

Each column of this table is described in detail in the next section.

9.2.3.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Financial institution of the parameter being defined. It should be defined in the 'BANK' table.
2 	INDEX_CODE	CHAR	4		The index code identifying or grouping the transaction-based fees for each profile. It is used at the 'CR_PROFILE' table parameters level to specify the link between the account profile and its transaction-based fees. The index should be defined in 'CR_AUTO_FEES_ON_TRANS_ID' table.
3	ABRV_WORDING	VARCHAR2	16		The automatic fees on transaction index abbreviated wording.
4	WORDING	VARCHAR2	32		The automatic fees on transaction index wording.
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

9.2.4 CR_CHARGING

Payment hierarchy parameters are defined and grouped according to a logic required by different processes within the account product characteristics of the catalog product module. These groups of parameters are then set up and stored in different parameter tables within PowerCARD database.

Records of this table concern the payment hierarchy. These are used to set up the charging (or clearing) order of payments (and of credit sign transactions) on debit transactions. This order is important, as the interest rates of different transaction categories may differ. This settlement order is a result of an overlapping priority set up by four user-defined arguments (Ordered 1 to 4).

Each settlement order is identified by an index code set at the 'Account Profile' level in order to specify the charging method for the profile linked accounts.



Note

Settlement order parameters are applicable only if the paid amount does not offset the total balance.

Each column of this table is described in detail in the next section.

9.2.4.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Financial institution name and code of the parameters being defined. It should be defined in the 'BANK' table.
2 	CHARGING_INDEX	CHAR	4		Index identifying the Charging method (Settlement order). This settlement order is a result of an overlapping priorities set up by four user defined arguments ordered 1 to 4. This index is used at the 'CR_PROFILE' table parameters level to specify the Charging method for the profile linked accounts.
3	ABRV_WORDING	VARCHAR2	16		Shortened description. This column is used for information and reports.
4	WORDING	VARCHAR2	32		The charging index description.
5	FIRST_ARGUMENT	CHAR	2		The first argument. Possible values are: 'TD' = Transaction date, 'PD' = Processing date, 'DD' = Due date, 'VD' = Value date, 'SD' = Statement date, 'CP' = Charging priority, 'CC' = Balance Category, 'TC' = Transaction code (Full payment transactions),

Seq.	Column Name	Data Type	Len	Sc	Column Description
					'PT' = Due transaction portion, 'PS' = Due portion statement date, 'CC' = Balance Category (Transactions will be settled according to there Balance category: 1-Purchase, 2-Cash, 3-Transfer, etc.), 'FI' = Fees & Interests first, 'CR' = Charging priority (Reserved), 'FP' = Full payment, 'CS' = Custom settlement, 'NA' = Ignore. (Default value is 'NA')
6	SECOND_ARGUMENT	CHAR	2		The second argument possible values are the same as first argument. (Default value is 'NA')
7	THIRD_ARGUMENT	CHAR	2		The third argument possible values are the same as first argument. (Default value is 'NA')
8	FOURTH_ARGUMENT	CHAR	2		The fourth argument possible values are the same as first argument. (Default value is 'NA')
9	USER_CREATE	VARCHAR2	15		ID of the user when record created.
10	DATE_CREATE	DATE	7		Record creation date and time.
11	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
12	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

9.2.5 CR_SCHEDULE

PowerCARD system provides the capability of capturing the Interest schedule index definition parameters through Graphical User Interface function.

Interest schedule index definition parameters' setup is essential and should be made with the utmost care to ensure optimal functioning of PowerCARD.

Revolving Credit parameters are stored in different database tables. Records of this table concerns Interest schedule index parameters. These parameters are used to define the Interest schedule index with related default rate, minimum interest amount and grace interest amount. Interest schedule index parameters are part of PowerCARD system Credit parameters.

Each column of this table is described in detail in the next section.

9.2.5.1 Columns description

Seq.	Column Name	Data type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		This is the institution for which the gift is being defined. It must be defined in 'BANK' table.
2 	GIFT_CODE	VARCHAR2	6		This is the code identifying the gift for the bank. This code is used to link the gift to different loyalty programs offering redemption by gift option.
3	ABRV_DESCRIPTION	VARCHAR2	16		This is the abbreviated description of the gift
4	DESCRIPTION	VARCHAR2	80		This is the description of the gift
5	CONSTRUCTOR_NAME	VARCHAR2	26		Name of the constructor liable for the loyalty gift being defined.
6	CONSTRUCTOR_ADDRESS	VARCHAR2	26		The address of the loyalty gift constructor
7	PROVIDER_NAME	VARCHAR2	26		The name of the entity responsible of providing the loyalty gift being defined.
8	PROVIDER_ADDRESS	VARCHAR2	26		The address of the loyalty gift provider.
9	GIFT_TYPE	CHAR	2		This is the category of the loyalty gift being defined in 'LOYALTY_GIFT_CATEGORY' table.
10	USER_CREATE	VARCHAR2	15		ID of the user when record created.
11	DATE_CREATE	DATE	7		Record creation date and time.
12	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
13	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

9.2.6 CR_MIN_DUE_SCHEDULE

Records of this table concern Minimum-due schedule parameters that are used to setup the minimum due calculation formula for each minimum due index defined. In PowerCARD standard, the Minimum due (Minimum to pay) calculation is performed according to the "rule of 5" that uses in addition to the rate by range, other parameters including Amount threshold, Fixed, Minimum, Maximum and the Grace amount.

Each column of this table is described in detail in the next section.

9.2.6.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Financial institution name and code concerned by the Minimum due schedule. It should be previously defined in the 'BANK' table.
2 	MIN_DUE_SCHEDULE_INDEX	CHAR	4		Index identifying the Minimum due schedule. This index is used at the 'CR_PROFILE' parameters level to

Seq.	Column Name	Data Type	Len	Sc	Column Description
					specify the Minimum due calculation method for the profile linked accounts.
3	AMOUNT_MAX	NUMBER	18	3	This is the maximum amount tier for which the minimum due parameters are applicable. The amount that will be used for the search of this rule of calculation is indicated at the Account Profile parameters level (Three amounts can be set up for the search, the Credit limit, the Opening balance or the Closing balance of the account).
4	MINIMUM_DUE_RATE	NUMBER	9	6	This is the rate to apply on the base amount.
5	MINIMUM_DUE_FIX	NUMBER	18	3	This is the amount that will be added to the result before comparing to the minimum, maximum and grace amount.
6	MINIMUM_DUE_MIN	NUMBER	18	3	This is the minimum amount that will be compared to the final result in order to bring this result in line with the minimum amount if the final result is less than this Minimum (If the final result is less than the minimum amount, then the final result gets the Minimum value).
7	MINIMUM_DUE_MAX	NUMBER	18	3	This is the maximum amount that will be compared to the final result in order to bring this result in line with the maximum amount if the final result is greater than this Maximum (If the final result is greater than the maximum amount, then the final result gets the Maximum value).
8	MINIMUM_DUE_GRACE	NUMBER	18	3	This is the amount under which the final result is brought to zero (If the final result is less or equal than the Grace amount, then the final result gets zero value).
9	RULE_IDENTIFIER	CHAR	3		The Minimum due calculation rule as follow: 'STD' = Standard, 'MIN' = Minimum, 'MAX' = Maximum. Note Refer to "PowerCARD's Calculation Rules" section for detailed description of calculation rule options.
10	ROUNDED_METHOD_IDENTIFIER	CHAR	1		This is to indicate the rounding method to be applied on the Minimum due calculation result. Possible values are: 'H' = High value,

Seq.	Column Name	Data Type	Len	Sc	Column Description
					'L' = 'Low value, 'N' = Normal, 'E' = Exponent (Default standard method). Note  Refer to " Rounded methods " section for detailed description of rounded methods.
11	THRESHOLD_AMOUNT	NUMBER	18	3	This is the base amount threshold under which the system does not undergo the Minimum due calculation and the result is set to zero.
12	FACTOR	NUMBER	6		This column is not used in V3.5.
13	ROUNDING_VALUE	NUMBER	8		The rounding value on decimals. Possible values are: 10, 100.
14	DEFAULT_QUOTA	NUMBER	2		This is the default value of the quota (Number of terms a transaction payment can be deferred) when the defined method of Minimum due calculation at the index level is set to 'QU' (Quota).
15	MAX_QUOTA	NUMBER	2		This is the maximum value of the quota when the defined method of Minimum due calculation at the index level is set to 'QU' (Quota).
16	USER_CREATE	VARCHAR2	15		ID of the user when record created.
17	DATE_CREATE	DATE	7		Record creation date and time.
18	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
19	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

9.2.7 CR_MIN_DUE_SCHEDULE_INDEX

Records of this table concern Minimum-due schedule index parameters that are used to set up the minimum payment or (MTP - Minimum to Pay) calculation method.

Each column of this table is described in detail in the next section.

9.2.7.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code and name concerned by the Minimum due

Seq.	Column Name	Data Type	Len	Sc	Column Description
					schedule index. It should be previously defined in the 'BANK' table.
2 	MIN_DUE_SCHEDULE_INDEX	CHAR	4		Index identifying the Minimum due schedule. This index is used at the 'CR_PROFILE' table parameters level to specify the Minimum due calculation method for the profile linked accounts.
3	ABRV_DESCRIPTION	VARCHAR2	16		The minimum due Schedule index abbreviated wording.
4	DESCRIPTION	VARCHAR2	32		The minimum due Schedule index wording.
5	METHOD_CALCUL	CHAR	2		The minimum due calculation method. Possible values are: 'FO' = Full of outstanding balance (100%), 'BO' = By range of specific amount, 'QU' = Quota.
6	CURRENCY_CODE	CHAR	3		The minimum due Schedule index currency code. It should be previously defined in the 'CURRENCY_TABLE'
7	GRACE_AMOUNT	NUMBER	18	3	The grace amount of Minimum due not to be charged. If the monthly Minimum due calculated for a given account is less than or equal to grace amount, no Minimum due amount is charged.
8	USER_CREATE	VARCHAR2	15		ID of the user when record created.
9	DATE_CREATE	DATE	7		Record creation date and time.
10	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
11	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

9.2.8 CR_PAYMENT_INCIDENT_REASON

This table is used to define for each institution, the reason that identifies the payment incident, change status option, fee charge as well as generate or cancel deposit option.

Each column of this table is described in detail in the next section.

9.2.8.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code concerned by the Payment incident reason. It should be defined in the 'BANK' table.
2 	PROFILE_CODE	CHAR	3		The credit profile code concerned by the Payment incident reason. It should be defined in 'CR_PROFILE' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
3	INCIDENT_REASON_CODE	VARCHAR2	4		The internal code identifying the Payment Incident reason.
4	ABRV_WORDING	VARCHAR2	16		The payment incident reason abbreviated wording.
5	WORDING	VARCHAR2	32		The payment incident reason wording.
6	REVERSAL_REASON_CODE	CHAR	2		The code identifying the reversal reason. It should be defined in 'CR_PAYMENT_INCIDENT_REASON' table.
7	CHANGE_STATUS_IND	CHAR	1		This column indicates whether the account's payment incident status level (PAYMENT_FAILED_STATUS field of 'SHADOW_ACCOUNT' table) should Change from '0' (Normal) to '1' (Failed payment) immediately or at the end of grace period, or the payment incident status level should remain unchanged. Possible values are: 'I' = Change status immediately, 'W' = Wait for grace period, 'N' = No status automatic change.
8	FEE_CHARGE_IND	CHAR	1		This column indicates whether the Payment incident fee should be charged immediately or at the end of grace period, or the fee should not be charged for this payment incident reason. Possible values are: 'I' = Charge fee immediately, 'W' = Wait for grace period, 'N' = No Charge fee associated.
9	CANCEL_DEPOSIT_IND	CHAR	1		In case a payment deposit has been generated automatically during automatic debit order or check waiting for confirmation capture, this column indicates whether the payment deposit transaction should be reversed immediately or at the end of grace period, or the payment transaction should not be reversed. Possible values are: 'I' = Cancel automatic deposit immediately, 'W' = Wait for grace period, 'N' = No 'Cancel automatic deposit' action associated.
10	DEPOSIT_GENERATE_IND	CHAR	1		This is to indicate whether or not for this payment incident, the deposit should be generated after reception of the payment promise during the payment incident process. If the selected option

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					is 'N', the system will not generate a payment deposit transaction after reception of the payment promise. Possible values are: 'Y' = Yes, 'N' = No.
11	GEN_TRANSACTION_CODE	CHAR	2		In case of fee charge associated to the payment incident reason, this is the generated fee transaction code. It should be defined in 'CR_TRANSACTION_PARAMETER' table.
12	GEN_REVERSAL_FLAG	CHAR	1		This column indicates whether or not the fee to be generated is a normal or reversal transaction. Possible values are: 'N' = Normal, 'R' = Reversal.
13	CHARGE_RATE	NUMBER	9	6	The rate to be applied on the due payment amount as to generate the payment incident reason associated fee transaction.
14	CHARGE_FIX	NUMBER	18	3	This is the amount that will be added to the result before comparing to the minimum, maximum and grace amount.
15	CHARGE_MIN	NUMBER	18	3	This is the minimum amount that will be compared to the final result in order to bring this result in line with the minimum amount, if the final result is less than this Minimum (If the final result is less than the minimum amount, then the final result gets the minimum value).
16	CHARGE_MAX	NUMBER	18	3	This is the maximum amount that will be compared to the final result in order to bring this result in line with the maximum amount, if the final result is greater than this Maximum (If the final result is greater than the maximum amount, then the final result gets the Maximum value).
17	CHARGE_GRACE	NUMBER	18	3	This is the amount under which the final result is brought to zero (If the final result is less or equal than the Grace amount, then the final result gets zero value).
18	DELTA_ALLOWED_BETWEEN_PAY_P	NUMBER	9	6	The percentage of a tolerated difference between amount promise and effective deposit.
19	RULE_IDENTIFIER	CHAR	3		The payment incident reason associated fee calculation rule as follow: 'STD' = Standard,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'MIN' = Minimum, 'MAX' = Maximum. Note Refer to "PowerCARD's Calculation Rules" section for detailed description of calculation rule options.
20	ROUNDED_METHOD_IDENTIFIER	CHAR	1		This is to indicate the rounding method to be applied on the payment incident reason associated fee calculation result. Possible values are: 'H' = High value, 'L' = Low value, 'N' = Normal, 'E' = Exponent (Default standard method). Note Refer to "Rounded methods" section for detailed description of rounded methods.
21	THRESHOLD_AMOUNT	NUMBER	18	3	This is the base amount threshold under which the system does not undergo the payment incident reason associated fee calculation and the result is set to zero.
22	DEROGATORY_CHEQUE	CHAR	1		This column indicates whether the Payment incident reason is a derogatory reason (Payment incident due check with an insufficient fund) or not (Due to technical reason). Possible values are: 'Y' = Yes, 'N' = No.
23	USER_CREATE	VARCHAR2	15		ID of the user when record created.
24	DATE_CREATE	DATE	7		Record creation date and time.
25	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
26	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

9.2.9 CR_TRANSACTION_PARAMETER

This table contains the characteristics of credit revolving transaction codes that mainly define the management of transactions by the account product catalog. These parameters define

especially transactions' value dates and due dates calculation methods. Other transaction parameters linked to the management of credit payment instrument transactions, interest calculation and payment transactions are also saved in this table.

Refer to "[Transaction codes group](#)" section in UG1019-Catalogue users guide for more details.

Each column of this table is described in detail in the next section.

9.2.9.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code concerned by the credit revolving transaction parameters. It should be present in the 'BANK' table.
2 	PROFILE_CODE	CHAR	3		Profile code concerned by the CR transaction parameters. It should be present in the 'CR_PROFILE' table.
3 	TRANSACTION_CODE	CHAR	2		The transaction code concerned by the CR transaction parameters. It should be present in the 'TRANSACTIONS_DEFINITION' table.
4	N_ABRV_WORDING	VARCHAR2	16		The normal CR transaction default abbreviated wording.
5	N_WORDING	VARCHAR2	40		The normal CR default transaction wording.
6	R_ABRV_WORDING	VARCHAR2	16		The reversal CR transaction default abbreviated wording.
7	R_WORDING	VARCHAR2	40		The reversal CR transaction default wording.
8	N_ABRV_WORDING_1	VARCHAR2	16		The abbreviated wording of normal CR transaction in the 1st language.
9	N_WORDING_1	VARCHAR2	40		The normal CR transaction description in the 1st language.
10	R_ABRV_WORDING_1	VARCHAR2	16		The abbreviated wording of reversal CR transaction in the 1st language.
11	R_WORDING_1	VARCHAR2	40		The reversal CR transaction description in the 1st language.
12	LANGUAGE_CODE_1	CHAR	3		The 1st language code. It should be present in the 'LANGUAGE_LIST' table.
13	N_ABRV_WORDING_2	VARCHAR2	16		The abbreviated wording of normal CR transaction in the 2nd language.
14	N_WORDING_2	VARCHAR2	40		The normal CR transaction description in the 2nd language.
15	R_ABRV_WORDING_2	VARCHAR2	16		The abbreviated wording of reversal CR transaction in the 2nd language.
16	R_WORDING_2	VARCHAR2	40		The reversal CR transaction description in the 2nd language.
17	LANGUAGE_CODE_2	CHAR	3		The 2nd language code. It should be present in the 'LANGUAGE_LIST' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
18	N_ABRV_WORDING_3	VARCHAR2	16		The abbreviated wording of normal CR transaction in the 3rd language.
19	N_WORDING_3	VARCHAR2	40		The normal CR transaction description in the 3rd language.
20	R_ABRV_WORDING_3	VARCHAR2	16		The abbreviated wording of reversal CR transaction in the 3rd language.
21	R_WORDING_3	VARCHAR2	40		The reversal CR transaction description in the 3rd language.
22	LANGUAGE_CODE_3	CHAR	3		The 3rd language code. It should be present in the 'LANGUAGE_LIST' table.
23	N_ABRV_WORDING_4	VARCHAR2	16		The abbreviated wording of normal CR transaction in the 4th language.
24	N_WORDING_4	VARCHAR2	40		The normal CR transaction description in the 4th language.
25	R_ABRV_WORDING_4	VARCHAR2	16		The abbreviated wording of reversal CR transaction in the 4th language.
26	R_WORDING_4	VARCHAR2	40		The reversal CR transaction description in the 4th language.
27	LANGUAGE_CODE_4	CHAR	3		The 4th language code. It should be present in the 'LANGUAGE_LIST' table.
28	N_TRANSACTION_SIGN	CHAR	1		The normal transaction sign defining the effect on the balance during transaction posting. Possible values are: 'D' = Debit, 'R' = Credit.
29	N_BALANCE_CATEGORY	NUMBER	2		The account balance where the normal transaction will be posted. Possible values are: '01' = Purchase (Debit balance reserved for purchase transactions posting), '02' = Cash (Debit balance reserved for ATM withdrawal and cash advance transactions posting), '03' = Transfer (Debit balance reserved for account to account transfer transactions posting), '04' = E-business (Debit balance reserved for e-business transactions posting), '05' = Check (Debit balance reserved for check transactions posting), '06' = Interest (Debit balance reserved for interest transactions posting), '07' = Installment (Debit balance reserved for loan fixed terms posting), '08' = Fee (Debit balance reserved for fee transactions posting),

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'09' = Tax (Debit balance reserved for tax due posting), '10' = Refund (Credit balance reserved for credit vouchers and chargeback posting), '11' = Deposit (Credit balance reserved for Payments posting).
30	N_PRIORITY_CHARGE	NUMBER	2		The normal transaction charging priority level ('00' = Highest priority and '99' = Lowest priority).
31	N_TRANSACTION_GROUP_REPORTING	CHAR	3		The group reporting assigned to the normal transaction. This group is used to group transactions according to criteria defined in the system in order to facilitate the process of generating accounting entries and management reports. If applicable, It should be present in the 'GROUP_REPORTING_DEF' table.
32	N_BASE_VALUE_DATE	CHAR	3		The reference date on which the normal transaction value date calculation is based. Possible values are: 'TED' = Transaction date, 'RMD' = Remittance date, 'PRD' = Processing date, 'STD' = Statement date, 'ATD' = Authorization date, 'TDD' = Term due date, 'TID' = Term unpaid date, 'DUD' = Due date, 'LAM' = Last Month, 'CUM' = Current Month, 'NXM' = Next Month.
33	N_OP_VALUE_DATE	CHAR	1		The appropriate operator that must be used for normal transaction value date calculation. Possible values are: 'F' = Fixed day in the month (Valid only for N_BASE_VALUE_DATE = 'LAM' (Last Month), 'CUM' (Current Month) or 'NXM' (Next Month)), 'A' = Add days, 'B' = Back days.
34	N_NBDAY_VALUE_DATE	NUMBER	3		Number of days (in absolute terms) to add or subtract from the reference date for normal transaction value date calculation.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					 Note '0' is a possible value.
35	N_SKIP_VALUE_DATE	CHAR	1		The method of taking into account days off (weekend days and official public holidays) for the calculation of the normal transaction value date. Possible values are: 'N' = No skip days off, 'S' = Skip days off for each day, 'R' = Skip days off after the calculation.
36	N_BASE_DUE_DATE	CHAR	3		The reference date on which the normal transaction due date calculation is based. Possible values are: 'TED' = Transaction Date, 'RMD' = Remittance Date, 'PRD' = Processing Date, 'STD' = Statement Date, 'ATD' = Authorization date, 'TDD' = Term due Date, 'TID' = Term unpaid Date, 'LAM' = Last Month, 'CUM' = Current Month, 'NXM' = Next Month.
37	N_OP_DUE_DATE	CHAR	1		The appropriate operator that must be used for normal transaction due date calculation. Possible values are: 'F' = Fixed day in the month (Valid only for N_BASE_DUE_DATE = 'LAM' (Last Month), 'CUM' (Current Month) or 'NXM' (Next Month)), 'A' = Add days, 'B' = Back days.
38	N_NBDAY_DUE_DATE	NUMBER	3		The number of days (in absolute terms) to add or subtract from the reference date for normal transaction due date calculation.  Note '0' is a possible value.
39	N_SKIP_DUE_DATE	CHAR	1		The method of taking into account days off (weekend days and official public

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					holidays) for the calculation of the normal transaction due date. Possible values are: 'N' = No skip days off, 'S' = Skip days off for each day, 'R' = Skip days off after the calculation.
40	N_SUBJECT_INTEREST_FLAG	CHAR	1		This column indicates whether the normal transaction should be subject to interest calculation or not. Possible values are: 'Y' = Yes, 'N' = No.
41	N_SUBJECT_LATE_FEES_FLAG	CHAR	1		This column is not used in V3.5.
42	N_GEN_AUTO_FEES_FLAG	CHAR	1		This column indicates whether the normal transaction should be subject to automatic fees generation or not. Possible values are: 'Y' = Yes, 'N' = No.
43	N_GEN_AUTO_FEES_ALT_FLAG	CHAR	1		This column indicates whether the normal transaction should be considered as a trigger for the automatic event based fee, on "At least one transaction occurred during the cycle period" or not. Possible values are: 'Y' = Yes, 'N' = No.
44	N_POTENTIAL_LOAN_IND	CHAR	1		This column indicates whether the normal transaction can be converted to loan or not. Possible values are: 'Y' = Yes, 'N' = No.
45	N_FULL_PAYMENT_IND	CHAR	1		This column indicates whether the full normal transaction amount should be requested as part of the minimum payment for the cycle, or not. Possible values are: 'Y' = Yes, 'N' = No. Note  If this column is set to 'N', only a percentage portion of the transaction amount, as defined in MIN_DUE column,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					will be requested as part of the minimum payment each cycle.
46	N_SUBJECT_PENALTY_FEE_FLAG	CHAR	1		This column is not used in V3.5.
47	N_SUBJECT_OVERLIMIT_FEE	CHAR	1		This column indicates whether the normal transaction should be subject to over-limit fees calculation or not. Possible values are: 'Y' = Yes, 'N' = No.
48	N_OTHER_INDICATOR_1	CHAR	1		This field is reserved for future use.
49	N_OTHER_INDICATOR_2	CHAR	1		This field is reserved for future use.
50	N_SEGREGATION_IND	CHAR	1		When the transaction is subject to interest calculation, this is to indicate the category of the interest transaction to be generated. Possible values are: '1' = Purchase (Purchase category transactions), '2' = Cash (Cash category transactions), '3' = Others (Fees & interest category transactions).
51	R_TRANSACTION_SIGN	CHAR	1		The reversal transaction sign defining the effect on the balance during transaction posting. Possible values are: 'D'= Debit, 'R'= Credit. Note  This column's value should be the opposite of the R_TRANSACTION_SIGN field's value.
52	R_BALANCE_CATEGORY	NUMBER	2		The account balance where the normal transaction will be posted. Possible values are: '01' = Purchase (Debit balance reserved for purchase transactions posting), '02' = Cash (Debit balance reserved for ATM withdrawal and cash advance transactions posting), '03' = Transfer (Debit balance reserved for account to account transfer transactions posting), '04' = E-business (Debit balance reserved for e-business transactions posting),

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'05' = Check (Debit balance reserved for check transactions posting), '06' = Interest (Debit balance reserved for interest transactions posting), '07' = Installment (Debit balance reserved for loan fixed terms posting), '08' = Fee (Debit balance reserved for fee transactions posting), '09' = Tax (Debit balance reserved for tax due posting), '10' = Refund (Credit balance reserved for credit vouchers and chargeback posting), '11' = Deposit (Credit balance reserved for Payments posting).
53	R_PRIORITY_CHARGE	NUMBER	2		The reversal transaction charging priority level ('00' = Highest priority and '99' = Lowest priority).
54	R_TRANSACTION_GROUP_REPORTING	CHAR	3		The group reporting assigned to the reversal transaction. This group is used to group transactions according to criteria defined in the system in order to facilitate the process of generating accounting entries and management reports. If applicable, it should be defined in 'GROUP_REPORTING_DEF' table.
55	R_BASE_VALUE_DATE	CHAR	3		The reference date on which the reversal transaction value date calculation is based. Possible values are: 'TED' = Transaction Date, 'RMD' = Remittance Date, 'PRD' = Processing Date, 'STD' = Statement Date, 'ATD' = Authorization date, 'TDD' = Term due Date, 'TID' = Term unpaid Date, 'DUD' = Due date, 'LAM' = Last Month, 'CUM' = Current Month, 'NXM' = Next Month.
56	R_OP_VALUE_DATE	CHAR	1		The appropriate operator that must be used for reversal transaction value date calculation. Possible values are: 'F' = Fixed day in the month (Valid only for R_BASE_VALUE_DATE = 'LAM' (Last Month), 'CUM' (Current Month) or 'NXM' (Next Month)), 'A' = Add days,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'B' = Back days.
57	R_NBDAY_VALUE_DATE	NUMBER	3		Number of days (in absolute terms) to add or subtract from the reference date for reversal transaction value date calculation.  Note '0' is a possible value.
58	R_SKIP_VALUE_DATE	CHAR	1		The method of taking into account days off (weekend days and official public holidays) for the calculation of the reversal transaction value date. Possible values are: 'N' = No skip days off, 'S' = Skip days off for each day, 'R' = Skip days off after the calculation.
59	R_BASE_DUE_DATE	CHAR	3		The reference date on which the reversal transaction due date calculation is based. Possible values are: 'TED' = Transaction Date, 'RMD' = Remittance Date, 'PRD' = Processing Date, 'STD' = Statement Date, 'ATD' = Authorization date, 'TDD' = Term due Date, 'TID' = Term unpaid Date, 'LAM' = Last Month, 'CUM' = Current Month, 'NXM' = Next Month.
60	R_OP_DUE_DATE	CHAR	1		The appropriate operator that must be used for reversal transaction due date calculation. Possible values are: 'F' = Fixed day in the month (Valid only for R_BASE_DUE_DATE = 'LAM' (Last Month), 'CUM' (Current Month) or 'NXM' (Next Month)), 'A' = Add days, 'B' = Back days.
61	R_NBDAY_DUE_DATE	NUMBER	3		The number of days (in absolute terms) to add or subtract from the reference date for reversal transaction due date calculation.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					 Note '0' is a possible value.
62	R_SKIP_DUE_DATE	CHAR	1		The method of taking into account days off (weekend days and official public holidays) for the calculation of the reversal transaction due date. Possible values are: 'N' = No skip days off, 'S' = Skip days off for each day, 'R' = Skip days off after the calculation.
63	R_SUBJECT_INTEREST_FLAG	CHAR	1		This column indicates whether the reversal transaction should be subject to interest calculation or not. Possible values are: 'Y' = Yes, 'N' = No.
64	R_SUBJECT_LATE_FEES_FLAG	CHAR	1		This column is not used in V3.5.
65	R_GEN_AUTO_FEES_FLAG	CHAR	1		This column indicates whether the reversal transaction should be subject to automatic fees generation or not. Possible values are: 'Y' = Yes, 'N' = No.
66	R_GEN_AUTO_FEES_ALT_FLAG	CHAR	1		This column indicates whether the reversal transaction should be considered as a trigger for the automatic event based fee, on "At least one transaction occurred during the cycle period" or not. Possible values are: 'Y' = Yes, 'N' = No.
67	R_POTENTIAL_LOAN_IND	CHAR	1		This column indicates whether the reversal transaction can be converted to loan or not. Possible values are: 'Y' = Yes, 'N' = No.
68	R_FULL_PAYMENT_IND	CHAR	1		This column indicates whether the full reversal transaction amount should be requested as part of the minimum payment for the cycle, or not. Possible values are: 'Y' = Yes,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'N' = No.
69	R_SUBJECT_PENALTY_FEE_FLAG	CHAR	1		This column is not used in V3.5.
70	R_SUBJECT_OVERLIMIT_FEE	CHAR	1		This column indicates whether the reversal transaction should be subject to over-limit fees calculation or not. Possible values are: 'Y' = Yes, 'N' = No.
71	R_OTHER_INDICATOR_1	CHAR	1		This field is reserved for future use.
72	R_OTHER_INDICATOR_2	CHAR	1		This field is reserved for future use.
73	R_SEGREGATION_IND	CHAR	1		When the transaction is subject to interest calculation, this is to indicate the category of the interest transaction to be generated. Possible values are: '1' = Purchase (Purchase category transactions), '2' = Cash (Cash category transactions), '3' = Others (Fees & interest category transactions).
74	N_LIVE_DEPOSIT	CHAR	1		For payment transactions, this is to indicate whether the normal transaction can be considered as live deposit or not. Possible values are: 'Y' = Yes, 'N' = No.
75	R_LIVE_DEPOSIT	CHAR	1		For payment transactions, this is to indicate whether the reversal transaction can be considered as live deposit or not. Possible values are: 'Y' = Yes, 'N' = No.
76	MIN_DUE	NUMBER	9	6	For transactions with N_FULL_PAYMENT_IND = 'N' (No)), this is the transaction amount portion that will be requested as part of the minimum payment each cycle. Note  - The minimum payment portion is defined as a percentage of the transaction amount. - This field is not applicable for reversal transactions.
77	CROSS_ACCT_BILLING_FLAG	CHAR	1		This column is not used in V3.5.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
78	USER_CREATE	VARCHAR2	15		ID of the user when record created.
79	DATE_CREATE	DATE	7		Record creation date and time.
80	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
81	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

9.2.10 CYCLE_CUTOFF_LIST

PowerCARD Financial account parameters integrates a module providing a large account characteristics centralized in the Account product catalogue.

They are defined and grouped according to a logic required by different processes within the Credit Account catalogue. These groups of parameters are then set up and stored indifferent parameter tables within PowerCARD database.

Only a few Account parameters are managed outside the Account Catalogue (Statement message, Statement reason, Prepaid entity reload Min/Max parameters, Statement message criteria, Accounting level, Prepaid reload parameters, Cycle cutoff list, Credit automatic write off).

Records of this table concern Account cycle cutoff criteria, used particularly for credit accounts to specify the cycle cut-off periodicity and all the criteria defining the cycle and statement dates.

Indeed, this table is used to store the status (Live, ignore) of each existing cut-off cycle and also the cut-off processing dates which will be updated by the system each time the cut-off is executed.

This table does not allow the data insertion. The data stored is the result of the Cut-off cycle definition for the concerned cycle.

Refer to [Cycle cutoff list parameters section](#) in UG1021-Financial account for more details.

Each of this table's fields is described in details in the next section.

9.2.10.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	BANK_CODE	CHAR	6		Financial institution name and code of the parameter being defined. It should be previously defined in the 'BANK' table.
2 	TASK_CODE	VARCHAR2	15		The system task concerned by the cycle cut-off definition. It should be specified according to the cycle cut-off periodicity as follow: 'CRVM' = Credit Revolving Monthly, 'CRVD' = Credit Revolving Daily.
3 	CYCLE_CODE	CHAR	3		This is the required Cycle cut-off identification Code. It must be already defined in CYCLE_CUTOFF_PARAMETERS table.

Seq.	Column Name	Data Type	Len	Sc	Column Description
4	CYCLE_STATUS	CHAR	1		This column indicates whether the cut-off cycle is live or not. Possible values are: 'I' = Ignore 'L' = Live (for Production use).
5	STATEMENT_DATE_IND	CHAR	1		The statement date source. Possible values are: 'S' = System date, 'O' = Original Next processing date, 'N' = Next processing date after skip days, 'B' = Business date.
6	LAST_PROCESSING_DATE	DATE	7		The last cycle cutoff processing date.
7	NEXT_PROCESSING_DATE_OFF	DATE	7		The original date (Planned without taking into account days-off) of the next Cycle cut-off processing.
8	NEXT_PROCESSING_DATE	DATE	7		The effective date (Planned taking into account days-off) of the next Cycle cut-off processing.
9	PERIODIC_EVENT_EXECUTE	CHAR	1		This flag indicates whether the cycle cutoff related periodical tasks were executed or not. Possible values are: 'Y' = Yes, 'N' = Not yet.
10	SENSITIVE_OPERATION_RECORD	CHAR	1		The identification code of the last action that has been applied on the record (For PowerCARD Internal use). Possible values are: 'I' = Insert, 'M' = Update, 'C' = Cancel, 'D' = Delete, 'X' = Special condition.
11	USER_CREATE	VARCHAR2	15		ID of the user when record created.
12	DATE_CREATE	DATE	7		Record creation date and time.
13	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
14	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

9.2.11 CYCLE_CUTOFF_PARAMETERS

Records of this table concern Account cycle cutoff parameters, used particularly for credit accounts to specify the cycle cut-off periodicity and all the parameters defining the cycle and statement dates.

Refer to ["Cut-off cycle definition"](#) section in UG1021-Financial account user's guide for more details.

Each column of this table is described in detail in the next section.



Note

This table is under validation.

9.2.11.1 Columns description

Seq.	Column Name	Data type	Len.	Sc.	Column Description
1	BANK_CODE	CHAR	6		Financial institution code concerned by the Account cycle cutoff criteria parameters. It should be previously defined in the 'BANK' table.
2	TASK_CODE	VARCHAR2	15		Task code according to the cycle cut-off periodicity. Possible values are: 'CRVM' = Credit revolving monthly, 'CRVD' = Credit revolving daily.
3	CYCLE_CODE	CHAR	3		The cycle identification code.
4	ABRV_WORDING	VARCHAR2	16		The cycle definition abbreviated wording.
5	WORDING	VARCHAR2	32		The cycle definition wording.
6	METHOD_FLAG	CHAR	2		The cycle method defines the cycle periodicity. Possible values are: - Daily 'DD' = Daily. - Weekly 'WD' = Day 'D' for each week. - Monthly 'DF' = First day in the month, 'DL' = Last day in the month, 'DM' = Day in month, 'MF' = Every first day 'D' in the month, 'MS' = Every second day 'D' in the month, 'MT' = Every third day 'D' in the month, 'ML' = Every forth day 'D' in the month. - Quarterly 'QW' = Week 'W' in the quarter

Seq.	Column Name	Data type	Len.	Sc.	Column Description
7	CLOSING_DAY_A	NUMBER	2		Closing day A defines the cycle closing day for weekly and monthly methods and the closing week for quarterly method. - For METHOD_FLAG = 'DD' (Daily), 'DF' (First day in the month), 'DL' (Last day in the month), the value is 'Null'. - For METHOD_FLAG = 'DM' (Day in month), the value is '2' to '28'. - For METHOD_FLAG = 'WD' (Day 'D' for each week), 'MF' (Every first day 'D' in the month), 'MS' (Every second day 'D' in the month), 'MT' (Every third day 'D' in the month), 'ML' (Every forth day 'D' in the month) the value is: '1'= Sunday, '2'= Monday, '3'= Tuesday, '4'= Wednesday, '5'= Thursday, '6'= Friday, '7'= Saturday. - For METHOD_FLAG = 'QW' (Week 'W' in the quarter) the value is: '1'= First week, '2'= second week, '3'= Third week, '4'= forth week, '5'= fifth week, '13'= Last week.
8	CLOSING_DAY_B	NUMBER	1		Closing day B defines the cycle closing day for quarterly method (METHOD_FLAG = 'QW'). Possible values are: '1'= Sunday, '2'= Monday, '3'= Tuesday, '4'= Wednesday, '5'= Thursday, '6'= Friday, '7'= Saturday.
9	CYCLE_DAY_OFF_METHOD	CHAR	1		This column indicates whether the day-off is taken into account or not during cutoff day calculation. Possible values are: 'N'= Forward (The cutoff day is the day next to the resulted cut-off day if this one is a day off),

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					'B'= Backward (The cutoff day is the day before the resulted cut-off day if this one is a day off), 'I'= Ignore (The cutoff day is the resulted cut-off day even if it is a day off).
10	COUNTRY_CODE	CHAR	3		The country code should be previously defined at the 'COUNTRY' table.
11	CYCLE_STATUS	CHAR	1		The status of current cycle. Possible values are: 'I'= Ignore, 'L'= Live.
12	STATEMENT_DATE_IND	CHAR	1		The statement date indicator. Possible values are: 'S' = System date, 'O' = Original Next processing date, 'N' = Next processing date after skip days, 'B' = Business date.
13	FIRST_BIMONTHLY_DAY	NUMBER	2		The first day of the half of month when the cut-off should be made. Possible values are: '1'= Sunday, '2'= Monday, '3'= Tuesday, '4'= Wednesday, '5'= Thursday, '6'= Friday, '7'= Saturday.
14	BIMONTHLY_DAY_NUMBER	NUMBER	2		The number of days in the cut-off cycle.
15	SECOND_BIMONTHLY_DAY	NUMBER	2		The second day of the half of month when the cut-off should be made. Possible values are: '1'= Sunday, '2'= Monday, '3'= Tuesday, '4'= Wednesday, '5'= Thursday, '6'= Friday, '7'= Saturday.
16	USER_CREATE	VARCHAR2	15		ID of the user when record created.
17	DATE_CREATE	DATE	7		Record creation date and time.
18	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
19	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

9.2.12 PAYMENT_INC_RESOLUT_REASON

This table is used to define for each institution, the payment incident resolution reasons.

Each column of this table is described in detail in the next section.

9.2.12.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. This field must be defined in 'BANK' table.
2 	REASON_CODE	VARCHAR2	6		The payment incident resolution reason identifier code. It should be already defined in the 'REASON' table.
3	ABRV_WORDING	VARCHAR2	16		Shortened description of the payment incident resolution reason.
4	WORDING	VARCHAR2	32		This is the payment incident resolution reason description.
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

9.2.13 SHADOW_ACCOUNT_STATUS

Records of this table concern Account status parameters. These parameters set the incident management decision-making algorithm for the different Account status categories supported by PowerCARD.

Six categories of status are available for a credit account of which only Administrative Status can be subject to manual modifications:

- Administrative status,
- Account balance status,
- Late payment status,
- Unpaid status,
- Payment promise status,
- Payment incident status.

Each column of this table is described in detail in the next section.

**Note**

This field is under validation.

9.2.13.1 Columns description

Seq.	Column Name	Data type	Len.	Sc.	Column Description
1	BANK_CODE	CHAR	6		The financial institution code concerned by the Account status parameters. It should be defined in the 'BANK' table.
2	PROFILE_CODE	CHAR	3		The Credit profile code concerned by the Account status parameters. It should be defined in 'CR_PROFILE' table.
3	STATUS_CATEGORY	CHAR	2		Account status category. Possible values are: 'AD' = Administrative status, 'BL' = Balance status, 'LP' = Late payment status, 'UP' = Unpaid status, 'IP' = Payment incident status, 'PP' = Payment promise status.
4	STATUS_LEVEL	CHAR	1		Indicates the status level within the status category. Administrative status Possible values are: '0' = Normal, '1' = Supervision, '2' = Pre-litigation, '3' = Litigation, '4' = Insurance management, '5' = Lost / closed, '6' = Lost / Death, '7' = Closed/Cancelled, '8' = Write Off, '9' = Untraceable. Balance status Possible values are: '0' = Inactive, '1' = Nil Balance, '2' = Credit Balance, '3' = Debit Balance, '4' = Permitted Overdraft, '5' = Critical Overdraft. Late payment status Possible values are: '0' = Normal, '1' = Late payment.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					Unpaid status Possible values are: '0' = 0 Unpaid, '1' = 1st Unpaid, '2' = 2nd Unpaid, '9' = 9th Unpaid. Payment incident status Possible values are: '0' = Normal, '1' = Failed payment. Payment promise status Possible values are: '0' = Normal, '1' = Ongoing, '2' = Broken promise.
5	ABRV_WORDING	VARCHAR2	16		The short description of the concerned status level.
6	WORDING	VARCHAR2	32		The full description of the concerned status level.
7	NAS_CATEGORY	CHAR	2		Category of administrative status. Always 'AD' value. This field is used only for checking the constraint of NEW_ADMINISTRATIVE_STATUS field.
8	A_PRIORITY_LEVEL	NUMBER	2		Ascending action priority of the status level (Since multiple account statuses are managed and therefore a conflict of multiple actions may take place, the system will take the action triggered by the status level with the highest priority).
9	A_LETTER_CODE	VARCHAR2	6		Ascending action automatic letter code when applicable.
10	A_STATEMENT_MESSAGE_INDEX	CHAR	4		When applicable, this is the ascending action's index of the message to print on the statement. It should be defined in 'CR_STATEMENT_MESSAGE' table.
11	A_CODE_ACTION	CHAR	3		Indicates the authorization responses code that will be forced to all requests involving any of the cards linked to the account having got the status level in ascending mode. Possible values are: '100' = Rejected, '107' = Refer to card issuer, '108' = Refer to card issuer; special condition, '115' = Function not available, '116' = No sufficient funds, '119' = Cardholder transaction not permitted,

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					'120' = Terminal transaction not permitted, '121' = Exceeds withdrawal frequency limit, '122' = Security violation, '123' = Withdrawal frequency exceeded, '125' = Card not in service, '129' = Suspected fraud, '180' = No credit account, '181' = No cheque account, '182' = No saving Account, '200' = Rejected, Pick up card, '202' = Fraudulent, Pick up, '205' = Call security acquirer, pick up, '207' = Special conditions, Pick up, '208' = Lost card, Pick up, '209' = Stolen card, Pick up, '210' = Suspected fraud, Pick up, '299' = Pick up.
12	A_NEW_PROFILE_CODE	CHAR	3		Indicates the new profile to be associated to account that gets the corresponding status level in ascending mode.
13	A_RETURN_ON_ORIGINAL_PROFILE	CHAR	1		Flag indicating that the concerned account must revert automatically to its original profile if the automatic actions of the status in process are executed. Possible values are: 'Y' = Yes, 'N' = No.
14	A_NADM_STATUS_CATEGORY	CHAR	2		Category of administrative status. Always 'AD' value.
15	A_NEW_ADMINISTRATIVE_STATUS	CHAR	1		Ascending mode New administrative status level. Should be defined in 'SHADOW_ACCOUNT_STATUS' table.
16	A_CHANGE_COLLECTION_LEVEL	CHAR	1		Change collection level indicator. Possible values are: 'Y' = Yes, 'N' = No.
17	A_CARDS_IN_STOP_LIST	CHAR	1		Flag indicating the risk automatic action that should be taken for cards under the account moving into the new status level in ascending mode. Possible values are: 'N' = No action, 'S' = Stop list all cards,

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					'R' = Release all cards.
18	A_STOP_LIST_REASON_CODE	CHAR	2		Stop list / Release reason code in case the A_CARDS_IN_STOP_LIST flag value is set to 'S' or 'R'. If applicable, it should be defined in 'STOP_LIST_REASON_CODE' table.
19	A_STOP_LIST_CODE_ACTION	CHAR	3		Indicates the authorization responses code in case the A_CARDS_IN_STOP_LIST flag value is set to 'S'. Possible values are: '107' = Refer to card issuer, '108' = Refer to card issuer; special condition, '115' = Function not available, '116' = No sufficient funds, '119' = Cardholder transaction not permitted, '120' = Terminal transaction not permitted, '121' = Exceeds withdrawal frequency limit, '122' = Security violation, '123' = Withdrawal frequency exceeded, '125' = Card not in service, '129' = Suspected fraud, '180' = No credit account, '181' = No cheque account, '182' = No saving Account, '200' = Rejected, Pick up card, '202' = Fraudulent, Pick up, '205' = Call security acquirer, pick up, '207' = Special conditions, Pick up, '208' = Lost card, Pick up, '209' = Stolen card, Pick up, '210' = Suspected fraud, Pick up, '299' = Pick up.
20	A_STOP_LIST_RISK_LEVEL	CHAR	1		Indicates the risk level in case the A_CARDS_IN_STOP_LIST flag value is set to 'S'. Possible values are: '0' = No risk, '1' = Low risk, '2' = Middle risk, '3' = High risk.
21	A_FCT_VALIDATION_BEFORE_UE	VARCHAR2	30		This column is not used in V3.5.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
22	A_FCT_OTHERS_ACTIONS_UE	VARCHAR2	30		This column is not used in V3.5.
23	A_SMS_CODE	CHAR	4		SMS code if SMS action for clients with account moving into the current status level in ascending mode.
24	A_EMAIL_CODE	VARCHAR2	4		EMAIL code if EMAIL action for clients with account moving into the current status level in ascending mode.
25	A_REASON_CODE	CHAR	2		Ascending mode status change reason code. It should be defined in 'STATUS_REASON_LIST' table.
26	D_PRIORITY_LEVEL	NUMBER	2		Descending action priority of the status level (Since multiple account statuses are managed and therefore a conflict of multiple actions may take place, the system will take the action triggered by the status level with the highest priority).
27	D_LETTER_CODE	VARCHAR2	6		Descending action automatic letter code when applicable.
28	D_STATEMENT_MESSAGE_INDEX	CHAR	4		When applicable, this is the descending action's index of the message to print on the statement. It should be defined in 'CR_STATEMENT_MESSAGE' table.
29	D_CODE_ACTION	CHAR	3		Indicates the authorization responses code that will be forced to all requests involving any of the cards linked to the account having got the status level in descending mode. Possible values are the same as in ascending mode.
30	D_NEW_PROFILE_CODE	CHAR	3		Indicates the new profile to be associated to account that gets the corresponding status level in descending mode.
31	D_RETURN_ON_ORIGINAL_PROFILE	CHAR	1		Flag indicating that the concerned account must revert automatically to its original profile if the automatic actions of the status in process are executed. Possible values are: 'Y' = Yes, 'N' = No.
32	D_NEW_ADMINISTRATIVE_STATUS	CHAR	1		Descending mode New administrative status level. Should be defined in 'SHADOW_ACCOUNT_STATUS' table.
33	D_CHANGE_COLLECTION_LEVEL	CHAR	1		Change collection level indicator. Possible values are: 'Y' = Yes, 'N' = No.
34	D_CARDS_IN_STOP_LIST	CHAR	1		Flag indicating the risk automatic action that should be taken for cards under the account moving into the new status level in descending mode. Possible values are: 'N' = No action,

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					'S' = Stop list all cards, 'R' = Release all cards.
35	D_STOP_LIST_REASON_CODE	CHAR	2		Stop list / Release reason code in case the A_CARDS_IN_STOP_LIST flag value is set to 'S' or 'R'. If applicable, it should be defined in 'STOP_LIST_REASON_CODE' table.
36	D_STOP_LIST_CODE_ACTION	CHAR	3		Indicates the authorization responses code in case the A_CARDS_IN_STOP_LIST flag value is set to 'S'. Possible values are the same as in ascending mode
37	D_STOP_LIST_RISK_LEVEL	CHAR	1		Indicates the risk level in case the A_CARDS_IN_STOP_LIST flag value is set to 'S'. Possible values are: '0' = No risk, '1' = Low risk, '2' = Middle risk, '3' = High risk.
38	D_FCT_VALIDATION_BEFORE_UE	VARCHAR2	30		This column is not used in V3.5.
39	D_FCT_OTHERS_ACTIONS_UE	VARCHAR2	30		This column is not used in V3.5.
40	D_SMS_CODE	CHAR	4		SMS code if SMS action for clients with account moving into the current status level in descending mode.
41	D_EMAIL_CODE	VARCHAR2	4		EMAIL code if EMAIL action for clients with account moving into the current status level in descending mode.
42	D_REASON_CODE	CHAR	2		Descending mode status change reason code. It should be defined in 'STATUS_REASON_LIST' table.
43	LATE_FEES_IND	CHAR	1		Indicates whether the accounts getting the concerned status level are subject to late payment fees calculation when applicable, or not. Possible values are: 'Y' = Yes, 'N' = No.
44	INTEREST_IND	CHAR	1		Indicates whether the accounts getting the concerned status level are subject to interest calculation when applicable, or not. Possible values are: 'Y' = Yes, 'N' = No.
45	STATEMENT_IND	CHAR	1		Indicates whether the accounts getting the concerned status level will have statement generated at the end of cycle, or not. Possible values are:

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					'Y' = Yes, 'N' = No.
46	ASK_FULL_BALANCE_INACTIVE_ACC	CHAR	1		Indicates whether the inactive accounts getting the concerned status level will be asked for the full balance payment at the end of cycle, or not. Possible values are: 'Y' = Yes, 'N' = No. This indicator is used only for Balance status, not for Account Administrative status.
47	ASK_FULL_BALANCE_PERIOD	NUMBER	3		This field indicates the period in number of cycles the account is considered inactive, in case the ASK_FULL_BALANCE_INACTIVE_ACC field is set to 'Y'. This indicator is used only for Balance status, not for Account Administrative status.
48	MULTI_LANG_ID	NUMBER	10		Multi-language ID. Should be defined in PowerCARD 'MULTI_LANG_VALUES' table.
49	ACCELERATE_LOAN	CHAR	1		Indicates whether the accounts getting the concerned status level will be asked for the full outstanding loan payment at the end of cycle, or not. Possible values are: 'Y' = Yes, 'N' = No. This indicator is used only for Unpaid status, not for Account Administrative status.
50	USER_CREATE	VARCHAR2	15		ID of the user when record created.
51	DATE_CREATE	DATE	7		Record creation date and time.
52	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
53	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

9.2.14 SKIP_PARENT_RULES

Minimum Due parameters are used to set up the minimum due or (MTP - Minimum to Pay) calculation method. Three options are offered:

- Full outstanding balance, used for full payment (case of Charge cards). In this case the rate is always 100%,
- By range of specific amount, used to define any specific rates to be applied for different ranges of a specific amount. The range represents the maximum amount tier for which the minimum due parameters are applicable. The amount that will be used for the

search of these rules of calculation is indicated at the Account Profile parameters level. Three amounts can be set up for the search, the Credit limit, the Opening balance or the Closing balance of the account. For this case, the system will apply the rate on the outstanding balance less all transactions with full payment indicator. Then these transaction amounts will be added to the result as to determine the minimum due amount. Note that for this second case; the calculation will be performed according to the "rule of 5" that uses other parameters including Amount threshold, Fixed, Minimum, Maximum and the Grace amount.

- Full outstanding balance by range of specific amount Quota.

The system provides different levels of Minimum Due parameter setting:

- Minimum due index definition,
- Minimum due setting criteria,
- Minimum due, skip payment rules,
- Term change eligibility criteria.

Records of this table concerns Minimum-due skip payment rules parameters. These parameters are used to setup criteria for not generating terms for certain categories of accounts (Accounts matching the skip payment criteria) upon request, during a defined period. So, if requested through the "Skip payment request" function, those account customers will not be asked to make payment on the next cycle during that period.

Each column of this table is described in detail in the next section.

9.2.14.1 Columns description

Seq.	Column Name	Data type	Len	Sc	Column Description
1 	SEQUENCE_ID	NUMBER	10		Sequence number identifying the minimum due skip payment rule.
2	BANK_CODE	CHAR	6		Financial institution of the parameter being defined. It should be defined in the 'BANK' table.
3	BRANCH_CODE	CHAR	6		Branch code as a criterion for skip payment eligibility. It should be previously defined in 'BRANCH' table.
4	PROFILE_CODE	CHAR	3		Credit profile code as a criterion for skip payment eligibility. It should be defined in 'CR_PROFILE' table.
5	VIP_LEVEL	CHAR	1		VIP level as a criterion for skip payment eligibility. It should be defined in 'VIP_LIST' table.
6	CUSTOMER_SEGMENT	CHAR	3		Customer segment as a criterion for skip payment eligibility. It should be defined in 'CUSTOMER_SEGMENT' table.
7	UNPAID_STATUS	NUMBER	2		Account unpaid status, as a criterion for skip payment eligibility. It should be defined in 'SHADOW_ACCOUNT_STATUS' table. Possible values are: '0'= 0 Unpaid, '1'= 1st Unpaid, '2'= 2nd Unpaid,

Seq.	Column Name	Data type	Len	Sc	Column Description
					 '9'= 9 or more Unpaid.
8	BALANCE_STATUS	NUMBER	2		Account balance status, as a criterion for skip payment eligibility. It should be defined in 'SHADOW_ACCOUNT_STATUS' table. Possible values are: '0'= Inactive, '1'= Zero Balance, '2'= Credit Balance, '3'= Debit Balance, '4'= Permitted Overdraft, '5'= Critical Overdraft.
9	YEARS_ON_BOOK	NUMBER	2		When used as a criterion for skip payment eligibility, it represents the minimum number of years since the account was created.
10	MIN_DUE_SCHEDULE_INDEX	CHAR	4		The index identifying the Minimum due calculation method generating zero value as a minimum to pay for the cycle.
11	MIN_DUE_START_DATE	DATE	7		The start date from which the skip payment will be applied on accounts matching the above criteria.
12	MIN_DUE_END_DATE	DATE	7		This is the end date when the skip payment will not be effective.
13	GEN_TRANSACTION_CODE	CHAR	2		If applicable, this is the Transaction code used to generate the skip payment fee transaction.
14	CURRENCY_CODE	CHAR	3		Currency set for the minimum due skip payment fee amount parameters. It should be previously defined in the 'CURRENCY_TABLE'.
15	RATE	NUMBER	9	6	Rate to be applied on the outstanding balance amount as to generate the skip payment fee transaction.
16	FIXE	NUMBER	18	3	This is the amount that will be added to the result before comparing to the minimum, maximum and grace amount.
17	MINIMUM	NUMBER	18	3	This is the minimum amount that will be compared to the final result in order to bring this result in line with the minimum amount, if the final result is less than this Minimum (If the final result is less than the Minimum amount, then the final result gets the Minimum value).
18	MAXIMUM	NUMBER	18	3	This is the maximum amount that will be compared to the final result in order to bring this result in line with the

Seq.	Column Name	Data type	Len	Sc	Column Description
					maximum amount, if the final result is greater than this Maximum (If the final result is greater than the Maximum amount, then the final result gets the Maximum value).
19	GRACE_AMOUNT	NUMBER	18	3	This is the amount under which the final result is brought to zero (If the final result is less or equal than the Grace amount, then the final result gets zero value).
20	THRESHOLD_AMOUNT	NUMBER	18	3	This is the base amount threshold under which the system does not undergo the skip payment fee calculation and the result is set to zero.
21	RULE_IDENTIFIER	CHAR	3		Skip payment fee calculation rule. Possible values are: 'STD' = Standard, 'MIN' = Minimum, 'MAX' = Maximum.
22	ROUNDED_METHOD_IDENTIFIER	CHAR	1		This is to indicate the rounding method to be applied on the skip payment fee calculation result. Possible values are: 'H' = High value, 'L' = Low value, 'N' = Normal, 'E' = Exponent (It means rounding to the exponent of the currency).
23	ACCOUNT_WITH_LOAN	CHAR	1		This flag indicates whether the skip payment will apply for accounts with open loan or not. Possible values are: 'Y'= Yes, 'N'= No.
24	USER_CREATE	VARCHAR2	15		ID of the user when record created.
25	DATE_CREATE	DATE	7		Record creation date and time.
26	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
27	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

9.3 Operation tables

9.3.1 CR_SETTLEMENT_TRANSACTION

Once transactions are created, generated and/or posted to the Financial Account, they get completed with all data related to Financial Account management including transaction dates

(Posting date, due date, Value date and Statement date) that are calculated according to parameters set up.

A Financial Account transaction life cycle starts from once it is posted until it is fully cleared depending on its sign (Debit or Credit). During its life cycle, until it is fully paid, a debit sign transaction is involved in different EOD (End of Day) and EOC (End of Cycle) processing mainly according to its Transaction and Credit Profile parameter set up. These processing include:

- During EOD:
 - If different, transaction currency conversion to the credit account currency (billing currency),
 - Payment allocation priority set-up (payment hierarchy),
 - Transaction based fees generation,
 - Event based fee generation (at least one transaction occurred),
 - A transaction is posted to its corresponding balance according to its balance category,
- Transaction conversion to loan,
- Charges (Interest) generation once every EOC processing,
- Late payment fees generation once every Term Overdue Date,
- Penalty fees generation once every Term Overdue Date,
- Sub-account transactions are posted to the concerned Primary account every EOC according to the Sub-shadow account posting parameters.
- During its payment, based on parameter set-up, a transaction is either fully paid or partially paid,

Records of this table, concern Account transaction settlement data at the statement date.

Each column of this table is described in detail in the next section.

9.3.1.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	STATEMENT_DATE	DATE	7		Statement date of the transaction settlement.
2 	MICROFILM_REF_NUMBER	VARCHAR2	23		The original transaction microfilm reference number.
3 	MICROFILM_SEQ_NUMBER	NUMBER	4		The original transaction microfilm sequence number. It is used to differentiate between transactions having the same microfilm reference number.
4 	ORIGINAL_TRX_FLAG	CHAR	1		The original transaction flag indicates whether the concerned settlement transaction record concerns the original transaction due amount or due parts of the original transaction. Possible values are: 'Y' = For original transaction due amount, 'N' = For due parts of original transaction amount.
5	ORIGINAL_STATEMENT_DATE	DATE	7		The original transaction statement date.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
6	TERM_DUE_DATE	DATE	7		Settlement transaction term due date.
7	BANK_CODE	CHAR	6		Financial institution of the parameter being defined. It should be defined in the 'BANK' table.
8	CURRENT_PROFILE_CODE	CHAR	3		The current account profile identification code.
9	SHADOW_ACCOUNT_NBR	VARCHAR2	24		Shadow account identification number. It should be defined in 'SHADOW_ACCOUNT' table.
10	PRIMARY_SHADOW_ACCOUNT_NBR	VARCHAR2	24		The primary shadow account identification number. If the shadow account is a secondary account, this field should contain the corresponding primary shadow account number. It should be defined in 'SHADOW_ACCOUNT' table.
11	TRANSACTION_CODE	CHAR	2		Transaction code that must be defined in 'CR_TRANSACTION_PARAMETER' table.
12	TRANSACTION_DATE	DATE	7		The transaction date.
13	PROCESSING_DATE	DATE	7		Transaction processing date.
14	BALANCE_CATEGORY	NUMBER	2		Transaction balance category. Possible values are: '01' = Purchase, '02' = Cash, '03' = Transfer, '04' = E business, '05' = Check, '06' = Interest, '07' = Installment, '08' = Fee, '09' = tax, '10' = Refund, '11' = Deposit.
15	OWNER_CATEGORY	CHAR	1		Category of the owner. Possible values are: 'I' = Individual, 'B' = Business, 'S' = Staff, 'P' = Professional, 'N' = Company, 'C' = Corporate, 'T' = Travel, 'L' = International corporate, 'R' = Procurement, 'X' = Others1,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'Y' = Others2, 'Z' = Others3.
16	RESIDENT_FLAG	CHAR	1		The resident flag indicates whether the concerned client is resident or not. Possible values are: 'Y' = Resident client, 'N' = Non resident client.
17	TRANSACTION_SIGN	CHAR	1		Transaction sign. Possible values are: 'D' = Debit, 'C' = Credit.
18	TRX_VALUE_DATE	DATE	7		Transaction value date. It must be defined in 'CR_TRANSACTION' table.
19	TRX_DUE_DATE	DATE	7		Cycle settlement the transaction due date. It must be defined in 'CR_TRANSACTION' table.
20	OPENING_BALANCE	NUMBER	18	3	Cycle settlement transaction opening capital balance.
21	CLOSING_BALANCE	NUMBER	18	3	Cycle settlement transaction closing capital balance.
22	OPENING_PRINCIPAL_BALANCE	NUMBER	18	3	Cycle settlement transaction opening principal balance.
23	CLOSING_PRINCIPAL_BALANCE	NUMBER	18	3	Cycle settlement transaction closing principal balance.
24	BILLING_AMOUNT	NUMBER	18	3	Settlement transaction billing amount.
25	MIN_DUE_TRX	NUMBER	18	3	The minimum due part of the transaction.
26	CLEARING_MIN_DUE_TRX_AMOUNT	NUMBER	18	3	Transaction minimum due settled.
27	DELTA_CLEA_MIN_DUE_TRX_AMNT	NUMBER	18	3	Transaction minimum due not settled.
28	ISS_AMOUNT_3	NUMBER	18	3	This field is reserved for internal use.
29	ISS_AMOUNT_3_START_DATE	DATE	7		This field is reserved for internal use.
30	ISS_AMOUNT_4	NUMBER	18	3	This field is reserved for internal use.
31	ISS_AMOUNT_4_START_DATE	DATE	7		This field is reserved for internal use.
32	ISS_AMOUNT_5	NUMBER	18	3	This field is reserved for internal use.
33	ISS_AMOUNT_5_START_DATE	DATE	7		This field is reserved for internal use.
34	ISS_AMOUNT_6	NUMBER	18	3	This field is reserved for internal use.
35	ISS_AMOUNT_6_START_DATE	DATE	7		This field is reserved for internal use.
36	CLEARING_TRANSACTION_AMOUNT	NUMBER	18	3	Transaction cleared amount (Transaction amount paid).
37	DATA_CAPTURE_SOURCE	CHAR	1		The not cleared transaction amount (<i>Transaction amount not paid</i>). Possible values are: 'T' = From historical transaction,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'M' = From PowerCARD data capture, 'A' = Automatic generation by credit account module.
38	PRIORITY_CHARGE	NUMBER	2		Transaction charging priority.
39	REVERSAL_FLAG	CHAR	1		This flag indicates whether the concerned transaction is a normal or reversal transaction. Possible values are: 'R' = Reversal, 'N' = Normal.
40	BILLING_CURRENCY	CHAR	3		Transaction billing currency code. It should be defined in 'CURRENCY_TABLE' table.
41	BILLING_CURRENCY_EXP	NUMBER	1		Transaction billing currency exponent.
42	CLEARING_VALUE_DATE	DATE	7		Transaction clearing value date.
43	DELTA_BILLING_CLEARING_TRANS	NUMBER	18	3	The delta between Billing amount and Clearing amount.
44	CYCLE_CUTOFF_CODE	CHAR	3		Account cycle cutoff code. It should be defined in 'CYCLE_CUTOFF_PARAMETERS' table.
45	N_FULL_PAYMENT_IND	CHAR	1		This flag indicates whether the transaction is a full payment transaction or not. Possible values are: 'Y' = Yes, 'N' = No.
46	N_CUSTOM_SETTLEMENT	CHAR	1		This flag indicates whether the transaction is designated by the customer with the highest priority during settlement or not. Possible values are: 'Y' = Yes, 'N' = No.
47	SETTLEMENT_ORDER	VARCHAR2	32		The order of the settlement.
48	SETTLEMENT_CUTOFF_ID_ACC	VARCHAR2	8		Accounting settlement cutoff processing id.
49	SETTLEMENT_CUTOFF_FLAG_ACC	CHAR	1		Accounting settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
50	SETTLEMENT_CUTOFF_ID_STA	VARCHAR2	8		The statistics' settlement cutoff processing ID.
51	SETTLEMENT_CUTOFF_FLAG_STA	CHAR	1		The statistics' settlement cutoff processing flag. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'N' = Not yet processed, 'Y' = Processed.
52	SETTLEMENT_CUTOFF_ID_SCO	VARCHAR2	8		The collection/scoring settlement cutoff processing ID.
53	SETTLEMENT_CUTOFF_FLAG_SCO	CHAR	1		The collection/scoring settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
54	SETTLEMENT_CUTOFF_ID_LOY	VARCHAR2	8		The loyalty settlement cutoff processing ID.
55	SETTLEMENT_CUTOFF_FLAG_LOY	CHAR	1		The loyalty settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
56	SETTLEMENT_CUTOFF_ID_OTH	VARCHAR2	8		The information system settlement cutoff processing ID.
57	SETTLEMENT_CUTOFF_FLAG_OTH	CHAR	1		The information system settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
58	USER_CREATE	VARCHAR2	15		ID of the user when record created.
59	DATE_CREATE	DATE	7		Record creation date and time.
60	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
61	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

9.3.2 CR_TERM

Records of this table, concern all Financial account data detailing the Account situation at the End-of-Cycle. It includes all information that reflects the exact status of the account cycle cut-off.

1. Administrative information (Account, Primary account, Bank and Branch code, Client code, Statement code, sequence, and date, Preferred statement address and sending mode, language code, etc.),
2. Management information (Statement date, Term due date and Overdue date, automatic Debit date and Debit value date, Currency, Credit limit including cash and loan limits, Initial and Current Account profiles, Cycle cut-off code, Customer segment, VIP level, Owner code and category, Administrative status, Balance status, Unpaid status, Late payment status, Payment promise and payment failed statuses, statuses dates and Collection level, Billing account identification, Billing bank account and Billing branch of bank account),
3. Delinquency information (Late payment and Penalty fees indicator, Age buckets 30-240 and over),

4. Financial information (Minimum due, Theoretical balance amortization period, number of unpaid terms, Total and last payment amount posted and last posting date, Deposit generated, Debit amount requested, Debit amount received and Debit received date, Loan balance, total Opening balance, Closing balance and closing balance detail by balance category, Current balance detail by balance category, Pending authorization, Pending authorization cash, Pending authorization loan, Live deposit, Higher over limit balance, Higher over limit balance authorization, Higher over limit date).

The Statement will be used to:

- Generate the Statement,
- Generate automatic Debit order,
- Generate automatic Deposit,
- Manage Debit order return,
- Manage the payment,
- Manage delinquency (Late payment and unpaid term)

Refer to "[Statement list](#)" section in UG1021-Financial account user guide for more detail.

Each column of this table is described in detail in the next section.



Note

This table is under validation.

9.3.2.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1	SHADOW_ACCOUNT_NBR	VARCHAR2	24		Shadow account identification number. It should be defined in 'SHADOW_ACCOUNT' table.
2	STATEMENT_DATE	DATE	7		Cycle cutoff date of the account.
3	PRIMARY_SHADOW_ACCOUNT_NBR	VARCHAR2	24		Primary shadow account identification number. If the shadow account is a secondary account, this column should contain the corresponding primary shadow account number. It should be defined in 'SHADOW_ACCOUNT' table.
4	PRIMARY_SHADOW_ACC_FLAG	CHAR	2		This flag indicates whether the concerned account is a primary or secondary account. Possible values are: '1P'= Primary, '0S'= Secondary.
5	BANK_CODE	CHAR	6		The issuer institution name and code concerned by the Credit account. It should be defined in the 'BANK' table.
6	CLIENT_CODE	VARCHAR2	24		Unique code identifying the client. It should be defined in 'CLIENT' table.
7	BRANCH_CODE	CHAR	6		Branch code concerned by the Credit account. It should be defined in 'BRANCH' table.
8	STATEMENT_SEQUENCE	NUMBER	5		Statement sequence number.

Seq.	Column Name	Data Type	Len	Sc	Column Description
9	STATEMENT_CODE	CHAR	2		Statement code. It should be defined in 'STATEMENT_PARAMETERS' table.
10	PREFERRED_STATEMENT_ADDRESS	CHAR	2		The preferred statement address for which the statement is communicated.
11	SM_PREFERRED_STATEMENT_ADDRESS	CHAR	2		The preferred statement sending mode.
12	LANGUAGE_CODE	CHAR	3		Language code. It should be defined in 'LANGUAGE_LIST' table.
13	TERM_DUE_DATE	DATE	7		Term due date.
14	TERM_OVERDUE_DATE	DATE	7		Date on which the term is considered as unpaid.
15	DEBIT_DATE	DATE	7		Term due to payment automatic debit date.
16	DEBIT_FILE_ID	VARCHAR2	12		Debit order file ID.
17	DEBIT_VALUE_DATE	DATE	7		Term due to payment automatic debit value date.
18	LAST_STATEMENT_DATE	DATE	7		Last statement date which corresponds to the date of the last cycle processing,
19	CURRENCY_CODE	CHAR	3		ISO alphabetic and numeric code of the currency. It indicates the currency of the account. It should be defined in 'CURRENCY_TABLE' table.
20	CURRENCY_EXPONENT	NUMBER	1		Currency exponent.
21	CREDIT_LIMIT	NUMBER	18	3	Credit limit at the account level. This Credit limit prevails on the one defined at the Credit profile level. However, this limit cannot exceed the Credit limit ceiling defined at the Credit profile level.
22	CASH_TRANSFER_LIMIT	NUMBER	18	3	The cash/transfer limit at the account level. This Cash/transfer limit is defined as part of the Credit limit and therefore, cannot exceed the Credit limit.
23	LOAN_LIMIT	NUMBER	18	3	Loan limit at the account level. This Loan limit can be defined as a separate limit or as part of the Credit limit but cannot exceed the Credit limit in any case.
24	INITIAL_PROFILE_CODE	CHAR	3		The initial account profile identification code. It should be defined in 'CR_PROFILE' table.
25	CURRENT_PROFILE_CODE	CHAR	3		Current Account profile identification code. It should be defined in 'CR_PROFILE' table.
26	CYCLE_TASK_NAME	VARCHAR2	15		This column is reserved for internal use.
27	CYCLE_CUTOFF_CODE	CHAR	3		Unique code identifying the account cycle cutoff. It should be defined in 'CYCLE_CUTOFF_PARAMETERS' table.

Seq.	Column Name	Data Type	Len	Sc	Column Description
28	CUSTOMER_SEGMENT	CHAR	3		Unique code identifying the concerned Customer segment. It should be defined in 'CUSTOMER_SEGMENT' table.
29	VIP_LEVEL	CHAR	1		VIP level defined for the client owner. It should be defined in 'VIP_LIST' table.
30	OWNER_CODE	CHAR	2		Unique code identifying the Owner. It should be defined in 'OWNER_LIST' table.
31	OWNER_CATEGORY	CHAR	1		The category of the owner. Possible values are: 'I' = Individual, 'B' = Business, 'S' = Staff, 'P' = Professional, 'N' = Company, 'C' = Corporate, 'T' = Travel, 'L' = International corporate, 'R' = Procurement, 'X' = Others1, 'Y' = Others2, 'Z' = Others3.
32	LOAN_DUE_DAY	NUMBER	2		In case a loan installment is included in the minimum due, this column indicates the loan installment transaction due day. Possible values are: '0' = Generate installment at loan transaction date, NULL = Generate installment at statement date, '01'-'28' = Generate installment in the specified day in the month.
33	ADMINISTRATIVE_STATUS	CHAR	1		The account administrative status at the time of term generation. It should be defined in 'SHADOW_ACCOUNT_STATUS' table.
34	ADMINISTRATIVE_STATUS_DATE	DATE	7		The account administrative status date.
35	BALANCE_STATUS	CHAR	1		The account balance status at the time of term generation. It should be defined in 'SHADOW_ACCOUNT_STATUS' table.
36	BALANCE_STATUS_DATE	DATE	7		The account balance status date.
37	UNPAID_STATUS	CHAR	1		The account unpaid status at the time of term generation. It should be defined in 'SHADOW_ACCOUNT_STATUS' table.
38	UNPAID_STATUS_DATE	DATE	7		The account unpaid status date.

Seq.	Column Name	Data Type	Len	Sc	Column Description
39	LATE_PAYMENT_STATUS	CHAR	1		The account late payment status at the time of term generation. It should be defined in 'SHADOW_ACCOUNT_STATUS' table.
40	LATE_PAYMENT_STATUS_DATE	DATE	7		The account late payment status date.
41	PAYMENT_FAILED_STATUS	CHAR	1		The account payment incident status at the time of term generation. It should be defined in 'SHADOW_ACCOUNT_STATUS' table.
42	PAYMENT_FAILED_STATUS_DATE	DATE	7		The account payment incident status date.
43	PAYMENT_PROMISE_STATUS	CHAR	1		The account payment promise status at the time of term generation. It should be defined in 'SHADOW_ACCOUNT_STATUS' table.
44	PAYMENT_PROMISE_STATUS_DATE	DATE	7		The account payment promise status date.
45	COLLECTION_LEVEL	VARCHAR2	6		The account collection level when applicable. It should be defined in 'CR_COLLECTION_LEVEL' table.
46	LATE_PAYMENT_FEE_ON_OFF	CHAR	1		This column indicates whether the late payment fee should be generated for the account or not. Possible values are: 'Y'= Yes, 'N'= No.
47	PENALTY_FEE_ON_OFF	CHAR	1		This column indicates whether the penalty fee should be generated for the account or not. Possible values are: 'Y'= Yes, 'N'= No.
48	REPRESENT_DEBIT_DATE	DATE	7		When applicable, this is used in case a debit order results in a payment incident. It indicates the date in which the debit order has been represented.
49	REPRESENT_DEBIT_USER	VARCHAR2	15		User who represented the debit order.
50	AGE_BUCKET_30	NUMBER	18	3	The outstanding payments (Unpaid terms) at age bucket 30 days.
51	AGE_BUCKET_60	NUMBER	18	3	The outstanding payments (Unpaid terms) at age bucket 60 days.
52	AGE_BUCKET_90	NUMBER	18	3	The outstanding payments (Unpaid terms) at age bucket 90 days.
53	AGE_BUCKET_120	NUMBER	18	3	The outstanding payments (Unpaid terms) at age bucket 120 days.
54	AGE_BUCKET_150	NUMBER	18	3	The outstanding payments (Unpaid terms) at age bucket 150 days.
55	AGE_BUCKET_180	NUMBER	18	3	The outstanding payments (Unpaid terms) at age bucket 180 days.

Seq.	Column Name	Data Type	Len	Sc	Column Description
56	AGE_BUCKET_210	NUMBER	18	3	The outstanding payments (Unpaid terms) at age bucket 210 days.
57	AGE_BUCKET_240	NUMBER	18	3	The outstanding payments (Unpaid terms) at age bucket 240 days.
58	AGE_BUCKET_OVR	NUMBER	18	3	The outstanding payments (Unpaid terms) at age bucket over 240 days.
59	AGE_BUCKET_30_SUBJECT_PENALTY	NUMBER	18	3	Penalty fee generated for outstanding payments (Unpaid terms) at age bucket 30 days.
60	AGE_BUCKET_60_SUBJECT_PENALTY	NUMBER	18	3	Penalty fee generated for outstanding payments (Unpaid terms) at age bucket 60 days.
61	AGE_BUCKET_90_SUBJECT_PENALTY	NUMBER	18	3	Penalty fee generated for outstanding payments (Unpaid terms) at age bucket 90 days.
62	AGE_BUCKET_120_SUBJECT_PENALTY	NUMBER	18	3	Penalty fee generated for outstanding payments (Unpaid terms) at age bucket 120 days.
63	AGE_BUCKET_150_SUBJECT_PENALTY	NUMBER	18	3	Penalty fee generated for outstanding payments (Unpaid terms) at age bucket 150 days.
64	AGE_BUCKET_180_SUBJECT_PENALTY	NUMBER	18	3	Penalty fee generated for outstanding payments (Unpaid terms) at age bucket 180 days.
65	AGE_BUCKET_210_SUBJECT_PENALTY	NUMBER	18	3	Penalty fee generated for outstanding payments (Unpaid terms) at age bucket 210 days.
66	AGE_BUCKET_240_SUBJECT_PENALTY	NUMBER	18	3	Penalty fee generated for outstanding payments (Unpaid terms) at age bucket 240 days.
67	AGE_BUCKET_OVR_SUBJECT_PENALTY	NUMBER	18	3	Penalty fee generated for outstanding payments (Unpaid terms) at age bucket over 240 days.
68	THEO_AMORTZ_NB_MONTHS	NUMBER	3		The theoretical number of months to pay off the balance.
69	MINIMUM_DUE	NUMBER	18	3	Minimum due calculated for the cycle.
70	RATE_MINIMUM_DUE	NUMBER	9	6	The rate used for the minimum due calculation during the cycle cutoff.
71	TERMS_UNPAID_AMOUNT	NUMBER	18	3	Total unpaid amount at the cycle cutoff date.
72	TERMS_UNPAID_NBR	NUMBER	2		Total number of unpaid terms at the cycle cutoff date.
73	POSTING_LEVEL_IND	CHAR	3		Term posting level indicator. Possible values are: 'NAC'= No action, 'WDD'= Waiting auto-debit & deposit generation, 'WAD'= Waiting for automatic debit, 'WGD'= Waiting for generate deposit,

Seq.	Column Name	Data Type	Len	Sc	Column Description
					'WFP'= Waiting for payment, 'WAC'= Waiting for automatic credit, 'PPR'= Partial payment received, 'TPR'= Total payment received, 'SUS'= Term suspended, 'CLO'= Term closed.
74	TOTAL_AMOUNT_POSTED	NUMBER	18	3	Total amount received for the term.
75	LAST_AMOUNT_POSTED	NUMBER	18	3	Last payment transaction amount posted.
76	NBR_AMOUNT_POSTED	NUMBER	3		Number of payments received for the term.
77	LAST_POSTING_DATE	DATE	7		Last payment posting date.
78	ARN_OF_LAST_PAYMENT	VARCHAR2	23		The acquirer reference number of last payment transaction received.
79	ARN_SEQ_OF_LAST_PAYMENT	NUMBER	4		The acquirer reference number and sequence of last payment transaction received.
80	ARN_OF_DEPOSIT_GEN	VARCHAR2	23		The acquirer reference number of the deposit generated transaction.
81	ARN_SEQ_OF_DEPOSIT_GEN	NUMBER	4		The acquirer reference number and sequence of the deposit generated transaction.
82	DEBIT_AMOUNT_REQUEST	NUMBER	18	3	The debit amount requested.
83	DEBIT_AMOUNT_RECEIVED	NUMBER	18	3	The debit amount received.
84	DEBIT_RECEIVED_DATE	DATE	7		The debit received date.
85	CREDIT_AMOUNT_TRANSFER	NUMBER	18	3	Credit amount transferred.
86	REOPENING_DATE	DATE	7		The reopening balance date.
87	STATEMENT_MSG_INDEX_R	CHAR	4		The statement message index. It should be defined in 'CR_STATEMENT_MESSAGE' table.
88	STATEMENT_MSG_INDEX_C	CHAR	4		The statement collection message index. It should be defined in 'CR_STATEMENT_MESSAGE' table.
89	STATEMENT_MSG_INDEX_S	CHAR	4		The statement standard message index. It should be defined in 'CR_STATEMENT_MESSAGE' table.
90	UNPAID_FEE_MONTH_NEXT_CAL	DATE	7		The unpaid monthly fee, next calculation date
91	LOAN_BALANCE	NUMBER	18	3	The loan balance.
92	OPENING_BALANCE	NUMBER	18	3	The opening balance during the last cycle.
93	OPENING_BALANCE_SIGN	CHAR	1		The opening balance sign. Possible values are: 'D'= Debit, 'C'= Credit.

Seq.	Column Name	Data Type	Len	Sc	Column Description
94	CLOSING_BALANCE	NUMBER	18	3	Cycle cutoff closing balance.
95	CLOSING_BALANCE_SIGN	CHAR	1		Closing balance sign. Possible values are: 'D'= Debit, 'C'= Credit.
96	CLOSING_BALANCE_PURCHASE	NUMBER	18	3	Last cycle cutoff closing balance purchase.
97	CLOSING_BALANCE_CASH	NUMBER	18	3	Last cycle cutoff closing balance cash.
98	CLOSING_BALANCE_TRANSFER	NUMBER	18	3	Last cycle cutoff closing balance transfer.
99	CLOSING_BALANCE_ECOM	NUMBER	18	3	Last cycle cutoff closing balance e-commerce.
100	CLOSING_BALANCE_CHEQUE	NUMBER	18	3	Last cycle cutoff closing balance check.
101	CLOSING_BALANCE_INTEREST	NUMBER	18	3	Last cycle cutoff closing balance interest.
102	CLOSING_BALANCE_INSTALLMENT	NUMBER	18	3	Last cycle cutoff closing balance loan installment.
103	CLOSING_BALANCE_FEES	NUMBER	18	3	Last cycle cutoff closing balance fees.
104	CLOSING_BALANCE_TAX	NUMBER	18	3	Last cycle cutoff closing balance tax.
105	CLOSING_BALANCE_REFUND	NUMBER	18	3	Last cycle cutoff closing balance refund.
106	CLOSING_BALANCE_DEPOSIT	NUMBER	18	3	Last cycle cutoff closing balance deposit.
107	CLOS_BAL_SUBJECT_LATE_FEES	NUMBER	18	3	Last cycle cutoff closing balance of transactions subject to late payment fees.
108	CURRENT_BALANCE_PURCHASE	NUMBER	18	3	Current balance purchase.
109	CURRENT_BALANCE_CASH	NUMBER	18	3	Current balance cash.
110	CURRENT_BALANCE_TRANSFER	NUMBER	18	3	Current balance transfer.
111	CURRENT_BALANCE_ECOM	NUMBER	18	3	Current balance e-commerce.
112	CURRENT_BALANCE_CHEQUE	NUMBER	18	3	Current balance check.
113	CURRENT_BALANCE_INTEREST	NUMBER	18	3	Current balance interest.
114	CURRENT_BALANCE_INSTALLMENT	NUMBER	18	3	Current balance loan installment.
115	CURRENT_BALANCE_FEES	NUMBER	18	3	Current balance fees.
116	CURRENT_BALANCE_TAX	NUMBER	18	3	Current balance tax.
117	CURRENT_BALANCE_REFUND	NUMBER	18	3	Current balance refund.
118	CURRENT_BALANCE_DEPOSIT	NUMBER	18	3	Current balance deposit.
119	NBRTRA_CURBAL_PURCHASE	NUMBER	8		Number of transactions in current balance purchase.
120	NBRTRA_CURBAL_CASH	NUMBER	8		Number of transactions in current balance cash.
121	NBRTRA_CURBAL_TRANSFER	NUMBER	8		Number of transactions in current balance transfer.

Seq.	Column Name	Data Type	Len	Sc	Column Description
122	NBRTRA_CURBAL_ECOM	NUMBER	8		Number of transactions in current balance e-commerce.
123	NBRTRA_CURBAL_CHEQUE	NUMBER	8		Number of transactions in current balance check.
124	NBRTRA_CURBAL_INTEREST	NUMBER	8		Number of transactions in current balance interest.
125	NBRTRA_CURBAL_INSTALMENT	NUMBER	8		Number of transactions in current balance loan installment.
126	NBRTRA_CURBAL_FEES	NUMBER	8		Number of transactions in current balance fees.
127	NBRTRA_CURBAL_TAX	NUMBER	8		Number of transactions in current balance tax.
128	NBRTRA_CURBAL_REFUND	NUMBER	8		Number of transactions in current balance refund.
129	NBRTRA_CURBAL_DEPOSIT	NUMBER	8		Number of transactions in current balance deposit.
130	PENDING_AUTHORIZATION	NUMBER	18	3	Pending authorization amount.
131	PENDING_AUT_CASH_TRANSFER	NUMBER	18	3	Pending authorization cash/transfer amount.
132	PENDING_AUT_LOAN	NUMBER	18	3	Pending authorization loan amount.
133	PENDING_CONV_BIL_BALANCE	NUMBER	18	3	Pending conversion billing balance.
134	PENDING_CONV_BIL_SIGN	CHAR	1		Pending conversion billing balance sign. Possible values are: 'D'= Debit, 'C'= Credit.
135	LIVE_DEPOSIT	NUMBER	18	3	The live deposit.
136	HIGHEST_OVERLIMIT_BAL	NUMBER	18	3	The highest over-limit balance.
137	HIGHEST_OVERLIMIT_BAL_AUT	NUMBER	18	3	The highest over-limit balance authorization.
138	HIGHEST_OVERLIMIT_DATE	DATE	7		The highest over-limit date.
139	DATE_LAST_AUT_CREDIT	DATE	7		Last credit authorization date.
140	DATE_LAST_AUT_CASH_TRANSFER	DATE	7		Last Cash/Transfer authorization date.
141	DATE_LAST_AUT_LOAN	DATE	7		Last Loan authorization date.
142	DEBIT_ACCOUNT_EC	CHAR	2		Debit account entity code is fixed to the value 'BA'.
143	DEBIT_ACCOUNT_EI	VARCHAR2	24		Debit account entity ID.
144	DEBIT_ACCOUNT_AS	NUMBER	2		Debit account sequence with regard to the account link.
145	DEBIT_ACCOUNT_AT	CHAR	2		Debit Account type should be defined in the 'ACCOUNT_TYPE_LIST' table.
146	DEBIT_ACCOUNT_NBR	VARCHAR2	24		Debit account number.
147	DEBIT_ACCOUNT_BANK	CHAR	6		Debit account bank code. It should be defined in the 'BANK' table.

Seq.	Column Name	Data Type	Len	Sc	Column Description
148	DEBIT_ACCOUNT_BRANCH	CHAR	6		Debit account branch code. It should be defined in the 'BRANCH' table.
149	SETTLEMENT_CUTOFF_ACC	VARCHAR2	8		The accounting settlement cutoff processing identifier.
150	SETTLEMENT_CUTOFF_CRD	VARCHAR2	8		The credit revolving settlement cutoff processing identifier.
151	SETTLEMENT_CUTOFF_OUTG	VARCHAR2	8		The outgoing settlement cutoff processing identifier.
152	SETTLEMENT_CUTOFF_MER	VARCHAR2	8		The merchant account settlement cutoff processing identifier.
153	SETTLEMENT_CUTOFF_IS	VARCHAR2	8		The information system settlement cutoff processing identifier.
154	SETTLEMENT_CUTOFF_STAT	VARCHAR2	8		The statistics settlement cutoff processing identifier.
155	SETTLEMENT_CUTOFF_RISK	VARCHAR2	8		The risk management settlement cutoff processing identifier.
156	SETTLEMENT_CUTOFF_SCO	VARCHAR2	8		The collection/Scoring settlement cutoff processing identifier.
157	SETTLEMENT_CUTOFF_INC	VARCHAR2	8		The incoming settlement cutoff processing identifier.
158	SETTLEMENT_CUTOFF_BANK	VARCHAR2	8		The institution settlement cutoff processing identifier.
159	SETTLEMENT_FLAG_ACC	CHAR	1		The accounting settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
160	SETTLEMENT_FLAG_CRD	CHAR	1		The credit revolving settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
161	SETTLEMENT_FLAG_OUTG	CHAR	1		The outgoing settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
162	SETTLEMENT_FLAG_MER	CHAR	1		This flag indicates the merchant account settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
163	SETTLEMENT_FLAG_IS	CHAR	1		This flag indicates the information system settlement cutoff processing flag. Possible values are:

Seq.	Column Name	Data Type	Len	Sc	Column Description
					'N' = Not yet processed, 'Y' = Processed.
164	SETTLEMENT_FLAG_STAT	CHAR	1		This flag indicates the statistics settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
165	SETTLEMENT_FLAG_RISK	CHAR	1		This flag indicates the risk management settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
166	SETTLEMENT_FLAG_SCO	CHAR	1		This flag indicates the collection/scoring settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
167	SETTLEMENT_FLAG_INC	CHAR	1		This flag indicates the incoming settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
168	SETTLEMENT_FLAG_BANK	CHAR	1		This flag indicates the institution settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
169	PRIVATE_DATA_D_1	DATE	7		Private data.
170	PRIVATE_DATA_D_2	DATE	7		Private data.
171	PRIVATE_DATA_V_3	VARCHAR2	24		Private data.
172	PRIVATE_DATA_V_4	VARCHAR2	24		Private data.
173	PRIVATE_DATA_N_5	NUMBER	22	3	Private data.
174	PRIVATE_DATA_N_6	NUMBER	22	3	Private data.
175	SENSITIVE_OPERATION_RECORD	CHAR	1		This column is reserved for internal use.
176	CURRENT_TABLE_NAME	VARCHAR2	3		Current table name. Possible values are: 'CUR' = Current Account term table, 'HST' = Historic Account term table.
177	MONTH_FIRST_OVERLIMIT_BAL	NUMBER	18	3	First over-limit balance during the cycle.
178	MONTH_FIRST_OVERLIMIT_DATE	DATE	7		Date of first over-limit balance during the cycle.
179	CUM_BON_CASH_INTEREST	NUMBER	18	3	This column is not used in V3.5.

Seq.	Column Name	Data Type	Len	Sc	Column Description
180	CUM_BON_PUR_INTEREST	NUMBER	18	3	This column is not used in V3.5.
181	CUM_BON_OTH_INTEREST	NUMBER	18	3	This column is not used in V3.5.
182	CUM_BON_INTEREST	NUMBER	18	3	This column is not used in V3.5.
183	NBR_DAYS_CYCLE	NUMBER	2		Number of days in the cycle.
184	CYCLE_OVERLIMIT	NUMBER	18	3	The over-limit balance of the account.
185	USER_CREATE	VARCHAR2	15		ID of the user when record created.
186	DATE_CREATE	DATE	7		Record creation date and time.
187	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
188	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

9.3.3 CR_TERM_HIST

Records of this table, concern all Financial account data detailing the Account situation at the End-of-Cycle. It includes all information that reflects the exact status of the account cycle cut-off.

1. Administrative information (Account, Primary account, Bank and Branch code, Client code, Statement code, sequence, and date, Preferred statement address and sending mode, language code, etc.),
2. Management information (Statement date, Term due date and Overdue date, automatic Debit date and Debit value date, Currency, Credit limit including cash and loan limits, Initial and Current Account profiles, Cycle cut-off code, Customer segment, VIP level, Owner code and category, Administrative status, Balance status, Unpaid status, Late payment status, Payment promise and payment failed statuses, statuses dates and Collection level, Billing account identification, Billing bank account and Billing branch of bank account),
3. Delinquency information (Late payment and Penalty fees indicator, Age buckets 30-240 and over),
4. Financial information (Minimum due, Theoretical balance amortization period, number of unpaid terms, Total and last payment amount posted and last posting date, Deposit generated, Debit amount requested, Debit amount received and Debit received date, Loan balance, total Opening balance, Closing balance and closing balance detail by balance category, Current balance detail by balance category, Pending authorization, Pending authorization cash, Pending authorization loan, Live deposit, Higher over limit balance, Higher over limit balance authorization, Higher over limit date).

The Statement will be used to:

- Generate the Statement,
- Generate automatic Debit order,
- Generate automatic Deposit,
- Manage Debit order return,
- Manage the payment,
- Manage delinquency (Late payment and unpaid term)

Refer to ["Statement list" section](#) in UG1021-Financial account user guide for more detail.

Each column of this table is described in detail in the next section.

9.3.3.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	SHADOW_ACCOUNT_NBR	VARCHAR2	24		Shadow account identification number. It should be defined in 'SHADOW_ACCOUNT' table.
2	STATEMENT_DATE	DATE	7		Cycle cutoff date of the account.
3	PRIMARY_SHADOW_ACCOUNT_NBR	VARCHAR2	24		Primary shadow account identification number. If the shadow account is a secondary account, this field should contain the corresponding primary shadow account number. It should be defined in 'SHADOW_ACCOUNT' table.
4	PRIMARY_SHADOW_ACC_FLAG	CHAR	2		This column indicates whether the concerned account is a primary or secondary account. Possible values are: '1P'= Primary, '0S'= Secondary.
5	BANK_CODE	CHAR	6		Issuer institution name and code concerned by the Credit account. It should be defined in the 'BANK' table.
6	CLIENT_CODE	VARCHAR2	24		Unique code identifying the client. It should be defined in 'CLIENT' table.
7	BRANCH_CODE	CHAR	6		Branch code concerned by the Credit account. It should be defined in 'BRANCH' table.
8	STATEMENT_SEQUENCE	NUMBER	5		Statement sequence number
9	STATEMENT_CODE	CHAR	2		Statement code. It should be defined in 'STATEMENT_PARAMETERS' table.
10	PREFERRED_STATEMENT_ADDRESS	CHAR	2		Preferred statement address for which the statement is communicated.
11	SM_PREFERRED_STATEMENT_ADDRESS	CHAR	2		Preferred statement sending mode.
12	LANGUAGE_CODE	CHAR	3		Language code. It should be defined in 'LANGUAGE_LIST' table.
13	TERM_DUE_DATE	DATE	7		Term due date.
14	TERM_OVERDUE_DATE	DATE	7		Date on which the term is considered as unpaid.
15	DEBIT_DATE	DATE	7		Term due to payment automatic debit date.
16	DEBIT_FILE_ID	VARCHAR2	12		Debit order file ID.
17	DEBIT_VALUE_DATE	DATE	7		Term due to payment automatic debit value date.
18	LAST_STATEMENT_DATE	DATE	7		Last statement date which corresponds to the date of the last cycle processing,
19	CURRENCY_CODE	CHAR	3		ISO alphabetic and numeric code of the currency. It indicates the currency of the account. It should be defined in 'CURRENCY_TABLE' table.

Seq.	Column Name	Data Type	Len	Sc	Column Description
20	CURRENCY_EXPONENT	NUMBER	1		Currency exponent.
21	CREDIT_LIMIT	NUMBER	18	3	Credit limit at the account level. This Credit limit prevails on the one defined at the Credit profile level. However, this limit cannot exceed the Credit limit ceiling defined at the Credit profile level.
22	CASH_TRANSFER_LIMIT	NUMBER	18	3	Cash/transfer limit at the account level. This Cash/transfer limit is defined as part of the Credit limit and therefore, cannot exceed the Credit limit.
23	LOAN_LIMIT	NUMBER	18	3	Loan limit at the account level. This Loan limit can be defined as a separate limit or as part of the Credit limit but cannot exceed the Credit limit in any case.
24	INITIAL_PROFILE_CODE	CHAR	3		Initial account profile identification code. It should be defined in 'CR_PROFILE' table.
25	CURRENT_PROFILE_CODE	CHAR	3		Current Account profile identification code. It should be defined in 'CR_PROFILE' table.
26	CYCLE_TASK_NAME	VARCHAR2	15		This column is reserved for internal use.
27	CYCLE_CUTOFF_CODE	CHAR	3		Unique code identifying the account cycle cutoff. It should be defined in 'CYCLE_CUTOFF_PARAMETERS' table.
28	CUSTOMER_SEGMENT	CHAR	3		Unique code identifying the concerned Customer segment. It should be defined in 'CUSTOMER_SEGMENT' table.
29	VIP_LEVEL	CHAR	1		VIP level defined for the client owner. It should be defined in 'VIP_LIST' table.
30	OWNER_CODE	CHAR	2		Unique code identifying the Owner. It should be defined in 'OWNER_LIST' table.
31	OWNER_CATEGORY	CHAR	1		Category of the owner. Possible values are: 'I' = Individual, 'B' = Business, 'S' = Staff, 'P' = Professional, 'N' = Company, 'C' = Corporate, 'T' = Travel, 'L' = International corporate, 'R' = Procurement, 'X' = Others1, 'Y' = Others2, 'Z' = Others3.

Seq.	Column Name	Data Type	Len	Sc	Column Description
32	LOAN_DUE_DAY	NUMBER	2		In case a loan installment is included in the minimum due, this field indicates the loan installment transaction due day. Possible values are: '0' = Generate installment at loan transaction date, NULL = Generate installment at statement date, '01'-'28' = Generate installment in the specified day in the month.
33	ADMINISTRATIVE_STATUS	CHAR	1		Account administrative status at the time of term generation. It should be defined in 'SHADOW_ACCOUNT_STATUS' table.
34	ADMINISTRATIVE_STATUS_DATE	DATE	7		Account administrative status date.
35	BALANCE_STATUS	CHAR	1		Account balance status at the time of term generation. It should be defined in 'SHADOW_ACCOUNT_STATUS' table.
36	BALANCE_STATUS_DATE	DATE	7		Account balance status date.
37	UNPAID_STATUS	CHAR	1		Account unpaid status at the time of term generation. It should be defined in 'SHADOW_ACCOUNT_STATUS' table.
38	UNPAID_STATUS_DATE	DATE	7		Account unpaid status date.
39	LATE_PAYMENT_STATUS	CHAR	1		Account late payment status at the time of term generation. It should be defined in 'SHADOW_ACCOUNT_STATUS' table.
40	LATE_PAYMENT_STATUS_DATE	DATE	7		Account late payment status date.
41	PAYMENT_FAILED_STATUS	CHAR	1		Account payment incident status at the time of term generation. It should be defined in 'SHADOW_ACCOUNT_STATUS' table.
42	PAYMENT_FAILED_STATUS_DATE	DATE	7		Account payment incident status date.
43	PAYMENT_PROMISE_STATUS	CHAR	1		Account payment promise status at the time of term generation. It should be defined in 'SHADOW_ACCOUNT_STATUS' table.
44	PAYMENT_PROMISE_STATUS_DATE	DATE	7		Account payment promise status date.
45	COLLECTION_LEVEL	VARCHAR2	6		Account collection level when applicable. It should be defined in 'CR_COLLECTION_LEVEL' table.
46	LATE_PAYMENT_FEE_ON_OFF	CHAR	1		This column indicates whether the late payment fee should be generated for the account or not. Possible values are: 'Y'= Yes, 'N'= No.

Seq.	Column Name	Data Type	Len	Sc	Column Description
47	PENALTY_FEE_ON_OFF	CHAR	1		This column indicates whether the penalty fee should be generated for the account or not. Possible values are: 'Y'= Yes, 'N'= No.
48	REPRESENT_DEBIT_DATE	DATE	7		When applicable, this column is used in case a debit order results in a payment incident. It indicates the date in which the debit order has been represented.
49	REPRESENT_DEBIT_USER	VARCHAR2	15		The user who represented the debit order.
50	AGE_BUCKET_30	NUMBER	18	3	The outstanding payments (Unpaid terms) at age bucket 30 days.
51	AGE_BUCKET_60	NUMBER	18	3	The outstanding payments (Unpaid terms) at age bucket 60 days.
52	AGE_BUCKET_90	NUMBER	18	3	The outstanding payments (Unpaid terms) at age bucket 90 days.
53	AGE_BUCKET_120	NUMBER	18	3	The outstanding payments (Unpaid terms) at age bucket 120 days.
54	AGE_BUCKET_150	NUMBER	18	3	The outstanding payments (Unpaid terms) at age bucket 150 days.
55	AGE_BUCKET_180	NUMBER	18	3	The outstanding payments (Unpaid terms) at age bucket 180 days.
56	AGE_BUCKET_210	NUMBER	18	3	The outstanding payments (Unpaid terms) at age bucket 210 days.
57	AGE_BUCKET_240	NUMBER	18	3	The outstanding payments (Unpaid terms) at age bucket 240 days.
58	AGE_BUCKET_OVR	NUMBER	18	3	The outstanding payments (Unpaid terms) at age bucket over 240 days.
59	AGE_BUCKET_30_SUBJECT_PENALTYNUMBER		18	3	Penalty fee generated for outstanding payments (Unpaid terms) at age bucket 30 days.
60	AGE_BUCKET_60_SUBJECT_PENALTYNUMBER		18	3	Penalty fee generated for outstanding payments (Unpaid terms) at age bucket 60 days.
61	AGE_BUCKET_90_SUBJECT_PENALTYNUMBER		18	3	Penalty fee generated for outstanding payments (Unpaid terms) at age bucket 90 days.
62	AGE_BUCKET_120_SUBJECT_PENALTYNUMBER		18	3	Penalty fee generated for outstanding payments (Unpaid terms) at age bucket 120 days.
63	AGE_BUCKET_150_SUBJECT_PENALTYNUMBER		18	3	Penalty fee generated for outstanding payments (Unpaid terms) at age bucket 150 days.
64	AGE_BUCKET_180_SUBJECT_PENALTYNUMBER		18	3	Penalty fee generated for outstanding payments (Unpaid terms) at age bucket 180 days.
65	AGE_BUCKET_210_SUBJECT_PENALTYNUMBER		18	3	Penalty fee generated for outstanding payments (Unpaid terms) at age bucket 210 days.

Seq.	Column Name	Data Type	Len	Sc	Column Description
66	AGE_BUCKET_240_SUBJECT_PENALTY	NUMBER	18	3	Penalty fee generated for outstanding payments (Unpaid terms) at age bucket 240 days.
67	AGE_BUCKET_OVR_SUBJECT_PENALTY	NUMBER	18	3	Penalty fee generated for outstanding payments (Unpaid terms) at age bucket over 240 days.
68	THEO_AMORTZ_NB_MONTHS	NUMBER	3		The theoretical number of months to pay off the balance.
69	MINIMUM_DUE	NUMBER	18	3	Minimum due calculated for the cycle.
70	RATE_MINIMUM_DUE	NUMBER	9	6	Rate used for the minimum due calculation during the cycle cutoff.
71	TERMS_UNPAID_AMOUNT	NUMBER	18	3	Total unpaid amount at the cycle cutoff date.
72	TERMS_UNPAID_NBR	NUMBER	2		Total number of unpaid terms at the cycle cutoff date.
73	POSTING_LEVEL_IND	CHAR	3		Term posting level indicator. Possible values are: 'NAC'= No action, 'WDD'= Waiting auto-debit & deposit generation, 'WAD'= Waiting for automatic debit, 'WGD'= Waiting for generate deposit, 'WFP'= Waiting for payment, 'WAC'= Waiting for automatic credit, 'PPR'= Partial payment received, 'TPR'= Total payment received, 'SUS'= Term suspended, 'CLO'= Term closed.
74	TOTAL_AMOUNT_POSTED	NUMBER	18	3	Total amount received for the term.
75	LAST_AMOUNT_POSTED	NUMBER	18	3	Last payment transaction amount posted.
76	NBR_AMOUNT_POSTED	NUMBER	3		Number of payments received for the term.
77	LAST_POSTING_DATE	DATE	7		Last payment posting date.
78	ARN_OF_LAST_PAYMENT	VARCHAR2	23		Acquirer reference number of last payment transaction received.
79	ARN_SEQ_OF_LAST_PAYMENT	NUMBER	4		Acquirer reference number and sequence of last payment transaction received.
80	ARN_OF_DEPOSIT_GEN	VARCHAR2	23		Acquirer reference number of the deposit generated transaction.
81	ARN_SEQ_OF_DEPOSIT_GEN	NUMBER	4		Acquirer reference number and sequence of the deposit generated transaction.
82	DEBIT_AMOUNT_REQUEST	NUMBER	18	3	Debit amount requested.
83	DEBIT_AMOUNT_RECEIVED	NUMBER	18	3	Debit amount received.

Seq.	Column Name	Data Type	Len	Sc	Column Description
84	DEBIT_RECEIVED_DATE	DATE	7		Debit received date.
85	CREDIT_AMOUNT_TRANSFER	NUMBER	18	3	Credit amount transferred.
86	REOPENING_DATE	DATE	7		Reopening balance date.
87	STATEMENT_MSG_INDEX_R	CHAR	4		Statement message index. It should be defined in 'CR_STATEMENT_MESSAGE' table.
88	STATEMENT_MSG_INDEX_C	CHAR	4		Statement collection message index. It should be defined in 'CR_STATEMENT_MESSAGE' table.
89	STATEMENT_MSG_INDEX_S	CHAR	4		Statement standard message index. It should be defined in 'CR_STATEMENT_MESSAGE' table.
90	UNPAID_FEE_MONTH_NEXT_CAL	DATE	7		The unpaid monthly fee, next calculation date
91	LOAN_BALANCE	NUMBER	18	3	Loan balance.
92	OPENING_BALANCE	NUMBER	18	3	The opening balance during the last cycle.
93	OPENING_BALANCE_SIGN	CHAR	1		The opening balance sign. Possible values are: 'D'= Debit, 'C'= Credit.
94	CLOSING_BALANCE	NUMBER	18	3	Cycle cutoff closing balance.
95	CLOSING_BALANCE_SIGN	CHAR	1		Closing balance sign. Possible values are: 'D'= Debit, 'C'= Credit.
96	CLOSING_BALANCE_PURCHASE	NUMBER	18	3	Last cycle cutoff closing balance purchase.
97	CLOSING_BALANCE_CASH	NUMBER	18	3	Last cycle cutoff closing balance cash.
98	CLOSING_BALANCE_TRANSFER	NUMBER	18	3	Last cycle cutoff closing balance transfer.
99	CLOSING_BALANCE_ECOM	NUMBER	18	3	Last cycle cutoff closing balance e-commerce.
100	CLOSING_BALANCE_CHEQUE	NUMBER	18	3	Last cycle cutoff closing balance check.
101	CLOSING_BALANCE_INTEREST	NUMBER	18	3	Last cycle cutoff closing balance interest.
102	CLOSING_BALANCE_INSTALLMENT	NUMBER	18	3	Last cycle cutoff closing balance loan installment.
103	CLOSING_BALANCE_FEES	NUMBER	18	3	Last cycle cutoff closing balance fees.
104	CLOSING_BALANCE_TAX	NUMBER	18	3	Last cycle cutoff closing balance tax.
105	CLOSING_BALANCE_REFUND	NUMBER	18	3	Last cycle cutoff closing balance refund.
106	CLOSING_BALANCE_DEPOSIT	NUMBER	18	3	Last cycle cutoff closing balance deposit.

Seq.	Column Name	Data Type	Len	Sc	Column Description
107	CLOS_BAL_SUBJECT_LATE_FEES	NUMBER	18	3	Last cycle cutoff closing balance of transactions subject to late payment fees.
108	CURRENT_BALANCE_PURCHASE	NUMBER	18	3	Current balance purchase.
109	CURRENT_BALANCE_CASH	NUMBER	18	3	Current balance cash.
110	CURRENT_BALANCE_TRANSFER	NUMBER	18	3	Current balance transfer.
111	CURRENT_BALANCE_ECOM	NUMBER	18	3	Current balance e-commerce.
112	CURRENT_BALANCE_CHEQUE	NUMBER	18	3	Current balance check.
113	CURRENT_BALANCE_INTEREST	NUMBER	18	3	Current balance interest.
114	CURRENT_BALANCE_INSTALLMENT	NUMBER	18	3	Current balance loan installment.
115	CURRENT_BALANCE_FEES	NUMBER	18	3	Current balance fees.
116	CURRENT_BALANCE_TAX	NUMBER	18	3	Current balance tax.
117	CURRENT_BALANCE_REFUND	NUMBER	18	3	Current balance refund.
118	CURRENT_BALANCE_DEPOSIT	NUMBER	18	3	Current balance deposit.
119	NBRTRA_CURBAL_PURCHASE	NUMBER	8		Number of transactions in current balance purchase.
120	NBRTRA_CURBAL_CASH	NUMBER	8		Number of transactions in current balance cash.
121	NBRTRA_CURBAL_TRANSFER	NUMBER	8		Number of transactions in current balance transfer.
122	NBRTRA_CURBAL_ECOM	NUMBER	8		Number of transactions in current balance e-commerce.
123	NBRTRA_CURBAL_CHEQUE	NUMBER	8		Number of transactions in current balance check.
124	NBRTRA_CURBAL_INTEREST	NUMBER	8		Number of transactions in current balance interest.
125	NBRTRA_CURBAL_INSTALLMENT	NUMBER	8		Number of transactions in current balance loan installment.
126	NBRTRA_CURBAL_FEES	NUMBER	8		Number of transactions in current balance fees.
127	NBRTRA_CURBAL_TAX	NUMBER	8		Number of transactions in current balance tax.
128	NBRTRA_CURBAL_REFUND	NUMBER	8		Number of transactions in current balance refund.
129	NBRTRA_CURBAL_DEPOSIT	NUMBER	8		Number of transactions in current balance deposit.
130	PENDING_AUTHORIZATION	NUMBER	18	3	Pending authorization amount.
131	PENDING_AUT_CASH_TRANSFER	NUMBER	18	3	Pending authorization cash/transfer amount.
132	PENDING_AUT_LOAN	NUMBER	18	3	Pending authorization loan amount.
133	PENDING_CONV_BIL_BALANCE	NUMBER	18	3	Pending conversion billing balance.
134	PENDING_CONV_BIL_SIGN	CHAR	1		Pending conversion billing balance sign. Possible values are:

Seq.	Column Name	Data Type	Len	Sc	Column Description
					'D'= Debit, 'C'= Credit.
135	LIVE_DEPOSIT	NUMBER	18	3	Live deposit.
136	HIGHEST_OVERLIMIT_BAL	NUMBER	18	3	Highest over-limit balance.
137	HIGHEST_OVERLIMIT_BAL_AUT	NUMBER	18	3	Highest over-limit balance authorization.
138	HIGHEST_OVERLIMIT_DATE	DATE	7		Highest over-limit date.
139	DATE_LAST_AUT_CREDIT	DATE	7		The last credit authorization date.
140	DATE_LAST_AUT_CASH_TRANSFER	DATE	7		The last Cash/Transfer authorization date.
141	DATE_LAST_AUT_LOAN	DATE	7		The last Loan authorization date.
142	DEBIT_ACCOUNT_EC	CHAR	2		Debit account entity code is fixed to the value 'BA'.
143	DEBIT_ACCOUNT_EI	VARCHAR2	24		Debit account entity ID.
144	DEBIT_ACCOUNT_AS	NUMBER	2		Debit account sequence with regard to the account link.
145	DEBIT_ACCOUNT_AT	CHAR	2		Debit Account type should be defined in the 'ACCOUNT_TYPE_LIST' table.
146	DEBIT_ACCOUNT_NBR	VARCHAR2	24		Debit account number.
147	DEBIT_ACCOUNT_BANK	CHAR	6		Debit account bank code. It should be defined in the 'BANK' table.
148	DEBIT_ACCOUNT_BRANCH	CHAR	6		Debit account branch code. It should be defined in the 'BRANCH' table.
149	SETTLEMENT_CUTOFF_ACC	VARCHAR2	8		Accounting settlement cutoff processing identifier.
150	SETTLEMENT_CUTOFF_CRD	VARCHAR2	8		Credit revolving settlement cutoff processing identifier.
151	SETTLEMENT_CUTOFF_OUTG	VARCHAR2	8		The outgoing settlement cutoff processing identifier.
152	SETTLEMENT_CUTOFF_MER	VARCHAR2	8		The merchant account settlement cutoff processing identifier.
153	SETTLEMENT_CUTOFF_IS	VARCHAR2	8		The information system settlement cutoff processing identifier.
154	SETTLEMENT_CUTOFF_STAT	VARCHAR2	8		Statistics settlement cutoff processing identifier.
155	SETTLEMENT_CUTOFF_RISK	VARCHAR2	8		Risk management settlement cutoff processing identifier.
156	SETTLEMENT_CUTOFF_SCO	VARCHAR2	8		The collection/Scoring settlement cutoff processing identifier.
157	SETTLEMENT_CUTOFF_INC	VARCHAR2	8		The incoming settlement cutoff processing identifier.
158	SETTLEMENT_CUTOFF_BANK	VARCHAR2	8		Bank settlement cutoff processing identifier.
159	SETTLEMENT_FLAG_ACC	CHAR	1		Accounting settlement cutoff processing flag.

Seq.	Column Name	Data Type	Len	Sc	Column Description
					Possible values are: 'N' = Not yet processed, 'Y' = Processed.
160	SETTLEMENT_FLAG_CRD	CHAR	1		Credit revolving settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
161	SETTLEMENT_FLAG_OUTG	CHAR	1		The outgoing settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
162	SETTLEMENT_FLAG_MER	CHAR	1		Merchant account settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
163	SETTLEMENT_FLAG_IS	CHAR	1		Information system settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
164	SETTLEMENT_FLAG_STAT	CHAR	1		The statistics settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
165	SETTLEMENT_FLAG_RISK	CHAR	1		Risk management settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
166	SETTLEMENT_FLAG_SCO	CHAR	1		The collection/scoring settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
167	SETTLEMENT_FLAG_INC	CHAR	1		Incoming settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
168	SETTLEMENT_FLAG_BANK	CHAR	1		Bank settlement cutoff processing flag.

Seq.	Column Name	Data Type	Len	Sc	Column Description
					Possible values are: 'N' = Not yet processed, 'Y' = Processed.
169	PRIVATE_DATA_D_1	DATE	7		Private data.
170	PRIVATE_DATA_D_2	DATE	7		Private data.
171	PRIVATE_DATA_V_3	VARCHAR2	24		Private data.
172	PRIVATE_DATA_V_4	VARCHAR2	24		Private data.
173	PRIVATE_DATA_N_5	NUMBER	22	3	Private data.
174	PRIVATE_DATA_N_6	NUMBER	22	3	Private data.
175	SENSITIVE_OPERATION_RECORD	CHAR	1		This column is reserved for future use.
176	CURRENT_TABLE_NAME	VARCHAR2	3		Current table name. Possible values are: 'CUR' = Current Account term table, 'HST' = Historic Account term table.
177	MONTH_FIRST_OVERLIMIT_BAL	NUMBER	18	3	First over-limit balance during the cycle.
178	MONTH_FIRST_OVERLIMIT_DATE	DATE	7		Date of first over-limit balance during the cycle.
179	CUM_BON_CASH_INTEREST	NUMBER	18	3	Cumulative of bonificable cash interest.
180	CUM_BON_PUR_INTEREST	NUMBER	18	3	Cumulative of bonificable purchase interest.
181	CUM_BON_OTH_INTEREST	NUMBER	18	3	Cumulative of bonificable other transactions' interest.
182	CUM_BON_INTEREST	NUMBER	18	3	Cumulative of bonificable all transactions' interest.
183	NBR_DAYS_CYCLE	NUMBER	2		Number of days in the cycle.
184	CYCLE_OVERLIMIT	NUMBER	18	3	The over-limit balance of the account.
185	USER_CREATE	VARCHAR2	15		ID of the user when record created.
186	DATE_CREATE	DATE	7		Record creation date and time.
187	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
188	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

9.3.4 CR_TRANSACTION

In addition to transactions received from PowerCARD Acquiring module or from other sources incoming files, PowerCARD system provides the capability of capturing the Credit Account transaction data through Graphical User Interface function.

Records of this table, concern all the data required for Credit account transaction management.

Refer to ["Operations"](#) section in UG1190-Issuer transactions management user guide for more details.

Each column of this table is described in detail in the next section.

9.3.4.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	MICROFILM_REF_NUMBER	CHAR	23		Transaction acquirer reference number.
2 	MICROFILM_REF_SEQ	NUMBER	4		Microfilm reference sequence. It is used to differentiate between transactions having the same acquirer reference number.
3	SHADOW_ACCOUNT_NBR	VARCHAR2	24		Shadow account identification number. It should be defined in 'SHADOW_ACCOUNT' table.
4	PRIMARY_SHADOW_ACCOUNT_NBR	VARCHAR2	24		Primary shadow account identification number. If the shadow account is a secondary account, this field should contain the corresponding primary shadow account number. It should be defined in 'SHADOW_ACCOUNT' table.
5	PRIMARY_SHADOW_ACC_FLAG	CHAR	2		This flag indicates whether the concerned account is a primary or secondary account. Possible values are: '1P' = Primary, '0S' = Secondary.
6	CARD_NUMBER	VARCHAR2	22		Card number concerned by the transaction. It should be defined in 'CARD' table.
7	CARD_NUMBER_SEQUENCE	NUMBER	3		Card number sequence.
8	CLIENT_CODE	VARCHAR2	24		Client identification code concerned. It should be defined in 'CLIENT' table.
9	BANK_CODE	CHAR	6		Financial institution code. It should be defined in the 'BANK' table.
10	BRANCH_CODE	CHAR	6		The branch code concerned. It should be defined in 'BRANCH' table.
11	INITIAL_PROFILE_CODE	CHAR	3		Initial Account profile identification code. It should be defined in 'CR_PROFILE' table.
12	CURRENT_PROFILE_CODE	CHAR	3		Current Account profile identification code. It should be defined in 'CR_PROFILE' table.
13	CYCLE_TASK_NAME	VARCHAR2	15		This column is reserved for future use.
14	CYCLE_CUTOFF_CODE	CHAR	3		Account cycle cutoff code. It should be defined in 'CYCLE_CUTOFF_PARAMETERS' table.
15	PARTNER_BRAND_ID	VARCHAR2	15		Partner brand identification code. It should be defined in 'PARTNER_BRAND' table.
16	CORPORATE_ID	VARCHAR2	15		Corporate identification code. It should be defined in 'CORPORATE' table.
17	NETWORK_CODE	CHAR	2		Card network code. It should be defined in 'NETWORK' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
18	NETWORK_CARD_TYPE	CHAR	2		Network card type. It should be defined in 'CARD_TYPE' table.
19	PRODUCT_CODE	CHAR	3		Card product code. It should be defined in 'CARD_PRODUCT' table.
20	PRODUCT_TYPE	CHAR	2		The product type. Possible values are: 'DC' = Debit Card, 'DD' = Deferred Debit Card, 'CC' = Charge Card, 'CR' = Credit Revolving Card, 'IC' = Installment Card, 'PP' = Prepaid Card.
21	BASIC_CARD_FLAG	CHAR	1		This flag indicates whether the concerned card is a basic (Primary) or supplementary card. Possible values are: 'B' = Basic (Primary) card, 'S' = Supplementary card.
22	OWNER_CODE	CHAR	2		Owner codes. It should be defined in 'OWNER_LIST' table.
23	OWNER_CATEGORY	CHAR	1		Category of the owner. Possible values are: 'I' = Individual, 'B' = Business, 'S' = Staff, 'P' = Professional, 'N' = Company, 'C' = Corporate, 'T' = Travel, 'L' = International corporate, 'R' = Procurement, 'X' = Others1, 'Y' = Others2, 'Z' = Others3.
24	CHAIN_CODE	VARCHAR2	15		The concerned transaction chain code. It should be defined in 'CHAIN' table.
25	MERCHANT_NUMBER	VARCHAR2	15		The concerned transaction merchant number. It should be defined in 'MERCHANT' table.
26	OUTLET_NUMBER	VARCHAR2	15		The concerned transaction acceptor point. It should be defined in 'MER_ACCEPTOR_POINT' table.
27	TERMINAL_ID	VARCHAR2	15		The concerned transaction terminal identification.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
28	ACRONYM	VARCHAR2	40		The concerned transaction merchant acronym.
29	COUNTRY_CODE	CHAR	3		Transaction concerned Merchant/ Acceptor point ISO numeric country code. It should be defined in 'COUNTRY' table
30	CITY_CODE	VARCHAR2	5		Transaction concerned Merchant/ Acceptor point city code. It should be defined in 'CITY' table
31	CITY_NAME	VARCHAR2	30		The concerned transaction merchant/ acceptor point city name.
32	MCC	CHAR	4		The transaction concerned Merchant Category Code. It should be defined in 'MCC' table.
33	MCC_GROUP	CHAR	4		The transaction concerned MCC Group code. It should be defined in 'MCC_RANGE' table.
34	TCC	CHAR	1		Transaction category code as received from the network.
35	ACTIVITY_CODE	CHAR	4		The concerned transaction merchant activity code. It should be defined in 'MERCHANT_ACTIVITY_SET' table.
36	LINKUP_CODE	VARCHAR2	12		The concerned transaction Linked-up code or Batch agent. Management of the LINKUP_CODE depends on PowerCARD acquiring 'Transaction capture mode parameters' set-up for the institution. These parameters define the usage of the linkup concept for the institution. The linkup concept can be defined as Not supported, Optional or Required.
37	BATCH_NUMBER	VARCHAR2	8		The concerned transaction batch group number. Management of the BATCH_NUMBER depends on PowerCARD acquiring 'Transaction capture mode parameters' set-up for the institution. These parameters define the usage of the batch group concept for the institution. The batch group concept can be defined as Not supported, Optional or Required.
38	REMITTANCE_SEQUENCE	NUMBER	4		The concerned transaction batch sequence.
39	VOUCHER_SEQUENCE	NUMBER	6		The concerned transaction voucher sequence.
40	REMITTANCE_NUMBER	VARCHAR2	8		The concerned transaction batch number.
41	VOUCHER_NUMBER	VARCHAR2	8		The concerned transaction voucher number.
42	TRANSACTION_CODE	CHAR	2		Transaction code that should be defined in

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'CR_TRANSACTION_PARAMETER' table.
43	REVERSAL_FLAG	CHAR	1		This flag indicates whether the concerned transaction is a normal or reversal transaction. Possible values are: 'R' = Reversal, 'N' = Normal.
44	TRANSACTION_DESCRIPTION	VARCHAR2	128		Description of the transaction.
45	TRANSACTION_WORDING	VARCHAR2	40		Short description of the transaction.
46	REVERSAL_REASON_CODE	CHAR	2		Transaction reason code. It should be defined in 'TRANS_REASON_CODE' table.
47	SUSPEND_REASON_CODE	CHAR	2		The suspend reason code. It should be defined in 'TRANS_REASON_CODE' table.
48	CAPTURE_REASON_CODE	CHAR	2		The capture reason code. It should be defined in 'TRANS_REASON_CODE' table.
49	POSTING_ACCOUNT_ENTITY	CHAR	1		Posting account entity. Possible values are: 'M' = Merchant, 'B' = Bank, 'C' = Credit card account, 'W' = Waiting for decision.
50	TRANSACTION_SIGN	CHAR	1		Transaction sign. Possible values are: 'D' = Debit, 'C' = Credit.
51	TRANSACTION_SIGN_OP	NUMBER	1		This column is reserved for future use.
52	FUNCTION_CODE	CHAR	3		This field indicates the function code. Possible values are: '200' = Initial financial advice, '205' = 1st presentation, '206' = 2nd presentation, '207' = 3rd presentation.
53	TRANSACTION_AMOUNT	NUMBER	18	3	This field indicates the transaction amount.
54	TRANSACTION_CURRENCY	CHAR	3		Transaction currency code. It should be defined in 'CURRENCY_TABLE' table.
55	TRANSACTION_CURRENCY_EXP	NUMBER	1		Transaction currency exponent.
56	OPENING_BALANCE	NUMBER	18	3	Account opening capital balance.
57	CLOSING_BALANCE	NUMBER	18	3	Account closing capital balance.
58	OPENING_PRINCIPAL_BALANCE	NUMBER	18	3	Account opening principal balance.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
59	CLOSING_PRINCIPAL_BALANCE	NUMBER	18	3	Account closing principal balance.
60	OFF_BALANCE_AMOUNT	NUMBER	18	3	This column is reserved for future use.
61	BILLING_AMOUNT	NUMBER	18	3	Transaction billing amount.
62	BILLING_CURRENCY	CHAR	3		Transaction billing currency code. It should be defined in 'CURRENCY_TABLE' table.
63	BILLING_CURRENCY_EXP	NUMBER	1		Transaction billing currency exponent.
64	LOCAL_AMOUNT	NUMBER	18	3	Transaction local amount.
65	LOCAL_CURRENCY	CHAR	3		Transaction local currency code. It should be defined in 'CURRENCY_TABLE' table.
66	LOCAL_CURRENCY_EXP	NUMBER	1		Transaction local currency exponent.
67	SETTLEMENT_AMOUNT	NUMBER	18	3	Transaction settlement amount.
68	SETTLEMENT_CURRENCY	CHAR	3		Transaction settlement currency code. It should be defined in 'CURRENCY_TABLE' table.
69	SETTLEMENT_CURRENCY_EXP	NUMBER	1		Transaction settlement currency exponent.
70	CONV_RATE_SETTLEMENT	VARCHAR2	8		Transaction settlement currency conversion rate.
71	CONV_DATE_SETTLEMENT	DATE	7		Transaction settlement currency conversion date.
72	RECONCILIATION_AMOUNT	NUMBER	18	3	Transaction reconciliation amount.
73	RECONCILIATION_CURRENCY	CHAR	3		Transaction reconciliation currency code. It should be defined in 'CURRENCY_TABLE' table.
74	RECONCILIATION_CURRENCY_EXP	NUMBER	1		Transaction reconciliation currency exponent.
75	CONV_RATE_RECONCILIATION	VARCHAR2	8		Transaction reconciliation currency conversion rate.
76	CONV_DATE_RECONCILIATION	DATE	7		Transaction reconciliation currency conversion date.
77	TIPS_AMOUNT	NUMBER	18	3	Transaction tips amount.
78	CASH_BACK_AMOUNT	NUMBER	18	3	Transaction cash-back amount.
79	ISS_POSTING_DESTINATION	CHAR	2		Issuer posting destination indicates the entity supporting the transaction. Possible values are: 'CO' = Corporate, 'SA' = Individual shadow account.
80	CHANGE_DIFFERENCE	NUMBER	18	3	The difference of change between first and last (Definitive) conversion.
81	ISS_MARKUP_AMOUNT	NUMBER	18	3	Issuer conversion markup amount.
82	ISS_MARKUP_RATE	NUMBER	9	6	Issuer conversion markup rate.
83	ISS_AMOUNT_1	NUMBER	18	3	This column is reserved for future use.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
84	ISS_AMOUNT_1 _CURRENCY_CODE	CHAR	3		This column is reserved for future use. It should be defined in 'CURRENCY_TABLE' table.
85	ISS_AMOUNT_1_CURRENCY_EXP	NUMBER	1		This column is reserved for future use. It should be defined in 'CURRENCY_TABLE' table.
86	ISS_AMOUNT_2	NUMBER	18	3	This column is reserved for future use.
87	ISS_AMOUNT_2_CURRENCY_CODE	CHAR	3		This column is reserved for future use. It should be defined in 'CURRENCY_TABLE' table.
88	ISS_AMOUNT_2_CURRENCY_EXP	NUMBER	1		This column is reserved for future use. It should be defined in 'CURRENCY_TABLE' table.
89	ISS_AMOUNT_3	NUMBER	18	3	This column is reserved for future use.
90	ISS_AMOUNT_3 _CURRENCY_CODE	CHAR	3		This column is reserved for future use. It should be defined in 'CURRENCY_TABLE' table.
91	ISS_AMOUNT_3_CURRENCY_EXP	NUMBER	1		This column is reserved for future use. It should be defined in 'CURRENCY_TABLE' table.
92	ISS_AMOUNT_4	NUMBER	18	3	This column is reserved for future use.
93	ISS_AMOUNT_4 _CURRENCY_CODE	CHAR	3		This column is reserved for future use. It should be defined in 'CURRENCY_TABLE' table.
94	ISS_AMOUNT_4_CURRENCY_EXP	NUMBER	1		This column is reserved for future use. It should be defined in 'CURRENCY_TABLE' table.
95	TRANSACTION_CATEGORY	NUMBER	2		Transaction category. Possible values are: '01' = Airline, '02' = Lodging, '03' = Rent car, '04' = Restaurant, '05' = Medical, '06' = Mail order, '07' = Purchase, '08' = Other purchase, '09' = Withdrawal, '10' = Quasi cash, '11' = Cash, '12' = Transfer, '13' = E-commerce, '14' = T&E.
96	BALANCE_CATEGORY	NUMBER	2		Transaction balance category. Possible values are: '01' = Purchase,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'02' = Cash, '03' = Transfer, '04' = E business, '05' = Check, '06' = Interest, '07' = Installment, '08' = Fee, '09' = tax, '10' = Refund, '11' = Deposit.
97	AUTHORIZATION_NUMBER	CHAR	6		The authorization code.
98	AUTHORIZATION_CURRENCY	CHAR	3		The authorization currency code. It should be defined in 'CURRENCY_TABLE' table.
99	AUTHORIZATION_AMOUNT	NUMBER	18	3	The authorization amount.
100	AUTHORIZATION_MATCH_FLAG	CHAR	1		Te authorization matching flag. Possible values are: 'Y' = Matched, 'N' = Not matched.
101	PENDING_AMOUNT_RECORDED	NUMBER	18	3	Amount of pending authorization for the account.
102	TRANSACTION_DATE	DATE	7		Transaction date.
103	INCOMING_SETTLEMENT_DATE	DATE	7		Incoming transaction settlement date.
104	AUTHORIZATION_DATE	DATE	7		The authorization date.
105	REMITTANCE_DATE	DATE	7		Transaction remittance (Batch) date.
106	REMITTANCE_TYPE	CHAR	1		The remittance (Batch) type. Possible values are: 'A' = ATM, 'P' = POS, 'M' = Manual, 'E' = Electronic Commerce, 'C' = CAT (Cardholder Activated Terminal).
107	REMITTANCE_ORIGIN	CHAR	1		The remittance (Batch) origin. Possible values are: 'C' = Basic Captured Transactions, 'V' = Credit Voucher Captured Transactions, 'G' = Charges-back, 'A' = Airline Captured Transactions, 'R' = Rent Car Captured Transactions, 'P' = Petrol Captured Transactions, 'L' = Lodging Captured Transactions,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'F' = Food Captured Transactions, 'O' = POS transactions, 'T' = ATM transactions, 'I' = Rail-Road Captured Transactions, 'E' = Telecom Captured Transactions, 'S' = Posting File Received Transactions, 'N' = Potential loan Transactions.
108	PROCESSING_DATE	DATE	7		Transaction processing date.
109	VALUE_DATE	DATE	7		Transaction value date.
110	CLEARING_VALUE_DATE	DATE	7		Transaction clearing value date.
111	DUE_DATE	DATE	7		Transaction due date.
112	STATEMENT_DATE	DATE	7		Transaction statement date.
113	DEBIT_DATE	DATE	7		Debit date.
114	DEBIT_VALUE_DATE	DATE	7		Debit value date.
115	GEN_DEPOSIT_DATE	DATE	7		The generation deposit date.
116	SENDING_DATE	DATE	7		The sending date.
117	ISSUER_SETTLEMENT_DATE	DATE	7		Issuer settlement date.
118	POSTING_DATE	DATE	7		Transaction posting date.
119	PROCESSING_STEP	CHAR	2		The processing step. Possible values are: 'WD' = Waiting for daily processing, 'WM' = Waiting for monthly processing, 'NC' = Waiting conversion, 'WC' = Daily processed & waiting conversion, 'ST' = Suspend & wait for decision, 'MP' = Monthly processed, 'HT' = To be archive, 'HW' = Transaction waiting monthly suspended & waiting decision, 'HM' = Transaction Waiting monthly Suspended & posted to the Merchant, 'HB' = Transaction Waiting monthly Suspended & posted to the bank, 'HC' = Transaction waiting monthly suspended & re-posted to the account, 'HA' = Transaction waiting monthly suspended & posted to another account, 'PW' = Transaction monthly processed suspended & waiting decision, 'PM' = Transaction monthly processed suspended & posted to the merchant,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'PB' = Transaction monthly processed suspended & posted to the bank, 'PC' = Transaction monthly processed suspended & re-posted to the account, 'PA' = Transaction monthly processed suspended & posted to another account, 'TW' = Archived transaction suspended & waiting decision, 'TM' = Archived transaction suspended & posted to the merchant, 'TB' = Archived transaction suspended & posted to the bank, 'TC' = Archived transaction suspended & re-posted to the account, 'TA' = Archived transaction suspended & posted to another account.
120	FORMER_PROCESSING_STEP	CHAR	2		The former processing step. Possible values are the same as PROCESSING_STEP field.
121	DATA_CAPTURE_SOURCE	CHAR	1		Transaction data capture source. Possible values are: 'T' = From historical transaction, 'M' = From PowerCARD data capture, 'A' = Automatic generation by credit account module.
122	DATA_CAPTURE_USER	VARCHAR2	15		The data capture user.
123	DATA_CAPTURE_DATE	DATE	7		The data capture date.
124	PRIORITY_CHARGE	NUMBER	2		Transaction charging priority.
125	SUBJECT_INTEREST_FLAG	CHAR	1		This flag indicates whether the transaction is subject to interest generation or not. Possible values are: 'Y' = Yes, 'N' = No.
126	SUBJECT_LATE_FEES_FLAG	CHAR	1		This column is not used in V3.5.
127	GEN_AUTO_FEES_FLAG	CHAR	1		This flag indicates whether the transaction is subject to automatic fee generation or not. Possible values are: 'Y' = Yes, 'N' = No, 'P' = Processed.
128	GEN_AUTO_FEES_ALT_FLAG	CHAR	1		This flag indicates whether the transaction is subject to ALT (At Least One Transaction) automatic fee generation or not.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Possible values are: 'Y' = Yes, 'N' = No, 'C' = Checked, 'P' = Processed.
129	POTENTIAL_LOAN_IND	CHAR	1		This flag indicates whether the transaction can be converted to loan or not. Possible values are: 'Y' = Yes, 'N' = No.
130	LOAN_TRANSACT_IND	CHAR	1		This flag indicates whether the transaction is a loan transaction or not. Possible values are: 'Y' = Yes, 'N' = No.
131	SUBJECT_PENALTY_FEE_FLAG	CHAR	1		This column is not used in V3.5.
132	N_FULL_PAYMENT_IND	CHAR	1		This flag indicates whether the transaction is a full payment transaction or not. Possible values are: 'Y' = Yes, 'N' = No.
133	N_OTHER_INDICATOR_1	CHAR	1		This column is reserved for future use.
134	N_OTHER_INDICATOR_2	CHAR	1		This column is reserved for future use.
135	N_CUSTOM_SETTLEMENT	CHAR	1		This flag indicates whether the transaction is designated by the customer with the highest priority during settlement or not. Possible values are: 'Y' = Yes, 'N' = No.
136	POSTING_TERMS_METHOD	CHAR	1		This column indicates the posting method for clearing the term. Possible values are: 'A' = Ascending, 'D' = Descending.
137	BLINDING_TRX_IND	CHAR	1		This flag indicates whether the transaction should be blinded on the statement when reversed or not. Possible values are: 'Y' = Yes, 'N' = No.
138	PROCUREMENT_IND	CHAR	1		This column is not used in V3.5.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
139	CONFIRM_DEPOSIT_CAPTURED	CHAR	1		In case of deposit, this is to indicate whether the deposit transaction is confirmed or not. Possible values are: 'Y' = Yes, 'N' = No, 'R' = Reversal.
140	DATE_CONFIRM_DEPOSIT_CAPTURED	DATE	7		The deposit confirmation date or Deposit request reversal date in case CONFIRM_DEPOSIT_CAPTURED = 'R' (Reversal).
141	M_INSTITUTION_CODE	VARCHAR2	15		Institution owner of auxiliary product when the transaction concern auxiliary product fees. If not NULL, it should be defined in 'M_INSTITUTION_LIST' table.
142	PRODUCT_IDENTIFIER	CHAR	6		The auxiliary product code when the transaction concern auxiliary product fees. If not NULL, it should be defined in 'LINKED_PROD_DESC' table.
143	CONTRACT_NUMBER	VARCHAR2	16		The cardholder contract number to the auxiliary product (Filled only if the transaction is related to auxiliary product fees).
144	SUB_CONTRACT_NUMBER	VARCHAR2	16		The cardholder sub-contract Number to the auxiliary product (Filled only if the transaction is related to auxiliary product fees).
145	ORIGIN_CODE	CHAR	1		Transaction issuer/acquirer indicator. Possible values are: '0' = ONUS card / local merchant, '1' = ONUS card / local other bank merchant, '2' = ONUS card / foreign merchant, '3' = local other bank card / local merchant, '4' = foreign card / local merchant.
146	DATE_DAILY_CUTOFF_BD	DATE	7		Last daily cutoff business date.
147	DATE_DAILY_CUTOFF_SD	DATE	7		Last daily cutoff system date.
148	DAILY_CUTOFF_ID	VARCHAR2	8		Last daily cutoff processing identifier.
149	DATE_MONTHLY_CUTOFF_BD	DATE	7		Last monthly cutoff business date.
150	DATE_MONTHLY_CUTOFF_SD	DATE	7		Last monthly cutoff system date.
151	MONTHLY_CUTOFF_ID	VARCHAR2	8		Last monthly cutoff processing identifier.
152	TRANSACTION_GROUP_REPORTING	CHAR	3		Transaction group reporting code. If applicable, it should be defined in 'GROUP_REPORTING_DEF' table.
153	CLEARING_TRANSACTION_AMOUNT	NUMBER	18	3	Clearing transaction amount.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
154	DELTA_BILLING_CLEARING_TRANS	NUMBER	18	3	The delta between Billing amount and Clearing amount.
155	LAST_CHARGE_RATE	NUMBER	9	6	Last interest charging rate.
156	LAST_CHARGE_VALUE_DAYS	NUMBER	9	6	This column is not used in V3.5.
157	CHARGE_VALUE_DAYS_CUM	NUMBER	14	6	This column is not used in V3.5.
158	LAST_CLEARING_TERM_AMOUNT	NUMBER	18	3	Last clearing term amount.
159	CLEARING_TERM_AMOUNT	NUMBER	18	3	The clearing term amount.
160	DELTA_BILLING_CLEARING_TERM	NUMBER	18	3	The delta between billing amount and clearing term amount.
161	NB_CLEARING_TERM	NUMBER	3		The number of terms paid by the transaction.
162	CLEARING_TERM_STATUS	CHAR	2		The clearing term status. Possible values are: 'NC' = Not concerned (Case of Debit transaction), 'FC' = Full clearing, 'PC' = Partial clearing, 'NY' = Not yet.
163	LIVE_TRANSACTION_FLAG	CHAR	1		In case of deposit transaction, it indicates whether it is a live deposit or not. Possible values are: 'Y' = Live deposit, 'N' = Normal deposit.
164	LAST_INTEREST_AMOUNT	NUMBER	18	3	This column is not used in V3.5.
165	INTEREST_AMOUNT_CUM	NUMBER	18	3	This column is not used in V3.5.
166	LINK_ORG_REFERENCE_NUMBER	VARCHAR2	23		Linked original acquirer reference number.
167	LINK_ORG_REFERENCE_SEQ	NUMBER	4		Linked original acquirer reference sequence.
168	LINK_ORG_TRANSACTION_DATE	DATE	7		Linked original transaction date.
169	LINK_LAST_TERM_CLEARED	DATE	7		Last term cleared date.
170	CHECK_NUMBER	VARCHAR2	30		The check number in case of check deposit transaction.
171	CHECK_BANK_CODE	CHAR	6		The check institution code in case of check deposit transaction. It should be defined in the 'BANK' table.
172	CHECK_ISSUING_DATE	DATE	7		The check issuing date in case of check deposit transaction.
173	CHECK_INFORMATION	VARCHAR2	40		The check information in case of check deposit transaction.
174	CUSTOMER_SEGMENT	CHAR	3		The concerned customer segment code. It should be defined in 'CUSTOMER_SEGMENT' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
175	NUMBER_OF_PRODUCT	NUMBER	2		Number of transaction concerned products.
176	LIST_PRODUCT_CODE_1	VARCHAR2	15		This column is not used in V3.5.
177	LIST_PRODUCT_AMOUNT_1	NUMBER	18	3	This column is not used in V3.5.
178	LIST_PRODUCT_CURRENCY_1	CHAR	3		This column is not used in V3.5.
179	LIST_PRODUCT_CURRENCY_EXP_1	NUMBER	1		This column is not used in V3.5.
180	LIST_PRODUCT_CODE_2	VARCHAR2	15		This column is not used in V3.5.
181	LIST_PRODUCT_AMOUNT_2	NUMBER	18	3	This column is not used in V3.5.
182	LIST_PRODUCT_CURRENCY_2	CHAR	3		This column is not used in V3.5.
183	LIST_PRODUCT_CURRENCY_EXP_2	NUMBER	1		This column is not used in V3.5.
184	LIST_PRODUCT_CODE_3	VARCHAR2	15		This column is not used in V3.5.
185	LIST_PRODUCT_AMOUNT_3	NUMBER	18	3	This column is not used in V3.5.
186	LIST_PRODUCT_CURRENCY_3	CHAR	3		This column is not used in V3.5.
187	LIST_PRODUCT_CURRENCY_EXP_3	NUMBER	1		This column is not used in V3.5.
188	LIST_PRODUCT_CODE_4	VARCHAR2	15		This column is not used in V3.5.
189	LIST_PRODUCT_AMOUNT_4	NUMBER	18	3	This column is not used in V3.5.
190	LIST_PRODUCT_CURRENCY_4	CHAR	3		This column is not used in V3.5.
191	LIST_PRODUCT_CURRENCY_EXP_4	NUMBER	1		This column is not used in V3.5.
192	LIST_PRODUCT_CODE_5	VARCHAR2	15		This column is not used in V3.5.
193	LIST_PRODUCT_AMOUNT_5	NUMBER	18	3	This column is not used in V3.5.
194	LIST_PRODUCT_CURRENCY_5	CHAR	3		List product 5 currency. It should be defined in ' CURRENCY_TABLE ' table.
195	LIST_PRODUCT_CURRENCY_EXP_5	NUMBER	1		This column is not used in V3.5.
196	LAST_SCHEDULE_INDEX_USED	CHAR	4		Last interest schedule index used for charging.
197	SPECIFIC_SCHEDULE_INDEX_USED	CHAR	4		Last specific interest schedule index used for charging.
198	SPECIFIC_INTEREST_RATE	NUMBER	9	6	Specific interest rate.
199	SPEC_INDEX_CUSTOM_INT_ED	DATE	7		End date of specific interest schedule index used.
200	STATEMENT_DATE_INT_PERIOD_1	DATE	7		This column is not used in V3.5.
201	RATE_USED_PERIOD_1	NUMBER	9	6	This column is not used in V3.5.
202	NB_VAL_DAYS_USED_PERIOD_1	NUMBER	9	6	This column is not used in V3.5.
203	INT_AMOUNT_PERIOD_1	NUMBER	18	3	This column is not used in V3.5.
204	BASIC_BIL_AMOUNT_PERIOD_1	NUMBER	18	3	This column is not used in V3.5.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
205	STATEMENT_DATE_INT_PERIOD_2	DATE	7		This column is not used in V3.5.
206	RATE_USED_PERIOD_2	NUMBER	9	6	This column is not used in V3.5.
207	NB_VAL_DAYS_USED_PERIOD_2	NUMBER	9	6	This column is not used in V3.5.
208	INT_AMOUNT_PERIOD_2	NUMBER	18	3	This column is not used in V3.5.
209	BASIC_BIL_AMOUNT_PERIOD_2	NUMBER	18	3	This column is not used in V3.5.
210	STATEMENT_DATE_INT_PERIOD_3	DATE	7		This column is not used in V3.5.
211	RATE_USED_PERIOD_3	NUMBER	9	6	This column is not used in V3.5.
212	NB_VAL_DAYS_USED_PERIOD_3	NUMBER	9	6	This column is not used in V3.5.
213	INT_AMOUNT_PERIOD_3	NUMBER	18	3	This column is not used in V3.5.
214	BASIC_BIL_AMOUNT_PERIOD_3	NUMBER	18	3	This column is not used in V3.5.
215	STATEMENT_DATE_INT_PERIOD_4	DATE	7		This column is not used in V3.5.
216	RATE_USED_PERIOD_4	NUMBER	9	6	This column is not used in V3.5.
217	NB_VAL_DAYS_USED_PERIOD_4	NUMBER	9	6	This column is not used in V3.5.
218	INT_AMOUNT_PERIOD_4	NUMBER	18	3	This column is not used in V3.5.
219	BASIC_BIL_AMOUNT_PERIOD_4	NUMBER	18	3	This column is not used in V3.5.
220	BILLING_ACCOUNT_NUMBER	VARCHAR2	24		Billing account number.
221	BILLING_BANK_CODE	CHAR	6		The billing bank code. It should be defined in the 'BANK' table.
222	BILLING_BRANCH_CODE	CHAR	6		The billing branch code. It should be defined in the 'BRANCH' table.
223	PROCESSING_CLASS	CHAR	4		This column is reserved for future use.
224	EXTERNAL_REFERENCE_ID	VARCHAR2	23		Reference assigned by external system processing when applicable.
225	COLLECTION_REFERENCE	VARCHAR2	40		Collection reference from external system when applicable.
226	COLLECTION_STATUS	VARCHAR2	4		Collection status from external system when applicable.
227	COLLECTION_DATE	DATE	7		Collection date from external system when applicable.
228	D_ACCOUNTING_DATE	DATE	7		Transaction accounting date.
229	ACCOUNTING_REFERENCE	VARCHAR2	40		Transaction accounting reference.
230	HOLDING_USER	VARCHAR2	15		The hold transaction user when applicable.
231	HOLDING_DATE	DATE	7		The hold transaction date when applicable.
232	REACTIVATE_USER	VARCHAR2	15		The reactivate transaction user when applicable.
233	REACTIVATE_DATE	DATE	7		The reactivate transaction date when applicable.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
234	GEN_DEPOSIT_FLAG	CHAR	1		In case of Automatic Debit order, it indicates whether the deposit has been generated or not. Possible values are: 'Y' = Deposit generated, 'N' = Deposit not generated.
235	LNK_ARN_DEPOSIT	VARCHAR2	23		Linked deposit transaction microfilm reference number.
236	LNK_ARN_DEPOSIT_SEQ	NUMBER	4		Linked deposit transaction microfilm reference sequence.
237	LNK_ARN_FEE	VARCHAR2	23		Linked fee transaction microfilm reference number.
238	LNK_ARN_FEE_SEQ	NUMBER	4		Linked fee transaction microfilm reference sequence.
239	LNK_ARN_INTEREST	VARCHAR2	23		Linked interest transaction microfilm reference number.
240	LNK_ARN_INTEREST_SEQ	NUMBER	4		Linked interest transaction microfilm reference sequence.
241	DEBIT_FILE_ID	VARCHAR2	12		Debit file's identification.
242	REPRESENT_DEBIT_DATE	DATE	7		When applicable, this column is used in case a debit order results in a payment incident. It indicates the date in which the debit order has been represented.
243	REPRESENT_DEBIT_USER	VARCHAR2	15		User who represented the debit order.
244	SETTLEMENT_CUTOFF_ID_ACC	VARCHAR2	8		Accounting settlement cutoff processing id.
245	SETTLEMENT_CUTOFF_FLAG_ACC	CHAR	1		Accounting settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
246	SETTLEMENT_CUTOFF_ID_STA	VARCHAR2	8		The statistics' settlement cutoff processing ID.
247	SETTLEMENT_CUTOFF_FLAG_STA	CHAR	1		The statistics' settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
248	SETTLEMENT_CUTOFF_ID_SCO	VARCHAR2	8		The collection/scoring settlement cutoff processing ID.
249	SETTLEMENT_CUTOFF_FLAG_SCO	CHAR	1		The collection/scoring settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
250	SETTLEMENT_CUTOFF_ID_LOY	VARCHAR2	8		Loyalty settlement cutoff processing ID.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
251	SETTLEMENT_CUTOFF_FLAG_LOY	CHAR	1		Loyalty settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
252	SETTLEMENT_CUTOFF_ID_OTH	VARCHAR2	8		Information system settlement cutoff processing ID.
253	SETTLEMENT_CUTOFF_FLAG_OTH	CHAR	1		Information system settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
254	CHKSECUR\$1	VARCHAR2	16		This column is reserved for future use.
255	PRIVATE_TLV_DATA_1	VARCHAR2	256		This column is reserved for future use.
256	CURRENT_TABLE_NAME	CHAR	3		Current table name. Possible values are: 'CUR' = Current Account transaction table, 'HST' = Historic Account transaction table.
257	DISPUTE_EXTERNAL_REFERENCE	VARCHAR2	40		Reference given to the transaction by the dispute external interface system.
258	DISPUTE_EXTERNAL_NAME	VARCHAR2	40		Name of the dispute external interface system.
259	DISPUTE_EXTERNAL_STATUS	CHAR	1		Status of the disputed transaction given by the dispute external interface system.
260	TOTAL_MIN_DUE_TRX	NUMBER	18	3	Total minimum due transaction.
261	PRIVATE_DATA_1	VARCHAR2	32		Private data 1. This column is reserved for future use.
262	PRIVATE_DATA_2	VARCHAR2	32		Private data 2. This column is reserved for future use.
263	PRIVATE_DATA_3	DATE	7		Private data 3. This column is reserved for future use.
264	PRIVATE_DATA_4	DATE	7		Private data 4. This column is reserved for future use.
265	PRIVATE_DATA_5	NUMBER	18	3	Private data 5. This column is reserved for future use.
266	PRIVATE_DATA_6	NUMBER	18	3	Private data 6. This column is reserved for future use.
267	EOD_DAILY_CLEARING_TRX_AMOUNT	NUMBER	18	3	End of day processing cleared transaction amount.
268	NBR_TERM_DUE	NUMBER	4		Number of due terms.
269	REQUEST_NBR_TERM	NUMBER	4		The requested number of terms.
270	REMAINIG_NBR_TERM	NUMBER	4		The remaining number of terms.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
271	REQUEST_AMNT	NUMBER	18	3	The requested amount.
272	REMAINIG_AMNT	NUMBER	18	3	The remaining amount.
273	F_NBR_TERM_DUE	NUMBER	4		The former number of due terms.
274	F_REQUEST_NBR_TERM	NUMBER	4		The former requested number of terms.
275	F_REMAINIG_NBR_TERM	NUMBER	4		The former remaining number of terms.
276	F_REQUEST_AMNT	NUMBER	18	3	The former requested amount.
277	F_REMAINIG_AMNT	NUMBER	18	3	The former Remaining amount.
278	DATE_NBR_TERM_CHG	DATE	7		When applicable, this column indicates the date of number of term change.
279	TYPE_NBR_TERM_CHG	CHAR	1		When applicable, this column indicates the type of term change. Possible values are: 'U' = Unbilled (Change before billing), 'B' = Billed (Change after billing), 'M' = Merge (Merge of more than one transaction).
280	SENSITIVE_OPERATION_RECORD	CHAR	1		This column is reserved for future use.
281	USER_CREATE	VARCHAR2	15		ID of the user when record created.
282	DATE_CREATE	DATE	7		Record creation date and time.
283	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
284	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

9.3.5 CR_TRANSACTION_HIST

In addition to transactions received from PowerCARD Acquiring module or from other sources incoming files, PowerCARD system provides the capability of capturing the Credit Account transaction data through Graphical User Interface function.

Records of this table, concern all the history data required for Credit account transaction management.

Refer to ["Operations"](#) section in UG1190-Issuer transactions management user guide for more details.

For more information about the Visa mapping, refer to the TRANSACTION_HIST_VISA_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

9.3.5.1 Fields description

Seq.	Field Name	Data Type	Len.	Sc.	Field Description
1 	MICROFILM_REF_NUMBER	CHAR	23		Transaction acquirer reference number.
2 	MICROFILM_REF_SEQ	NUMBER	4		Microfilm reference sequence. It is used to differentiate between transactions having the same acquirer reference number.

Seq.	Field Name	Data Type	Len.	Sc.	Field Description
3	SHADOW_ACCOUNT_NBR	VARCHAR2	24		Shadow account identification number. It should be defined in 'SHADOW_ACCOUNT' table.
4	PRIMARY_SHADOW_ACCOUNT_NBR	VARCHAR2	24		Primary shadow account identification number. If the shadow account is a secondary account, this field should contain the corresponding primary shadow account number. It should be defined in 'SHADOW_ACCOUNT' table.
5	PRIMARY_SHADOW_ACC_FLAG	CHAR	2		This flag indicates whether the concerned account is a primary or secondary account. Possible values are: '1P' = Primary, '0S' = Secondary.
6	CARD_NUMBER	VARCHAR2	22		Card number concerned by the transaction. It should be defined in 'CARD' table.
7	CARD_NUMBER_SEQUENCE	NUMBER	3		Card number sequence.
8	CLIENT_CODE	VARCHAR2	24		Client identification code concerned. It should be defined in 'CLIENT' table.
9	BANK_CODE	CHAR	6		Financial institution code. It should be defined in the 'BANK' table.
10	BRANCH_CODE	CHAR	6		The branch code concerned. It should be defined in 'BRANCH' table.
11	INITIAL_PROFILE_CODE	CHAR	3		Initial Account profile identification code. It should be defined in 'CR_PROFILE' table.
12	CURRENT_PROFILE_CODE	CHAR	3		Current Account profile identification code. It should be defined in 'CR_PROFILE' table.
13	CYCLE_TASK_NAME	VARCHAR2	15		This column is reserved for future use.
14	CYCLE_CUTOFF_CODE	CHAR	3		Account cycle cutoff code. It should be defined in 'CYCLE_CUTOFF_PARAMETERS' table.
15	PARTNER_BRAND_ID	VARCHAR2	15		Partner brand identification code. It should be defined in 'PARTNER_BRAND' table.
16	CORPORATE_ID	VARCHAR2	15		Corporate identification code. It should be defined in 'CORPORATE' table.
17	NETWORK_CODE	CHAR	2		Card network code. It should be defined in 'NETWORK' table.
18	NETWORK_CARD_TYPE	CHAR	2		Network card type. It should be defined in 'CARD_TYPE' table.
19	PRODUCT_CODE	CHAR	3		Card product code. It should be defined in 'CARD_PRODUCT' table.
20	PRODUCT_TYPE	CHAR	2		The product type. Possible values are: 'DC' = Debit Card,

Seq.	Field Name	Data Type	Len.	Sc.	Field Description
					'DD' = Deferred Debit Card, 'CC' = Charge Card, 'CR' = Credit Revolving Card, 'IC' = Installment Card, 'PP' = Prepaid Card.
21	BASIC_CARD_FLAG	CHAR	1		This flag indicates whether the concerned card is a basic (Primary) or supplementary card. Possible values are: 'B' = Basic (Primary) card, 'S' = Supplementary card.
22	OWNER_CODE	CHAR	2		Owner codes. It should be defined in 'OWNER_LIST' table.
23	OWNER_CATEGORY	CHAR	1		Category of the owner. Possible values are: 'I' = Individual, 'B' = Business, 'S' = Staff, 'P' = Professional, 'N' = Company, 'C' = Corporate, 'T' = Travel, 'L' = International corporate, 'R' = Procurement, 'X' = Others1, 'Y' = Others2, 'Z' = Others3.
24	CHAIN_CODE	VARCHAR2	15		The concerned transaction chain code. It should be defined in 'CHAIN' table.
25	MERCHANT_NUMBER	VARCHAR2	15		The concerned transaction merchant number. It should be defined in 'MERCHANT' table.
26	OUTLET_NUMBER	VARCHAR2	15		The concerned transaction acceptor point. It should be defined in 'MER_ACCEPTOR_POINT' table.
27	TERMINAL_ID	VARCHAR2	15		The concerned transaction terminal identification.
28	ACRONYM	VARCHAR2	40		The concerned transaction merchant acronym.
29	COUNTRY_CODE	CHAR	3		Transaction concerned Merchant/ Acceptor point ISO numeric country code. It should be defined in 'COUNTRY' table
30	CITY_CODE	VARCHAR2	5		Transaction concerned Merchant/ Acceptor point city code. It should be defined in 'CITY' table

Seq.	Field Name	Data Type	Len.	Sc.	Field Description
31	CITY_NAME	VARCHAR2	30		The concerned transaction merchant/acceptor point city name.
32	MCC	CHAR	4		The transaction concerned Merchant Category Code. It should be defined in 'MCC' table.
33	MCC_GROUP	CHAR	4		The transaction concerned MCC Group code. It should be defined in 'MCC_RANGE' table.
34	TCC	CHAR	1		Transaction category code as received from the network.
35	ACTIVITY_CODE	CHAR	4		The concerned transaction merchant activity code. It should be defined in 'MERCHANT_ACTIVITY_SET' table.
36	LINKUP_CODE	VARCHAR2	12		The concerned transaction Linked-up code or Batch agent. Management of the LINKUP_CODE depends on PowerCARD acquiring 'Transaction capture mode parameters' set-up for the institution. These parameters define the usage of the linkup concept for the institution. The linkup concept can be defined as Not supported, Optional or Required.
37	BATCH_NUMBER	VARCHAR2	8		The concerned transaction batch group number. Management of the BATCH_NUMBER depends on PowerCARD acquiring 'Transaction capture mode parameters' set-up for the institution. These parameters define the usage of the batch group concept for the institution. The batch group concept can be defined as Not supported, Optional or Required.
38	REMITTANCE_SEQUENCE	NUMBER	4		The concerned transaction batch sequence.
39	VOUCHER_SEQUENCE	NUMBER	6		The concerned transaction voucher sequence.
40	REMITTANCE_NUMBER	VARCHAR2	8		The concerned transaction batch number.
41	VOUCHER_NUMBER	VARCHAR2	8		The concerned transaction voucher number.
42	TRANSACTION_CODE	CHAR	2		Transaction code that should be defined in 'CR_TRANSACTION_PARAMETER' table.
43	REVERSAL_FLAG	CHAR	1		This flag indicates whether the concerned transaction is a normal or reversal transaction. Possible values are: 'R' = Reversal, 'N' = Normal.

Seq.	Field Name	Data Type	Len.	Sc.	Field Description
44	TRANSACTION_DESCRIPTION	VARCHAR2	128		Description of the transaction.
45	TRANSACTION_WORDING	VARCHAR2	40		Short description of the transaction.
46	REVERSAL_REASON_CODE	CHAR	2		Transaction reason code. It should be defined in 'TRANS_REASON_CODE' table.
47	SUSPEND_REASON_CODE	CHAR	2		The suspend reason code. It should be defined in 'TRANS_REASON_CODE' table.
48	CAPTURE_REASON_CODE	CHAR	2		The capture reason code. It should be defined in 'TRANS_REASON_CODE' table.
49	POSTING_ACCOUNT_ENTITY	CHAR	1		Posting account entity. Possible values are: 'M' = Merchant, 'B' = Bank, 'C' = Credit card account, 'W' = Waiting for decision.
50	TRANSACTION_SIGN	CHAR	1		Transaction sign. Possible values are: 'D' = Debit, 'C' = Credit.
51	TRANSACTION_SIGN_OP	NUMBER	1		This column is reserved for future use.
52	FUNCTION_CODE	CHAR	3		This field indicates the function code. Possible values are: '200' = Initial financial advice, '205' = 1st presentation, '206' = 2nd presentation, '207' = 3rd presentation.
53	TRANSACTION_AMOUNT	NUMBER	18	3	This field indicates the transaction amount.
54	TRANSACTION_CURRENCY	CHAR	3		Transaction currency code. It should be defined in 'CURRENCY_TABLE' table.
55	TRANSACTION_CURRENCY_EXP	NUMBER	1		Transaction currency exponent.
56	OPENING_BALANCE	NUMBER	18	3	Account opening capital balance.
57	CLOSING_BALANCE	NUMBER	18	3	Account closing capital balance.
58	OPENING_PRINCIPAL_BALANCE	NUMBER	18	3	Account opening principal balance.
59	CLOSING_PRINCIPAL_BALANCE	NUMBER	18	3	Account closing principal balance.
60	OFF_BALANCE_AMOUNT	NUMBER	18	3	This column is reserved for future use.
61	BILLING_AMOUNT	NUMBER	18	3	Transaction billing amount.
62	BILLING_CURRENCY	CHAR	3		Transaction billing currency code. It should be defined in 'CURRENCY_TABLE' table.
63	BILLING_CURRENCY_EXP	NUMBER	1		Transaction billing currency exponent.

Seq.	Field Name	Data Type	Len.	Sc.	Field Description
64	LOCAL_AMOUNT	NUMBER	18	3	Transaction local amount.
65	LOCAL_CURRENCY	CHAR	3		Transaction local currency code. It should be defined in 'CURRENCY_TABLE' table.
66	LOCAL_CURRENCY_EXP	NUMBER	1		Transaction local currency exponent.
67	SETTLEMENT_AMOUNT	NUMBER	18	3	Transaction settlement amount.
68	SETTLEMENT_CURRENCY	CHAR	3		Transaction settlement currency code. It should be defined in 'CURRENCY_TABLE' table.
69	SETTLEMENT_CURRENCY_EXP	NUMBER	1		Transaction settlement currency exponent.
70	CONV_RATE_SETTLEMENT	VARCHAR2	8		Transaction settlement currency conversion rate.
71	CONV_DATE_SETTLEMENT	DATE	7		Transaction settlement currency conversion date.
72	RECONCILIATION_AMOUNT	NUMBER	18	3	Transaction reconciliation amount.
73	RECONCILIATION_CURRENCY	CHAR	3		Transaction reconciliation currency code. It should be defined in 'CURRENCY_TABLE' table.
74	RECONCILIATION_CURRENCY_EXP	NUMBER	1		Transaction reconciliation currency exponent.
75	CONV_RATE_RECONCILIATION	VARCHAR2	8		Transaction reconciliation currency conversion rate.
76	CONV_DATE_RECONCILIATION	DATE	7		Transaction reconciliation currency conversion date.
77	TIPS_AMOUNT	NUMBER	18	3	Transaction tips amount.
78	CASH_BACK_AMOUNT	NUMBER	18	3	Transaction cash-back amount.
79	ISS_POSTING_DESTINATION	CHAR	2		Issuer posting destination indicates the entity supporting the transaction. Possible values are: 'CO' = Corporate, 'SA' = Individual shadow account.
80	CHANGE_DIFFERENCE	NUMBER	18	3	The difference of change between first and last (Definitive) conversion.
81	ISS_MARKUP_AMOUNT	NUMBER	18	3	Issuer conversion markup amount.
82	ISS_MARKUP_RATE	NUMBER	9	6	Issuer conversion markup rate.
83	ISS_AMOUNT_1	NUMBER	18	3	This column is reserved for future use.
84	ISS_AMOUNT_1_CURRENCY_CODE	CHAR	3		This column is reserved for future use. It should be defined in 'CURRENCY_TABLE' table.
85	ISS_AMOUNT_1_CURRENCY_EXP	NUMBER	1		This column is reserved for future use. It should be defined in 'CURRENCY_TABLE' table.
86	ISS_AMOUNT_2	NUMBER	18	3	This column is reserved for future use.

Seq.	Field Name	Data Type	Len.	Sc.	Field Description
87	ISS_AMOUNT_2_CURRENCY_CODE	CHAR	3		This column is reserved for future use. It should be defined in 'CURRENCY_TABLE' table.
88	ISS_AMOUNT_2_CURRENCY_EXP	NUMBER	1		This column is reserved for future use. It should be defined in 'CURRENCY_TABLE' table.
89	ISS_AMOUNT_3	NUMBER	18	3	This column is reserved for future use.
90	ISS_AMOUNT_3_CURRENCY_CODE	CHAR	3		This column is reserved for future use. It should be defined in 'CURRENCY_TABLE' table.
91	ISS_AMOUNT_3_CURRENCY_EXP	NUMBER	1		This column is reserved for future use. It should be defined in 'CURRENCY_TABLE' table.
92	ISS_AMOUNT_4	NUMBER	18	3	This column is reserved for future use.
93	ISS_AMOUNT_4_CURRENCY_CODE	CHAR	3		This column is reserved for future use. It should be defined in 'CURRENCY_TABLE' table.
94	ISS_AMOUNT_4_CURRENCY_EXP	NUMBER	1		This column is reserved for future use. It should be defined in 'CURRENCY_TABLE' table.
95	TRANSACTION_CATEGORY	NUMBER	2		Transaction category. Possible values are: '01' = Airline, '02' = Lodging, '03' = Rent car, '04' = Restaurant, '05' = Medical, '06' = Mail order, '07' = Purchase, '08' = Other purchase, '09' = Withdrawal, '10' = Quasi cash, '11' = Cash, '12' = Transfer, '13' = E-commerce, '14' = T&E.
96	BALANCE_CATEGORY	NUMBER	2		Transaction balance category. Possible values are: '01' = Purchase, '02' = Cash, '03' = Transfer, '04' = E business, '05' = Check, '06' = Interest, '07' = Installment,

Seq.	Field Name	Data Type	Len.	Sc.	Field Description
					'08' = Fee, '09' = tax, '10' = Refund, '11' = Deposit.
97	AUTHORIZATION_NUMBER	CHAR	6		The authorization code.
98	AUTHORIZATION_CURRENCY	CHAR	3		The authorization currency code. It should be defined in 'CURRENCY_TABLE' table.
99	AUTHORIZATION_AMOUNT	NUMBER	18	3	The authorization amount.
100	AUTHORIZATION_MATCH_FLAG	CHAR	1		Te authorization matching flag. Possible values are: 'Y' = Matched, 'N' = Not matched.
101	PENDING_AMOUNT_RECORDED	NUMBER	18	3	Amount of pending authorization for the account.
102	TRANSACTION_DATE	DATE	7		Transaction date.
103	INCOMING_SETTLEMENT_DATE	DATE	7		Incoming transaction settlement date.
104	AUTHORIZATION_DATE	DATE	7		The authorization date.
105	REMITTANCE_DATE	DATE	7		Transaction remittance (Batch) date.
106	REMITTANCE_TYPE	CHAR	1		The remittance (Batch) type. Possible values are: 'A' = ATM, 'P' = POS, 'M' = Manual, 'E' = Electronic Commerce, 'C' = CAT (Cardholder Activated Terminal).
107	REMITTANCE_ORIGIN	CHAR	1		The remittance (Batch) origin. Possible values are: 'C' = Basic Captured Transactions, 'V' = Credit Voucher Captured Transactions, 'G' = Charges-back, 'A' = Airline Captured Transactions, 'R' = Rent Car Captured Transactions, 'P' = Petrol Captured Transactions, 'L' = Lodging Captured Transactions, 'F' = Food Captured Transactions, 'O' = POS transactions, 'T' = ATM transactions, 'I' = Rail-Road Captured Transactions, 'E' = Telecom Captured Transactions,

Seq.	Field Name	Data Type	Len.	Sc.	Field Description
					'S' = Posting File Received Transactions, 'N' = Potential loan Transactions.
108	PROCESSING_DATE	DATE	7		Transaction processing date.
109	VALUE_DATE	DATE	7		Transaction value date.
110	CLEARING_VALUE_DATE	DATE	7		Transaction clearing value date.
111	DUE_DATE	DATE	7		Transaction due date.
112	STATEMENT_DATE	DATE	7		Transaction statement date.
113	DEBIT_DATE	DATE	7		Debit date.
114	DEBIT_VALUE_DATE	DATE	7		Debit value date.
115	GEN_DEPOSIT_DATE	DATE	7		The generation deposit date.
116	SENDING_DATE	DATE	7		The sending date.
117	ISSUER_SETTLEMENT_DATE	DATE	7		Issuer settlement date.
118	POSTING_DATE	DATE	7		Transaction posting date.
119	PROCESSING_STEP	CHAR	2		The processing step. Possible values are: 'WD' = Waiting for daily processing, 'WM' = Waiting for monthly processing, 'NC' = Waiting conversion, 'WC' = Daily processed & waiting conversion, 'ST' = Suspend & wait for decision, 'MP' = Monthly processed, 'HT' = To be archive, 'HW' = Transaction waiting monthly suspended & waiting decision, 'HM' = Transaction Waiting monthly Suspended & posted to the Merchant, 'HB' = Transaction Waiting monthly Suspended & posted to the bank, 'HC' = Transaction waiting monthly suspended & re-posted to the account, 'HA' = Transaction waiting monthly suspended & posted to another account, 'PW' = Transaction monthly processed suspended & waiting decision, 'PM' = Transaction monthly processed suspended & posted to the merchant, 'PB' = Transaction monthly processed suspended & posted to the bank, 'PC' = Transaction monthly processed suspended & re-posted to the account, 'PA' = Transaction monthly processed suspended & posted to another account,

Seq.	Field Name	Data Type	Len.	Sc.	Field Description
					'TW' = Archived transaction suspended & waiting decision, 'TM' = Archived transaction suspended & posted to the merchant, 'TB' = Archived transaction suspended & posted to the bank, 'TC' = Archived transaction suspended & re-posted to the account, 'TA' = Archived transaction suspended & posted to another account.
120	FORMER_PROCESSING_STEP	CHAR	2		The former processing step. Possible values are the same as PROCESSING_STEP field.
121	DATA_CAPTURE_SOURCE	CHAR	1		Transaction data capture source. Possible values are: 'T' = From historical transaction, 'M' = From PowerCARD data capture, 'A' = Automatic generation by credit account module.
122	DATA_CAPTURE_USER	VARCHAR2	15		The data capture user.
123	DATA_CAPTURE_DATE	DATE	7		The data capture date.
124	PRIORITY_CHARGE	NUMBER	2		Transaction charging priority.
125	SUBJECT_INTEREST_FLAG	CHAR	1		This flag indicates whether the transaction is subject to interest generation or not. Possible values are: 'Y' = Yes, 'N' = No.
126	SUBJECT_LATE_FEES_FLAG	CHAR	1		This column is not used in V3.5.
127	GEN_AUTO_FEES_FLAG	CHAR	1		This flag indicates whether the transaction is subject to automatic fee generation or not. Possible values are: 'Y' = Yes, 'N' = No, 'P' = Processed.
128	GEN_AUTO_FEES_ALT_FLAG	CHAR	1		This flag indicates whether the transaction is subject to ALT (At Least One Transaction) automatic fee generation or not. Possible values are: 'Y' = Yes, 'N' = No, 'C' = Checked, 'P' = Processed.

Seq.	Field Name	Data Type	Len.	Sc.	Field Description
129	POTENTIAL_LOAN_IND	CHAR	1		This flag indicates whether the transaction can be converted to loan or not. Possible values are: 'Y' = Yes, 'N' = No.
130	LOAN_TRANSACT_IND	CHAR	1		This flag indicates whether the transaction is a loan transaction or not. Possible values are: 'Y' = Yes, 'N' = No.
131	SUBJECT_PENALTY_FEE_FLAG	CHAR	1		This column is not used in V3.5.
132	N_FULL_PAYMENT_IND	CHAR	1		This flag indicates whether the transaction is a full payment transaction or not. Possible values are: 'Y' = Yes, 'N' = No.
133	N_OTHER_INDICATOR_1	CHAR	1		This column is reserved for future use.
134	N_OTHER_INDICATOR_2	CHAR	1		This column is reserved for future use.
135	N_CUSTOM_SETTLEMENT	CHAR	1		This flag indicates whether the transaction is designated by the customer with the highest priority during settlement or not. Possible values are: 'Y' = Yes, 'N' = No.
136	POSTING_TERMS_METHOD	CHAR	1		This column indicates the posting method for clearing the term. Possible values are: 'A' = Ascending, 'D' = Descending.
137	BLINDING_TRX_IND	CHAR	1		This flag indicates whether the transaction should be blinded on the statement when reversed or not. Possible values are: 'Y' = Yes, 'N' = No.
138	PROCUREMENT_IND	CHAR	1		This column is not used in V3.5.
139	CONFIRM_DEPOSIT_CAPTURED	CHAR	1		In case of deposit, this is to indicate whether the deposit transaction is confirmed or not. Possible values are: 'Y' = Yes, 'N' = No.

Seq.	Field Name	Data Type	Len.	Sc.	Field Description
					'R' = Reversal.
140	DATE_CONFIRM_DEPOSIT_CAPTURED	DATE	7		The deposit confirmation date or Deposit request reversal date in case CONFIRM_DEPOSIT_CAPTURED = 'R' (Reversal).
141	M_INSTITUTION_CODE	VARCHAR2	15		Institution owner of auxiliary product when the transaction concern auxiliary product fees. If not NULL, it should be defined in 'M_INSTITUTION_LIST' table.
142	PRODUCT_IDENTIFIER	CHAR	6		The auxiliary product code when the transaction concern auxiliary product fees. If not NULL, it should be defined in 'LINKED_PROD_DESC' table.
143	CONTRACT_NUMBER	VARCHAR2	16		The cardholder contract number to the auxiliary product (Filled only if the transaction is related to auxiliary product fees).
144	SUB_CONTRACT_NUMBER	VARCHAR2	16		The cardholder sub-contract Number to the auxiliary product (Filled only if the transaction is related to auxiliary product fees).
145	ORIGIN_CODE	CHAR	1		Transaction issuer/acquirer indicator. Possible values are: '0' = ONUS card / local merchant, '1' = ONUS card / local other bank merchant, '2' = ONUS card / foreign merchant, '3' = local other bank card / local merchant, '4' = foreign card / local merchant.
146	DATE_DAILY_CUTOFF_BD	DATE	7		Last daily cutoff business date.
147	DATE_DAILY_CUTOFF_SD	DATE	7		Last daily cutoff system date.
148	DAILY_CUTOFF_ID	VARCHAR2	8		Last daily cutoff processing identifier.
149	DATE_MONTHLY_CUTOFF_BD	DATE	7		Last monthly cutoff business date.
150	DATE_MONTHLY_CUTOFF_SD	DATE	7		Last monthly cutoff system date.
151	MONTHLY_CUTOFF_ID	VARCHAR2	8		Last monthly cutoff processing identifier.
152	TRANSACTION_GROUP_REPORTING	CHAR	3		Transaction group reporting code. If applicable, it should be defined in 'GROUP_REPORTING_DEF' table.
153	CLEARING_TRANSACTION_AMOUNT	NUMBER	18	3	Clearing transaction amount.
154	DELTA_BILLING_CLEARING_TRANS	NUMBER	18	3	The delta between Billing amount and Clearing amount.
155	LAST_CHARGE_RATE	NUMBER	9	6	Last interest charging rate.
156	LAST_CHARGE_VALUE_DAYS	NUMBER	9	6	This column is not used in V3.5.
157	CHARGE_VALUE_DAYS_CUM	NUMBER	14	6	This column is not used in V3.5.

Seq.	Field Name	Data Type	Len.	Sc.	Field Description
158	LAST_CLEARING_TERM_AMOUNT	NUMBER	18	3	Last clearing term amount.
159	CLEARING_TERM_AMOUNT	NUMBER	18	3	The clearing term amount.
160	DELTA_BILLING_CLEARING_TERM	NUMBER	18	3	The delta between billing amount and clearing term amount.
161	NB_CLEARING_TERM	NUMBER	3		The number of terms paid by the transaction.
162	CLEARING_TERM_STATUS	CHAR	2		The clearing term status. Possible values are: 'NC' = Not concerned (Case of Debit transaction), 'FC' = Full clearing, 'PC' = Partial clearing, 'NY' = Not yet.
163	LIVE_TRANSACTION_FLAG	CHAR	1		In case of deposit transaction, it indicates whether it is a live deposit or not. Possible values are: 'Y' = Live deposit, 'N' = Normal deposit.
164	LAST_INTEREST_AMOUNT	NUMBER	18	3	This column is not used in V3.5.
165	INTEREST_AMOUNT_CUM	NUMBER	18	3	This column is not used in V3.5.
166	LINK_ORG_REFERENCE_NUMBER	VARCHAR2	23		Linked original acquirer reference number.
167	LINK_ORG_REFERENCE_SEQ	NUMBER	4		Linked original acquirer reference sequence.
168	LINK_ORG_TRANSACTION_DATE	DATE	7		Linked original transaction date.
169	LINK_LAST_TERM_CLEARED	DATE	7		Last term cleared date.
170	CHECK_NUMBER	VARCHAR2	30		The check number in case of check deposit transaction.
171	CHECK_BANK_CODE	CHAR	6		The check institution code in case of check deposit transaction. It should be defined in the 'BANK' table.
172	CHECK_ISSUING_DATE	DATE	7		The check issuing date in case of check deposit transaction.
173	CHECK_INFORMATION	VARCHAR2	40		The check information in case of check deposit transaction.
174	CUSTOMER_SEGMENT	CHAR	3		The concerned customer segment code. It should be defined in 'CUSTOMER_SEGMENT' table.
175	NUMBER_OF_PRODUCT	NUMBER	2		Number of transaction concerned products.
176	LIST_PRODUCT_CODE_1	VARCHAR2	15		This column is not used in V3.5.
177	LIST_PRODUCT_AMOUNT_1	NUMBER	18	3	This column is not used in V3.5.
178	LIST_PRODUCT_CURRENCY_1	CHAR	3		This column is not used in V3.5.

Seq.	Field Name	Data Type	Len.	Sc.	Field Description
179	LIST_PRODUCT_CURRENCY_EXP_1	NUMBER	1		This column is not used in V3.5.
180	LIST_PRODUCT_CODE_2	VARCHAR2	15		This column is not used in V3.5.
181	LIST_PRODUCT_AMOUNT_2	NUMBER	18	3	This column is not used in V3.5.
182	LIST_PRODUCT_CURRENCY_2	CHAR	3		This column is not used in V3.5.
183	LIST_PRODUCT_CURRENCY_EXP_2	NUMBER	1		This column is not used in V3.5.
184	LIST_PRODUCT_CODE_3	VARCHAR2	15		This column is not used in V3.5.
185	LIST_PRODUCT_AMOUNT_3	NUMBER	18	3	This column is not used in V3.5.
186	LIST_PRODUCT_CURRENCY_3	CHAR	3		This column is not used in V3.5.
187	LIST_PRODUCT_CURRENCY_EXP_3	NUMBER	1		This column is not used in V3.5.
188	LIST_PRODUCT_CODE_4	VARCHAR2	15		This column is not used in V3.5.
189	LIST_PRODUCT_AMOUNT_4	NUMBER	18	3	This column is not used in V3.5.
190	LIST_PRODUCT_CURRENCY_4	CHAR	3		This column is not used in V3.5.
191	LIST_PRODUCT_CURRENCY_EXP_4	NUMBER	1		This column is not used in V3.5.
192	LIST_PRODUCT_CODE_5	VARCHAR2	15		This column is not used in V3.5.
193	LIST_PRODUCT_AMOUNT_5	NUMBER	18	3	This column is not used in V3.5.
194	LIST_PRODUCT_CURRENCY_5	CHAR	3		List product 5 currency. It should be defined in ' CURRENCY_TABLE ' table.
195	LIST_PRODUCT_CURRENCY_EXP_5	NUMBER	1		This column is not used in V3.5.
196	LAST_SCHEDULE_INDEX_USED	CHAR	4		Last interest schedule index used for charging.
197	SPECIFIC_SCHEDULE_INDEX_USED	CHAR	4		Last specific interest schedule index used for charging.
198	SPECIFIC_INTEREST_RATE	NUMBER	9	6	Specific interest rate.
199	SPEC_INDEX_CUSTOM_INT_ED	DATE	7		End date of specific interest schedule index used.
200	STATEMENT_DATE_INT_PERIOD_1	DATE	7		This column is not used in V3.5.
201	RATE_USED_PERIOD_1	NUMBER	9	6	This column is not used in V3.5.
202	NB_VAL_DAYS_USED_PERIOD_1	NUMBER	9	6	This column is not used in V3.5.
203	INT_AMOUNT_PERIOD_1	NUMBER	18	3	This column is not used in V3.5.
204	BASIC_BIL_AMOUNT_PERIOD_1	NUMBER	18	3	This column is not used in V3.5.
205	STATEMENT_DATE_INT_PERIOD_2	DATE	7		This column is not used in V3.5.
206	RATE_USED_PERIOD_2	NUMBER	9	6	This column is not used in V3.5.
207	NB_VAL_DAYS_USED_PERIOD_2	NUMBER	9	6	This column is not used in V3.5.
208	INT_AMOUNT_PERIOD_2	NUMBER	18	3	This column is not used in V3.5.
209	BASIC_BIL_AMOUNT_PERIOD_2	NUMBER	18	3	This column is not used in V3.5.

Seq.	Field Name	Data Type	Len.	Sc.	Field Description
210	STATEMENT_DATE_INT_PERIOD_3	DATE	7		This column is not used in V3.5.
211	RATE_USED_PERIOD_3	NUMBER	9	6	This column is not used in V3.5.
212	NB_VAL_DAYS_USED_PERIOD_3	NUMBER	9	6	This column is not used in V3.5.
213	INT_AMOUNT_PERIOD_3	NUMBER	18	3	This column is not used in V3.5.
214	BASIC_BIL_AMOUNT_PERIOD_3	NUMBER	18	3	This column is not used in V3.5.
215	STATEMENT_DATE_INT_PERIOD_4	DATE	7		This column is not used in V3.5.
216	RATE_USED_PERIOD_4	NUMBER	9	6	This column is not used in V3.5.
217	NB_VAL_DAYS_USED_PERIOD_4	NUMBER	9	6	This column is not used in V3.5.
218	INT_AMOUNT_PERIOD_4	NUMBER	18	3	This column is not used in V3.5.
219	BASIC_BIL_AMOUNT_PERIOD_4	NUMBER	18	3	This column is not used in V3.5.
220	BILLING_ACCOUNT_NUMBER	VARCHAR2	24		Billing account number.
221	BILLING_BANK_CODE	CHAR	6		The billing bank code. It should be defined in the 'BANK' table.
222	BILLING_BRANCH_CODE	CHAR	6		The billing branch code. It should be defined in the 'BRANCH' table.
223	PROCESSING_CLASS	CHAR	4		This column is reserved for future use.
224	EXTERNAL_REFERENCE_ID	VARCHAR2	23		Reference assigned by external system processing when applicable.
225	COLLECTION_REFERENCE	VARCHAR2	40		Collection reference from external system when applicable.
226	COLLECTION_STATUS	VARCHAR2	4		Collection status from external system when applicable.
227	COLLECTION_DATE	DATE	7		Collection date from external system when applicable.
228	D_ACCOUNTING_DATE	DATE	7		Transaction accounting date.
229	ACCOUNTING_REFERENCE	VARCHAR2	40		Transaction accounting reference.
230	HOLDING_USER	VARCHAR2	15		The hold transaction user when applicable.
231	HOLDING_DATE	DATE	7		The hold transaction date when applicable.
232	REACTIVATE_USER	VARCHAR2	15		The reactivate transaction user when applicable.
233	REACTIVATE_DATE	DATE	7		The reactivate transaction date when applicable.
234	GEN_DEPOSIT_FLAG	CHAR	1		In case of Automatic Debit order, it indicates whether the deposit has been generated or not. Possible values are: 'Y' = Deposit generated, 'N' = Deposit not generated.
235	LNK_ARN_DEPOSIT	VARCHAR2	23		Linked deposit transaction microfilm reference number.

Seq.	Field Name	Data Type	Len.	Sc.	Field Description
236	LNK_ARN_DEPOSIT_SEQ	NUMBER	4		Linked deposit transaction microfilm reference sequence.
237	LNK_ARN_FEE	VARCHAR2	23		Linked fee transaction microfilm reference number.
238	LNK_ARN_FEE_SEQ	NUMBER	4		Linked fee transaction microfilm reference sequence.
239	LNK_ARN_INTEREST	VARCHAR2	23		Linked interest transaction microfilm reference number.
240	LNK_ARN_INTEREST_SEQ	NUMBER	4		Linked interest transaction microfilm reference sequence.
241	DEBIT_FILE_ID	VARCHAR2	12		Debit file's identification.
242	REPRESENT_DEBIT_DATE	DATE	7		When applicable, this column is used in case a debit order results in a payment incident. It indicates the date in which the debit order has been represented.
243	REPRESENT_DEBIT_USER	VARCHAR2	15		User who represented the debit order.
244	SETTLEMENT_CUTOFF_ID_ACC	VARCHAR2	8		Accounting settlement cutoff processing id.
245	SETTLEMENT_CUTOFF_FLAG_ACC	CHAR	1		Accounting settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
246	SETTLEMENT_CUTOFF_ID_STA	VARCHAR2	8		The statistics' settlement cutoff processing ID.
247	SETTLEMENT_CUTOFF_FLAG_STA	CHAR	1		The statistics' settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
248	SETTLEMENT_CUTOFF_ID_SCO	VARCHAR2	8		The collection/scoring settlement cutoff processing ID.
249	SETTLEMENT_CUTOFF_FLAG_SCO	CHAR	1		The collection/scoring settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
250	SETTLEMENT_CUTOFF_ID_LOY	VARCHAR2	8		Loyalty settlement cutoff processing ID.
251	SETTLEMENT_CUTOFF_FLAG_LOY	CHAR	1		Loyalty settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
252	SETTLEMENT_CUTOFF_ID_OTH	VARCHAR2	8		Information system settlement cutoff processing ID.

Seq.	Field Name	Data Type	Len.	Sc.	Field Description
253	SETTLEMENT_CUTOFF_FLAG_OTH	CHAR	1		Information system settlement cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
254	CHKSECUR\$1	VARCHAR2	16		This column is reserved for future use.
255	PRIVATE_TLV_DATA_1	VARCHAR2	256		This column is reserved for future use.
256	CURRENT_TABLE_NAME	CHAR	3		Current table name. Possible values are: 'CUR' = Current Account transaction table, 'HST' = Historic Account transaction table.
257	DISPUTE_EXTERNAL_REFERENCE	VARCHAR2	40		Reference given to the transaction by the dispute external interface system.
258	DISPUTE_EXTERNAL_NAME	VARCHAR2	40		Name of the dispute external interface system.
259	DISPUTE_EXTERNAL_STATUS	CHAR	1		Status of the disputed transaction given by the dispute external interface system.
260	TOTAL_MIN_DUE_TRX	NUMBER	18	3	Total minimum due transaction.
261	PRIVATE_DATA_1	VARCHAR2	32		Private data 1. This column is reserved for future use.
262	PRIVATE_DATA_2	VARCHAR2	32		Private data 2. This column is reserved for future use.
263	PRIVATE_DATA_3	DATE	7		Private data 3. This column is reserved for future use.
264	PRIVATE_DATA_4	DATE	7		Private data 4. This column is reserved for future use.
265	PRIVATE_DATA_5	NUMBER	18	3	Private data 5. This column is reserved for future use.
266	PRIVATE_DATA_6	NUMBER	18	3	Private data 6. This column is reserved for future use.
267	EOD_DAILY_CLEARING_TRX_AMOUNT	NUMBER	18	3	End of day processing cleared transaction amount.
268	NBR_TERM_DUE	NUMBER	4		Number of due terms.
269	REQUEST_NBR_TERM	NUMBER	4		The requested number of terms.
270	REMAINIG_NBR_TERM	NUMBER	4		The remaining number of terms.
271	REQUEST_AMNT	NUMBER	18	3	The requested amount.
272	REMAINIG_AMNT	NUMBER	18	3	The remaining amount.
273	F_NBR_TERM_DUE	NUMBER	4		The former number of due terms.
274	F_REQUEST_NBR_TERM	NUMBER	4		The former requested number of terms.
275	F_REMAINIG_NBR_TERM	NUMBER	4		The former remaining number of terms.
276	F_REQUEST_AMNT	NUMBER	18	3	The former requested amount.

Seq.	Field Name	Data Type	Len.	Sc.	Field Description
277	F_REMAINIG_AMNT	NUMBER	18	3	The former Remaining amount.
278	DATE_NBR_TERM_CHG	DATE	7		When applicable, this column indicates the date of number of term change.
279	TYPE_NBR_TERM_CHG	CHAR	1		When applicable, this column indicates the type of term change. Possible values are: 'U' = Unbilled (Change before billing), 'B' = Billed (Change after billing), 'M' = Merge (Merge of more than one transaction).
280	SENSITIVE_OPERATION_RECORD	CHAR	1		This column is reserved for future use.
281	USER_CREATE	VARCHAR2	15		ID of the user when record created.
282	DATE_CREATE	DATE	7		Record creation date and time.
283	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
284	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

9.3.6 SHADOW_ACCOUNT

When editing a contract element related to an Account product, the table is used firstly to capture mandatory and complementary information for contract element validation, i.e. :

- Direct debit payment options (Minimum due, fixed amount or percentage of balance),
- Credit lines : credit limit, cash limit and additional loan limit (Both permanent and temporary),
- Direct debit accounts if any,
- Additional fields if any.

And secondly to view the characteristics of the marketable product with which the Account contract element is initiated and update the negotiable characteristics if needed.

Records of this table, concern all Account data required for account management.

Refer to "[Financial Account](#)" section in UG1021-Financial account user's guide for more details.

Each column of this table is described in detail in the next section.

9.3.6.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	SHADOW_ACCOUNT_NBR	VARCHAR2	24		Shadow account identification number.
2	PRIMARY_SHADOW_ACCOUNT_NBR	VARCHAR2	24		Primary Shadow account identification number. If the shadow account is a secondary account, this field should contain the corresponding primary shadow account number.
3	CLIENT_CODE	VARCHAR2	24		Client identification code concerned by the Credit account. It should be defined in 'CLIENT' table.

Seq.	Column Name	Data Type	Len	Sc	Column Description
4	CLIENT_HOST_ID	VARCHAR2	24		Client identification code at the financial institution's Host level.
5	BANK_CODE	CHAR	6		Financial institution code concerned by the Credit account. It should be defined in the 'BANK' table.
6	BRANCH_CODE	CHAR	6		Branch code concerned by the Credit account. It should be defined in 'BRANCH' table.
7	APPLICATION_ID	VARCHAR2	24		Application identification number with which the client has been subscribed. It should be in 'CLIENT' table.
8	APPLICATION_CONTRACT_ID	VARCHAR2	24		Application identification number of the client's contract. It should be in 'BOARDING_ACCOUNT_APP' table.
9	HIERARCHY_CODE	CHAR	6		Hierarchy identification code concerned by the Credit account.
10	MAIN_CORP_ID	VARCHAR2	15		The main corporate identification. It should be defined in 'CORPORATE' table
11	CLIENT_BIRTH_DATE	DATE	7		Client birth date.
12	CLIENT_PREFERRED_STAT_ADDRESS	CHAR	2		This column is not used in V3.5.
13	CLIENT_SM_PREF_STAT_ADDRESS	CHAR	2		This column is not used in V3.5.
14	CONTRACT_NUMBER	VARCHAR2	30		This column is not used in V3.5.
15	CUSTOMER_SEGMENT	CHAR	3		Customer segment code. It should be defined in 'CUSTOMER_SEGMENT' table.
16	CORPORATE_ID	VARCHAR2	15		Corporate ID in case of corporate account. It should be defined in 'CORPORATE' table.
17	LIABILITY_INDICATOR	CHAR	1		Account liability indicator. Possible values are: 'P' = Personal Liability (For personal cards), 'I' = Individual liability (Personal liability for corporate cards), 'J' = Joint (Both personal and corporate liability for corporate cards), 'F' = Full liability (Only corporation is liable).
18	CHANNEL_NUMBER	VARCHAR2	15		The concerned internal Channel identification number. It should be defined in 'CHANNEL' table.
19	TAX_IDENTIFICATION	VARCHAR2	10		The client tax identification as taxpayer, as defined in 'CLIENT' table.
20	INITIAL_PROFILE_CODE	CHAR	3		The initial account profile identification code. It should be defined in 'CR_PROFILE' table.
21	TYPE_OF_INITIAL_PROFILE_ACC	CHAR	1		Type of initial account profile. Possible values are:

Seq.	Column Name	Data Type	Len	Sc	Column Description
					'R' = Credit revolving, 'C' = Charge, 'P' = Prepaid.
22	CURRENT_PROFILE_CODE	CHAR	3		The current account profile identification code. It should be defined in 'CR_PROFILE' table.
23	TYPE_OF_CURRENT_PROFILE_ACC	CHAR	1		This column is used to specify the type of current account profile. Possible values are: 'R' = Credit revolving, 'C' = Charge, 'P' = Prepaid.
24	INSTALLMENT_FACILITY_IND	CHAR	1		This column indicates whether the loan (EMI) is supported for the account or not. Possible values are: 'Y' = Yes (By default), 'N' = No.
25	PRIMARY_CARD_PRODUCT_CODE	CHAR	3		The product code of primary payment instrument. It should be defined in 'CARD_PRODUCT' table.
26	SOURCE_CODE_INDICATOR	CHAR	1		The source of the account. Possible values are: 'N' = New account, 'C' = Converted account, 'T' = Transferred account.
27	CURRENCY_CODE	CHAR	3		Account currency code. It should be defined in 'CURRENCY_TABLE' table.
28	CREDIT_LIMIT	NUMBER	15		Credit limit at the account level. This Credit limit prevails on the one defined at the account catalogue product level. However, this limit cannot exceed the Credit limit ceiling defined at the account catalogue product level.
29	CASH_TRANSFER_LIMIT	NUMBER	15		It indicates the temporary cash/transfer limit at the account level. This Cash/transfer limit is defined as part of the Credit limit and therefore, cannot exceed the Credit limit.
30	LOAN_LIMIT	NUMBER	15		Loan limit at the account level. This Loan limit can be defined as a separate limit or as part of the Credit limit but cannot exceed the Credit limit in any case.
31	VIP_LEVEL	CHAR	1		VIP level defined for the client owner. It should be defined in 'VIP_LIST' table.
32	OWNER_CODE	CHAR	2		Owner codes. It should be defined in 'OWNER_LIST' table.

Seq.	Column Name	Data Type	Len	Sc	Column Description
33	OWNER_CATEGORY	CHAR	1		Category of the owner. Possible values are: 'I' = Individual, 'B' = Business, 'S' = Staff, 'P' = Professional, 'N' = Company, 'C' = Corporate, 'T' = Travel, 'L' = International corporate, 'R' = Procurement, 'X' = Others1, 'Y' = Others2, 'Z' = Others3.
34	FORMER_CREDIT_LIMIT	NUMBER	15		The previous credit limit at the account level.
35	FORMER_CREDIT_LIMIT_D	DATE	7		The date on which the previous credit limit's change to the current credit limit occurred.
36	FORMER_CASH_TRANSFER_LIMIT	NUMBER	15		The previous Cash/Transfer limit at the account level.
37	FORMER_CASH_TRANSFER_LIMIT_D	DATE	7		The date on which the previous Cash/Transfer limit's change to the current Cash/Transfer limit occurred.
38	FORMER_LOAN_LIMIT	NUMBER	15		The previous Loan limit at the account level.
39	FORMER_LOAN_LIMIT_D	DATE	7		Date on which the previous Loan limit's change to the current Credit limit occurred.
40	TD_CREDIT_LIMIT	NUMBER	15		Temporary Credit limit at the account level. This Credit limit prevails on the one defined at the account catalogue product level. However, this limit cannot exceed the Credit limit ceiling defined at the account catalogue product level.
41	TD_CASH_TRANSFER_LIMIT	NUMBER	15		It indicates the temporary Cash/transfer limit at the account level. This Cash/transfer limit is defined as part of the Temporary Credit limit and therefore, cannot exceed it.
42	TD_LOAN_LIMIT	NUMBER	15		It indicates the temporary loan limit at the account level. This Loan limit can be defined as a separate limit or as part of the Temporary Credit limit but cannot exceed it in any case.
43	TD_START_DATE	DATE	7		It indicates the effective start date of the Temporary limits including Temporary Credit limit, Temporary Cash/Transfer limit and Temporary Loan limit.

Seq.	Column Name	Data Type	Len	Sc	Column Description
44	TD_END_DATE	DATE	7		It indicates the date on which the Temporary Credit limits including Cash/ transfer and Loan limits return to their values of Permanent limits.
45	CYCLE_TASK_NAME	VARCHAR2	15		This column is reserved for internal use.
46	CYCLE_CUTOFF_CODE	CHAR	3		Account cycle cutoff code. It should be defined in 'CYCLE_CUTOFF_PARAMETERS' table.
47	LOAN_DUE_DAY	NUMBER	2		In case 'INSTALLMENT_FACILITY_IND' is set to 'Y' (Yes), this column indicates the loan installment transaction due day. Possible values are: '0' = Generate installment at loan transaction date, NULL = Generate installment at statement date, '01'-'28' = Generate installment in the specified day in the month.
48	LATE_PAYMENT_FEE_ON_OFF	CHAR	1		It indicates whether the late payment fee should be generated for the account or not. Possible values are: 'Y' = Yes, 'N' = No.
49	PENALTY_FEE_ON_OFF	CHAR	1		It indicates whether the penalty fee should be generated for the account or not. Possible values are: 'Y' = Yes, 'N' = No.
50	PENALTY_FEE_NEXT_PROC_DATE	DATE	7		It indicates the penalty fee next generation date, i.e. the date when the next penalty fees will be generated for the account.
51	DEFAULT_CODE_ACTION	CHAR	3		It indicates the default authorization response code. It should be defined in 'ACTION_LIST' table. Below are few samples: '100' = Rejected, '107' = Refer to card issuer, '108' = Refer to card issuer; special condition, '115' = Function not available, '116' = No sufficient funds, '119' = Cardholder transaction not permitted, '120' = Terminal transaction not permitted,

Seq.	Column Name	Data Type	Len	Sc	Column Description
					'121' = Exceeds withdrawal frequency limit, '122' = Security violation, '123' = Withdrawal frequency exceeded, '125' = Card not in service, '129' = Suspected fraud, '180' = No credit account, '181' = No cheque account, '182' = No saving Account, '200' = Rejected, Pick up card, '202' = Fraudulent, Pick up, '205' = Call security acquirer, pick up, '207' = Special conditions, Pick up, '208' = Lost card, Pick up, '209' = Stolen card, Pick up, '210' = Suspected fraud, Pick up, '299' = Pick up.
52	CURRENT_CODE_ACTION	CHAR	3		It indicates the current authorization response code. It should be defined in 'ACTION_LIST' table.
53	AD_IND	CHAR	2		This column is fixed to the value 'AD' (Administrative) for internal usage.
54	ADMINISTRATIVE_STATUS	CHAR	1		It indicates the current account administrative status. It should be defined in SHADOW_ACCOUNT_STATUS table with STATUS_CATEGORY column's value set at 'AD' (Administrative).
55	ADMINISTRATIVE_STATUS_DATE	DATE	7		It indicates the current account administrative status date.
56	F_ADMINISTRATIVE_STATUS	CHAR	1		It indicates the former account administrative status.
57	F_ADMINISTRATIVE_STATUS_DATE	DATE	7		It indicates the former account administrative status date.
58	BL_IND	CHAR	2		This column is fixed to the value 'BL' (Balance) for internal usage.
59	BALANCE_STATUS	CHAR	1		It indicates the current Account balance status. It should be defined in SHADOW_ACCOUNT_STATUS table with STATUS_CATEGORY column's value set at 'BL' (Balance).
60	BALANCE_STATUS_DATE	DATE	7		It indicates the current account balance status date.
61	F_BALANCE_STATUS	CHAR	1		It indicates the former Account balance status.
62	F_BALANCE_STATUS_DATE	DATE	7		It indicates the former Account balance status date.

Seq.	Column Name	Data Type	Len	Sc	Column Description
63	OVERDRAWN_PR_BAL_DATE	DATE	7		It indicates the date when the allowed overdrawn occurred for the first time during the current cycle
64	OVERDRAWN_NP_BAL_DATE	DATE	7		It indicates the date when the critical overdrawn occurred for the first time during the current cycle
65	UP_IND	CHAR	2		This column is fixed to the value 'UP' (Unpaid) for internal usage.
66	UNPAID_STATUS	CHAR	1		It indicates the current Account unpaid status. It should be defined in SHADOW_ACCOUNT_STATUS table with STATUS_CATEGORY field's value set at 'UP' (Unpaid).
67	UNPAID_STATUS_DATE	DATE	7		It indicates the current Account unpaid status date.
68	F_UNPAID_STATUS	CHAR	1		It indicates the former Account unpaid status.
69	F_UNPAID_STATUS_DATE	DATE	7		It indicates the former account unpaid status date.
70	FIRST_UNPAID_DATE	DATE	7		It indicates the date of the first occurred unpaid.
71	SECOND_UNPAID_DATE	DATE	7		It indicates the date of the second occurred unpaid.
72	LP_IND	CHAR	2		This column is fixed to the value 'LP' (Late payment) for internal usage.
73	LATE_PAYMENT_STATUS	CHAR	1		It indicates the current Account late payment status. It should be defined in SHADOW_ACCOUNT_STATUS table with STATUS_CATEGORY column's value set at 'LP' (Late payment).
74	LATE_PAYMENT_STATUS_DATE	DATE	7		It indicates the current Account late payment status date.
75	F_LATE_PAYMENT_STATUS	CHAR	1		It indicates the former account late payment status.
76	F_LATE_PAYMENT_STATUS_DATE	DATE	7		It indicates the former account late payment status date.
77	IP_IND	CHAR	2		This column is fixed to the value 'IP' (Payment failed) for internal usage.
78	PAYMENT_FAILED_STATUS	CHAR	1		It indicates the current account payment incident status. It should be defined in SHADOW_ACCOUNT_STATUS table with STATUS_CATEGORY column's value set at 'IP' (Payment failed).
79	PAYMENT_FAILED_STATUS_DATE	DATE	7		It indicates the current account payment incident status date.
80	F_PAYMENT_FAILED_STATUS	CHAR	1		It indicates the former account payment incident status.
81	F_PAYMENT_FAILED_STATUS_DATE	DATE	7		It indicates the former account payment incident status date.
82	PAYMENT_FAILED_DATE	DATE	7		It indicates the payment failed date.

Seq.	Column Name	Data Type	Len	Sc	Column Description
83	PAYMENT_FAILED_NUMBER	NUMBER	3		It indicates the number of times a payment incident has occurred for the account from the time it was created.
84	PP_IND	CHAR	2		This column is fixed to the value 'PP' (Payment promise) for internal usage.
85	PAYMENT_PROMISE_STATUS	CHAR	1		It indicates the current account payment promise status. It should be defined in 'SHADOW_ACCOUNT_STATUS' table with STATUS_CATEGORY column's value set at 'PP' (Payment promise).
86	PAYMENT_PROMISE_STATUS_DATE	DATE	7		It indicates the current account payment promise status date.
87	F_PAYMENT_PROMISE_STATUS	CHAR	1		The former account payment promise status.
88	F_PAYMENT_PROMISE_STATUS_DATE	DATE	7		The former account payment promise status date.
89	HIGHEST_STATUS_CATEGORY	CHAR	2		The account status category having the highest priority level. Possible values are: 'AD' = Administrative status, 'BL' = Balance status, 'LP' = Late payment status, 'UP' = Unpaid status, 'IP' = Payment incident status, 'PP' = Payment promise status.
90	HIGHEST_SEVERITY_LEVEL	NUMBER	2		The highest priority level.
91	RISK_LEVEL	NUMBER	2		The risk level of the customer as defined by the financial institution. This data (Generally evaluated outside PowerCARD using a scoring system) is stored for an information purpose.
92	COLLECTION_LEVEL	VARCHAR2	6		This column is not used in V3.5.
93	START_COLLECTION_DATE	DATE	7		When applicable, this column indicates the start collection date.
94	END_COLLECTION_DATE	DATE	7		When applicable, this column indicates the end collection date.
95	NB_TRANS_D_DURING_COL	NUMBER	6		It indicates the number of debit transactions as received during collection period.
96	NB_TRANS_C_DURING_COL	NUMBER	6		It indicates the number of credit transactions as received during collection period.
97	MINIMUM_DUE_FIXED	NUMBER	18	3	This column is not used in V3.5.
98	MIN_DUE_SCHEDULE_CRITERIA	CHAR	1		This column is not used in V3.5.
99	MIN_DUE_SCHEDULE_INDEX	CHAR	4		This column is not used in V3.5.
100	FIX_DUE_START_DATE	DATE	7		This column is not used in V3.5.

Seq.	Column Name	Data Type	Len	Sc	Column Description
101	FIX_DUE_END_DATE	DATE	7		This column is not used in V3.5.
102	PAYMENT_MODE_AUTO_DEBIT_IND	CHAR	1		The automatic debit payment mode indicator. Possible values are: 'M' = Mandatory direct debit, 'P' = Allowed, 'F' = Closing balance.
103	PAYMENT_MODE_CHECK_IND	CHAR	1		The check payment mode indicator. Possible values are: 'P' = Allowed, 'F' = Closing balance.
104	BASE_AUTODEBIT_EFF_DATE	CHAR	1		This column is not used in V3.5.
105	OP_AUTODEBIT_EFF_DATE	CHAR	1		This column is not used in V3.5.
106	NBDAY_AUTODEBIT_EFF_DATE	NUMBER	3		This column is not used in V3.5.
107	SKIP_AUTODEBIT_EFF_DATE	CHAR	1		This column is not used in V3.5.
108	BASE_AUTODEBIT_VAL_DATE	CHAR	1		This column is not used in V3.5.
109	OP_AUTODEBIT_VAL_DATE	CHAR	1		This column is not used in V3.5.
110	NBDAY_AUTODEBIT_VAL_DATE	NUMBER	3		This column is not used in V3.5.
111	SKIP_AUTODEBIT_VAL_DATE	CHAR	1		This column is not used in V3.5.
112	ELIGIBILITY_INDICATOR	CHAR	1		This column is not used in V3.5.
113	ELIGIBILITY_START_DATE	DATE	7		This column is not used in V3.5.
114	ELIGIBILITY_END_DATE	DATE	7		This column is not used in V3.5.
115	STATEMENT_SEQUENCE	NUMBER	6		It indicates the last statement sequence number.
116	LANGUAGE_CODE	CHAR	3		It indicates the last language code. It should be defined in 'LANGUAGE_LIST' table.
117	STATEMENT_CODE	CHAR	2		It indicates the statement code should be defined in 'STATEMENT_PARAMETERS' table.
118	LOAN_BALANCE	NUMBER	18	3	It indicates the loan balance.
119	OPENING_BALANCE	NUMBER	18	3	It indicates the last cycle cutoff opening balance.
120	OPENING_BALANCE_SIGN	CHAR	1		It indicates the last cycle cutoff opening balance sign.
121	CLOSING_BALANCE	NUMBER	18	3	It indicates the last cycle cutoff closing balance.

Seq.	Column Name	Data Type	Len	Sc	Column Description
122	CLOSING_BALANCE_SIGN	CHAR	1		It indicates the last cycle cutoff closing balance sign.
123	CLOSING_BALANCE_PURCHASE	NUMBER	18	3	It indicates the last cycle cutoff closing balance purchase.
124	CLOSING_BALANCE_CASH	NUMBER	18	3	It indicates the last cycle cutoff closing balance cash.
125	CLOSING_BALANCE_TRANSFER	NUMBER	18	3	It indicates the last cycle cutoff closing balance transfer.
126	CLOSING_BALANCE_ECOM	NUMBER	18	3	It indicates the last cycle cutoff closing balance e-commerce.
127	CLOSING_BALANCE_CHEQUE	NUMBER	18	3	It indicates the last cycle cutoff closing balance cheque.
128	CLOSING_BALANCE_INTEREST	NUMBER	18	3	It indicates the last cycle cutoff closing balance interest.
129	CLOSING_BALANCE_INSTALLMENT	NUMBER	18	3	It indicates the last cycle cutoff closing balance loan installment.
130	CLOSING_BALANCE_FEES	NUMBER	18	3	It indicates the last cycle cutoff closing balance fees.
131	CLOSING_BALANCE_TAX	NUMBER	18	3	It indicates the last cycle cutoff closing balance tax.
132	CLOSING_BALANCE_REFUND	NUMBER	18	3	It indicates the last cycle cutoff closing balance refund.
133	CLOSING_BALANCE_DEPOSIT	NUMBER	18	3	It indicates the last cycle cutoff closing balance deposit.
134	CLOS_BAL_SUBJECT_LATE_FEES	NUMBER	18	3	It indicates the last cycle cutoff closing balance of transactions subject to late payment fees.
135	CURRENT_BALANCE_PURCHASE	NUMBER	18	3	It indicates the current balance purchase.
136	CURRENT_BALANCE_CASH	NUMBER	18	3	It indicates the current balance cash.
137	CURRENT_BALANCE_TRANSFER	NUMBER	18	3	It indicates the current balance transfer.
138	CURRENT_BALANCE_ECOM	NUMBER	18	3	It indicates the current balance e-commerce.
139	CURRENT_BALANCE_CHEQUE	NUMBER	18	3	It indicates the current balance cheque.
140	CURRENT_BALANCE_INTEREST	NUMBER	18	3	It indicates the current balance interest.
141	CURRENT_BALANCE_INSTALLMENT	NUMBER	18	3	It indicates the current balance loan installment.
142	CURRENT_BALANCE_FEES	NUMBER	18	3	It indicates the current balance fees.
143	CURRENT_BALANCE_TAX	NUMBER	18	3	It indicates the current balance tax.
144	CURRENT_BALANCE_REFUND	NUMBER	18	3	It indicates the current balance refund.
145	CURRENT_BALANCE_DEPOSIT	NUMBER	18	3	It indicates the current balance deposit.
146	NBRTRA_CURBAL_PURCHASE	NUMBER	8		It indicates the number of transactions in current balance purchase.
147	NBRTRA_CURBAL_CASH	NUMBER	8		It indicates the number of transactions in current balance cash.

Seq.	Column Name	Data Type	Len	Sc	Column Description
148	NBRTRA_CURBAL_TRANSFER	NUMBER	8		It indicates the number of transactions in current balance transfer.
149	NBRTRA_CURBAL_ECOM	NUMBER	8		It indicates the number of transactions in current balance e-commerce.
150	NBRTRA_CURBAL_CHEQUE	NUMBER	8		It indicates the number of transactions in current balance cheque.
151	NBRTRA_CURBAL_INTEREST	NUMBER	8		It indicates the number of transactions in current balance interest.
152	NBRTRA_CURBAL_INSTALLMENT	NUMBER	8		It indicates the number of transactions in current balance loan installment.
153	NBRTRA_CURBAL_FEES	NUMBER	8		It indicates the number of transactions in current balance fees.
154	NBRTRA_CURBAL_TAX	NUMBER	8		It indicates the number of transactions in current balance tax.
155	NBRTRA_CURBAL_REFUND	NUMBER	8		It indicates the number of transactions in current balance refund.
156	NBRTRA_CURBAL_DEPOSIT	NUMBER	8		It indicates the number of transactions in current balance deposit.
157	PENDING_AUTHORIZATION	NUMBER	18	3	It indicates the pending authorization amount.
158	PENDING_AUT_CASH_TRANSFER	NUMBER	18	3	It indicates the pending authorization cash/transfer amount.
159	PENDING_AUT_LOAN	NUMBER	18	3	It indicates the pending authorization loan amount.
160	PENDING_CONV_BALANCE	NUMBER	18	3	It indicates the pending conversion balance.
161	PENDING_CONV_BALANCE_S	CHAR	1		It indicates the pending conversion balance sign.
162	PENDING_CONV_BAL_CASH_TRANSFER	NUMBER	18	3	It indicates the pending conversion cash/transfer balance.
163	PENDING_CONV_BAL_CASH_TRANSFER_S	CHAR	1		It indicates the pending conversion cash/transfer balance sign.
164	PENDING_CONV_BAL_LOAN	NUMBER	18	3	It indicates the pending conversion loan balance.
165	PENDING_CONV_BAL_LOAN_S	CHAR	1		It indicates the pending conversion loan balance sign.
166	LIVE_DEPOSIT	NUMBER	18	3	It indicates the live deposit amount.
167	CHECK_DEPOSIT_WAIT_CONFIRM	NUMBER	18	3	It indicates the check deposit waiting confirmation amount.
168	FULL_PAYMENT_BALANCE	NUMBER	18	3	It indicates the full payment balance.
169	SPECIFIC_DEBIT_ORDER_AMNT	NUMBER	18	3	It indicates the specific debit order amount.
170	SPECIFIC_DEBIT_ORDER_SD	DATE	7		It indicates the start date of specific debit order.
171	SPECIFIC_DEBIT_ORDER_ED	DATE	7		It indicates the end date of specific debit order.

Seq.	Column Name	Data Type	Len	Sc	Column Description
172	BALANCE_AT_CANCELLATION_DATE	NUMBER	18	3	For cancelled accounts, this field indicates the balance at cancellation date.
173	BALANCE_AT_LAST_YEARLY_CUTOFF	NUMBER	18	3	It indicates the account balance at last yearly cutoff.
174	CANCELLATION_DATE	DATE	7		For cancelled accounts, this field indicates the cancellation date.
175	AGE_BUCKET_30	NUMBER	18	3	It indicates the outstanding payments (Unpaid terms) at age bucket 30 days.
176	AGE_BUCKET_60	NUMBER	18	3	It indicates the outstanding payments (Unpaid terms) at age bucket 60 days.
177	AGE_BUCKET_90	NUMBER	18	3	It indicates the outstanding payments (Unpaid terms) at age bucket 90 days.
178	AGE_BUCKET_120	NUMBER	18	3	It indicates the outstanding payments (Unpaid terms) at age bucket 120 days.
179	AGE_BUCKET_150	NUMBER	18	3	It indicates the outstanding payments (Unpaid terms) at age bucket 150 days.
180	AGE_BUCKET_180	NUMBER	18	3	It indicates the outstanding payments (Unpaid terms) at age bucket 180 days.
181	AGE_BUCKET_210	NUMBER	18	3	It indicates the outstanding payments (Unpaid terms) at age bucket 210 days.
182	AGE_BUCKET_240	NUMBER	18	3	It indicates the outstanding payments (Unpaid terms) at age bucket 240 days.
183	AGE_BUCKET_OVR	NUMBER	18	3	It indicates the outstanding payments (Unpaid terms) at age bucket over 240 days.
184	AGE_BUCKET_30_SUBJECT_PENALTY	NUMBER	18	3	It indicates the penalty fee generated for outstanding payments (Unpaid terms) at age bucket 30 days.
185	AGE_BUCKET_60_SUBJECT_PENALTY	NUMBER	18	3	It indicates the penalty fee generated for outstanding payments (Unpaid terms) at age bucket 60 days.
186	AGE_BUCKET_90_SUBJECT_PENALTY	NUMBER	18	3	It indicates the penalty fee generated for outstanding payments (Unpaid terms) at age bucket 90 days.
187	AGE_BUCKET_120_SUBJECT_PENALTY	NUMBER	18	3	It indicates the penalty fee generated for outstanding payments (Unpaid terms) at age bucket 120 days.
188	AGE_BUCKET_150_SUBJECT_PENALTY	NUMBER	18	3	It indicates the penalty fee generated for outstanding payments (Unpaid terms) at age bucket 150 days.
189	AGE_BUCKET_180_SUBJECT_PENALTY	NUMBER	18	3	It indicates the penalty fee generated for outstanding payments (Unpaid terms) at age bucket 180 days.
190	AGE_BUCKET_210_SUBJECT_PENALTY	NUMBER	18	3	It indicates the penalty fee generated for outstanding payments (Unpaid terms) at age bucket 210 days.
191	AGE_BUCKET_240_SUBJECT_PENALTY	NUMBER	18	3	It indicates the penalty fee generated for outstanding payments (Unpaid terms) at age bucket 240 days.

Seq.	Column Name	Data Type	Len	Sc	Column Description
192	AGE_BUCKET_OVR_SUBJECT_PENALTY	NUMBER	18	3	It indicates the penalty fee generated for outstanding payments (Unpaid terms) at age bucket over 240 days.
193	CUM_TURNOVER_PURCHASE	NUMBER	22	3	It indicates the cumulative amount of purchase transactions since account opening date.
194	CUM_TURNOVER_CASH	NUMBER	22	3	It indicates the cumulative amount of cash transactions since account opening date.
195	CUM_TURNOVER_TRANSFER	NUMBER	22	3	It indicates the cumulative amount of transfer transactions since account opening date.
196	CUM_TURNOVER_ECOM	NUMBER	22	3	It indicates the cumulative amount of e-commerce transactions since account opening date.
197	CUM_TURNOVER_CHEQUE	NUMBER	22	3	It indicates the cumulative amount of cheque transactions since account opening date.
198	CUM_TURNOVER_INTEREST	NUMBER	22	3	It indicates the cumulative amount of interest transactions since account opening date.
199	CUM_TURNOVER_INSTALLM	NUMBER	22	3	It indicates the cumulative amount of loan installment transactions since account opening date.
200	CUM_TURNOVER_FEES	NUMBER	22	3	It indicates the cumulative amount of fee transactions since account opening date.
201	CUM_TURNOVER_TAX	NUMBER	22	3	It indicates the cumulative amount of tax on transactions since account opening date.
202	CUM_TURNOVER_REFUND	NUMBER	22	3	It indicates the cumulative amount of refund transactions since account opening date.
203	CUM_TURNOVER_DEPOSIT	NUMBER	22	3	It indicates the cumulative amount of deposit transactions since account opening date.
204	CUM_NBRTRA_PURCHASE	NUMBER	10		It indicates the cumulative number of purchase transactions since account opening date.
205	CUM_NBRTRA_CASH	NUMBER	10		It indicates the cumulative number of cash transactions since account opening date.
206	CUM_NBRTRA_TRANSFER	NUMBER	10		It indicates the cumulative number of transfer transactions since account opening date.
207	CUM_NBRTRA_ECOM	NUMBER	10		It indicates the cumulative number of e-commerce transactions since account opening date.
208	CUM_NBRTRA_CHEQUE	NUMBER	10		It indicates the cumulative number of cheque transactions since account opening date.

Seq.	Column Name	Data Type	Len	Sc	Column Description
209	CUM_NBRTRA_INTEREST	NUMBER	10		It indicates the cumulative number of interest transactions since account opening date.
210	CUM_NBRTRA_INSTALLM	NUMBER	10		It indicates the cumulative number of loan installment transactions since account opening date.
211	CUM_NBRTRA_FEES	NUMBER	10		It indicates the cumulative number of fee transactions since account opening date.
212	CUM_NBRTRA_TAX	NUMBER	10		It indicates the cumulative number of tax on transactions since account opening date.
213	CUM_NBRTRA_REFUND	NUMBER	10		It indicates the cumulative number of refund transactions since account opening date.
214	CUM_NBRTRA_DEPOSIT	NUMBER	10		It indicates the cumulative number of deposit transactions since account opening date.
215	MONTHLY_MAX_OVERLIMIT_BAL	NUMBER	18	3	It indicates the highest overdrawn in the current cycle.
216	MONTHLY_MAX_OVERLIMIT_BAL_AUTNUMBER	NUMBER	18	3	It indicates the highest over limit authorization in the current cycle.
217	MONTHLY_MAX_OVERLIMIT_DATE	DATE	7		It indicates the highest overdrawn date.
218	PREV_YEARLY_TURNOVER_PURCHASE	NUMBER	22	3	It indicates the previous yearly cumulative Amount of purchase transactions.
219	PREV_YEARLY_TURNOVER_CASH	NUMBER	22	3	It indicates the previous yearly cumulative Amount of cash transactions.
220	PREV_YEARLY_TURNOVER_TRANSFER	NUMBER	22	3	It indicates the previous yearly cumulative Amount of transfer transactions.
221	PREV_YEARLY_TURNOVER_ECOM	NUMBER	22	3	It indicates the previous yearly cumulative Amount of e-commerce transactions.
222	PREV_YEARLY_TURNOVER_CHEQUE	NUMBER	22	3	It indicates the previous yearly cumulative Amount of cheque transactions.
223	PREV_YEARLY_TURNOVER_INTEREST	NUMBER	22	3	It indicates the previous yearly cumulative Amount of interest transactions.
224	PREV_YEARLY_TURNOVER_INSTALLM	NUMBER	22	3	It indicates the previous yearly cumulative Amount of loan installment transactions.
225	PREV_YEARLY_TURNOVER_FEES	NUMBER	22	3	It indicates the previous yearly cumulative Amount of fee transactions.
226	PREV_YEARLY_TURNOVER_TAX	NUMBER	22	3	It indicates the previous yearly cumulative Amount of tax on transactions.

Seq.	Column Name	Data Type	Len	Sc	Column Description
227	PREV_YEARLY_TURNOVER_REFUND	NUMBER	22	3	It indicates the previous yearly cumulative Amount of refund transactions.
228	PREV_YEARLY_TURNOVER_DEPOSIT	NUMBER	22	3	It indicates the previous yearly cumulative Amount of deposit transactions.
229	CURR_YEARLY_TURNOVER_PURCHASE	NUMBER	22	3	It indicates the current yearly cumulative Amount of purchase transactions.
230	CURR_YEARLY_TURNOVER_CASH	NUMBER	22	3	It indicates the current yearly cumulative Amount of cash transactions.
231	CURR_YEARLY_TURNOVER_TRANSFER	NUMBER	22	3	It indicates the current yearly cumulative Amount of transfer transactions.
232	CURR_YEARLY_TURNOVER_ECOM	NUMBER	22	3	It indicates the current yearly cumulative Amount of e-commerce transactions.
233	CURR_YEARLY_TURNOVER_CHEQUE	NUMBER	22	3	It indicates the current yearly cumulative Amount of cheque transactions.
234	CURR_YEARLY_TURNOVER_INTEREST	NUMBER	22	3	It indicates the current yearly cumulative Amount of interest transactions.
235	CURR_YEARLY_TURNOVER_INSTALLMENT	NUMBER	22	3	It indicates the current yearly cumulative Amount of loan installment transactions.
236	CURR_YEARLY_TURNOVER_FEES	NUMBER	22	3	It indicates the current yearly cumulative Amount of fee transactions.
237	CURR_YEARLY_TURNOVER_TAX	NUMBER	22	3	It indicates the current yearly cumulative Amount of tax on transactions.
238	CURR_YEARLY_TURNOVER_REFUND	NUMBER	22	3	It indicates the current yearly cumulative Amount of refund transactions.
239	CURR_YEARLY_TURNOVER_DEPOSIT	NUMBER	22	3	It indicates the current yearly cumulative Amount of deposit transactions.
240	STATUS_MONTHLY_HISTORY_ADMIN	VARCHAR2	24		It indicates the monthly account administrative status history of the last and current year (One character indicating the status level at the end of cycle for each month from January to December of last and current year).
241	STATUS_MONTHLY_HISTORY_BALANCE	VARCHAR2	24		It indicates the monthly account administrative status history of the last and current year (One character indicating the status level at the end of cycle for each month from January to December of last and current year).
242	STATUS_MONTHLY_HISTORY_UNPAID	VARCHAR2	24		It indicates the monthly account unpaid status history of the last and current year (One character indicating the status level at the end of cycle for each

Seq.	Column Name	Data Type	Len	Sc	Column Description
					month from January to December of last and current year).
243	STATUS_MONTHLY_HISTORY_LAT	VARCHAR2	24		It indicates the monthly account late payment status history of the last and current year (One character indicating the status level at the end of cycle for each month from January to December of last and current year).
244	STATUS_MONTHLY_HISTORY_FAI	VARCHAR2	24		It indicates the monthly account payment incident status history of the last and current year (One character indicating the status level at the end of cycle for each month from January to December of last and current year).
245	STATUS_MONTHLY_HISTORY_PRO	VARCHAR2	24		It indicates the monthly account promise payment status history of the last and current year (One character indicating the status level at the end of cycle for each month from January to December of last and current year).
246	DATE_LAST_AUT_CREDIT	DATE	7		It indicates the last Credit authorization date.
247	DATE_LAST_AUT_CASH_TRANSFER	DATE	7		It indicates the last Cash/Transfer authorization date.
248	DATE_LAST_AUT_LOAN	DATE	7		It indicates the last Loan authorization date.
249	DATE_LAST_STATEMENT	DATE	7		It indicates the last statement date.
250	DATE_LAST_TRANSACTION	DATE	7		It indicates the last transaction date.
251	DATE_DAILY_CUTOFF_BD	DATE	7		It indicates the last daily cutoff business date.
252	DATE_DAILY_CUTOFF_SD	DATE	7		It indicates the last daily cutoff system date.
253	DAILY_CUTOFF_ID	VARCHAR2	8		It indicates the last daily cutoff process identification.
254	DATE_MONTHLY_CUTOFF_BD	DATE	7		It indicates the last cycle cutoff business date.
255	DATE_MONTHLY_CUTOFF_SD	DATE	7		It indicates the last cycle cutoff system date.
256	MONTHLY_CUTOFF_ID	VARCHAR2	8		It indicates the last cycle cutoff process identification.
257	LAST_YEARLY_CUTOFF_DATE	DATE	7		It indicates the last yearly cutoff date.
258	DATE_OF_LAST_FEE_ONCE_1_YEAR	DATE	7		It indicates the date of last yearly fee generated.
259	DATE_OF_LAST_FEE_ONCE_2_YEAR	DATE	7		It indicates the date of last 2 years fee generated.
260	DATE_OF_LAST_FEE_ONCE_3_YEAR	DATE	7		It indicates the date of last 3 years fee generated.
261	UNPAID_FEE_MONTH_NEXT_CAL	DATE	7		It indicates the next calculation date of monthly unpaid fee.
262	TERM_DUE_DATE	DATE	7		It indicates the term due date.

Seq.	Column Name	Data Type	Len	Sc	Column Description
263	TERM_OVERDUE_DATE	DATE	7		It indicates the term overdue date.
264	TERMS_UNPAID_AMOUNT	NUMBER	18	3	It indicates the unpaid terms amount.
265	TERMS_UNPAID_NBR	NUMBER	2		It indicates the number of unpaid terms.
266	TERMS_LATE_AMOUNT	NUMBER	18	3	It indicates the late payment terms amount.
267	TERMS_LATE_NBR	NUMBER	2		It indicates the number of Late payment terms.
268	NOT_DUE_TERMS_AMOUNT	NUMBER	18	3	It indicates the Not due terms amount.
269	NOT_DUE_TERMS_NB	NUMBER	2		It indicates the number of Not due terms.
270	TOTAL_NBR_UNPAID_DAYS	NUMBER	15		It indicates the total number of unpaid days.
271	CREDIT_SCORE	NUMBER	6		This column is not used in V3.5.
272	CREDIT_REQUEST_FILE_NUMBER	VARCHAR2	40		This column is not used in V3.5.
273	COLLECTION_REFERENCE	VARCHAR2	40		This column is not used in V3.5.
274	CREDIT_SCORING_REFERENCE	VARCHAR2	40		This column is not used in V3.5.
275	ACCOUNTING_REFERENCE	VARCHAR2	40		This column is not used in V3.5.
276	DEBTOR_IDENTIFIER	VARCHAR2	16		This column is not used in V3.5.
277	GEN_NEW_ACC_FEES_FLAG	CHAR	1		It indicates whether the new account fee has been generated or not. Possible values are: 'Y' = Yes, 'N' = No.
278	BILLING_BANK_SCORING_LEVEL	VARCHAR2	6		This column is not used in V3.5.
279	BILLING_BANK_CONTACT_DATE	DATE	7		This column is not used in V3.5.
280	PRIMARY_SHADOW_ACC_FLAG	CHAR	2		It indicates whether the concerned account is a primary or a secondary account. Possible values are: '1P' = Primary, '0S' = Secondary.
281	BALANCE_OF_TRANS_NFULL_IND	NUMBER	18	3	It indicates the total balance of transactions with NO full payment indicator.
282	BALANCE_OF_TRANS_FULL_IND	NUMBER	18	3	It indicates the total balance of transactions with full payment indicator.
283	STATUS_REASON_CODE	CHAR	2		It indicates the administrative status reason code. It should be defined in 'STATUS_REASON_LIST' table.
284	AGREEMENT_DATE	DATE	7		It indicates the account opening contract signature date.
285	APPLICATION_DATE	DATE	7		It indicates the account opening application date.

Seq.	Column Name	Data Type	Len	Sc	Column Description
286	DEBIT_ACCOUNT_BANK_CODE	CHAR	6		It indicates the debit account institution code. It should be defined in the 'BANK' table.
287	DEBIT_ACCOUNT_BRANCH_CODE	CHAR	6		It indicates the debit account branch code. It should be defined in the 'BRANCH' table.
288	DEBIT_ACCOUNT_NUMBER	VARCHAR2	24		It indicates the debit account number.
289	DEBIT_ENTITY_CODE	CHAR	2		It indicates the debit account entity code.
290	DEBIT_ACCOUNT_SEQUENCE	NUMBER	2		It indicates the debit account sequence with regard to the account link.
291	DEBIT_ACCOUNT_TYPE	CHAR	2		It indicates the debit account type should be defined in the 'ACCOUNT_TYPE_LIST' table.
292	NB_ACCOUNTS_LINK	NUMBER	2		It indicates the number of linked accounts.
293	ENTITY_CODE	CHAR	2		It indicates the entity code. It is fixed to 'SA' (Shadow account).
294	PRIVATE_TLV_DATA_1	VARCHAR2	128		It indicates the private TLV data.
295	CHKSECURE\$2	VARCHAR2	16		It indicates the private use field.
296	UPDATE_SHADOW_ACC_ACT_FLAG	CHAR	1		This field is reserved for internal use.
297	TOTAL_CURRENT_MIN_DUE_TRX	NUMBER	18	3	It indicates the total current minimum due transactions.
298	ADDITIONAL_DATA_1	VARCHAR2	32		It indicates the Private Additional data 1.
299	ADDITIONAL_DATA_2	VARCHAR2	32		It indicates the Private Additional data 2.
300	ADDITIONAL_DATA_3	VARCHAR2	32		It indicates the Private Additional data 3.
301	ADDITIONAL_DATA_4	VARCHAR2	32		It indicates the Private Additional data 4.
302	ADDITIONAL_DATA_5	VARCHAR2	32		It indicates the Private Additional data 5.
303	ADDITIONAL_DATA_6	VARCHAR2	32		It indicates the Private Additional data 6.
304	SENSITIVE_OPERATION_RECORD	CHAR	1		It indicates the sensitive operation record (Action Code) reserved for internal use. Possible values are: 'I' = Insertion, 'M' = Modification, 'C' = Cancellation, 'X' = Internal Usage.
305	WAIVER_LATE_PAYMENT_FEE	CHAR	1		This column is not used in V3.5.
306	WAIVER_INTEREST_FEE	CHAR	1		

Seq.	Column Name	Data Type	Len	Sc	Column Description
					This column is not used in V3.5.
307	MONTH_FIRST_OVERLIMIT_BAL	NUMBER	18	3	It indicates the first overdraft balance during the current cycle.
308	MONTH_FIRST_OVERLIMIT_BAL_AUT	NUMBER	18	3	It indicates the first over-limit authorization balance during the current cycle.
309	MONTH_FIRST_OVERLIMIT_DATE	DATE	7		It indicates the first over-limit date during the current cycle.
310	COM_YEAR	NUMBER	3		It indicates the number of days in the commercial year ('360' to '366') used for interest calculation.
311	INTEREST_METHOD	CHAR	1		This column is not used in V3.5..
312	USING_INTEREST_INDEX_RATE_IND	CHAR	1		This column is not used in V3.5..
313	SCHEDULE_INDEX	CHAR	4		This column is not used in V3.5..
314	SCHEDULE_INDEX_SD	DATE	7		This column is not used in V3.5..
315	FORMER_SCHEDULE_INDEX	CHAR	4		This column is not used in V3.5..
316	OVERLAPPING_CHANGE_CYCLE	CHAR	1		This column is not used in V3.5.
317	SPECIAL_SCHEDULE_INDEX	CHAR	4		This column is not used in V3.5.
318	SPECIAL_SCHEDULE_INDEX_SD	DATE	7		This column is not used in V3.5.
319	SPECIAL_SCHEDULE_INDEX_ED	DATE	7		This column is not used in V3.5.
320	WELCOME_SCHEDULE_INDEX	CHAR	4		This column is not used in V3.5.
321	WELCOME_SCHEDULE_INDEX_PER	NUMBER	2		This column is not used in V3.5.
322	WELCOME_SCHEDULE_INDEX_BD	CHAR	1		This column is not used in V3.5.
323	SLIPPING_RATE_FLAG	CHAR	1		This column is not used in V3.5.
324	SLIPPING_RATE_PERIOD	NUMBER	2		This column is not used in V3.5.
325	SLIPPING_AND_WELCOM_ADVANTAGE	CHAR	1		This column is not used in V3.5.
326	INTR_BASIC_AMOUNT_CRITERIA	CHAR	2		This column is not used in V3.5.
327	NO_INTEREST_CONDITION_IND	CHAR	2		This column is not used in V3.5.
328	NO_INTEREST_SPECIFIC_AMOUNT	NUMBER	15		This column is not used in V3.5.
329	RECIDIVISM_FLAG	CHAR	1		It indicates whether the account is considered as recidivist or not. Possible values are: 'Y' = Yes, when TERMS_UNPAID_NBR column's value is greater or equal to RECIDIVISM_UNPAID_THRESHOLD field's value in 'CR_PROFILE' table. 'N' = No.

Seq.	Column Name	Data Type	Len	Sc	Column Description
330	DD_AMOUNT_TYPE	CHAR	2		This field indicates the direct debit payment mode. Possible values are: 'FX' = Fixed amount (Fixed amount to be requested as a direct debit order. When specified, this amount overrides the debit amount request defined in the Account marketable product), 'MD' = Minimum due, 'PR' = Percentage of closing balance (Percentage value to be applied on the Account balance and then to be requested as a direct debit order. When specified, this amount override the debit amount request defined in the Account marketable product). Note  Depending on the chosen value, the Fixed amount and Percentage closing balance columns are activated or deactivated.
331	DD_CL_BAL_PERCENTAGE	NUMBER	9	6	Percentage closing balance.
332	STATEMENT_DELIVERY_METHOD	CHAR	3		Account's statement delivery method (Secured mail, Ordinary mail, Air mail ...). It should be defined in 'DELIVERY_METHOD' table.
333	STATEMENT_DELIVERY_SUPPLIER	CHAR	3		Account's statement delivery supplier (DHL, ARAMEX, Italian Post ...). It should be defined in 'DELIVERY_SUPPLIER_CODE' table.
334	ACCEPT_ROLLUP_FLAG	CHAR	1		This column is used only for primary account record. It indicates whether the Primary shadow account accepts roll-up from other secondary accounts or not. Possible values are: 'Y' = Yes, 'N' = No.
335	APPLY_FOR_ROLLUP_FLAG	CHAR	1		This column is used for secondary accounts and only when their primary account accepts roll-up. It indicates whether the secondary account can be subject to roll-up or not. Possible values are: 'Y' = Yes, 'N' = No.

Seq.	Column Name	Data Type	Len	Sc	Column Description
336	ROLLUP_OPTION	CHAR	2		This column is displayed for secondary accounts and only when their primary account accepts roll-up. When the APPLY_FOR_ROLLUP_FLAG flag of the secondary shadow account is set to 'Y', this column indicates the option of Secondary account roll-up to the Primary account. Possible values are: 'MD' = Minimum Due Roll-up (Minimum payment from the secondary account will be added to the primary account on the statement; Secondary account aging in case of missed payment will also be tracked), 'FB' = Full balance (Current cycle balance will be transferred to the primary account; Secondary account will behave like a full charge account; A debit sign transaction will be posted to the primary account with equivalent secondary account balance; The latter will be credited with the same amount), 'TT' = Transaction by transaction (Current cycle transactions will be transferred to the primary account transaction by transaction; Secondary account will behave like a full charge account; A credit sign transaction will be posted to the secondary account to make the balance zero).
337	CATALOGUE_OFFER	CHAR	3		Code identifying the catalogue offer. As defined in 'BOARDING_ACCOUNT_APP' table.
338	CATALOGUE_PRODUCT	CHAR	6		Code identifying the Account product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
339	CATALOGUE_PRODUCT_VERSION	VARCHAR2	10		Version of the Account product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
340	CATALOGUE_PACK	CHAR	6		Unique code identifying the pack. As defined in 'CATALOGUE_PACK' table.
341	CHASING_FLAG	CHAR	1		This column is not used in V3.5.
342	CHASING_PERIOD	NUMBER	2		
343	DEBIT_FILE_GENERATION_FLAG	CHAR	3		Possible values are: This column is not used in V3.5.
344	PDD_DEFFERMENT_DAYS	NUMBER	3		Number of delayed days after the statement date the account will be due.
345	DEFF_START_DATE	DATE	7		Date from which the deferment will start for this account.
346	DEFF_END_DATE	DATE	7		Date from which the deferment will end for this account.

Seq.	Column Name	Data Type	Len	Sc	Column Description
347	USER_CREATE	VARCHAR2	15		ID of the user when record created.
348	DATE_CREATE	DATE	7		Record creation date and time.
349	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
350	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

9.3.7 SHADOW_ACCOUNT_ACTIVITY; SHADOW_ACCOUNT_ACTIVITY_DF

Authorization Available or OTB (Open-to-Buy) is the amount of credit available at a given time on a credit account. In other words, it is the difference between the Account Balance plus Pending Authorizations, and the Credit limit.

Pending Authorization amount is the amount held at the time of authorization and placed against the Account's Open-to-Buy thereby reducing the amount of its Open-to-Buy for future transactions. These pending authorizations are matched with their corresponding transactions and released during transaction posting as these amounts are added to the Account balance.

While Authorization reversals' amounts are reversing directly the pending authorization, Transaction reversals are processed and posted onto the account balance with a "Credit sign" thereby reducing the amount of total balance and therefore increasing the OTB.

Same as Transaction reversals, Payment deposits transactions increase the OTB by decreasing the account balance but only when they are processed at the end-of-day. However, PowerCARD system supports On-line or live deposits transactions by maintaining real time deposit amounts within the account activity thereby increasing the OTB before end-of-day processing.

These live deposit amounts are released from the account activity live deposit during end-of-day transaction posting as these amounts are updated into the Account balance. Using Credit parameters function, users may set up fees generation for live deposit payment transactions.

PowerCARD system also provides a feature of Credit Account operation management function allowing the replenishment of authorizations. This is done in order to correct potential errors on the pending authorization. Amounts that may manually be corrected are:

- Pending authorization amount related to credit,
- Pending authorization amount related to cash/transfer, and
- Pending authorization amount related to loan.

PowerCARD approves authorizations against the Available/OTB (Open-to-Buy) at different levels depending on the type of transaction. The OTB is not maintained in the system but calculated at the time of authorization (real time). So, in order to calculate the OTB, the system maintains three separate balances and three separate pending authorization amounts at the account level, i.e. the Credit balance, Cash/transfer balance and Loan/EMI balance, and the Credit pending authorization, Cash/transfer pending authorization and Loan/EMI pending authorization amounts. The system also maintains the daily live payment deposit as it is only included in the Credit balance at the EOD (End of Day) processing.

Thus, depending on whether EMI limit is a part of the Credit limit or not, and depending on whether the authorization is for normal Purchase, Cash/transfer or Loan/EMI, the system processes authorizations as follows:

- Normal purchase authorizations are directly approved against the Credit OTB (Authorization amount must be less than or equal to the Credit OTB)

- Credit OTB = ((Credit limit + %OVD Overdraft allowed) – Credit balance – Pending authorizations)) + live Deposit.
- Cash/Transfer authorizations are approved against Cash OTB first before Credit OTB (Authorization amount must be less than or equal to Cash OTB and less than or equal to the Credit OTB)
- Cash OTB = (Cash limit – Cash balance – Cash Pending authorizations).
- Loan/EMI authorizations, when EMI limit is a part of the Credit limit, they are approved against EMI OTB first before Credit OTB (Authorization amount must be less than or equal to EMI OTB and less than or equal to the Credit OTB)
- EMI OTB = (EMI limit – EMI balance – EMI Pending authorizations).
- When EMI limit is separate from Credit limit, authorizations are approved only against EMI OTB (Authorization amount must be less than or equal to EMI OTB)

Records of SHADOW_ACCOUNT_ACTIVITY and SHADOW_ACCOUNT_ACTIVITY_DF tables, concern all Account activity data required for Authorization management, and both tables contains the same columns.

Refer to [Account activity section](#) in UG1021-Financial account for more details.

Each column of this table is described in detail in the next section.

9.3.7.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	SHADOW_ACCOUNT_NBR	VARCHAR2	24		Shadow account identification number. It should be defined in 'SHADOW_ACCOUNT' table.
2	BANK_CODE	CHAR	6		Financial institution code of the parameter being defined. It should be defined in the 'BANK' table.
3	CLIENT_CODE	VARCHAR2	24		Client identification code concerned. It should be defined in 'CLIENT' table.
4	CURRENCY_CODE	CHAR	3		Credit account currency code. It should be defined in 'CURRENCY_TABLE' table.
5	CREDIT_LIMIT	NUMBER	15		Credit limit at the account level. The credit limit prevails on the one defined at the credit profile level. However, this limit cannot exceed the credit limit ceiling defined at the credit profile level.
6	CASH_TRANSFER_LIMIT	NUMBER	15		The cash/transfer limit at the account level. The cash/transfer limit is defined as part of the credit limit and therefore, cannot exceed the credit limit.
7	LOAN_LIMIT	NUMBER	15		Loan limit at the account level. This loan limit can be defined as a separate limit or as part of the credit limit but cannot exceed the credit limit in any case.
8	VIP_LEVEL	CHAR	1		VIP level assigned to the client owner. It should be defined in 'VIP_LIST' table.
9	INITIAL_PROFILE_CODE	CHAR	3		The initial account profile identification code. It should be defined in 'CR_PROFILE' table.

Seq.	Column Name	Data Type	Len	Sc	Column Description
10	CURRENT_PROFILE_CODE	CHAR	3		The current account profile identification code. It should be defined in 'CR_PROFILE' table.
11	LOAN_DUE_DAY	NUMBER	2		The loan installment transaction due day. Possible values are: '0' = generate installment at loan transaction date, NULL = generate installment at statement date, '01'-'28' = generate installment in the specified day in the month.
12	BASIC_SHADOW_ACCOUNT_NUMBER	VARCHAR2	24		The primary shadow account identification number. If the concerned shadow account is a secondary account, this field should contain the corresponding primary shadow account number. It should be defined in 'SHADOW_ACCOUNT' table.
13	CREDIT_BALANCE	NUMBER	18	3	This is the total credit balance including cash/transfer and Loan balances.
14	CASH_TRANSFER_BALANCE	NUMBER	18	3	The cash/transfer balance.
15	EXTRA_LOAN_BALANCE	NUMBER	18	3	The extra loan balance
16	INTRA_LOAN_BALANCE	NUMBER	18	3	The intra loan balance.
17	PENDING_AUT_CREDIT	NUMBER	18	3	Total pending authorization credit amount.
18	PENDING_AUT_CASH_TRANSFER	NUMBER	18	3	The pending authorization Cash/transfer amount.
19	PENDING_AUT_EXTRA_LOAN	NUMBER	18	3	The pending authorization extra loan amount.
20	PENDING_AUT_INTRA_LOAN	NUMBER	18	3	The pending authorization intra loan amount.
21	LIVE_DEPOSIT	NUMBER	18	3	Live deposit.
22	INTRA_LOAN_IN_PROGRESS	NUMBER	18	3	The intra loan in progress
23	EXTRA_LOAN_IN_PROGRESS	NUMBER	18	3	The extra loan in progress
24	SUSP_CASH	NUMBER	18	3	This column is used to stock the total amount of suspended credit revolving transactions, of type cash, for which the used suspension reason asks to exclude them from OTB.
25	SUSP_NON_CASH	NUMBER	18	3	This column is used to stock the total amount of suspended credit revolving transactions, of type other than cash, for which the used suspension reason asks to exclude them from OTB.
26	LAST_PENDING_AUT_CREDIT	NUMBER	18	3	Last pending authorization credit amount.
27	LAST_PENDING_AUT_CASH_TRANSFER	NUMBER	18	3	Last pending authorization cash/transfer amount.

Seq.	Column Name	Data Type	Len	Sc	Column Description
28	LAST_AUT_EXTRA_LOAN	NUMBER	18	3	This field indicates the last authorization extra loan amount.
29	LAST_AUT_INTRA_LOAN	NUMBER	18	3	Last authorization intra-loan amount.
30	LAST_LIVE_DEPOSIT	NUMBER	18	3	This is the last Live deposit of payment transactions.
31	LAST_SUSP_CASH	NUMBER	18	3	The amount of the last suspended credit revolving transaction, of type cash, for which the used suspension reason asks to exclude it from OTB.
32	LAST_SUSP_NON_CASH	NUMBER	18	3	The amount of the last suspended credit revolving transaction, of type other than cash, for which the used suspension reason asks to exclude it from OTB.
33	DATE_LAST_AUT_CREDIT	DATE	7		Date of the last authorization credit.
34	DATE_LAST_AUT_CASH_TRANSFER	DATE	7		Date of the last authorization cash/transfer.
35	DATE_LAST_AUT_EXTRA_LOAN	DATE	7		Date of the last authorization extra loan.
36	DATE_LAST_AUT_INTRA_LOAN	DATE	7		Date of the last authorization extra loan.
37	DATE_LAST_SUSP_CASH	DATE	7		Date of the last suspended credit revolving transaction, of type cash, for which the used suspension reason asks to exclude it from OTB.
38	DATE_LAST_SUSP_NON_CASH	DATE	7		Date of the last suspended credit revolving transaction, of type other than cash, for which the used suspension reason asks to exclude it from OTB.
39	CODE_ACTION	CHAR	3		The default action code. It should be defined in 'ACTION_LIST' table.
40	LAST_CODE_ACTION	CHAR	3		The last action code. It should be defined in 'ACTION_LIST' table.
41	STATEMENT_NUMBER	VARCHAR2	12		The statement number.
42	BALANCE_1	NUMBER	18	3	The first balance.
43	BALANCE_2	NUMBER	18	3	The second balance.
44	BALANCE_3	NUMBER	18	3	Third balance.
45	BALANCE_4	NUMBER	18	3	The fourth balance.
46	F_DBSERV_ID_1	CHAR	4		First identifier of the front-end DB server. It should be defined in SWITCH_DBSERV table. Note This column is available only in V3.5.5
47	LAST_F_AUT_INT_TDT_1	DATE	7		Transmission time (time-stamp) of the last authorization processed for this account on the front-end data base.

Seq.	Column Name	Data Type	Len	Sc	Column Description
					 Note This column is available only in V3.5.5
48	LAST_F_AUT_INT_STAN_1	CHAR	6		The internal STAN (System Trace Audit Number) of the last authorization processed for this account on the front-end data base.  Note This column is available only in V3.5.5
49	F_DBSERV_ID_2	CHAR	4		Second identifier of the front-end DB server. It should be defined in SWITCH_DBSERV table.  Note This column is available only in V3.5.5
50	LAST_F_AUT_INT_TDT_2	DATE	7		Transmission time (time-stamp) of the last authorization processed for this account on the front-end data base.  Note This column is available only in V3.5.5
51	LAST_F_AUT_INT_STAN_2	CHAR	6		The internal STAN (System Trace Audit Number) of the last authorization processed for this account on the front-end data base.  Note This column is available only in V3.5.5
52	F_DBSERV_ID_3	CHAR	4		Third identifier of the front-end DB server. It should be defined in SWITCH_DBSERV table.  Note This column is available only in V3.5.5
53	LAST_F_AUT_INT_TDT_3	DATE	7		Transmission time (time-stamp) of the last authorization processed for this account on the front-end data base.

Seq.	Column Name	Data Type	Len	Sc	Column Description
					 Note This column is available only in V3.5.5
54	LAST_F_AUT_INT_STAN_3	CHAR	6		The internal STAN (System Trace Audit Number) of the last authorization processed for this account on the front-end data base.  Note This column is available only in V3.5.5
55	F_DBSERV_ID_4	CHAR	4		Fourth identifier of the front-end DB server. It should be defined in SWITCH_DBSERV table.  Note This column is available only in V3.5.5
56	LAST_F_AUT_INT_TDT_4	DATE	7		Transmission time (time-stamp) of the last authorization processed for this account on the front-end data base.  Note This column is available only in V3.5.5
57	LAST_F_AUT_INT_STAN_4	CHAR	6		The internal STAN (System Trace Audit Number) of the last authorization processed for this account on the front-end data base.  Note This column is available only in V3.5.5
58	LAST_B_AUT_INT_TDT	DATE	7		Transmission time (time-stamp) of the last authorization processed for this account on the back-office data base
59	LAST_B_AUT_INT_STAN	CHAR	6		The internal STAN (System Trace Audit Number) of the last authorization processed for this account on the back-office data base
60	CUTOFF_DATE_TIME	DATE	7		The cycle cutoff date.
61	PRIVATE_TLV_DATA	VARCHAR2	256		The Private TLV data.
62	SENSITIVE_OPERATION_RECORD	CHAR	1		The sensitive operation record (Action Code) reserved for internal use. Possible values are:

Seq.	Column Name	Data Type	Len	Sc	Column Description
					'I' = Insertion, 'M' = Modification, 'C' = Cancellation, 'X' = Internal Usage.
63	USER_CREATE	VARCHAR2	15		ID of the user when record created.
64	DATE_CREATE	DATE	7		Record creation date and time.
65	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
66	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

9.3.8 SHADOW_ACCOUNT_ACTIVITY_MVT

This table stores historical information of the shadow account activity.

Records of this tables, concern all Account activity data required for Authorization management, and both tables contains the same columns.

Each column of this table is described in detail in the next section.

9.3.8.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	ACCOUNT_NBR	VARCHAR2	24		Shadow account identification number. It should be defined in 'SHADOW_ACCOUNT' table.
2	BANK_CODE	CHAR	6		Financial institution code of the parameter being defined. It should be defined in the 'BANK' table.
3	CREDIT_LIMIT	NUMBER	15		Credit limit at the account level. The credit limit prevails on the one defined at the credit profile level. However, this limit cannot exceed the credit limit ceiling defined at the credit profile level.
4	CASH_LIMIT	NUMBER	15		Cash limit at the account level. This cash limit can be defined as a separate limit or as part of the cash limit but cannot exceed the cash limit in any case.
5	LOAN_LIMIT	NUMBER	15		Loan limit at the account level. This loan limit can be defined as a separate limit or as part of the credit limit but cannot exceed the credit limit in any case.
6	CREDIT_BALANCE	NUMBER	18	3	This is the total credit balance including cash/transfer and Loan balances.
7	CASH_BALANCE	NUMBER	18	3	The cash balance.
8	EXTRA_LOAN_BALANCE	NUMBER	18	3	The extra loan balance
9	INTRA_LOAN_BALANCE	NUMBER	18	3	The intra loan balance.
10	PENDING_CREDIT	NUMBER	18	3	Total pending credit amount.

Seq.	Column Name	Data Type	Len	Sc	Column Description
11	PENDING_CASH	NUMBER	18	3	The pending cash amount.
12	PENDING_INTRA_LOAN	NUMBER	18	3	The pending intra loan amount.
13	PENDING_EXTRA_LOAN	NUMBER	18	3	The pending extra loan amount.
14	INTRA_LOAN_IN_PROGRESS	NUMBER	18	3	The intra loan in progress
15	EXTRA_LOAN_IN_PROGRESS	NUMBER	18	3	The extra loan in progress
16	LIVE_DEPOSIT	NUMBER	18	3	Live deposit.
17	SUSP_CASH	NUMBER	18	3	This column is used to stock the total amount of suspended credit revolving transactions, of type cash, for which the used suspension reason asks to exclude them from OTB.
18	SUSP_NON_CASH	NUMBER	18	3	This column is used to stock the total amount of suspended credit revolving transactions, of type other than cash, for which the used suspension reason asks to exclude them from OTB.
19	BALANCE_1	NUMBER	18	3	The first balance.
20	BALANCE_2	NUMBER	18	3	The second balance.
21	BALANCE_3	NUMBER	18	3	Third balance.
22	BALANCE_4	NUMBER	18	3	The fourth balance.
23	LAST_SUSP_NON_CASH	NUMBER	18	3	The amount of the last suspended credit revolving transaction, of type other than cash, for which the used suspension reason asks to exclude it from OTB.
24	F_DBSERV_ID_1	CHAR	4		First identifier of the front-end DB server. It should be defined in SWITCH_DBSERV table. Note  This column is available only in V3.5.5
25	LAST_F_AUT_INT_TDT_1	DATE	7		Transmission time (time-stamp) of the last authorization processed for this account on the front-end data base. Note  This column is available only in V3.5.5
26	LAST_F_AUT_INT_STAN_1	CHAR	6		The internal STAN (System Trace Audit Number) of the last authorization processed for this account on the front-end data base. Note  This column is available only in V3.5.5

Seq.	Column Name	Data Type	Len	Sc	Column Description
27	F_DBSERV_ID_2	CHAR	4		Second identifier of the front-end DB server. It should be defined in SWITCH_DBSERV table. Note This column is available only in V3.5.5
28	LAST_F_AUT_INT_TDT_2	DATE	7		Transmission time (time-stamp) of the last authorization processed for this account on the front-end data base. Note This column is available only in V3.5.5
29	LAST_F_AUT_INT_STAN_2	CHAR	6		The internal STAN (System Trace Audit Number) of the last authorization processed for this account on the front-end data base. Note This column is available only in V3.5.5
30	F_DBSERV_ID_3	CHAR	4		Third identifier of the front-end DB server. It should be defined in SWITCH_DBSERV table. Note This column is available only in V3.5.5
31	LAST_F_AUT_INT_TDT_3	DATE	7		Transmission time (time-stamp) of the last authorization processed for this account on the front-end data base. Note This column is available only in V3.5.5
32	LAST_F_AUT_INT_STAN_3	CHAR	6		The internal STAN (System Trace Audit Number) of the last authorization processed for this account on the front-end data base. Note This column is available only in V3.5.5
33	F_DBSERV_ID_4	CHAR	4		Fourth identifier of the front-end DB server. It should be defined in SWITCH_DBSERV table.

Seq.	Column Name	Data Type	Len	Sc	Column Description
					 Note This column is available only in V3.5.5
34	LAST_F_AUT_INT_TDT_4	DATE	7		Transmission time (time-stamp) of the last authorization processed for this account on the front-end data base.  Note This column is available only in V3.5.5
35	LAST_F_AUT_INT_STAN_4	CHAR	6		The internal STAN (System Trace Audit Number) of the last authorization processed for this account on the front-end data base.  Note This column is available only in V3.5.5
36	LAST_B_AUT_INT_TDT	DATE	7		Transmission time (time-stamp) of the last authorization processed for this account on the back-office data base
37	LAST_B_AUT_INT_STAN	CHAR	6		The internal STAN (System Trace Audit Number) of the last authorization processed for this account on the back-office data base
38	CUTOFF_DATE_TIME	DATE	7		The cycle cutoff date.
39	PRIVATE_TLV_DATA	VARCHAR2	256		The Private TLV data.
40	STATUS_CODE	CHAR	1		Account activity status code. Possible values are: 'N' = Normal, 'S' = Suspended.
41	STATUS_DATE	DATE	7		Account activity status date.
42	USER_CREATE	VARCHAR2	15		ID of the user when record created.
43	DATE_CREATE	DATE	7		Record creation date and time.
44	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
45	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

10 Issuer general parameters

10.1 STATUS_LIST

This table is used to store the parameters for the management of different entities status (Payment instrument, client, corporate, Financial account...) status. The values cannot be changed unlike the wording.


Note

The data stored on the table is initially loaded during PowerCARD implementation. It may be updated during maintenance and support activity.

Refer to "[Status list](#)" section in UG1115-Issuer general parameters user's guide for more details.

Each column of this table is described in detail in the next section.

10.1.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the status code is set. It should be already defined in the 'BANK' table.
2 	STATUS_CODE	CHAR	1		Code identifying the status.
3	ABRV_WORDING	VARCHAR2	16		Shortened description of the status used for information, for reporting or on other screens and tables.
4	WORDING	VARCHAR2	32		Brief description of the status.
5	NORMAL_FLAG	CHAR	1		This column specifies whether the concerned status is valid or not in case it is involved in the authorization decision. Possible values are: 'Y' = The status is considered as valid in the system, 'N' = The authorization will be declined If the status is involved in the authorization decision.
6	CH_ENTITY	CHAR	1		This column is used to define whether the Cardholder entity is concerned by this status setting or not. Possible values are: 'Y' = Yes, 'N' = No.
7	MC_ENTITY	CHAR	1		This column is used to define whether the Merchant entity is concerned by this status setting or not. Possible values are: 'Y' = Yes,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'N' = No.
8	MT_ENTITY	CHAR	1		This column is used to define whether the Merchant account entity is concerned by this status setting or not. Possible values are: 'Y' = Yes, 'N' = No.
9	CL_ENTITY	CHAR	1		This column is used to define whether the Client entity is concerned by this status setting or not. Possible values are: 'Y' = Yes, 'N' = No.
10	OL_ENTITY	CHAR	1		This column is used to define whether the Outlet entity is concerned by this status setting or not. Possible values are: 'Y' = Yes, 'N' = No.
11	CA_ENTITY	CHAR	1		This is used to define whether the Chain entity is concerned by this status setting or not. Possible values are: 'Y' = Yes, 'N' = No.
12	CT_ENTITY	CHAR	1		This is used to define whether the Chain Account entity is concerned by this status setting or not. Possible values are: 'Y' = Yes, 'N' = No.
13	CO_ENTITY	CHAR	1		This is used to define whether the Corporate entity is concerned by this status setting or not. Possible values are: 'Y' = Yes, 'N' = No.
14	NL_ENTITY	CHAR	1		This is used to define whether the Channel entity is concerned by this status setting or not. Possible values are: 'Y' = Yes, 'N' = No.
15	SA_ENTITY	CHAR	1		This is used to define whether the financial account entity is concerned by this status setting or not. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'Y' = Yes, 'N' = No.
16	PB_ENTITY	CHAR	1		This is used to define whether the Partner Brand entity concerned by with this status setting or not. Possible values are: 'Y' = Yes, 'N' = No.
17	TA_ENTITY	CHAR	1		This is used to define whether the Terminal ATM entity is concerned by this status setting or not. Possible values are: 'Y' = Yes, 'N' = No.
18	TP_ENTITY	CHAR	1		This is used to define whether the Terminal POS entity is concerned by this status setting or not. Possible values are: 'Y' = Yes, 'N' = No.
19	IT_ENTITY	CHAR	1		This is used to define whether the Institution entity is concerned by this status setting or not. Possible values are: 'Y' = Yes, 'N' = No.
20	BA_ENTITY	CHAR	1		This is used to define whether the Bank Account entity is concerned by this status setting or not. Possible values are: 'Y' = Yes, 'N' = No.
21	PA_ENTITY	CHAR	1		This is used to define whether the PAN additional service entity is concerned by this status setting or not. Possible values are: 'Y' = Yes, 'N' = No.
22	AA_ENTITY	CHAR	1		This is used to define whether the Account additional service entity is concerned by this status setting or not. Possible values are: 'Y' = Yes, 'N' = No.
23	VH_ENTITY	CHAR	1		This is used to define whether the VH service entity is concerned by this status setting or not.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Possible values are: 'Y' = Yes, 'N' = No.
24	DV_ENTITY	CHAR	1		This is used to define whether the DV service entity is concerned by this status setting or not. Possible values are: 'Y' = Yes, 'N' = No.
25	MULTI_LANG_ID	NUMBER	10		Multi-language ID. It should exist in 'MULTI_LANG_VALUES' table.
26	USER_CREATE	VARCHAR2	15		ID of the user when record created.
27	DATE_CREATE	DATE	7		Record creation date and time.
28	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
29	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

11 Loan

11.1 Operation tables

11.1.1 CR_LOAN

In PowerCARD, Loans may be captured directly into the system or initiated either as a result of balance manual conversion or as a result of normal Credit transaction manually converted to loan. Whether for loan balance conversion or for manual transaction conversion, loans are granted according to the Account / Customer loan limit and Account / Customer overall Credit limit.

In general, the Customer initially makes a purchase transaction of a Product predefined by the financial institution as eligible to loan or the financial institution agreed to convert a normal transaction to loan upon Customer request. In both cases, Transaction amount is called the Capital. As the main characteristic of a loan is to be paid back by the customer in regular equal payments called Installments, the Interest if applied, is calculated upfront. Additional insurances and taxes can be also generated depending on the parameter setup in PowerCARD.

This table is used to store and maintain the different loans in the system. Records of this table, concern all Loan transaction data required for loan management.

Refer to [Loan list views](#) section in UG1045-Loan management user's guide for more details.

Each column of this table is described in detail in the next section.

11.1.1.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1 	MICROFILM_REF_NUMBER	CHAR	23		Loan transaction reference number.
2 	MICROFILM_REF_SEQ	NUMBER	4		Microfilm reference sequence. Used to differentiate between transactions having the same reference number.
3	SHADOW_ACCOUNT_NBR	VARCHAR2	24		Shadow account identification number concerned by the loan. It should be defined in 'SHADOW_ACCOUNT' table.
4	BANK_CODE	CHAR	6		Financial institution of the credit loan. It should be defined in the 'BANK' table.
5	BRANCH_CODE	CHAR	6		Branch code concerned by the credit loan. It should be defined in 'BRANCH' table.
6	APPLICATION_ID	VARCHAR2	24		Application identification number. As defined in 'BOARDING_CARD_APP' table.
7	APPLICATION_CONTRACT_ID	VARCHAR2	24		Application identification number of the contract.
8	LOAN_TYPE	CHAR	1		Type of the loan. Possible values are: 'L' = Loan Over the Phone (LOP), the standalone loan that is provided to the customer via cash or check, 'E' = Easy Payment Plan (EPP), the conversion of an existing transaction to loan,

Seq.	Column Name	Data Type	Len	Sc	Column Description
					'B' = Balance Conversion (Forbearance), the conversion of an existing account balance to a loan. This field must be defined in 'LOAN_PROGRAM' table.
9	LOAN_DESCRIPTION	VARCHAR2	128		Description of loan type.
10	LOAN_FININCING	CHAR	1		This option indicates whether a loan under the program being defined is managed within the credit limits and credit balance or managed within the extra loan limits and extra loan balance. Possible values are: 'I' = Intra (The loan under the program being defined is managed within the Credit limits and Credit balance), 'E' = Extra (The loan under the program being defined is managed within the Extra loan limits and Extra loan balance).
11	PROGRAM_ID	VARCHAR2	8		Loan program identification. It must be present in 'LOAN_PROGRAM' table.
12	CATALOGUE_OFFER	CHAR	3		Code identifying the catalog offer. As defined in 'BOARDING_LOAN_APP' table.
13	CATALOGUE_PRODUCT	CHAR	6		Code identifying the loan catalog product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
14	CATALOGUE_PRODUCT_VERSION	VARCHAR2	10		Version of the loan catalog product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table
15	CATALOGUE_PACK	CHAR	6		Unique code identifying the pack as defined in 'CATALOGUE_PACK' table.
16	CLIENT_CODE	VARCHAR2	24		Client identification code concerned. It should be defined in 'CLIENT' table.
17	CARD_NUMBER	VARCHAR2	22		This is the PAN of the payment instrument concerned by the loan transaction. It should be defined in 'CARD' table.
18	CARD_NUMBER_SEQUENCE	NUMBER	3		PAN sequence number.
19	CORPORATE_ID	VARCHAR2	15		Corporate ID in case of a corporate account. It should be defined in 'CORPORATE' table.
20	PRODUCT_CODE	CHAR	3		Product code of the payment instrument concerned by the loan transaction. It should be defined in the 'CARD_PRODUCT' table.
21	PRODUCT_TYPE	CHAR	2		Product type of the payment instrument concerned by the loan transaction. Possible values are: 'DC' = Debit,

Seq.	Column Name	Data Type	Len	Sc	Column Description
					'CC' = Charge, 'CR' = Credit, 'PP' = Prepaid card.
22	PROFILE_CODE	CHAR	3		Account profile identification code. It should be defined in 'CR_PROFILE' table.
23	CUSTOMER_SEGMENT	CHAR	3		Customer segment code. It should be defined in 'CUSTOMER_SEGMENT' table.
24	ORIGIN_CODE	CHAR	1		This is the loan transaction origin code. Possible values are: '0' = ONUS card / local merchant, '1' = ONUS card / local other bank merchant, '2' = ONUS card / foreign merchant, '3' = Local other bank card / local merchant, '4' = Foreign card / local merchant.
25	OWNER_CODE	CHAR	2		Owner code. It should be defined in 'OWNER_LIST' table.
26	OWNER_CATEGORY	CHAR	1		Category of the owner. Possible values are: 'I' = Individual, 'B' = Business, 'S' = Staff, 'P' = Professional, 'N' = Company, 'C' = Corporate, 'T' = Travel, 'L' = International corporate, 'R' = Procurement, 'X' = Others1, 'Y' = Others2, 'Z' = Others3.
27	MERCHANT_NUMBER	VARCHAR2	15		The merchant identification number of the transaction converted to loan. It should be defined in 'MERCHANT' table.
28	CHAIN_CODE	VARCHAR2	15		The chain identification code of the transaction converted to loan. It should be defined in 'CHAIN' table.
29	OUTLET_NUMBER	VARCHAR2	15		The acceptor point identification number of the transaction converted to loan.
30	TERMINAL_ID	VARCHAR2	15		Terminal identification number of the transaction converted to loan.

Seq.	Column Name	Data Type	Len	Sc	Column Description
31	ACRONYM	VARCHAR2	40		The merchant acronym of the transaction converted to loan.
32	COUNTRY_CODE	CHAR	3		The merchant country code as defined in 'COUNTRY' table.
33	CITY_CODE	CHAR	5		The merchant city code. It should be previously defined in 'CITY' table.
34	CITY_NAME	VARCHAR2	30		Merchant city name.
35	MCC	CHAR	4		Merchant category code.
36	ORIGINAL_TRANSACTION_CODE	CHAR	2		Transaction code of the original transaction subject to loan conversion. It should be defined in 'CR_TRANSACTION_PARAMETER' table.
37	ORIGINAL_REVERSAL_FLAG	CHAR	1		The original transaction reversal flag. Possible values are: 'N' = Normal, 'R' = Reversal.
38	REVERSAL_FLAG	CHAR	1		This flag indicates whether the current loan transaction is a 'Normal' or 'Reversal' transaction Possible values are: 'N' = Normal, 'R' = Reversal.
39	TRANSACTION_SIGN	CHAR	1		The loan transaction sign. Possible values are: 'D' = Debit, 'C' = Credit.
40	TRANSACTION_DATE	DATE	7		The date on which the loan transaction occurs.
41	REMITTANCE_DATE	DATE	7		The loan transaction batch (Remittance) date.
42	PROCESSING_DATE	DATE	7		The loan transaction processing date.
43	DUE_DATE	DATE	7		The loan transaction due date.
44	STATEMENT_DATE	DATE	7		The loan transaction statement date.
45	TRANSACTION_AMOUNT	NUMBER	18	3	The loan transaction amount expressed in transaction currency.
46	TRANSACTION_CURRENCY	CHAR	3		Transaction currency code. It should be defined in 'CURRENCY_TABLE' table.
47	TRANSACTION_CURRENCY_EXP	NUMBER	1		Transaction currency exponent.
48	RECONCILIATION_AMOUNT	NUMBER	18	3	The loan reconciliation amount.
49	RECONCILIATION_CURRENCY	CHAR	3		The loan reconciliation currency code. It should be defined in 'CURRENCY_TABLE' table.
50	RECONCILIATION_CURRENCY_EXP	NUMBER	1		The loan reconciliation currency exponent.

Seq.	Column Name	Data Type	Len	Sc	Column Description
51	INSTALLMENT_AMOUNT	NUMBER	18	3	The loan installment amount to be paid off.
52	INSTALLMENT_CURRENCY	CHAR	3		The installment currency code. It should be defined in 'CURRENCY_TABLE' table.
53	INSTALLMENT_PRINCIPAL_AMOUNT	NUMBER	18	3	The installment principal amount.
54	INSTALLMENT_INTEREST_AMOUNT	NUMBER	18	3	The installment interest amount.
55	INSTALLMENT_TAX1	NUMBER	18	3	The installment tax1 amount.
56	INSTALLMENT_TAX2	NUMBER	18	3	The installment tax2 (Fund tax) amount.
57	TAX_1_RATE	NUMBER	5	2	This is the first tax rate.
58	TAX_2_RATE	NUMBER	5	2	This is the second tax rate.
59	CHANGE_DIFFERENCE	NUMBER	18	3	This field indicates the difference of change between first and last definitive conversion. Note  Applicable only when LOAN_TYPE = 'E' (Easy Payment Plan - EPP)
60	INSTALLMENT_MONTH_STARTED_	NDNUMBER	1		This column is reserved for internal use.
61	NUMBER_PRODUCT_GROUP	NUMBER	2		When applicable, this column indicates the number of product -group subject of purchase transaction.
62	PRODUCT_GROUP_01	VARCHAR2	15		When applicable, this column indicates the reference of Product group 01. It should be defined in 'LIST_PRODUCT' table.
63	PRODUCT_GROUP_02	VARCHAR2	15		When applicable, this column indicates the reference of Product group 02. It should be defined in 'LIST_PRODUCT' table.
64	PRODUCT_GROUP_03	VARCHAR2	15		When applicable, this column indicates the reference of Product group 03. It should be defined in 'LIST_PRODUCT' table.
65	PRODUCT_GROUP_04	VARCHAR2	15		When applicable, this column indicates the reference of Product group 04. It should be defined in 'LIST_PRODUCT' table.
66	PRODUCT_GROUP_05	VARCHAR2	15		When applicable, this column indicates the reference of Product group 05. It should be defined in 'LIST_PRODUCT' table.
67	NUMBER_OF_TERMS	NUMBER	3		This is the initial number of installments which means the loan period.
68	REBATE	NUMBER	9	6	When applicable, this column indicates the interest rebate rate.

Seq.	Column Name	Data Type	Len	Sc	Column Description
69	INTEREST_INDEX	CHAR	3		This is the interest schedule index. It should be defined in 'CR_SCHEDULE' table.
70	INTEREST_RATE	NUMBER	9	6	This is the loan interest rate.
71	LOAN_DUE	NUMBER	18	3	This is the loan due calculated during the early settlement process.
72	NUMBER_TERMS_DUE	NUMBER	3		This is to indicates the number of due terms.
73	LOAN_START_DATE	DATE	7		Date when the first installment should be paid.
74	LOAN_END_DATE	DATE	7		Date when the last installment should be paid.
75	NEXT_TERM_DATE	DATE	7		Date when the next term should be paid.
76	LOAN_POSTING	CHAR	1		It indicates the loan posting indicator. Possible values are: 'P' = Posted to the account, 'W' = Waiting for posting.
77	LOAN_STATUS	CHAR	1		The loan status. Possible values are: 'O' = Ongoing, 'S' = Suspended, 'R' = Reversed, 'A' = Amortized, 'P' = Procurement, 'N' = No action, 'F' = Early settled, 'H' = Rescheduled, 'W' = Early closed.
78	TYPE_OF_INTEREST	CHAR	3		The interest calculation method as defined in 'LOAN_PROGRAM' table. Possible values are: 'MFF' = Monthly fix fee, 'MFT' = Monthly fee by tier, 'EMI' = Equal monthly installment, 'EPI' = Equal principal installment.
79	EARLY_SETTLEMENT_PAYMENT_DATE	DATE	7		When applicable, this column indicates the early settlement payment date.
80	EARLY_SETTLEMENT_AMOUNT	NUMBER	18	3	When applicable, this column indicates the early settlement amount.
81	EARLY_SETTLEMENT_TO_BE_PAID	NUMBER	18	3	When applicable, this column indicates the early settlement amount to be paid.
82	AUTHORIZATION_NUMBER	CHAR	6		The authorization number of the original transaction converted to loan.

Seq.	Column Name	Data Type	Len	Sc	Column Description
83	AUTHORIZATION_CURRENCY	CHAR	3		The authorization currency code of the original transaction converted to loan.
84	AUTHORIZATION_AMOUNT	NUMBER	18	3	The authorization amount of the original transaction converted to loan.
85	AUTHORIZATION_MATCH_FLAG	CHAR	1		The matching status of the original transaction converted to loan. Possible values are: 'Y' = Matched, 'N' = Not matched.
86	PRIVATE_DATA_1	DATE	7		This is the first private data.
87	PRIVATE_DATA_2	DATE	7		This is the second private data.
88	PRIVATE_DATA_3	NUMBER	18	3	This is the third private data.
89	PRIVATE_DATA_4	NUMBER	18	3	This is the fourth private data.
90	PRIVATE_DATA_5	VARCHAR2	16		This is the fifth private data.
91	PRIVATE_DATA_6	VARCHAR2	64		This is the sixth private data.
92	CURRENT_TABLE_NAME	CHAR	3		The current table name. Possible values are: 'CUR' = Current loan transaction table, 'HST' = Historic loan transaction table.
93	SETTLEMENT_CUTOFF_ACC	VARCHAR2	8		It indicates the Accounting cutoff processing ID.
94	SETTLEMENT_CUTOFF_CRD	VARCHAR2	8		It indicates the Credit revolving cutoff processing ID.
95	SETTLEMENT_CUTOFF_OUTG	VARCHAR2	8		It indicates the Outgoing cutoff processing ID.
96	SETTLEMENT_CUTOFF_MER	VARCHAR2	8		It indicates the Merchant account cutoff processing ID.
97	SETTLEMENT_CUTOFF_IS	VARCHAR2	8		It indicates the Information system cutoff processing ID.
98	SETTLEMENT_CUTOFF_STAT	VARCHAR2	8		It indicates the Statistics cutoff processing id.
99	SETTLEMENT_CUTOFF_RISK	VARCHAR2	8		It indicates the Risk management cutoff processing id.
100	SETTLEMENT_CUTOFF_SCO	VARCHAR2	8		It indicates the Collection/Scoring cutoff processing ID.
101	SETTLEMENT_CUTOFF_INC	VARCHAR2	8		It indicates the Incoming cutoff processing ID.
102	SETTLEMENT_CUTOFF_BANK	VARCHAR2	8		It indicates the Bank cutoff processing ID.
103	SETTLEMENT_FLAG_ACC	CHAR	1		This flag indicates whether the cutoff is processed or not. Possible values are: 'N' = Not yet processed, 'Y' = Processed.

Seq.	Column Name	Data Type	Len	Sc	Column Description
104	SETTLEMENT_FLAG_CRD	CHAR	1		This flag indicates whether the credit revolving cutoff is processed or not. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
105	SETTLEMENT_FLAG_OUTG	CHAR	1		This flag indicates whether the outgoing cutoff is processed or not. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
106	SETTLEMENT_FLAG_MER	CHAR	1		This flag indicates whether the merchant account cutoff is processed or not. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
107	SETTLEMENT_FLAG_IS	CHAR	1		This flag indicates whether the information system cutoff is processed or not. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
108	SETTLEMENT_FLAG_STAT	CHAR	1		This flag indicates whether the statistics cutoff is processed or not. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
109	SETTLEMENT_FLAG_RISK	CHAR	1		This flag indicates whether the risk management cutoff is processed or not. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
110	SETTLEMENT_FLAG_SCO	CHAR	1		This flag indicates whether the collection/scoring cutoff processed or not. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
111	SETTLEMENT_FLAG_INC	CHAR	1		This flag indicates whether the incoming cutoff is processed or not. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
112	SETTLEMENT_FLAG_BANK	CHAR	1		This flag indicates whether the institution cutoff is processed or not.

Seq.	Column Name	Data Type	Len	Sc	Column Description
					Possible values are: 'N' = Not yet processed, 'Y' = Processed.
113	SENSITIVE_OPERATION_RECORD	CHAR	1		This column is reserved for internal use.
114	USER_CREATE	VARCHAR2	15		ID of the user when record created.
115	DATE_CREATE	DATE	7		Record creation date and time.
116	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
117	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

12 Loyalty

12.1 Conceptual data model

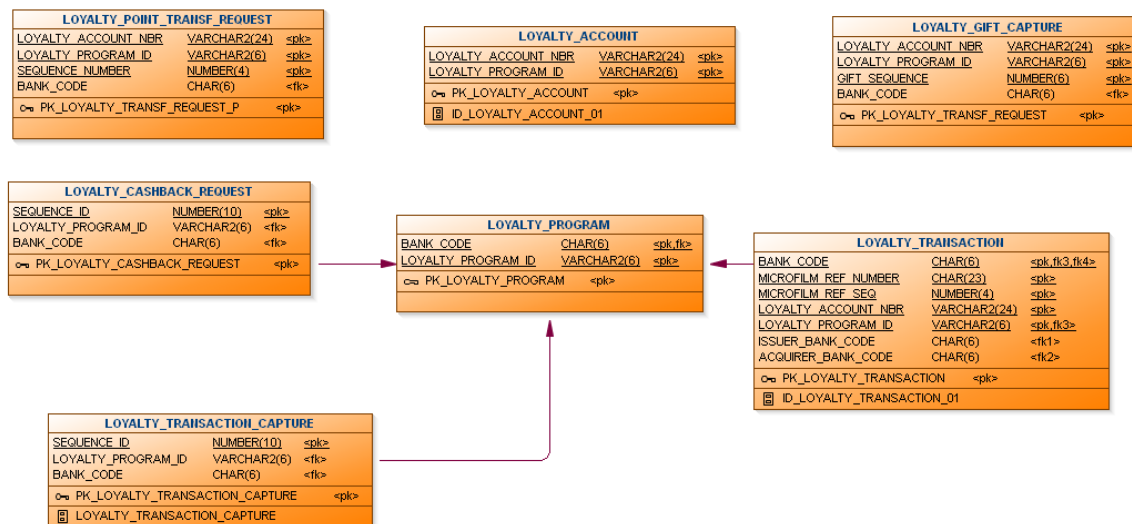


Figure 3: Loyalty management (CDM)

12.2 Parameter tables

12.2.1 LOYALTY GIFT

Gifts are defined by Gift code through a PowerCARD provided GUI function. Gift definition data include Gift description, Constructor name, Constructor address, Provider name, Provider address and the Gift Category. These are stored into this table .

'LOYALTY GIFT' table contains the list of gift codes available for the loyalty programs.

This table contains such element as:

- Bank
- Gift code
- Conversion rate
- Currency
- Etc.

Each column of this table is described in detail in the next section.

12.2.1.1 Columns description

Seq.	Column Name	Data type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution code concerned by the schedule index. It should be previously defined in the 'BANK' table.
2 	GIFT_CODE	VARCHAR2	6		This is the code identifying the gift for the bank. This code is used to link the gift to different loyalty programs offering redemption by gift option.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
3	ABRV_DESCRIPTION	VARCHAR2	16		This is the abbreviated description of the gift
4	DESCRIPTION	VARCHAR2	80		This is the description of the gift
5	CONSTRUCTOR_NAME	VARCHAR2	26		Name of the constructor liable for the loyalty gift being defined.
6	CONSTRUCTOR_ADDRESS	VARCHAR2	26		Address of the loyalty gift constructor
7	PROVIDER_NAME	VARCHAR2	26		Name of the entity responsible of providing the loyalty gift being defined.
8	PROVIDER_ADDRESS	VARCHAR2	26		Address of the loyalty gift provider.
9	GIFT_TYPE	CHAR	2		This is the category of the loyalty gift being defined in 'LOYALTY_GIFT_CATEGORY' table.
10	USER_CREATE	VARCHAR2	15		ID of the user when record created.
11	DATE_CREATE	DATE	7		Record creation date and time.
12	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
13	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

12.2.2 LOYALTY_PROGRAM

This table contains the necessary parameters to process a loyalty product. A sample of these parameters are:

- The loyalty type (Cash-back, Fee-back, ...),
- Points or amount boosters,
- Points or amount validity period,
- Automatic redemption,
- Automatic capping of points or amount.

Refer to [Loyalty product setup](#) section in UG1019-Catalogue for more details.

Each column of this table is described in detail in the next section.

12.2.2.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		This is the financial institution for which the program is being defined. It must be defined in 'BANK' table.
2 	LOYALTY_PROGRAM_ID	VARCHAR2	6		Loyalty program identification code.
3	ABRV_PROGRAM_NAME	VARCHAR2	16		The abbreviated wording of program name.
4	PROGRAM_NAME	VARCHAR2	32		The name of loyalty program.
5	STARTING_DATE_OF_PROGRAM	DATE	7		The loyalty program start date. It is the date from which the loyalty program becomes effective.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
6	ENDING_DATE_OF_PROGRAM	DATE	7		This is the loyalty program end date. It is the date on which the loyalty program expires.
7	CARDHOLDER_FLAG	CHAR	1		This flag indicates if this loyalty product applies for cardholders or not. Possible values are: 'Y' = Yes (By default), 'N' = No.
8	CORPORATE_FLAG	CHAR	1		This flag indicates if this loyalty product applies for corporates or not. Possible values are: 'Y' = Yes, 'N' = No (By default).
9	CARD_CHANNEL_FLAG	CHAR	1		This flag indicates if this loyalty product applies for payment instrument's channels or not. Possible values are: 'Y' = Yes, 'N' = No (By default).
10	MERCHANT_FLAG	CHAR	1		This flag indicates if this loyalty product applies for merchants or not. Possible values are: 'Y' = Yes, 'N' = No (By default).
11	CHAIN_FLAG	CHAR	1		This flag indicates if this loyalty product applies for chains or not. Possible values are: 'Y' = Yes, 'N' = No (By default).
12	MERCHANT_CHANNEL_FLAG	CHAR	1		This flag indicates if this loyalty product applies for merchant's channels or not. Possible values are: 'Y' = Yes, 'N' = No (By default).
13	CURRENCY_CODE_REFERENCE	CHAR	3		This is the currency code of the loyalty program. It must be defined in 'CURRENCY_TABLE' table.
14	MULTIPLIER_CODE	NUMBER	9	6	The loyalty program multiplier value. This promotional multiplier is used for loyalty points or amount calculation within the promotional period delimited by the start and end dates defined below (If for example the multiplier value is set to '2', the points earned from this program during the promotional period is multiplied by 2).
15	MULTIPLIER_START_DATE	DATE	7		This is the start date of the promotional multiplier for exceptional loyalty points or amount calculation.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
16	MULTIPLIER_END_DATE	DATE	7		This is the end date of the promotional multiplier for exceptional loyalty points or amount calculation.
17	LOYALTY_EXPIRY_CODE	CHAR	1		The validity of loyalty point gained. Possible values are: 'P' = Permanent (the loyalty points accumulated based on this program are permanent and it will not expire), 'S' = Valid for period value (the loyalty points accumulated based on this program are valid for specific period defined by a number of days from the point earned date. When this option is selected the VALIDITY_PERIOD field below should be defined).
18	PURGE_FREQUENCY	CHAR	1		This column is not used in V3.5.
19	VALIDITY_PERIOD	NUMBER	4		This is a value indicating the number of days the loyalty point is valid. Mandatory only if LOYALTY_EXPIRY_CODE = 'S' (Valid for period value).
20	PURGE_PERIOD_1	DATE	7		This column is not used in V3.5.
21	PURGE_PERIOD_2	DATE	7		This column is not used in V3.5.
22	PURGE_PERIOD_3	DATE	7		This column is not used in V3.5.
23	PURGE_PERIOD_4	DATE	7		This column is not used in V3.5.
24	BALANCE_NEGATIVE_REV_IND	CHAR	1		This flag indicates if negative balance will be allowed in case of reversal or not. Possible values are: 'Y' = Yes, 'N' = No (By default).
25	BALANCE_NEGATIVE_PEN_IND	CHAR	1		This flag indicates if negative balance will be allowed in case of penalty or not. Possible values are: 'Y' = Yes, 'N' = No (By default).
26	PROGRAM_PRIORITY	NUMBER	2		The priority of the loyalty catalog product. In case the eligible entity account is enrolled to more than one loyalty catalog products, this priority determines which one is to be considered for points calculation.  Note This field is defaulted to 1.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
27	PROGRAM_STATUS	CHAR	1		This is the loyalty program status. Possible values are: 'E' = Exclusive (Program of highest priority), 'N' = Normal by transaction (Normal cumulative loyalty program by transaction; points are generated by batch processing on daily basis), 'B' = Normal by balance (Normal cumulative loyalty program by balance; points are generated by batch processing at each End-of-Cycle), 'C' = Canceled (Loyalty program canceled).  Note This column is defaulted to 'N' (Normal by transaction).
28	REDEMPTION_OPTION	CHAR	1		This column indicates if redemption is supported by this loyalty program and how. Possible values are: 'N' = Redemption value not managed (Loyalty program does not support redemption), 'M' = Managed (Loyalty program supports redemption), 'C' = Managed with credit to merchant.  Note This column is defaulted to 'M' (Managed).
29	CHARGING_MODE	CHAR	1		The charging mode. Possible values are: 'P' = By point (By default), 'V' = By value of point.
30	CHARGING_EVENT	CHAR	1		This code specifies when the partner's will be debited in order to credit the Merchant. Possible values are: 'T' = Transaction (When transaction is processed), 'R' = Redemption (When the points are used).  Note This column is defaulted to 'T' (Transaction).
31	REDEMPTION_VALUE_ORIGIN	CHAR	1		The redemption type supported by this loyalty program. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'G' = By gift (Program supports redemption by gift), 'R' = By point (Program supports redemption by point), 'P' = By point value (Program supports redemption by value of point).  Note This column is defaulted to 'R' (By point).
32	PARTNER_POSTING_D_PERCENT	NUMBER	9	6	The debit charge rate of co-brander.  Note It is defaulted to '0'.
33	MERCHANT_POSTING_D_PERCENT	NUMBER	9	6	This field defines the debit charge rate of merchant.  Note It is defaulted to '0'.
34	BANK_POSTING_D_PERCENT	NUMBER	9	6	The debit charge rate of issuer institution.  Note It is defaulted to '0'.
35	PARTNER_POSTING_C_PERCENT	NUMBER	9	6	The credit charge rate of co-brander.  Note It is defaulted to '0'.
36	MERCHANT_POSTING_C_PERCENT	NUMBER	9	6	The credit charge rate of merchant.  Note It is defaulted to '0'.
37	BANK_POSTING_C_PERCENT	NUMBER	9	6	The credit charge rate of issuer institution.  Note It is defaulted to '0'.
38	CYCLE_CONSUMPTION_BONUS	NUMBER	9		This column is not used in V3.5.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
39	CYCLE_CONSUMPTION	NUMBER	9		This column is not used in V3.5.
40	TRX_INACTIVE_MONTH	NUMBER	2		This column is not used in V3.5.
41	LOYALTY_TYPE	CHAR	2		The type of loyalty product. Possible values are: 'CB' = Cash back, 'FB' = Fee back, 'ML' = Miles, 'PT' = Points.
42	TRANSACTION_CODE	CHAR	2		The transaction code to post the cash-back or/and fee-back credit transaction to the customer. Note  By default, this column's value must be set to 'CB' for Cash back loyalty product and to 'FB' for Fee back loyalty product.
43	LOYALTY_TRANSACTION_CODE	CHAR	2		Transaction code to post the adjustment to the loyalty account.
44	ACCUMULATION_THRESHOLD	NUMBER	18		This is the amount past which the account is eligible for automatic redemption on redemption end date.
45	REDEMPTION_PERIOD	NUMBER	3		The number of months/cycles at the end of which the automatic redemption is triggered.
46	FEEDBACK_TYPE	CHAR	2		The loyalty program fee-back type. Possible values are: 'AF' = Annual fees, 'IF' = Initial fees. Note  This column is applicable only when the LOYALTY_TYPE field is set to 'FB' (Fee back).
47	CASHBACK_RATE	NUMBER	9		The rate will be used to calculate the cash back amount based on the converted balance point of the customer. Applicable only when the loyalty program type is Cash back.
48	CAPPING_PERIOD	CHAR	2		The period during which the points will stop getting accumulated if the total of earned points reaches or exceeds the MAXIMUM_POINTS field defined and described below. Possible values are: 'AC' = Account cycle, 'CM' = Calender month,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'CQ' = Calender quarter, 'CS' = Account semester, 'CY' = Account year.
49	MAXIMUM_POINTS	NUMBER	18		Threshold post which the accumulation will be stopped and this is within the CAPPING_PERIOD field described above.
50	USER_CREATE	VARCHAR2	15		ID of the user when record created.
51	DATE_CREATE	DATE	7		Record creation date and time.
52	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
53	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

12.3 Operation tables

12.3.1 LOYALTY_ACCOUNT

This table contains the summary of loyalty activity such as:

- Earned points,
- Accrued points,
- Redeemed points,
- Expired points,
- Adjusted points,
- Last redemption date.

Refer to "[Loyalty account view and operations](#)" section in UG1016-Loyalty management user's guide for more details.

Each column of this table is described in detail in the next section.

12.3.1.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	BANK_CODE	CHAR	6		The institution code of the loyalty account. It must be declared in 'BANK' table
2	BRANCH_CODE	CHAR	6		Branch code of the loyalty account. It must be defined in 'BRANCH' table.
3	CURRENCY_CODE	CHAR	3		ISO alpha code of the currency. It must be already defined in 'CURRENCY_TABLE' table.
4 	LOYALTY_ACCOUNT_NBR	VARCHAR2	24		This is the loyalty account number automatically assigned by the system to the owner. To generate the loyalty account number, the system uses the owner account number concatenated with the suffix '93' that represents the loyalty account link code within PowerCARD system, i.e. if the account owner is '123456789000' then

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					the loyalty account number will be '12345678900093'.
5 	LOYALTY_PROGRAM_ID	VARCHAR2	6		This is the identification of the loyalty program to which the account is associated. It must be defined in 'LOYALTY_PROGRAM' table
6	APPLICATION_ID	VARCHAR2	24		Application identification number with which the customer has been subscribed to the loyalty product.
7	APPLICATION_CONTRACT_ID	VARCHAR2	24		This is populated with the contract element ID with which the customer has been subscribed to the loyalty product.
8	CATALOGUE_OFFER	CHAR	3		Code identifying the catalogue offer.
9	CATALOGUE_PRODUCT	CHAR	6		Catalogue product to which the loyalty account is associated. It must be already defined in 'CATALOGUE_PRODUCT' table.
10	CATALOGUE_PRODUCT_VERSION	VARCHAR2	10		Version of the loyalty product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
11	CATALOGUE_PACK	CHAR	6		Unique code identifying the pack as defined in 'CATALOGUE_PRODUCT' table.
12	CLIENT_CODE	VARCHAR2	24		Unique code identifying the Customer ID. It must be defined in 'CIENT' table.
13	LOYALTY_TYPE	CHAR	2		Type of loyalty product. Possible values are: 'CB' = Cash-back, 'FB' = Fee-back, 'ML' = Miles, 'PT' = Points.
14	ACCOUNT_OWNER	CHAR	2		This column indicates to which entity the loyalty account number is associated. Possible values are: 'CH' = Cardholder, 'SA' = Account. Note - For payment instrument debit products, the ACCOUNT_OWNER is set to 'CH' (Cardholder), - For payment instrument credit products, the ACCOUNT_OWNER is set to 'SA' (Account).
15	ENTITY_ID	VARCHAR2	24		In case the ACCOUNT_OWNER is set to 'SA' (Account), this column displays the Credit account number

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					(Shadow account number) identifying the Credit account. Otherwise, it's the PAN (Primary Account number) of the Payment Instrument.
16	BALANCE_POINT	NUMBER	18	3	The points or amount, in case of Cash-back (LOYALTY_TYPE = 'CB') or Fee-back (LOYALTY_TYPE = 'FB'), accumulated from eligible transactions based on the loyalty program linked to the account.
17	OPENING_BALANCE_POINT	NUMBER	18	3	The opening balance points or amount in case of Cash-back (LOYALTY_TYPE = 'CB') or Fee-back (LOYALTY_TYPE = 'FB'). It is the balance at the beginning of the statement cycle.
18	CLOSING_BALANCE_POINT	NUMBER	18	3	The closing balance points or amount in case of Cash-back (LOYALTY_TYPE = 'CB') or Fee-back (LOYALTY_TYPE = 'FB'). The balance at the closing of the statement cycle.
19	LAST_TRANSACTION_DATE	DATE	7		Date of the last transaction subject to loyalty program.
20	PENDING_GAINED_POINT	NUMBER	18	3	The points earned based on the authorizations that are approved, but still pending due to non-posting of matching transaction. This pending balance points also include points from loyalty transaction captured but still not yet processed.
21	LAST_AUTHORIZATION_DATE	DATE	7		The last date of the last authorization subject to loyalty program.
22	PENDING_REDEMPTION_POINT	NUMBER	18	3	The points or amount, in case of Cash-back (LOYALTY_TYPE = 'CB') or Fee-back (LOYALTY_TYPE = 'FB'), used in redemption requests captured but still not yet processed.
23	LAST_REDEMPTION_DATE	DATE	7		The last date earned points or amount, in case of Cash-back (LOYALTY_TYPE = 'CB') or Fee-back (LOYALTY_TYPE = 'FB'), was used for redemption.
24	VOL_ACCUM_START_DATE	DATE	7		Date when the volume accumulation starts.
25	VOL_ACCUM_END_DATE	DATE	7		Date when the volume accumulation ends.
26	TRANSACTION_VOL_ACCUM	NUMBER	12		The transaction volume.
27	SETTLEMENT_CUTOFF_ACC	VARCHAR2	8		Accounting cutoff processing ID.
28	SETTLEMENT_CUTOFF_CRD	VARCHAR2	8		Credit cutoff processing ID.
29	SETTLEMENT_CUTOFF_OUTG	VARCHAR2	8		Outgoing cutoff processing ID.
30	SETTLEMENT_CUTOFF_MER	VARCHAR2	8		Account merchant cutoff processing ID.
31	SETTLEMENT_CUTOFF_IS	VARCHAR2	8		Information system cutoff processing ID.
32	SETTLEMENT_CUTOFF_STAT	VARCHAR2	8		Statistics cutoff processing ID.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
33	SETTLEMENT_CUTOFF_RISK	VARCHAR2	8		Risk management cutoff processing ID.
34	SETTLEMENT_CUTOFF_SCO	VARCHAR2	8		The Collection/scoring cutoff processing ID.
35	SETTLEMENT_CUTOFF_INC	VARCHAR2	8		Incoming cutoff processing ID.
36	SETTLEMENT_CUTOFF_BANK	VARCHAR2	8		Bank cutoff processing ID.
37	SETTLEMENT_FLAG_ACC	CHAR	1		This flag indicates whether the Accounting cut off has been processed or not yet. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
38	SETTLEMENT_FLAG_CRD	CHAR	1		This flag indicates whether the Credit revolving cutoff has been processed or not yet Possible values are: 'N' = Not yet processed, 'Y' = Processed.
39	SETTLEMENT_FLAG_OUTG	CHAR	1		This flag indicates if the Outgoing cutoff has been processed or not yet. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
40	SETTLEMENT_FLAG_MER	CHAR	1		This flag indicates if the Merchant account cutoff has been processed or not yet. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
41	SETTLEMENT_FLAG_IS	CHAR	1		This flag indicates if the Information system cutoff has been processed or not yet. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
42	SETTLEMENT_FLAG_STAT	CHAR	1		This flag indicates whether the Statistics cutoff has been processed or not yet. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
43	SETTLEMENT_FLAG_RISK	CHAR	1		This flag indicates if the Risk management cutoff has been processed or not yet. Possible values are: 'N' = Not yet processed,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'Y' = Processed.
44	SETTLEMENT_FLAG_SCO	CHAR	1		This flag indicates whether the Collection/scoring cutoff has been processed or not yet. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
45	SETTLEMENT_FLAG_INC	CHAR	1		This flag indicates if the Incoming cutoff has been processed or not. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
46	SETTLEMENT_FLAG_BANK	CHAR	1		This flag indicates whether the Bank cutoff has been processed or not yet. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
47	LOYALTY_STATUS	CHAR	1		This field indicates the status of the loyalty account. Possible values are: 'N' = Normal, 'C' = Canceled, 'T' = Transfer.
48	LOYALTY_STATUS_DATE	DATE	7		Date when the status was last updated.
49	AUTO_REDEMPTION_START_DATE	DATE	7		The period start date for the automatic redemption. Note It is applicable when the LOYALTY_TYPE column's value is set to 'CB' (Cash-back) or 'FB' (Fee-back).
50	AUTO_REDEMPTION_END_DATE	DATE	7		The period end date for automatic redemption. Note It is applicable when the LOYALTY_TYPE column's value is set to 'CB' (Cash-back) or 'FB' (Fee-back).
51	ACCRUED_POINTS	NUMBER	18	3	Total accrued points or amount during the capping period, in case of Cash-back (LOYALTY_TYPE = 'CB') or Fee-back (LOYALTY_TYPE = 'FB').
52	START_CAPPING	DATE	7		The start date from which the control of the accrued points or amount is applied,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					in case of Cash-back (LOYALTY_TYPE = 'CB') or Fee-back (LOYALTY_TYPE = 'FB').
53	END_CAPPING	DATE	7		The date on which the control of the accrued points or amount ends, in case of Cash-back (LOYALTY_TYPE = 'CB') or Fee-back (LOYALTY_TYPE = 'FB'). At the end of the capping period, the Capping start date and Capping end date will be reset according to the capping period and business date, also the accrued points or amount will be set to '0'.
54	CYCLE_TO_DATE_POINTS_EARNED	NUMBER	18	3	The balance earned from the beginning of the current cycle until the current date.
55	CYCLE_TO_DATE_POINTS_ADJUSTED	NUMBER	18	3	The balance adjusted from the beginning of the current cycle until the current date.
56	CYCLE_TO_DATE_POINTS_REDEEMED	NUMBER	18	3	The balance redeemed from the beginning of the current cycle until the current date.
57	CYCLE_TO_DATE_POINTS_EXPIRED	NUMBER	18	3	The balance expired from the beginning of the current cycle until the current date.
58	MONTH_TO_DATE_POINTS_EARNED	NUMBER	18	3	The balance earned from the beginning of the month until the current date.
59	MONTH_TO_DATE_POINTS_ADJUSTED	NUMBER	18	3	The balance adjusted from the beginning of the month until the current date.
60	MONTH_TO_DATE_POINTS_REDEEMED	NUMBER	18	3	The balance redeemed from the beginning of the month until the current date.
61	MONTH_TO_DATE_POINTS_EXPIRED	NUMBER	18	3	The balance expired from the beginning of the month until the current date.
62	YEAR_TO_DATE_POINTS_EARNED	NUMBER	18	3	The balance earned from the beginning of the year until the current date.
63	YEAR_TO_DATE_POINTS_ADJUSTED	NUMBER	18	3	The balance adjusted from the beginning of the year until the current date.
64	YEAR_TO_DATE_POINTS_REDEEMED	NUMBER	18	3	The balance redeemed from the beginning of the year until the current date.
65	YEAR_TO_DATE_POINTS_EXPIRED	NUMBER	18	3	The balance expired from the beginning of the year until the current date.
66	LIFE_TO_DATE_POINTS_EARNED	NUMBER	18	3	The balance earned from the beginning of the loyalty account creation until the current date.
67	LIFE_TO_DATE_POINTS_ADJUSTED	NUMBER	18	3	The balance adjusted from the beginning of the loyalty account creation until the current date.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
68	LIFE_TO_DATE_POINTS_REDEEMED	NUMBER	18	3	The balance redeemed from the beginning of the loyalty account creation until the current date.
69	LIFE_TO_DATE_POINTS_EXPIRED	NUMBER	18	3	The balance expired from the beginning of the loyalty account creation until the current date.
70	USER_CREATE	VARCHAR2	15		ID of the user when record created.
71	DATE_CREATE	DATE	7		Record creation date and time.
72	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
73	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

12.3.2 LOYALTY_TRANSACTION

This table contains the list of all transactions generated following events related to loyalty:

- Credit loyalty transactions generated from posted purchase transactions,
- Debit loyalty transactions generated from posted purchase transaction reversals,
- Debit loyalty transactions generated from different loyalty redemption,
- Debit and Credit loyalty transactions generated from account to account point transfer,
- Credit loyalty transactions generated from loyalty positive events (Account creation event, Birthday event, etc.),
- Debit loyalty transactions generated from loyalty negative events (Penalties, etc.),
- Etc.

Refer to [Loyalty transactions](#) section in UG1016-Loyalty management user's guide for more details.

Each column of this table is described in detail in the next section.

12.3.2.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		This is the institution concerned by the loyalty program. It must be defined in 'BANK' table.
2 	MICROFILM_REF_NUMBER	CHAR	23		Microfilm reference number of original transaction.
3 	MICROFILM_REF_SEQ	NUMBER	4		Microfilm reference sequence of original transaction
4 	LOYALTY_ACCOUNT_NBR	VARCHAR2	24		This is the loyalty account number automatically assigned by the system to the owner. This account is represented by the owner's account number concatenated with the suffix '93' that represents the loyalty account link code within PowerCARD system.
5 	LOYALTY_PROGRAM_ID	VARCHAR2	6		This is the identification of the loyalty program to which the account is associated. It must be defined in 'LOYALTY_PROGRAM' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
6	ISSUER_BANK_CODE	CHAR	6		Issuer institution code. It must be present in 'BANK' table.
7	ACQUIRER_BANK_CODE	CHAR	6		Acquirer institution code. It must be present in 'BANK' table.
8	TRANSACTION_AMOUNT	NUMBER	18	3	The amount of the transaction that triggered the loyalty program. Note  It is not applicable when TRANSACTION_EVENT column's value is different from 'TR' (Transaction).
9	TRANSACTION_CURRENCY_CODE	CHAR	3		Currency of the transaction that triggered the loyalty program. Note  It is not applicable when TRANSACTION_EVENT column's value is different from 'TR' (Transaction).
10	TRANSACTION_CURRENCY_EXP	NUMBER	1		Currency exponent of the transaction that triggered the loyalty program. Note  It is not applicable when TRANSACTION_EVENT column's value is different from 'TR' (Transaction).
11	LOCAL_AMOUNT	NUMBER	18	3	Local amount of the transaction that triggered the loyalty program. Note  It is not applicable when TRANSACTION_EVENT column's value is different from 'TR' (Transaction).
12	LOCAL_CURRENCY_CODE	CHAR	3		Local currency of the transaction that triggered the loyalty program. Note  It is not applicable when TRANSACTION_EVENT column's value is different from 'TR' (Transaction).
13	LOCAL_CURRENCY_EXP	NUMBER	1		Local currency exponent of the transaction that triggered the loyalty program.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Note  It is not applicable when TRANSACTION_EVENT column's value is different from 'TR' (Transaction).
14	LOYALTY_TRANSACTION_SIGN	CHAR	1		The sign of the loyalty transaction. Possible values are: 'D' = Debit, 'C' = Credit.
15	TRANSACTION_EVENT	CHAR	2		The event that triggered the posting of the loyalty transaction. Possible values are: 'TR' = Transaction, 'WP' = Welcome point, 'RD' = Redemption, 'PC' = Points Conversion, 'CT' = Captured Transaction, 'PB' = Penalties – overdrawn balance, 'PU' = Penalties – Unpaid, 'PL' = Penalties – Late payment, 'PI' = Penalties – Payment Incident, 'RG' = Redemption gift.
16	PROCESSING_LEVEL	CHAR	1		Processing level. Possible values are: 'P' = Processed, 'C' = Current, 'R' = Reversed, 'E' = Expired.
17	ORG_TRANSACTION_CODE	CHAR	2		Transaction code of the transaction that triggered the loyalty program. It must be present in 'TRANSACTIONS_DEFINITION' table. Note  It is not applicable when TRANSACTION_EVENT column's value is different from 'TR' (Transaction).
18	ORG_REVERSAL_FLAG	CHAR	1		This flag indicates whether the original transaction, that triggered the loyalty program, was normal or reversal. Possible values are: 'N' = Normal, 'R' = Reversal.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Note  It is not applicable when TRANSACTION_EVENT column's value is different from 'TR' (Transaction).
19	ORG_TRANSACTION_SIGN	CHAR	1		The sign of the transaction that triggered the loyalty program. Possible values are: 'C' = Point gained, 'D' = Point used. Note  It is not applicable when TRANSACTION_EVENT column's value is different from 'TR' (Transaction).
20	ORG_MICROFILM_REF_N	CHAR	23		The original reference number. This column is: Optional in single message. - In no authorized transaction request. Mandatory in single message reversal (contains a microfilm reference number of original transaction) - In authorized transaction request (contains an original ARN) - In authorization reversal (contains an original ARN) - In authorization request (contains an original ARN).
21	ORG_MICROFILM_REF_S	NUMBER	4	0	The original sequence reference number.
22	ORG_INTERNAL_STAN	CHAR	6		The original Internal STAN. This column is: Optional in single message. - In no authorized transaction request. Mandatory in single message reversal (contains an original ARN) - In authorized transaction request (contains authorization Stan) - In authorization reversal (contains authorization Stan) - In authorization request (contains authorization Stan).
23	CARD_NUMBER	VARCHAR2	22		This column stores the PAN. When present, it should exist in 'CARD' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
24	SHADOW_ACCOUNT_NBR	VARCHAR2	24		Shadow account identification number of transaction. When present, it must exist in 'SHADOW_ACCOUNT' table.
25	CORPORATE_ID	VARCHAR2	15		The identification number of corporate. When present, it must exist in 'CORPORATE' table.
26	CARD_CHANNEL_NUMBER	VARCHAR2	15		The payment instrument channel. When present, it must exist in 'CHANNEL' table.
27	MERCHANT_NUMBER	VARCHAR2	15		The merchant identification number. When present, it must exist in 'MERCHANT' table.
28	CHAIN_CODE	VARCHAR2	15		The chain identification number. When present, it must exist in 'CHAIN' table.
29	MERCHANT_CHANNEL_NUMBER	VARCHAR2	15		The merchant channel number. When present, it must exist in 'CHANNEL' table.
30	LOYALTY_TRANSACTION_DATE	DATE	7		This field is used to indicate the loyalty Transaction date.
31	STATEMENT_DATE	DATE	7		The statement date of the loyalty transaction.
32	PURGE_DATE	DATE	7		The validity date of the loyalty transaction, according to the setup in the 'LOYALTY_PROGRAM' table.
33	VALUE_POINT_GAINED	NUMBER	9	0	The value of loyalty points gained from purchase transactions during the cycle.
34	VALUE_AMOUNT_GAINED	NUMBER	18	3	The monetary amount gained.
35	LOYALTY_PROGRAM_CURRENCY	CHAR	3		This is the currency code of the loyalty program as defined in 'LOYALTY_PROGRAM' table. It must exist in 'CURRENCY_TABLE' table as well.
36	TRANSACTION_REASON_CODE	CHAR	2		The reason of the loyalty transaction in case of adjustment. It must exist in 'TRANS_REASON_CODE' table.  Note Not applicable when TRANSACTION_EVENT column's value is different from 'CT' (Captured Transaction).
37	TRANSACTION_REJECT_REASON	VARCHAR2	80		Transaction Reject Reason description.
38	VALUE_POINT_REDEMPTION	NUMBER	9	0	Number of redeemed points.
39	VALUE_AMOUNT_REDEMPTION	NUMBER	18	3	Amount value of redeemed point.
40	GIFT_CODE	VARCHAR2	6		This code identifies the gift used for redemption. It must be defined in 'LOYALTY_GIFT' table.
41	GIFT_TYPE_DESC	VARCHAR2	32		Shortened description of the gift category.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
42	REDEMPTION_PARTNER_CHARGE_A	NUMBER	18	3	The posted amount on co-branded account.
43	REDEMPTION_PARTNER_CHARGE_S	CHAR	1		The Sign of posted amount on co-branded account.
44	REDEMPTION_MERCHANT_CHARGE_A	NUMBER	18	3	The posted amount on merchant account.
45	REDEMPTION_MERCHANT_CHARGE_S	CHAR	1		The Sign of posted amount on merchant account.
46	REDEMPTION_BANK_CHARGE_A	NUMBER	18	3	The posted amount on account institution.
47	REDEMPTION_BANK_CHARGE_S	CHAR	1		The Sign of posted amount on account institution.
48	STATEMENT_PRINT_FLAG	CHAR	1		This flag indicates whether the Statement must be printed or not. Possible values are: 'Y' = Printed, 'N' = Not Printed.
49	SETTLEMENT_CUTOFF_ACC	VARCHAR2	8		Accounting cutoff processing ID. It is automatically filled with the value 'X' before the batch processing.
50	SETTLEMENT_CUTOFF_CRD	VARCHAR2	8		Credit cutoff processing ID. It is automatically filled with the value 'X' before the batch processing.
51	SETTLEMENT_CUTOFF_OUTG	VARCHAR2	8		Outgoing cutoff processing ID. It is automatically filled with the value 'X' before the batch processing.
52	SETTLEMENT_CUTOFF_MER	VARCHAR2	8		Account merchant cutoff processing ID. It is automatically filled with the value 'X' before the batch processing.
53	SETTLEMENT_CUTOFF_IS	VARCHAR2	8		Information system cutoff processing ID. It is automatically filled with the value 'X' before the batch processing.
54	SETTLEMENT_CUTOFF_STAT	VARCHAR2	8		Statistics cutoff processing ID. It is automatically filled with the value 'X' before the batch processing.
55	SETTLEMENT_CUTOFF_RISK	VARCHAR2	8		Risk management cutoff processing ID. It is automatically filled with the value 'X' before the batch processing.
56	SETTLEMENT_CUTOFF_SCO	VARCHAR2	8		The Collection/scoring cutoff processing ID. It is automatically filled with the value 'X' before the batch processing.
57	SETTLEMENT_CUTOFF_INC	VARCHAR2	8		This field contains the Incoming cutoff processing ID. It is automatically filled with the value 'X' before the batch processing.
58	SETTLEMENT_CUTOFF_BANK	VARCHAR2	8		The institution cutoff processing ID. It is automatically filled with the value 'X' before the batch processing.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
59	SETTLEMENT_FLAG_ACC	CHAR	1		This flag indicates whether the Accounting cutoff of the current loyalty transaction is processed or not. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
60	SETTLEMENT_FLAG_CRD	CHAR	1		This flag indicates if the Credit revolving cutoff of the current loyalty transaction is processed or not. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
61	SETTLEMENT_FLAG_OUTG	CHAR	1		This flag indicates whether the Outgoing cutoff of the current loyalty transaction is processed or not. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
62	SETTLEMENT_FLAG_MER	CHAR	1		This flag indicates whether the Merchant account cutoff of the current loyalty transaction is processed or not. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
63	SETTLEMENT_FLAG_IS	CHAR	1		This flag indicates if the Information system cutoff of the current loyalty transaction is processed or not. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
64	SETTLEMENT_FLAG_STAT	CHAR	1		This flag indicates if the Statistics cutoff of the current loyalty transaction is processed or not. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
65	SETTLEMENT_FLAG_RISK	CHAR	1		This flag indicates whether the Risk management cutoff of the current loyalty transaction is processed or not. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
66	SETTLEMENT_FLAG_SCO	CHAR	1		This flag indicates whether the Collection/scoring cutoff of the current loyalty transaction is processed or not. Possible values are: 'N' = Not yet processed,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'Y' = Processed.
67	SETTLEMENT_FLAG_INC	CHAR	1		This flag indicates if the Incoming cutoff of the current loyalty transaction is processed or not. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
68	SETTLEMENT_FLAG_BANK	CHAR	1		This flag indicates whether the institution cutoff of the current loyalty transaction is processed or not. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
69	STATEMENT_FLAG_ACCT	CHAR	1		This flag indicates whether the Statement of the current loyalty transaction is processed or not. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
70	PRIVATE_TLV_DATA	VARCHAR2	256		PowerCARD private data element.
71	LOYALTY_ACCOUNT_NBR_S	VARCHAR2	24		The account number linked to the loyalty point transfer source.
72	LOYALTY_ACCOUNT_NBR_D	VARCHAR2	24		The account number linked to the loyalty point transfer destination.
73	USER_CREATE	VARCHAR2	15		ID of the user when record created.
74	DATE_CREATE	DATE	7		Record creation date and time.
75	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
76	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13 Payment instrument

13.1 Conceptual data model

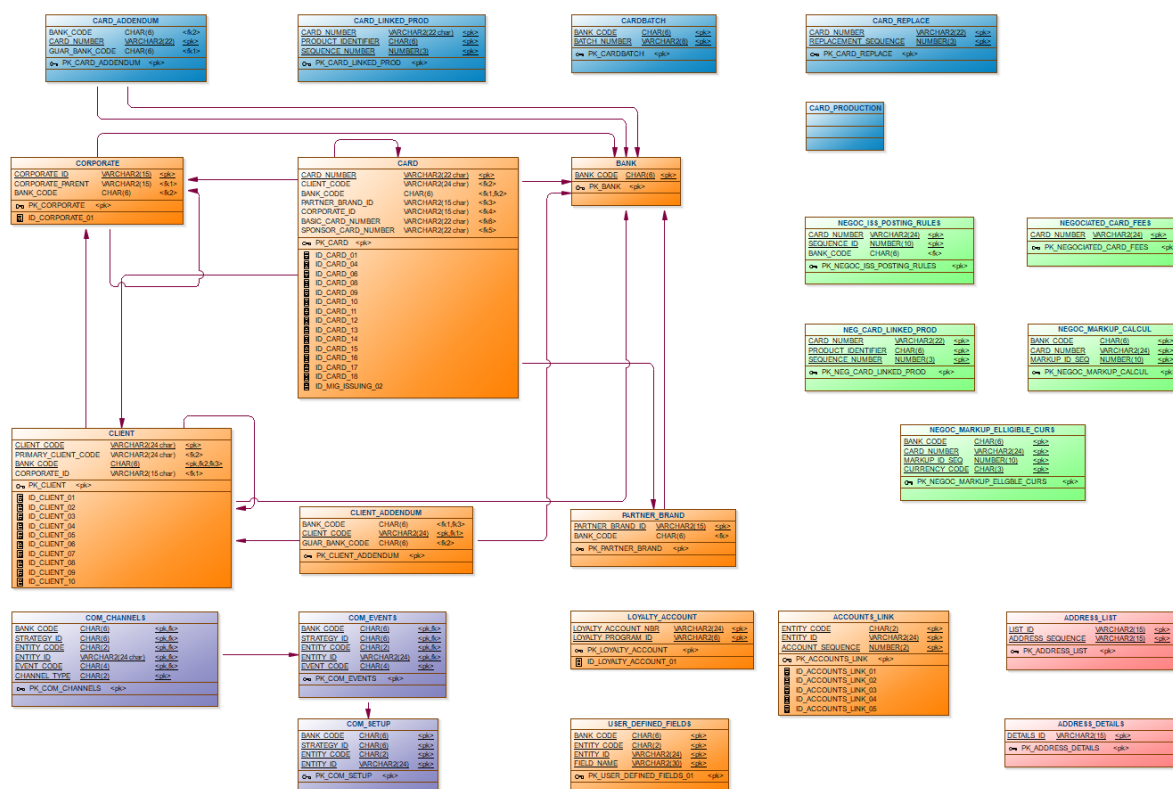


Figure 4: Cardholder management (CDM)

13.2 Parameter tables

13.2.1 BATCH_RENEWAL_CRITERIA

PAN renewal criteria table is used to set the parameters for the management of Pans in terms of number to be sent to the concerned manufacturer so as to be renewed. This is checked during the monthly processing batch where the number of PANs to be renewed may vary according to the Manufacturers system capacities. Record of this concern the payment instrument parameters.

Each column of this table is described in detail in the next section.

13.2.1.1 Columns description

Seq.	Column Name	Data type	Len.	Sc.	Column Description
1	BANK_CODE	CHAR	6		Financial institution for which parameters are being defined. It must be present in the 'BANK' table.
2	PRODUCT_CODE	CHAR	3		This is the product code for which the parameters are being defined. It must be defined in 'CARD_PRODUCT' table.
3	NBR_CARDS_TO_BE_RENEWED	NUMBER	6		This is used to provide the maximum number of PANs to be renewed by a single renewal processing batch.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
4	NBR_CARDS_PER_BATCH	NUMBER	6		This is used to provide the maximum number of PANs that a manufacturing batch can include.
5	BATCH_RENEWAL_LAST_DATE	DATE	7		Date of the last batch renewal. This field is for inquiry only and is updated by the monthly batch. This date format is controlled by the system.
6	NBR_REMAINING_CARDS	NUMBER	6		This is used to provide the number of PANs to be renewed that were not processed by the monthly batch. This column is for inquiry only and is updated by the monthly batch.
7	NBR_CARD_TO_BE_KEPT	NUMBER	6		This is used to provide the threshold beyond which the remaining PANs to renew will not be included in a manufacturing batch for the ongoing month.
8	USER_CREATE	VARCHAR2	15		ID of the user when record created.
9	DATE_CREATE	DATE	7		Record creation date and time.
10	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
11	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.2.2 CARD_FEES

This table contains Fees parameters that define a price or tariff list based on combination of different parameters or group of parameters that define the fee amount, billing method and periodicity, etc. for individuals as well as for corporate. Fees are automatically managed by the system, according to a price list code which might be applied for all Payment instrument (PI) of a defined product (standard tariff for that product) or customized for a single PI (specific price list).

Refer to "[PAN fees](#)" section in UG10206Payment instrument user's guide for more details.

Each column of this table is described in detail in the next section.

13.2.2.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Institution for which the parameters are being set-up. It must be present in the 'BANK' table.
2 	CARD_FEES_CODE	CHAR	3		The internal code identifying uniquely the fee code for this institution.
3	ABRV_DESCRIPTION	VARCHAR2	16		Shortened description used for information and reports.
4	DESCRIPTION	VARCHAR2	32		Fee's description. It is for information only.
5	STATUS	CHAR	1		The fee billing status. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'U' = Not used (the system does not generate any fee), 'A' = Advanced (the system uses the corporate scheme), 'N' = Normal (the system generates fee).  Note This column is defaulted to 'N'.
6	CARD_FEES_BILLING_EVT	CHAR	1		The event triggering the fees posting. Possible values are: 'M' = Manufacturing (At the payment instrument manufacture process), 'U' = First transaction (At PAN usage only), 'G' = After grace period (After a grace period if the payment instrument is not canceled), 'A' = On PAN activation (When PAN is activated).  Note 'U' and 'G' options can be used in case of mass issuance on new product.
7	CARD_FEES_GRACE_PERIOD	NUMBER	3		Number of days before starting fees billing. This field is mandatory if CARD_FEES_BILLING_EVT = 'G' (After grace period).
8	CARD_FEES_BILLING_DATE	CHAR	1		The billing process is totally independent for renewal process. In case of payment instrument usage or grace period payment instrument fees generation triggers, this field enables the system to set the next billing date. Possible values are: 'X' = Bill at period end, 'V' = Bill at period start.
9	CARD_FEES_BILLING_PERIOD	CHAR	1		Period when the Annual Membership Fee amount is charged. The following period options are offered: 'M' = Monthly, 'Q' = Quarterly, 'S' = By semester, 'Y' = Yearly.
10	NUMBER_OF_YEAR	NUMBER	1		This column is not used in V3.5.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
11	CURRENCY_CODE	CHAR	3		Subscription and periodical membership currency code in which the fees are going to be expressed. It should be defined in 'CURRENCY_TABLE' table.
12	SUBSCRIPTION_AMOUNT	NUMBER	18	3	The subscription fee paid for the first issuance of main PI and supplementary. It is not charged on annual membership fee and renewals. (Default: 0).
13	FEES_AMOUNT_FIRST	NUMBER	18	3	The periodic fee amount that is paid during the first issuance validity period of the Payment instrument (PI). This amount is not added to the subscription fee. When the PI is created, only the subscription is generated. (Default: 0).
14	FEES_AMOUNT_RENEW	NUMBER	18	3	The fee amount that is charged to the cardholder for the first renewal of the Payment instrument (PI). The renewal amount is also used to generate periodic fees for the second validity period.
15	SUBSEQUENT_RENEWAL_FEES	NUMBER	18	3	Fees amount that is charged to the cardholder for subsequent renewals of the payment instrument. It is valid for the second renewal and above. The subsequent amount is also used to generate periodic fees for the third (and subsequent) validity period.
16	PLASTIC_FEES	NUMBER	18	3	This column gives the possibility to enter in the system the cost of the payment instrument. This is appreciated in term of accounting since the system will be able to provide the payment instrument fees plastic cost excluded. These fees are added to the different amounts each time a payment instrument is produced.
17	PLASTIC_FEES_INDICATOR	CHAR	1		This column gives the possibility to hide the plastic cost to the customer or let the system show two transactions on the customer statement. In case of separation, it can be coupled to the fact of not charging the service fee, only plastic fee in case on card replacement. Possible values are: 'I' = Fees included in the card fees, 'S' = Fees billed separately.
18	PHOTO_FEES	NUMBER	18	3	The cost of putting a photo on a card. This is appreciated in term of accounting since the system will be able to provide the card fees photo cost excluded. This field is automatically generated by the system with this amount and with 'F1' as transaction code.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
19	PHOTO_FEES_INDICATOR	CHAR	1		This column gives the possibility to hide the photo cost to the customer or in the contrary show it on the customer statement. Possible values are: 'I' = Fees included in the card fees, 'S' = Fees billed separately.
20	PROMOTION_STARTING_DATE	DATE	7		This column is not used in V3.5.
21	PROMOTION_ENDING_DATE	DATE	7		This column is not used in V3.5.
22	PROMOTION_FEES_AMOUNT	NUMBER	18	3	This column is not used in V3.5.
23	DAMAGED_REPLACEMENT_FEES	NUMBER	18	3	This is the damaged replacement fees used to generate the replacement fees amount. (Default: 0).
24	ERRONEOUS_REPLACEMENT_FEES	NUMBER	18	3	The erroneous card replacement fees used to generate the replacement fees amount. (Default: 0).
25	LOST_REPLACEMENT_FEES	NUMBER	18	3	The lost card replacement fees used to generate the replacement fees amount. (Default: 0).
26	STOLEN_REPLACEMENT_FEES	NUMBER	18	3	The stolen card replacement fees used to generate the replacement fees amount. (Default: 0).
27	COUNTREFEIT_REPLACEMENT_FEES	NUMBER	18	3	The counterfeit card replacement fees used to generate the replacement fees amount. (Default: 0).
28	EMERGENCY_REPLACEMENT_FEES	NUMBER	18	3	The emergency card replacement fees used to generate the replacement fees amount. (Default: 0).
29	PIN_REPLACEMENT_FEES	NUMBER	18	3	The PIN Replacement Fees used to generate the replacement fees amount. (Default: 0).
30	OTHER_REPLACEMENT_FEES	NUMBER	18	3	The other replacement fees used to generate the replacement fees amount. (Default: 0).
31	OTHER_FEES_1	NUMBER	18	3	This column is not used in V3.5.
32	OTHER_FEES_1_INDICATOR	CHAR	1		This column is not used in V3.5.
33	OTHER_FEES_2	NUMBER	18	3	This column is not used in V3.5.
34	OTHER_FEES_2_INDICATOR	CHAR	1		This column is not used in V3.5.
35	OTHER_FEES_3	NUMBER	18	3	This column is not used in V3.5.
36	OTHER_FEES_3_INDICATOR	CHAR	1		This column is not used in V3.5.
37	OTHER_FEES_4	NUMBER	18	3	This column is not used in V3.5.
38	OTHER_FEES_4_INDICATOR	CHAR	1		This column is not used in V3.5.
39	USER_CREATE	VARCHAR2	15		ID of the user when record created.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
40	DATE_CREATE	DATE	7		Record creation date and time.
41	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
42	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.2.3 CARD_FEES_ADVANCED

This table contains the price or tariff list based on combination of different parameters or group of parameters that define the fee amount, billing method and periodicity, etc. that could not be defined within the '[CARD_FEES](#)' table. Advanced PAN fees are automatically managed by the system, according to a price list code which might be applied for all PANs of a defined product (standard tariff for that product) or customized for a single PAN (specific price list).

The table contains corporate fees structures as well as advanced free structure per institution. The fees structures are based on the following elements:

- Billing (to define the status, frequency, triggering event, grace period if any)
- First issuance fees
- Choice of plastic (physical card)
- Photo fees
- Renewal amount
- Replacement with the various types of replacement conditions
- PIN issuing
- Promotion

The table '[CARD_FEES_ADVANCED](#)' contains each of the fees declared within the Platform and described in detail in the next section

13.2.3.1 Columns description

Seq.	Column Name	Data type	Len.	Sc.	Column Description
1 	SEQUENCE_ID	NUMBER	10	0	Sequence number, to guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose.
2	BANK_CODE	CHAR	6		Institution for which the PAN fees advanced parameters are being set-up. It must be present in the 'BANK' table
3	CARD_FEES_CODE	CHAR	3		Tariff code showing the PAN fees. It must be present in 'CARD_FEES' table.
4	CHANNEL_NUMBER	VARCHAR2	15		Channel Number of PAN fees. It must be present in 'CHANNEL' table.
5	OFFER_NUMBER	VARCHAR2	15		PAN fees offers number. It must be defined in 'PCARD_OFFER' table.
6	CARD_FEES_BILLING_EVT	CHAR	1		The event triggering the PAN fees posting. Possible values are:

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					'M' = Manufacturing (At the card manufacture process, upon card activation) 'U' = Used (At PAN usage only) 'G' = Grace Period (After a grace period if the PAN is not cancelled) 'R' = Renewal time (for future use) It should be defined in 'CARD_FEES' table.
7	CARD_FEES_GRACE_PERIOD	NUMBER	3		Number of days before starting PAN fees billing. This field is mandatory if CARD_FEES_BILLING_EVT='G'. It should be defined in 'CARD_FEES' table.
8	CARD_FEES_BILLING_DATE	CHAR	1		The base to calculate renewal fee billing value date. Possible values are: 'X' = Start validity month 'V' = Start Event month It should be defined in 'CARD_FEES' table.
9	CARD_FEES_BILLING_PERIOD	CHAR	1		It is the period when the Annual Membership Fee amount is charged. Possible values are: 'R' = In renewal date 'M' = Month 'Q' = Quarter 'S' = Half-year 'Y' = Year 'N' = n 2 ... 9 years 'O' = Once n year. For future use. It should be defined in 'CARD_FEES' table.
10	NUMBER_OF_YEAR	NUMBER	1		Number of year. It is active only in case CARD_FEES_BILLING_PERIOD = Once N year '1' to '9'. This column is reserved for future use.. It should be defined in 'CARD_FEES' table.
11	CURRENCY_CODE	CHAR	3		Subscription and periodical membership currency code in which the fees are being expressed. It should be defined in 'CURRENCY' table.
12	SUBSCRIPTION_AMOUNT	NUMBER	18	3	Subscription fee paid only once when first receiving the PAN. (Default: 0). As defined in 'CARD_FEES' table.
13	FEES_AMOUNT_FIRST	NUMBER	18	3	Periodical membership amount. (Default: 0). As defined in 'CARD_FEES' table.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
14	FEES_AMOUNT_RENEW	NUMBER	18	3	The renewal membership amount. (Default: 0). As defined in 'CARD_FEES' table.
15	SUBSEQUENT_RENEWAL_FEES	NUMBER	18	3	The fees amount that is charged to the PANholder for subsequent renewals of the PAN. It is valid for the second renewal and above. The subsequent amount is also used to generate periodic fees for the third (and subsequent) validity period. As defined in 'CARD_FEES' table.
16	PLASTIC_FEES	NUMBER	18	3	This column gives the possibility to enter in the system the cost of the PAN. This is appreciated in term of accounting since the system will be able to provide the PAN fees plastic cost excluded. These fees are added to the different amounts each time a card is produced. It should be defined in 'CARD_FEES' table.
17	PLASTIC_FEES_INDICATOR	CHAR	1		The plastic fees indicator: Possible values are: 'I' = Fees included in the card fees 'S' = Fees billed separately It should be defined in 'CARD_FEES' table.
18	PHOTO_FEES	NUMBER	18	3	The cost of putting a photo on a card. This is appreciated in term of accounting since the system will be able to provide the PAN fees photo cost excluded. This column is automatically generated by the system with this amount and with 'F1' as transaction code. It should be defined in 'CARD_FEES' table.
19	PHOTO_FEES_INDICATOR	CHAR	1		The photo fees indicator: (include the photo fees in the card fees or bill separately) Possible values are: 'I' = Fees included in the card fees 'S' = Fees billed separately It should be defined in 'CARD_FEES' table.
20	PROMOTION_STARTING_DATE	DATE	7		This is the date when a promotional fees amount starts replacing the subscription and first issuance amount. (Default: 0). As defined in 'CARD_FEES' table.
21	PROMOTION_ENDING_DATE	DATE	7		This is the date when a promotional fee amount ends replacing the subscription and first issuance amount. (Default: 0). As defined in 'CARD_FEES' table.
22	PROMOTION_FEES_AMOUNT	NUMBER	18	3	This is the promotional fees amount that replaces the subscription and first issuance amount. (Default: 0). As defined in 'CARD_FEES' table.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
23	DAMAGED_REPLACEMENT_FEES	NUMBER	18	3	The damaged replacement fees used to generate the replacement fees amount. (Default: 0). As defined in 'CARD_FEES' table.
24	ERRONEOUS_REPLACEMENT_FEES	NUMBER	18	3	The erroneous PAN replacement fees used to generate the replacement fees amount. (Default: 0). As defined in 'CARD_FEES' table.
25	LOST_REPLACEMENT_FEES	NUMBER	18	3	The lost PAN replacement fees used to generate the replacement fees amount. (Default: 0). As defined in 'CARD_FEES' table.
26	STOLEN_REPLACEMENT_FEES	NUMBER	18	3	The stolen PAN replacement fees used to generate the replacement fees amount. (Default: 0). As defined in 'CARD_FEES' table.
27	COUNTREFEIT_REPLACEMENT_FEES	NUMBER	18	3	The counterfeit PAN replacement fees used to generate the replacement fees amount. (Default: 0). As defined in 'CARD_FEES' table.
28	EMERGENCY_REPLACEMENT_FEES	NUMBER	18	3	The emergency PAN replacement fees used to generate the replacement fees amount. (Default: 0). As defined in 'CARD_FEES' table.
29	PIN_REPLACEMENT_FEES	NUMBER	18	3	The PIN Replacement Fees used to generate the replacement fees amount. (Default: 0). As defined in 'CARD_FEES' table.
30	OTHER_REPLACEMENT_FEES	NUMBER	18	3	The other replacement fees used to generate the replacement fees amount. (Default: 0). As defined in 'CARD_FEES' table.
31	C_SUBSCRIPTION_AMOUNT	NUMBER	18	3	The corporate fees subscription amount. (Default: 0)
32	C_FEES_AMOUNT_FIRST	NUMBER	18	3	The corporate Periodical membership amount. (Default: 0)
33	C_FEES_AMOUNT_RENEW	NUMBER	18	3	The corporate renewal membership amount. (Default: 0)
34	C_SUBSEQUENT_RENEWAL_FEES	NUMBER	18	3	Subsequent renewal fees (Default: 0)
35	C_PLASTIC_FEES	NUMBER	18	3	This field defines the corporate Plastic fees (Default: 0)
36	C_PLASTIC_FEES_INDICATOR	CHAR	1		This column gives the possibility to hide the plastic cost to the corporate or let the system show two transactions on the corporate statement. In case of separation it can be coupled to the fact of not charging the service fee, only plastic fee in case on card replacement. Possible values are: 'I' = Fees included in the card fees 'S' = Fees billed separately
37	C_PHOTO_FEES	NUMBER	18	3	The corporate Photo fees. (Default: 0)

Seq.	Column Name	Data type	Len.	Sc.	Column Description
38	C_PHOTO_FEES_INDICATOR	CHAR	1		The photo fees indicator. Possible values are: 'I' = Fees included in the card fees 'S' = Fees billed separately
39	C_PROMOTION_FEES_AMOUNT	NUMBER	18	3	This is the corporate promotional fees amount that replaces the subscription and first issuance amount. (Default: 0)
40	C_DAMAGED_REPLACEMENT_FEES	NUMBER	18	3	This is the corporate damaged replacement fees used to generate the replacement fees amount. (Default: 0)
41	C_ERRONEOUS_REPLACEMENT_FEES	NUMBER	18	3	This is the corporate erroneous PAN replacement fees used to generate the replacement fees amount. (Default: 0)
42	C_LOST_REPLACEMENT_FEES	NUMBER	18	3	This is the corporate lost PAN replacement fees used to generate the replacement fees amount. (Default: 0)
43	C_STOLEN_REPLACEMENT_FEES	NUMBER	18	3	This is the corporate stolen PAN replacement fees used to generate the replacement fees amount. (Default: 0)
44	C_COUNTREFEIT_REPLACEMENT_FEES	NUMBER	18	3	This is the corporate counterfeit PAN replacement fees used to generate the replacement fees amount. (Default: 0)
45	C_EMERGENCY_REPLACEMENT_FEES	NUMBER	18	3	This is the corporate emergency PAN replacement fees used to generate the replacement fees amount. (Default: 0)
46	C_PIN_REPLACEMENT_FEES	NUMBER	18	3	This is the corporate PIN Replacement Fees used to generate the replacement fees amount. (Default: 0)
47	C_OTHER_REPLACEMENT_FEES	NUMBER	18	3	This is the corporate other replacement fees used to generate the replacement fees amount. (Default: 0)
48	ENTITY_CODE	CHAR	2		Third Party which can support a part of fee Possible values are: 'NL' = Channel 'PB' = partner brand
49	O_SUBSCRIPTION_AMOUNT	NUMBER	18	3	The subscription fee amount that can be posted to a third part (Default: 0)
50	O_FEES_AMOUNT_FIRST	NUMBER	18	3	The periodical membership amount that can be posted to a third part (Default: 0)
51	O_FEES_AMOUNT_RENEW	NUMBER	18	3	The renewal membership amount that can be posted to a third part (Default: 0)
52	O_SUBSEQUENT_RENEWAL_FEES	NUMBER	18	3	The subsequent renewal fees that can be posted to a third part (Default: 0)
53	O_PLASTIC_FEES	NUMBER	18	3	The plastic fees that can be posted to a third part (Default: 0)
54	O_PLASTIC_FEES_INDICATOR	CHAR	1		The plastic fees indicator: Possible values are:

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					'I' = Fees included in the card fees 'S' = Fees billed separately
55	O_PHOTO_FEES	NUMBER	18	3	The photo fees that can be posted to a third part (Default: 0)
56	O_PHOTO_FEES_INDICATOR	CHAR	1		The photo fees indicator: Possible values are: 'I' = Fees included in the card fees 'S' = Fees billed separately
57	O_PROMOTION_FEES_AMOUNT	NUMBER	18	3	This is the promotion fees amount of the third party. (Default: 0)
58	O_DAMAGED_REPLACEMENT_FEES	NUMBER	18	3	The damaged PAN replacement fees that can be posted to a third part (Default: 0)
59	O_ERRONEOUS_REPLACEMENT_FEES	NUMBER	18	3	The erroneous PAN replacement fees that can be posted to a third part (Default: 0)
60	O_LOST_REPLACEMENT_FEES	NUMBER	18	3	The lost PAN replacement fees that can be posted to a third part. (Default: 0)
61	O_STOLEN_REPLACEMENT_FEES	NUMBER	18	3	The stolen PAN replacement fees that can be posted to a third part (Default: 0)
62	O_COUNTREFEIT_REPLACEMENT_FEES	NUMBER	18	3	The counterfeit PAN replacement fees that can be posted to a third part (Default: 0)
63	O_EMERGENCY_REPLACEMENT_FEES	NUMBER	18	3	The emergency PAN replacement fees (Default: 0)
64	O_PIN_REPLACEMENT_FEES	NUMBER	18	3	The PIN replacement fees that can be posted to a third part (Default: 0)
65	O_OTHER_REPLACEMENT_FEES	NUMBER	18	3	The other replacement fees that can be posted to a third part (Default: 0)
66	OTHER_FEES_1	NUMBER	18	3	The first other fees. (Default: 0). As defined in 'CARD_FEES' table.
67	OTHER_FEES_1_INDICATOR	CHAR	1		The first other fees indicator. As defined in 'CARD_FEES' table. Possible values are: 'I' = Fees included in the card fees 'S' = Fees billed separately
68	OTHER_FEES_2	NUMBER	18	3	The second other fees. (Default: 0). As defined in 'CARD_FEES' table.
69	OTHER_FEES_2_INDICATOR	CHAR	1		The second other fees indicator. As defined in 'CARD_FEES' table. Possible values are: 'I' = Fees included in the card fees 'S' = Fees billed separately
70	OTHER_FEES_3	NUMBER	18	3	Third other fees. (Default: 0). As defined in 'CARD_FEES' table.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
71	OTHER_FEES_3_INDICATOR	CHAR	1		Third other fees indicator. As defined in 'CARD_FEES' table. Possible values are: 'I' = Fees included in the card fees 'S' = Fees billed separately
72	OTHER_FEES_4	NUMBER	18	3	The fourth other fees. (Default: 0). As defined in 'CARD_FEES' table.
73	OTHER_FEES_4_INDICATOR	CHAR	1		The fourth other fees indicator. As defined in 'CARD_FEES' table. Possible values are: 'I' = Fees included in the card fees 'S' = Fees billed separately 'X' = Internal usage
74	USER_CREATE	VARCHAR2	15		ID of the user when record created.
75	DATE_CREATE	DATE	7		Record creation date and time.
76	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
77	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.2.4 CARD_GEN_COUNTERS

This table contains the parameters to define the criteria for PAN numbering generation procedure. As sample of these criteria, there are : Network, Payment instrument product, Issuer BIN, Branch. Refer to the ["PAN numbering"](#) section in the UG1020-Payment instrument user guide.

Each column of this table is described in detail in the next section.

13.2.4.1 Columns description

Seq.	Column Name	Data type	Len.	Sc.	Column Description
1 	SEQUENCE_ID	NUMBER	10		This is used to guarantee the uniqueness of the entry in the table
2	CARD_GEN_PROCEDURE	CHAR	2		Index of the procedure to be used for PAN numbering.
3	ISSUER_BIN	VARCHAR2	11		BIN (Bank Identification Number) delivered by the interchange system or by ISO of the issuer to whom this PAN range belongs.
4	BANK_CODE	CHAR	6		Institution concerned by these parameters. Must be present in 'BANK' table
5	NETWORK_CODE	CHAR	2		Network for which parameters are being defined. Must be present in 'NETWORK' table
6	CARD_PRODUCT_CODE	CHAR	3		PAN product concerned by these parameters. Null value indicates that all PAN products defined for the institution

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					are concerned. Must be present in 'CARD_PRODUCT' table
7	CARD_TYPE	CHAR	2		PAN type in the interchange (Visa: Gold, Classic, Electron, MCI, Gold, Classic, Maestro, Etc.). Must be defined in 'CARD_TYPE' table.
8	OWNER_CODE	CHAR	2		The PowerCARD owner code. Must be defined in 'OWNER_LIST' table.
9	BASIC_CARD_FLAG	CHAR	1		This flag indicates the Primary PAN indicator. Possible values are: 'P' = Primary 'S' = Secondary.
10	BRANCH_CODE	CHAR	6		The branch code. It must be present in 'BRANCH' table.
11	LENGTH_MIN	NUMBER	2	0	This is used to specify the minimum PAN length.
12	LENGTH_MAX	NUMBER	2	0	This is used to specify the maximum PAN length.
13	RANGE_MIN	VARCHAR2	22		This is used to specify the first PAN that can be generated by the numbering procedure. The result of generation should be >= of RANGE_MIN.
14	RANGE_MAX	VARCHAR2	22		This is used to specify the last PAN that can be generated. The result of generation should be <= of RANGE_MIN.
15	RANDOM_OPTION	CHAR	1		Method to be used to generate a sequence for the PAN. Possible values are: 'R' = Random (PowerCARD will generate randomly the PAN. In this case, COUNTERS_INDICATOR, LAST_COUNTER_USED fields and CARD_COUNTER_INITIAL, CARD_COUNTER_NEXT and CARD_COUNTER_MAX fields cannot be entered) 'S' = Sequential (PowerCARD will generate the PAN in a sequential manner using the following COUNTERS_INDICATOR field and the intervals data indicated below in the CARD_COUNTER_INITIAL, CARD_COUNTER_NEXT and CARD_COUNTER_MAX fields)
16	COUNTERS_INDICATOR	NUMBER	1		This is used to determine the number of intervals to be used to constitute the sequence in question. This column may take values from '0' to '6' and is used only where RANDOM_OPTION field is set to 'S'.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
17	LAST_COUNTER_USED	NUMBER	1		This is updated automatically by the system, depending on the processing of the card numbering procedure, with the number of the last interval used during this generation. This column may take values from '1' to '6' and is used only where RANDOM_OPTION column is set to 'S'.
18	ISSUER_BIN_OFFSET_START	NUMBER	2		This is used to specify the first position where the Issuer BIN Offset should appear in the PAN.
19	ISSUER_BIN_OFFSET_END	NUMBER	2		This is used to specify the last position where the Issuer BIN Offset should appear in the PAN.
20	BANK_CODE_OFFSET_START	NUMBER	2		This is used to specify the first position where the Bank Code Offset should appear in the PAN.
21	BANK_CODE_OFFSET_END	NUMBER	2		This is used to specify the last position where the Bank Code Offset should appear in the PAN.
22	PRODUCT_CODE_OFFSET_START	NUMBER	2		This is used to specify the first position where the Product Code Offset should appear in the card number
23	PRODUCT_CODE_OFFSET_END	NUMBER	2		This is used to specify the last position where the Product Code Offset should appear in the PAN.
24	NETWORK_CODE_OFFSET_START	NUMBER	2		This is used to specify the first position where the Network Code Offset should appear in the PAN.
25	NETWORK_CODE_OFFSET_END	NUMBER	2		This is used to specify the last position where the Network Code Offset should appear in the PAN.
26	BRANCH_CODE_OFFSET_START	NUMBER	2		This is used to specify the first position where the Branch Code Offset should appear in the PAN.
27	BRANCH_CODE_OFFSET_END	NUMBER	2		This is used to specify the last position where the Branch Code Offset should appear in the PAN.
28	COUNTER_OFFSET_START	NUMBER	2		This is used to specify the first position where the Counter Offset should appear in the PAN.
29	COUNTER_OFFSET_END	NUMBER	2		This is used to specify the last position where the Counter Offset should appear in the PAN.
30	CARD_COUNTER_INITIAL_1	NUMBER	22		This numeric column indicates the first sequence used in the interval 1.
31	CARD_COUNTER_NEXT_1	NUMBER	3		This numeric column indicates the sequence step generation used in the interval 1.
32	CARD_COUNTER_MAX_1	NUMBER	22		This numeric column indicates the last sequence used in the interval 1.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
33	CARD_COUNTER_INITIAL_2	NUMBER	22		This numeric column indicates the first sequence used in the interval 2.
34	CARD_COUNTER_NEXT_2	NUMBER	3		This numeric column indicates the sequence step generation used in the interval 2.
35	CARD_COUNTER_MAX_2	NUMBER	22		This numeric column indicates the last sequence used in the interval 2.
36	CARD_COUNTER_INITIAL_3	NUMBER	22		This numeric column indicates the first sequence used in the interval 3.
37	CARD_COUNTER_NEXT_3	NUMBER	3		This numeric field indicates the sequence step generation used in the interval 3.
38	CARD_COUNTER_MAX_3	NUMBER	22		This numeric column indicates the last sequence used in the interval 3.
39	CARD_COUNTER_INITIAL_4	NUMBER	22		This numeric column indicates the first sequence used in the interval 4.
40	CARD_COUNTER_NEXT_4	NUMBER	3		This numeric column indicates the sequence step generation used in the interval 4.
41	CARD_COUNTER_MAX_4	NUMBER	22		This numeric column indicates the last sequence used in the interval 4.
42	CARD_COUNTER_INITIAL_5	NUMBER	22		This numeric column indicates the first sequence used in the interval 5.
43	CARD_COUNTER_NEXT_5	NUMBER	3		This numeric column indicates the sequence step generation used in the interval 5.
44	CARD_COUNTER_MAX_5	NUMBER	22		This numeric column indicates the last sequence used in the interval 5.
45	CARD_COUNTER_INITIAL_6	NUMBER	22		This numeric column indicates the first sequence used in the interval 6.
46	CARD_COUNTER_NEXT_6	NUMBER	3		This numeric column indicates the sequence step generation used in the interval 6.
47	CARD_COUNTER_MAX_6	NUMBER	22		This numeric column indicates the last sequence used in the interval 6.
48	SENSITIVE_OPERATION_RECORD	CHAR	1		The sensitive operation record code. Possible values are: 'I' = Insertion 'M' = Modification 'X' = Internal usage
49	USER_CREATE	VARCHAR2	15		ID of the user when record created.
50	DATE_CREATE	DATE	7		Record creation date and time.
51	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
52	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.2.5 CARD_PERMITTED_PROD_CHANGE

This table is used to define the payment instrument product permitted change transitions and management.

Refer to "[Allowed product change](#)" section in UG1020-Payment instrument user guide for more details.

Each column of this table is described in detail in the next section.

13.2.5.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Institution for which parameters are being defined. It should be defined in the 'BANK' table.
2 	INITIAL_PRODUCT_CODE	CHAR	3		The source payment instrument product. It should be defined in the 'CARD_PRODUCT' table.
3	INITIAL_CATALOGUE_PRODUCT_CODE	CHAR	6		The source marketable catalog payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with PRODUCT_TYPE = 'P' (Payment instrument)
4	INITIAL_CATALOGUE_PRODUCT_VERSION	CHAR2	10		The initial version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
5 	NEW_PRODUCT_CODE	CHAR	3		The allowed destination Payment instrument product. It must be defined in the 'CARD_PRODUCT' table.
6	NEW_CATALOGUE_PRODUCT_CODE	CHAR	6		Code identifying the allowed destination marketable catalog Payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P' (Payment instrument)
7	NEW_CATALOGUE_PRODUCT_VERSION	CHAR2	10		Version of the allowed destination payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
8	CARD_FEE_CALCULATION_METHOD	CHAR	1		This column indicates whether the delta of the remaining fee from the initial product should be considered or not. Possible values are: 'Y' = Yes, 'N' = No (By default).
9	CHANGING_MODE	CHAR	1		This column indicates when the product change should take place. Possible values are: 'I' = Immediate (By default), 'B' = Periodic fee anniversary, 'R' = Renewal time.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
10	EXPIRY_DATE_INDICATOR	CHAR	1		This column indicates whether the expiry date should be recalculated or not and how. Possible values are: 'B' = Re-calculate based on the fee anniversary date, 'C' = Re-calculate based on request date, 'U' = Unchanged (By default).
11	REASON_CODE	CHAR	2		This column is not used in V3.5.
12	DEACTIVATION_MODE	CHAR	1		This column is not used in V3.5.
13	NBR_DAYS	NUMBER	18	3	This column is not used in V3.5.
14	USER_CREATE	VARCHAR2	15		ID of the user when record created.
15	DATE_CREATE	DATE	7		Record creation date and time.
16	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
17	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.2.6 CARD_RANGE

PAN range management concept is used in PowerCARD especially for optimization and simplification of authorization processing. Authorization processes consult the specific settings in the PAN Range group of the payment instrument product in order to get the authorization data needed for processing.

Thus, parameters defined in this table include almost all authorization related parameters that are included in ['CARD_PRODUCT'](#) parameter table.

This table also includes other authorization parameters such as PIN verification data (including the PIN length, maximum retry, Primary PIN key number, Alternate PIN key number and the Alternate PIN key start date), CVV verification data (Primary CVV key number, Alternate CVV key number, and the Alternate CVV key start date), and the PVKI (PIN Verification Key Index).

Refer to ["PAN range parameters"](#) section in UG1020-Payment instrument user's guide for more details.

Each column of this table is described in detail in the next section.

13.2.6.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	MIN_CARD_RANGE	VARCHAR2	22		This numeric column indicates the low limit of the PAN range. It can be used for security purposes; declaring only valid ranges of a given risk reduce the risk in counterfeit fraud.
2 	MAX_CARD_RANGE	VARCHAR2	22		This numeric column indicates the high limit of the PAN range. It can be used for security purposes; declaring only

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					valid ranges of a given risk reduce the risk in counterfeit fraud.
3	ISSUING_BANK_CODE	CHAR	6		Institution of the issuing PAN. This code must be defined in the 'BANK' table.
4	ISSUER_BIN	VARCHAR2	11		It's the BIN delivered by the interchange system or by ISO of the issuer to whom this PAN range belongs. This column is required for VISA, MasterCard and Europay Networks.
5	ISSUER_ICA	CHAR	6		The institution ICA number (International PAN Association) for MasterCard member only. It is mandatory for MasterCard issuers (NETWORK_CODE = '03').
6	NETWORK_CODE	CHAR	2		PAN related interchange (MasterCard, Visa, JCB, Local, Etc.). This code must be defined in the 'NETWORK' and 'BANK_NETWORK' tables.
7	CARD_NUMBER_LENGTH_MIN	NUMBER	2		It's the PAN minimum length. This is used during authorization processing.  Note PAN length definition is used because same prefixes are used by different issuers but with different card length.
8	CARD_NUMBER_LENGTH_MAX	NUMBER	2		It's the PAN maximum length. This is used during authorization processing.  Note Card length definition is used because same prefixes are used by different issuers but with different card length.
9	CARD_FILE_OPTION	CHAR	1		This column indicates if the PAN range is ON_US in case the institution issue and manages the PAN (fully issuer) or only act as a switch. Possible values are: 'Y' = Yes, 'N' = No.
10	CARD_STATUS_CODE	CHAR	1		The status code that the payment instrument should get when the PIN try limit is exceeded. The possible values must already be defined in 'STATUS_LIST' table.
11	CARD_STATUS_REASON	CHAR	2		The status reason that the payment instrument should get when the PIN try limit is exceeded. It must be present in 'STATUS_REASON_LIST' table.
12	APP_BLOCK_FLAG	CHAR	1		This column is not used in V3.5.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
13	GET_PRODUCT_DATA_LEVEL	CHAR	1		This column is not used in V3.5.
14	GET_CARD_DATA_LEVEL	CHAR	1		This column is not used in V3.5.
15	SINGLE_PRODUCT_FLAG	CHAR	1		This flag indicates if the PAN range is shared or not between one single product. 'Y' = The PAN range is linked to one single product, 'N' = The PAN range is shared between multiple products.
16	PRODUCT_CODE	CHAR	3		Product code to which this PAN range applies. This code must be defined in the 'CARD_PRODUCT' table. Note  This column is mandatory when SINGLE_PRODUCT_FLAG = 'Y' (The PAN range is linked to one single product).
17	SERVICES_SETUP_INDEX	CHAR	4		This column is not used in V3.5.
18	VIP_RESPONSE_TRANSLATION	CHAR	1		This column is not used in V3.5.
19	SERVICE_CODE	CHAR	3		This information mentions three major aspects of payment instrument's usage (payment instrument's territoriality, Risks associated to the payment instrument and Services allowed).
20	CURRENCY_CODE	CHAR	3		This is the default billing currency for payment instrument belonging to the current PAN range. The limit indexes are expressed in this currency. This code must be defined in the 'CURRENCY_TABLE' table.
21	LIMITS_INDEXES	CHAR	4		This column is not used in V3.5.
22	PERIODICITY_CODE	CHAR	3		This column is not used in V3.5.
23	PRIMARY_PIN_KEY_NUMBER	CHAR	3		This is used to specify the PIN production key index. It is used for Personal Identification Number (PIN) production. In case of standard PIN production algorithms (IBM3624, Random...), the active PIN Verification Key (PVK) index is used and should be indicated in the PVKI field described below. This number must be already declared in the 'HSM_KEY_MEMBER' table.
24	NETWORK_CARD_TYPE	CHAR	2		PAN type in the interchange (Visa: Gold, Classic, Electron, MCI, Gold, Classic, Maestro, Etc.). It is used for regulation driven processes and payment organization regulatory

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					reporting. If present, it must be defined in 'CARD_TYPE' table.
25	ALTERNATE_PIN_KEY_NUMBER	CHAR	3		This is used to cope with Personal Identification Number (PIN) keys changes; the system proposes an alternative key and an effective date (to specify in the next field).
26	START_PIN_ALTERNATE_KEY	DATE	7		Date from which the alternative key is to be used instead of the primary key. This column is required if the previous field is entered. It usually takes the system date value and cannot be changed. This date format (YYYYMM) is controlled by the system.
27	PRIMARY_CVV_KEY_NUMBER	CHAR	3		This is used to specify the card verification value production and validation key index.
28	ALTERNATE_CVV_KEY_NUMBER	CHAR	3		This is used to cope with Card verification value key changes; the system proposes an alternative key and an effective date (to specify in the next field).
29	START_CVV_ALTERNATE_KEY	DATE	7		Date from which the alternative card verification value key is to be used instead of the primary key. This column is required if the previous field is entered. It usually takes the system date value and cannot be changed. This date format (YYYYMM) is controlled by the system.
30	EXCEPTION_CVV_KEY_NUMBER	CHAR	3		This is used in case there is a need of using a specific key index for cards expiring a given date.
31	EXCEPTION_CVV_KEY_VALDATE	DATE	7		The expiry date related to the card verification value key index indicated above. This column is required if the previous field is entered. It usually takes the system date value and cannot be changed. This date format (YYYYMM) is controlled by the system.
32	PVKI	NUMBER	1		This digit column is used to specify the number of PIN Verification Key indexes to declare on the next 6 fields. Each PVKi is used during PIN Verification value (PVV) calculation and verification. It often changes on migration and can be used to diversify key among the same Bank Identification Number (BIN). Note  Column's value must fall between '1' and '6' only.
33	KEY_SET_NUMBER_1	CHAR	3		This is used to declare the PIN Verification Key indexes in order to be used during PIN Verification value (PVV) verification and production.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					The index present for the PVKi will be used for production. For verification, PowerCARD relies on the PVKi received on the track II. The indexes related keys have to be declared in the HSM key member screen, as defined in 'HSM_KEY_MEMBER' table. So, this column specifies the key set when PVKi = 1. This column is mandatory if the PVKi = 1.
34	KEY_SET_NUMBER_2	CHAR	3		This is used to declare the PIN verification key indexes in order to be used during PVV verification and production. The index present for the PVKi will be used for production. For verification, PowerCARD relies on the PVKi received on the track II. The indexes related keys have to be declared in the HSM key member screen, as defined in 'HSM_KEY_MEMBER' table. So, this column specifies the key set when PVKi = 2. This column is mandatory if the PVKi = 2.
35	KEY_SET_NUMBER_3	CHAR	3		This is used to declare the PIN verification key indexes in order to be used during PIN Verification value (PVV) verification and production. The index present for the PVKi will be used for production. For verification, PowerCARD relies on the PVKi received on the track II. The indexes related keys have to be declared in the HSM key member screen, as defined in 'HSM_KEY_MEMBER' table. So, this column specifies the key set when PVKi = 3. This column is mandatory if the PVKi = 3.
36	KEY_SET_NUMBER_4	CHAR	3		This is used to declare the PIN verification key indexes in order to be used during PIN Verification value (PVV) verification and production. The index present for the PVKi will be used for production. For verification, PowerCARD relies on the PVKi received on the track II. The indexes related keys have to be declared in the HSM key member screen, as defined in 'HSM_KEY_MEMBER' table. So, this column specifies the key set when PVKi = 4. This column is mandatory if the PVKi = 4.
37	KEY_SET_NUMBER_5	CHAR	3		This is used to declare the PIN verification key indexes in order to be used during PIN Verification value (PVV) verification and production. The index present for the PVKi will be used for production. For verification, PowerCARD relies on the PVKi received on the track II. The indexes related keys have to be declared in the

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					HSM key member screen, as defined in 'HSM_KEY_MEMBER' table. So, this column specifies the key set when PVKi = 5. This column is mandatory if the PVKi = 5.
38	KEY_SET_NUMBER_6	CHAR	3		This is used to declare the PIN verification key indexes in order to be used during PIN Verification value (PVV) verification and production. The index present for the PVKi will be used for production. For verification, PowerCARD relies on the PVKi received on the track II. The indexes related keys have to be declared in the HSM key member screen, as defined in 'HSM_KEY_MEMBER' table. So, this column specifies the key set when PVKi = 6. This column is mandatory if the PVKi = 6.
39	CVKI_KEY_SET_NUMBER_1	CHAR	3		The first PVK index that is used during PVV verification and production. The index present for the PVKi is used for production. For verification, PowerCARD relies on the PVKi received on the track II. The indexes related keys have to be declared in 'HSM_KEYSET_KEYS' table.
40	CVKI_KEY_SET_NUMBER_2	CHAR	3		The second PVK index that is used during PVV verification and production. The index present for the PVKi is used for production. For verification, PowerCARD relies on the PVKi received on the track II. The indexes related keys have to be declared in 'HSM_KEYSET_KEYS' table.
41	CVKI_KEY_SET_NUMBER_3	CHAR	3		The third PVK index that is used during PVV verification and production. The index present for the PVKi is used for production. For verification, PowerCARD relies on the PVKi received on the track II. The indexes related keys have to be declared in 'HSM_KEYSET_KEYS' table.
42	CVKI_KEY_SET_NUMBER_4	CHAR	3		The fourth PVK index that is used during PVV verification and production. The index present for the PVKi is used for production. For verification, PowerCARD relies on the PVKi received on the track II. The indexes related keys have to be declared in 'HSM_KEYSET_KEYS' table.
43	CVKI_KEY_SET_NUMBER_5	CHAR	3		The fifth PVK index that is used during PVV verification and production. The index present for the PVKi is used for production. For verification, PowerCARD relies on the PVKi received on the track II. The indexes related keys have to be declared in 'HSM_KEYSET_KEYS' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
44	CVKI_KEY_SET_NUMBER_6	CHAR	3		The sixth PVK index that is used during PVV verification and production. The index present for the PVKi is used for production. For verification, PowerCARD relies on the PVKi received on the track II. The indexes related keys have to be declared in 'HSM_KEYSET_KEYS' table.
45	DCVV_CVC3_SEQ_NUM	CHAR	3		Sequence number of the cryptogram for contactless transactions (Dynamic Card Verification Value).
46	AAV_SEQ_NUMBER	CHAR	3		Sequence number for automatic address verification (AAV).
47	PIN_RETRY_MAX	NUMBER	1		This is used to specify in one digit the Personal Identification Number (PIN) retry counter. In case the PIN validation failure counter exceeds this counter, the system does not validate the PIN any more.
48	PIN_LENGTH	NUMBER	2		This is used to specify in two digits the PIN length used for PIN generation. It takes usually '04' as default value and must fall between '04' and '12' only.
49	OFF_LINE_ATM_PERIOD	CHAR	3		This column is not used in V3.5.
50	OFF_LINE_ATM_LIMIT_ONUS	NUMBER	18		This column is not used in V3.5.
51	OFF_LINE_ATM_LIMIT_OFFUS	NUMBER	18		This column is not used in V3.5.
52	ISO3_SMART_OPTION	CHAR	1		This column is not used in V3.5.
53	ROT_MEM_OPTION	CHAR	1		This column is not used in V3.5.
54	ROT_MEM_CTRL_LIMIT	CHAR	1		This column is not used in V3.5.
55	ROT_MEM_CTRL_AVAILABLE	CHAR	1		This column is not used in V3.5.
56	ROT_MEM_SCANF_ISO2ISO3	CHAR	1		This column is not used in V3.5.
57	ROT_MEM_LAST_USAGE_DATE	CHAR	1		This column is not used in V3.5.
58	ISO3_SMART_PROC_MODE	CHAR	7		This column is not used in V3.5.
59	LANGUAGE_CODE	CHAR	3		This column is not used in V3.5.
60	CONTROL_VERIFICATION_INDEX	CHAR	3		This column is not used in V3.5.
61	USER_CREATE	VARCHAR2	15		ID of the user when record created.
62	DATE_CREATE	DATE	7		Record creation date and time.
63	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
64	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.2.7 CARD_RANGE_KEY

This table is used to define different PIN and CVK keys for a PAN range which may be used on different periods of the range lifetime. Record of this table concern the Payment instrument parameter. Refer to "[PIN keys and CVC keys sections data](#)" section in UG1020-Payment instrument user guide for more details.

Each column of this table is described in detail in the next section.

13.2.7.1 Columns description

Seq.	Column Name	Data type	Len.	Sc.	Column Description
1 	MIN_CARD_RANGE	VARCHAR2	22		First PAN of the PAN range.
2 	MAX_CARD_RANGE	VARCHAR2	22		Last PAN of the PAN range.
3	ISSUING_BANK_CODE	CHAR	6		Issuer financial institution for which parameters are being defined. It should be defined in the 'BANK' table.
4 	KEY_CODE	VARCHAR2	16		Type of the PAN range key. The key code can be 'CVKI' or 'PVKI'.
5 	KEY_INDEX	CHAR	3		The key index value.  Note Key Index applicable only for: CVKI, PVKI.
5 	KEY_SEQ	CHAR	3		The sequence number used to retrieve the CVKI or PVKI.
6	START_VAL_DATE	DATE	7		The start validity date of the derivation key index.
7	END_VAL_DATE	DATE	7		The end validity date of the derivation key index.
8	USER_CREATE	VARCHAR2	60		ID of the user when record created.
9	DATE_CREATE	DATE	7		Record creation date and time.
10	USER_MODIF	VARCHAR2	60		ID of the last user who modified the record.
11	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.2.8 CARD_PRODUCT

This table contains the payment instrument Product parameters required for manufacturing process, payment instrument contract management, authorization and risk management options. It is the main parameter for the payment instrument Management Module of PowerCARD since all the Payment Instruments managed by the system are linked to this parameter and will inherit its options.

Refer to "[Payment instruments product setup](#)" section in UG1020-Catalogue user's guide for more details.

Each column of this table is described in detail in the next section.

13.2.8.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Issuing institution owning the issuing product. This code must be defined in the 'BANK' table.
2 	PRODUCT_CODE	CHAR	3		Code that uniquely identifies the product for the issuing institution.
3	ABRV_WORDING	VARCHAR2	16		Shortened description displayed in all subsequent screens and used for information and reports.
4	WORDING	VARCHAR2	32		The product description as stated by the payment system. It is for information only.
5	ON_US_PRODUCT_FLAG	CHAR	1		This flag is used to indicate if the payment instrument is ON_US or not. It is used for stand in processing. Possible values are: 'Y' = ON US Product, 'N' = OFF US Product.
6	PRODUCT_TYPE	CHAR	2		Type of the product. Possible values are: 'DC' = Debit, 'CC' = Charge card, 'CR' = Credit, 'PP' = Prepaid Card.
7	NETWORK_CODE	CHAR	2		System or International Network, to which the product's Payment Instrument belongs. This information will make the system ask for payment system specific information. This code must be defined in the 'NETWORK' and 'BANK_NETWORK' tables.
8	NETWORK_CARD_TYPE	CHAR	2		Type of payment instruments that can be managed by the system. This code must be defined in the 'CARD_TYPE' table.
9	SERVICE_CODE	CHAR	3		This information mentions three major aspects of payment instrument's usage (payment instrument's territoriality, Risks associated to the payment instrument and Services allowed). First digit (Position 1) '1' = International, '2' = International other technology, '5' = National, '6' = National other technology,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'7' = Private (Invalid for Visa & MCI). Second digit (Position 2) '0' = Normal risk level, '1' = Low risk level (Invalid for Visa & MCI), '2' = Positive authorization required, '3' = High risk level (Invalid for Visa & MCI), '4' = Required issuer authorization or stand-in in case of specific agreement (Invalid for Visa and MCI, Valid for Cirrus and Maestro), '9' = Private. Third digit (Position 2) '0' = No restriction, Pin required, '1' = No restriction, '2' = Retail only, '3' = Withdrawal only, Pin required, '4' = Withdrawal only (Invalid for Visa & MCI), '5' = Retail only, Pin required '6' = No restriction, Pin required if PINPAD, '7' = Retail only, Pin required if PINPAD, '9' = Private.
10	SERVICES_SETUP_INDEX	CHAR	4		The index of the permitted services for the payment instruments belonging this product. The service setup index will define the type of transactions allowed on the payment instruments under the product. This option can be used to restrict certain transactions like Withdrawal on the payment instruments. It must be defined in 'P7_SERVICES_SETUP' table.
11	CURRENCY_CODE	CHAR	3		This is the Base currency for product related parameters. Must be defined in 'CURRENCY_TABLE' table.
12	LIMITS_INDEXES	CHAR	4		The permitted limits for the payment instruments belonging this product. In other words, it defines the maximum amounts / number of transaction the customers can use their payment instruments per day or for a specific period. Must be defined in 'P7_LIMITS_SETUP_TOTAL' table.
13	PERIODICITY_CODE	CHAR	3		This column is not used in V3.5.
14	ENABLE_CARD_LIMITS_EXCEPTION	CHAR	1		This column indicates whether the limit indicator modification can be enabled or disabled. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'Y' = Enabled, 'N' = Disabled.  Note This column is not used anymore since ISO 3 track is not used anymore in cards industry due to security reasons.
15	PROD_PIN_OFFSET_PVV	CHAR	3		This is used to specify the PIN verification method. Possible values are: 'NCP' = No PIN, 'PVV' = PVV Method, 'OFS' = Offset Method.
16	PROD_CVV1	CHAR	1		This column indicates if the CVV1 should be calculated by PowerCARD or not. Possible values are: 'Y' = Yes, 'N' = No.
17	PROD_CVV2	CHAR	1		This column indicates if the CVV2 should be calculated by PowerCARD or not. Possible values are: 'Y' = Yes, 'N' = No.
18	PROD_CCD	CHAR	1		This column indicates if the CCD should be calculated by PowerCARD or not. Possible values are: 'Y' = Yes (by default), 'N' = No.
19	PROD_TELECODE	CHAR	1		This column indicates if the TELECODE should be calculated by PowerCARD or not. Possible values are: 'Y' = Yes (by default), 'N' = No.
20	PROD_ENCOD_ISO_1	CHAR	1		This column indicates if the ISO1 encoding should be calculated by PowerCARD or not. Possible values are: 'Y' = Yes (by default), 'N' = No.
21	PROD_ENCOD_ISO_2	CHAR	1		This column indicates if the ISO2 encoding should be calculated by PowerCARD or not.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Possible values are: 'Y' = Yes (by default), 'N' = No.
22	PROD_ENCOD_ISO_3	CHAR	1		This column indicates if the ISO3 encoding should be calculated by PowerCARD or not. Possible values are: 'Y' = Yes (by default), 'N' = No.
23	PROD_ENCOD_SHIP	CHAR	1		This column indicates if the SHIP encoding should be calculated by PowerCARD or not. Possible values are: 'Y' = Yes (by default), 'N' = No.
24	OFF_LINE_ATM_PERIOD	CHAR	3		This column is not used in V3.5.
25	OFF_LINE_ATM_LIMIT_ONUS	NUMBER	18		This column is not used in V3.5.
26	OFF_LINE_ATM_LIMIT_OFFUS	NUMBER	18		This column is not used in V3.5.
27	CARD_GEN_PROCEDURE	CHAR	2		This is used to indicate the specific PAN generation procedure usually provided in the project document. Otherwise (Case of standard PAN generation procedure), this field remains empty. It must be defined in 'CARD_GEN_COUNTERS' table.
28	PLASTIC_TYPE	CHAR	3		Type of Plastic used for the payment instrument catalog product. Must be present in 'PLASTIC_LIST' table.
29	DELIVERY_MODE	CHAR	1		The default delivery mode for payment instruments belonging to this product. Possible values are: 'B' = Branch, 'P' = Processing Center, 'M' = Mail, 'C' = Customer selection.
30	DELIVERY_FLAG	CHAR	1		This is used to indicate if the payment instrument needs to be delivered or not. Possible values are: 'Y' = Yes, 'N' = No.
31	REPLACEMENT_DELIVERY_FLAG	CHAR	1		This is used to indicate if the replaced new payment instrument should inherit the old payment instrument delivery status or apply the delivery status option directly from the catalog product. Possible values are: 'Y' = Yes, 'N' = No.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
32	EMBOSSING_OPTION	CHAR	1		This column indicates whether the production process should start automatically post the payment instrument creation or should wait a manual confirmation. Possible values are: 'A' = Automatic (the production data are automatically prepared during the EOD processing), 'M' = Manual (PowerCARD needs a user's confirmation to prepare the production data).
33	RENEWAL_OPTION	CHAR	1		This column indicates whether the renewal process should start automatically at the payment instruments expiry or should wait a manual request. Possible values are: 'A' = Automatic (For an automatic renewal when the institution initiates the payment instruments renewal « N » months before their expiration with no need for a user confirmation, and this is done using the PRIOR_EXPIRY_DATE field (See below), 'M' = Manual (PowerCARD needs a manual request to initiate the payment instrument renewal. In this case, the system gives, in a specific screen, the user the possibility to enter the PAN to renew and execute the renewal request. The request will be saved and processed in next daily batch). Note o The renewal is processed only if the STATUS_CODE column of 'CARD' table is set to 'N' (Normal) or 'M' (Monitored) and not in stop list, the RENEWAL_OPTION column of 'CARD' table is set to 'Y' and the PAN doesn't verify any stop renewal criteria set in the system. The renewal fees are generated automatically, when parametrized, during EOD processing with 'C9' as transaction code.
34	ACTIVATION_FLAG	CHAR	1		This flag is used to indicate if the payment instrument needs to be activated or not when created or should wait an event to be activated. Possible values are: 'Y' = Activated,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'N' = Inactive, 'C' = Pin change, 'P' = Successful Pin verification.
35	REPLACEMENT_ACTIVATION_FLAG	CHAR	1		This is used to indicate if the replaced new PAN should inherit the old PAN activation status or apply the activation option directly from the catalog product. Possible values are: 'Y' = Yes, 'N' = No.
36	DELIVERY_PIN_MAILER_FLAG	CHAR	2		This column indicates to the system if PIN mailer delivery should be confirmed or not before payment instrument manufacture. Possible values are: 'NN' = No PIN production (No PIN is generated and printed from PowerCARD), 'PY' = On PAN creation (The PIN mailer is considered automatically delivered on PAN creation), 'WA' = On PAN activation (The PIN mailer is generated once the payment instrument is activated), 'WR' = After N days of PAN creation (The PIN mailer is generated automatically after the N days of PAN creation. It will be possible to manually force the PIN generation before reaching the N days through the system pending Payment instrument operations functionality).
37	NBR_PURGE_DAYS	NUMBER	3		This is used to determine the pending delay after PAN creation (in number of days) so that the PIN mailer generation can be done. Required only when DELIVERY_PIN_MAILER_FLAG field is set to 'WR' (After N days of PAN creation).
38	SUPPLEMENTARY_CARD_EXP_FLAG	CHAR	1		This is used to specify if supplementary PAN expiry should be the same as the Primary PAN. Possible values are: 'Y' = Yes, 'N' = No.
39	CARD_CARRIER_OPTION	CHAR	1		This flag is used to indicate if the payment instrument needs to be delivered with PAN carrier or not. If 'Y' the PAN should be present in the PAN carrier file that is used to print the name and address of the customer in the delivery envelope. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'Y' = Yes, 'N' = No (by default).
40	ADVICE_OPTION	CHAR	1		This flag is used to indicate if an advice should be printed for first PAN issuance or not. Possible values are: 'Y' = Yes (by default), 'N' = No.
41	ADVICE_RENEWAL_OPTION	CHAR	1		This flag is used to indicate if an advice should be printed for PAN renewal or not. Possible values are: 'Y' = Yes (by default), 'N' = No.
42	PIN_MANAGEMENT_OPTION	CHAR	2		This column specifies how should be the PIN generation for payment instrument first issuance and renewal. Possible values are: 'NC' = First issuance without PIN, Change managed (PIN not produced by the system and PIN change allowed), 'BN' = First issuing and renewal without change (First issuing and renewal PIN printing, no PIN change allowed), 'FN' = First issuing without change (First issuing with PIN, no PIN change allowed), 'BC' = First issuing, renewal with change (First issuing and renewal PIN printing, with PIN change), 'NN' = PIN and change not managed (PIN not produced by the system and no PIN change allowed), 'RC' = Renewal with change (Renewal with PIN, with PIN change), 'RN' = Renewal without change (Renewal with PIN and no PIN change allowed), 'FC' = First issuing with change (First issuing with PIN, with PIN change).
43	VALIDITY_CODE_FIRST	NUMBER	3		This is used to determine (in number of months) the duration/validity of a new PAN.
44	VALIDITY_CODE_RENEWAL	NUMBER	3		This is used to determine (in number of months) the duration of a renewed PAN.
45	EXPIRATION_MONTH	NUMBER	2		This is used to specify the expiration month of PAN.
46	MINIMUM_VALIDITY	NUMBER	2		This is used along with the EXPIRATION_MONTH field to indicate the minimum validity period (in number of months) for products parametrized to be renewed in a fixed month of the year (July for example).

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
47	RESTRICTED_RENEWAL_MONTH_1	NUMBER	2		This is used to specify the 1st restricted months of payment instruments associated with this product. It's used to restrict the renewal of payment instruments whose expiration month is the month specified as the 1st month (Format MM).
48	SUBSTITUTED_RENEWAL_MONTH_1	NUMBER	2		This is used to specify the 1st replaced month of payment instruments associated with this product. It is used to indicate the 1st month that replaces respectively the month specified in the RESTRICTED_RENEWAL_MONTH_1 column and where no end of validity is tolerated. This month is used when a large number of customers are not able to collect their payment instruments because they may be elsewhere. (Format MM). <u>Example of use:</u> Restricted month = 8 (August); Replaced month = 9 (September). No production occurs in the month of August, so if there are new payment instruments where the expiration month is August, the month of September should be replaced.
49	RESTRICTED_RENEWAL_MONTH_2	NUMBER	2		This is used to specify the 2nd restricted months of payment instruments associated with this product. It's used to restrict the renewal of payment instruments whose expiration month is the month specified as the 2nd month. (Format MM).
50	SUBSTITUTED_RENEWAL_MONTH_2	NUMBER	2		This is used to specify the 2nd replaced month of payment instruments associated with this product. It is used to indicate the 2nd month that replaces respectively the month specified in the RESTRICTED_RENEWAL_MONTH_2 column and where no end of validity is tolerated. This month is used when a large number of customers are not able to collect their payment instruments because they may be elsewhere. (Format MM).
51	RESTRICTED_RENEWAL_MONTH_3	NUMBER	2		This is used to specify the 3rd restricted months of payment instruments associated with this product. It's used to restrict the renewal of payment instruments whose expiration month is the month specified as the 3rd month. (Format MM).
52	SUBSTITUTED_RENEWAL_MONTH_3	NUMBER	2		This is used to specify the 3rd replaced month of payment instruments associated with this product. It is used to indicate the 3rd month that replaces respectively the month specified in the RESTRICTED_RENEWAL_MONTH_3 column and where no end of validity is tolerated. This month is used when a large number of customers are not able

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					to collect their payment instruments because they may be elsewhere. (Format MM).
53	PRIOR_EXPIRY_DATE	NUMBER	2		This is used to determine the number of months « N » before payment instrument expiration for initiating the renewal by PowerCARD. It is enabled and used only if the RENEWAL_OPTION of 'CARD' table is set to 'A' (Automatic). Note This parameter will be considered by the cardholder Monthly batch for renewal processing; in this example, the renewal will occur 1 month prior to old payment instrument expiry if PRIOR_EXPIRY_DATE value is set to '1'.
54	PRODUCTION_FLAG	CHAR	1		This flag is used to indicate whether the production request of the payment instrument can be treated within the EOD process or wait for an external event. Possible values are: 'I' = Immediate (by default), 'W' = Wait confirmation.
55	CARD_FEES_IND_PRIM	CHAR	3		This is used to define fees tariff for Individual Primary payment instrument. It must be present in 'CARD_FEES' table. Note Defaulted to the fees setup at the payment instrument catalog product (Refer to "Fees group" section in UG1019 Catalogue User's Guide for more details).
56	CARD_FEES_IND_SEC	CHAR	3		This is used to define fees tariff for Individual Secondary payment instrument. It must be present in 'CARD_FEES' table. Note Defaulted to the fees setup at the payment instrument catalog product (Refer to "Fees group" section in UG1019 Catalogue User's Guide for more details).

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
57	CARD_FEES_BUS_PRIM	CHAR	3		This is used to define fees tariff for Company (Corporate) Primary payment instrument. It must be present in 'CARD_FEES' table. Note Defaulted to the fees setup at the payment instrument catalog product (Refer to "Fees group" section in UG1019 Catalogue User's Guide for more details).
58	CARD_FEES_BUS_SEC	CHAR	3		This is used to define fees tariff for Company (Corporate) Secondary payment instrument. It must be present in 'CARD_FEES' table. Note Defaulted to the fees setup at the payment instrument catalog product (Refer to "Fees group" section in UG1019 Catalogue User's Guide for more details).
59	CARD_FEES_STF_PRIM	CHAR	3		This is used to define fees tariff for Staff Primary payment instrument. It must be present in 'CARD_FEES' table. Note Defaulted to the fees setup at the payment instrument catalog product (Refer to "Fees group" section in UG1019 Catalogue User's Guide for more details).
60	CARD_FEES_STF_SEC	CHAR	3		This is used to define fees tariff for Staff Secondary payment instrument. It must be present in 'CARD_FEES' table. Note Defaulted to the fees setup at the payment instrument catalog product (Refer to "Fees group" section in UG1019 Catalogue User's Guide for more details).
61	SETTLEMENT_PERIOD	CHAR	1		This column is not used in V3.5.
62	SETTLEMENT_PERIOD_CASH	CHAR	1		This column is not used in V3.5.
63	MARKUP_CODE	CHAR	2		This is to indicate the conversion fees to apply when the cardholder makes

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					transactions with a currency different than the billing currency. This markup will be applicable on cardholder billing related amounts. It must be defined in 'MARKUP_INDEX' table.
64	SCENARIO_CODE	CHAR	1		This column is not used in V3.5.
65	ROT_MEM_OPTION	CHAR	1		This column is not used in V3.5.
66	ROT_MEM_CTRL_LIMIT	CHAR	1		This column is not used in V3.5.
67	ROT_MEM_CTRL_AVAILABLE	CHAR	1		This column is not used in V3.5.
68	ROT_MEM_SCANF_ISO2_ISO3	CHAR	1		This column is not used in V3.5.
69	ROT_MEM_LAST_USAGE_DATE	CHAR	1		This column is not used in V3.5.
70	ISO3_SMART_PROC_MODE	CHAR	7		This column is not used in V3.5.
71	ISO3_SMART_OPTION	CHAR	1		This column is not used in V3.5.
72	ICC_APPLICATION_INDEX	CHAR	4		Integrated Card Circuit (ICC) application index that supports EMV compliant products (used only for chip payment instruments). Must be present in 'ICC_APPLICATION_PAR_INDEX' table Note  This information is used for regulation driven processes and payment organization regulatory reporting.
73	DEFAULT_LANGUAGE_CODE	CHAR	3		The default language to use for the payment instruments belonging to this product. This code must be present in 'LANGUAGE_LIST' table.
74	CONTROL_VERIFICATION_INDEX	CHAR	3		This is the Control verification flag used during the Authorization STANDIN Processing, i.e. it is on line controls applicable during authorization processing both on host and off host. This column must be present in 'CONTROL_VERIFICATION_FLAGS' table.
75	PRIVATE_TLV_DATA	VARCHAR2	64		This column is reserved for internal use.
76	LOY_ENTITY_LEVEL_FLAG	CHAR	1		This flag indicates if the loyalty programs for the payment instruments belonging to this product should be at level of the Account or the PAN. Possible values are: 'A' = Account (by default),

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'C' = PAN.
77	LOY_AUTO_ENROLLMENT_FLAG	CHAR	1		This column indicates whether the payment instruments belonging to this product should be automatically enrolled to a loyalty program or not. Possible values are: 'A' = Automatic, 'N' = Manual (by default).
78	LOAD_TRANS_ACTIVATION_FLAG	CHAR	1		This column indicates if the payment instrument should be activated upon the first load of transaction. Possible values are: 'Y' = Yes, 'N' = No.
79	EVENT_RULES_INDEX	CHAR	3		This column indicates if the payment instrument should be activated upon the first load of transaction.
80	MULTI_ACCOUNT_FLAG	CHAR	1		This flag is used when PRODUCT_TYPE column is set to 'CR' (Credit Card) or 'PP' (Prepaid Card). It is used to indicate if the card product supports multi-accounts (multi-currencies product). Otherwise, the product is for single account. Possible values are: 'Y' = Yes, 'N' = No (by default).
81	ACS_ENROLLMENT_STATUS	CHAR	1		This is used to indicate if the enrollment in 3D secure service is activated. Possible values are: 'Y' = Yes, 'N' = No.
82	INITIAL_STATUS_CODE	CHAR	1		Status to be assigned as default value to the new issued payment instruments belonging to this product. It should be present in 'STATUS_LIST' table for ENTITY_CODE = 'CH' (Cardholder).
83	INITIAL_STATUS_REASON	CHAR	2		Status reason to be assigned as default value to the new issued payment instruments belonging to this product. It must be present in 'STATUS_REASON_LIST' table for ENTITY_CODE = 'CH' (Cardholder).
84	NAMELESS_FLAG	CHAR	1		This flag is used to indicate whether the payment instrument catalog product supports nameless PANs issuance or not. Possible values are: 'Y' = Yes, 'N' = No.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
85	TRANSACTION_FEE_INDEX	VARCHAR2	7		The automatic fees to generate on the submitted transactions in case of Debit product type. It must be already defined in 'ISS_TRANSACTION_FEES_INDEX' table.
86	MAX_MONTH_VALIDITY	NUMBER	2		Maximum number of months allowed for manually captured Expiry date in case of manual renewal and replacement.
87	ADJUST_DATE_FLAG	CHAR	1		This flag indicates whether the expiry date should be adjusted by the system to the defined maximum validity months, when captured expiry date is greater than MAX_MONTH_VALIDITY field's value or not. Possible values are: 'Y' = Yes, 'N' = No.
88	OLD_CARD_PLASTIC_MNG	CHAR	1		This column indicates whether to reject the authorization when performed with the old plastic once the new plastic is used (first authenticated authorization). Possible values are: 'R' = Reject once new plastic used, 'A' = Accept even new plastic used.
89	CATALOGUE_PI_PRODUCT	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P' (Generic Payment Instrument)
90	CATALOGUE_PI_VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P' (Generic Payment Instrument)
91	DIGITIZATION_FLAG	CHAR	1		This field indicates whether the product is eligible for digitization or not. Possible values are: 'Y' = Yes, 'N' = No.
92	INITIAL_ALLOWED_OPS	CHAR	6		The authorization types concerned by the initial allowed operations. It is defined as a bitmap; Each position represents a certain authorization type. Possible values are: 1st position = Digitization and token authorizations, 2nd position = Card Not Present authorizations. For Example, YYYYYY or NNNNNN where 'Y' and 'N' indicates if the initial operation is allowed for one of the

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					authorization types presented above or not. Note Only 2 positions are used by the system. The 4 remaining positions are set to 'N' by default.
93	USER_CREATE	VARCHAR2	15		ID of the user when record created.
94	DATE_CREATE	DATE	7		Record creation date and time.
95	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
96	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.2.9 CARD_TYPE

PAN type parameters define the different types of payment instruments that can be managed by the system.

PAN type defines the Card class as required by the international payment association (Silver, Gold, Premier, Platinum, Classic, Electron, Maestro, Cirrus, etc.). It also defines the Group (Individual payment instrument, Business payment instrument), Class level (Credit, Debit, Prepaid) and the Payment instrument option (Corporate, Co-branded, Purchase, Business or Affinity).

Records of this table concern the payment instrument parameters setup part of PowerCARD Issuer system.

Refer to [PAN type](#) section in UG1020-Payment Instrument for more details.

Each column of this table is described in detail in the next section.

13.2.9.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. It should be defined in 'BANK' table.
2 	NETWORK_CODE	CHAR	2		Payment system to which the card belongs to. It must be defined in 'NETWORK' table.
3 	NETWORK_CARD_TYPE	CHAR	2		Internal code identifying the PAN type uniquely within the system.
4	ABRV_WORDING	VARCHAR2	16		PAN type abbreviated wording displayed in all subsequent screens and reports.
5	WORDING	VARCHAR2	32		PAN type's wording as stated by the payment system. It is for information only.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
6	CLASS	CHAR	2		Card class provided by the payment systems and used for quarterly reporting mainly. Possible values are: '01' = Authorization required '02' = Classic '03' = Silver '04' = Gold/Premier '05' = Cirrus '06' = Infinite/Premium.
7	CLASS_GROUP	CHAR	2		The class group is defined in PowerCARD system in order to differentiate in terms of management, individual cards from business cards. It is used for quarterly reporting mainly. Possible values are: 'IN' = Individual 'BU' = Business
8	CLASS_LEVEL	NUMBER	1		It's the payment mode linked to the payment instrument. It is used for quarterly reporting mainly. Possible values are: '1' = Debit '2' = Credit '3' = Prepaid
9	CORPORATE_CARD_FLAG	CHAR	1		This flag indicates if this product is corporate card or not. Possible values are: 'Y' = Corporate card 'N' = No Corporate card
10	COBRANDED_CARD_FLAG	CHAR	1		This flag indicates if this product is co-branded card or not. Possible values are: 'Y' = Co branded card 'N' = No Co branded card
11	PURCHASE_CARD_FLAG	CHAR	1		This flag indicates if this product is purchase card or not. Possible values are: 'Y' = Purchasing card 'N' = No Purchasing card
12	BUSINESS_CARD_FLAG	CHAR	1		This flag indicates if this product is business card or not. Possible values are: 'Y' = Business card 'N' = No Business card

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
13	AFFINITY_CARD_FLAG	CHAR	1		This flag indicates if this product is affinity card or not. Possible values are: 'Y' = Affinity card 'N' = No Affinity card
14	REPORTING_INDICATOR_1	VARCHAR2	16		The first Reporting indicator. It is used by the system to consolidate card type involved in the processing of generating management reports (Ex: quarterly network reports) and accounting entries.
15	REPORTING_INDICATOR_2	VARCHAR2	16		The second Reporting indicator. It is used by the system to consolidate card type involved in the processing of generating management reports (Ex: quarterly network reports) and accounting entries.
16	NETWORK_CARD_CLASS	VARCHAR2	3		Network Card Class. It must be present in 'CARD_CLASS' table
17	NETWORK_BRAND_TYPE	VARCHAR2	3		Network brand type. It is used only in case of MasterCard card type (NETWORK_CODE = '02'). Possible values are: 'MSI' = Maestro, 'CIR' = Cirrus, 'MCC' = MasterCard
18	USER_CREATE	VARCHAR2	15		ID of the user when record created.
19	DATE_CREATE	DATE	7		Record creation date and time.
20	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
21	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.2.10 ICC_APPLICATION_PAR_INDEX

This table stores the parameters for the management of Integrated Circuit Card application as to comply with EMV Standard Requirements.

Refer to "[Application identifier](#)" section in UG1020-Payment instrument user's guide.

Each column of this table is described in detail in the next section.

13.2.10.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Issuer institution code. It should be defined in the 'BANK' table.
2 	ICC_APPLICATION_INDEX	CHAR	4		Integrated circuit card application code.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
3 	PRODUCT_CODE	CHAR	3		Payment instrument product code. It must be present in 'CARD_PRODUCT' table.
4	APPLICATION_ID	VARCHAR2	4		AID that is identifying specific organizations and their chip-based products according to ISO/IEC 7816-5. The AID is comprised of the registered identifier (RID) and the proprietary application identifier extension (PIX).
5	ABRV_WORDING	VARCHAR2	16		Application shortened description used for information, for reporting or on other screens.
6	WORDING	VARCHAR2	32		Application wording.
7	USER_CREATE	VARCHAR2	15		ID of the user when record created.
8	DATE_CREATE	DATE	7		Record creation date and time.
9	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
10	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.2.11 ISS_POSTING_RULES

This table is used to define the rules for which the transaction posting will apply. For example, setup can be done so that transactions with local currency are to be posted to the local currency account, and transactions with other currencies are to be posted to the USD account.

Refer to "[Transaction posting group](#)" section in UG1019-Catalogue user guide for more details.

Each column of this table is described in detail in the next section.

13.2.11.1 Columns description

Seq.	Column Name	Data type	Len.	Sc.	Column Description
1 	SEQUENCE_ID	NUMBER	10		Sequence number identifying the Issuer transactions posting rule criteria.
2	BANK_CODE	CHAR	6		Financial institution code concerned by the Issuer transactions posting rule criteria parameters. It should be defined in the 'BANK' table.
3	CORPORATE_ID	VARCHAR2	15		This column is not used in V3.5.
4	CARD_PRODUCT_CODE	CHAR	3		Payment instrument product code as criterion for the transaction posting rule. It should be defined in the 'CARD_PRODUCT' table.
					 Note Null value indicates that all payment instrument products of the institution are concerned.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
5	PRODUCT_TYPE	CHAR	2		Product type as criterion for the transaction posting rule. Possible values are: 'CC' = Charge, 'CR' = Credit, 'PP' = Prepaid, 'DC' = Debit.  Note Null value indicates that all product types are concerned.
6	MCC	CHAR	4		Merchant Category Code as criterion for the transaction posting rule. It should be defined in the 'MCC' table.  Note Null value indicates that all MCCs are concerned.
7	MCC_GROUP	CHAR	4		MCC Group code as criterion for the transaction posting rule. It should be defined in 'MCC_RANGE' table.  Note Null value indicates that all MCC groups are concerned.
8	OWNER_CODE	CHAR	2		Customer type as criterion for the transaction posting rule. It should be defined in 'OWNER_LIST' table.  Note Null value indicates that all customer types of the institution are concerned.
9	TRANSACTION_CODE	CHAR	2		Transaction code as criterion for the transaction posting rule. It should be defined in 'TRANSACTIONS_DEFINITION' table.  Note Null value indicates that all transaction codes are concerned.
10	TRANSACTION_CATEGORY	NUMBER	2		This is the transaction category as criterion for the transaction posting rule. Possible values are: '01' = Airline,

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					'02' = Lodging, '03' = Rent car, '04' = Restaurant, '05' = Medical, '06' = Mail order, '07' = Purchase, '09' = Withdrawal, '10' = Quasi cash, '11' = Cash, '12' = Transfer, '13' = E-commerce, '14' = T&E. Note  Null value indicates that all transaction categories are concerned.
11	TRANSACTION_CURRENCY	CHAR	3		This is the Transaction currency applicable as criterion for the transaction posting rule. It should be defined in 'CURRENCY_TABLE' table. Note  Null value indicates that all currencies are concerned.
12	ACQUIRER_COUNTRY_CODE	CHAR	3		This is the Acquirer country code as criterion for the transaction posting rule. It should be defined in the 'COUNTRY' table. Note  Null value indicates that all currencies are concerned
13	CARD_ACCEPTOR_ID	VARCHAR2	15		This column is not used in V3.5.
14	CURRENCY_FLAG	CHAR	1		It is to indicate the transaction currency (Local or foreign currency) as a criterion for the transaction posting rule (Cross border territory). Possible values are: 'F' = Foreign currency, 'L' = Local currency.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					 Note Null value indicates that both Foreign/local currency indicator values are concerned.
15	COUNTRY_FLAG	CHAR	1		Country territory indicator applicable as criterion for the transaction posting rule. It is to indicate whether the transaction acquiring country is a Local or foreign country. Possible values are: 'F' = Foreign country, 'L' = Local country.  Note Null value indicates that both Foreign/local country values are considered.
15	LIST_PRODUCT_CODE	VARCHAR2	15		This column is not used in V3.5.
16	POSTING_DESTINATION	CHAR	2		Posting account destination. Possible values are: 'CH' = Card / Account, 'CO' = Corporate.
17	CORPORATE_LEVEL	NUMBER	2		Corporate posting level when POSTING_DESTINATION is set to 'CO' (Corporate).
18	POSTING_ACCOUNT_TYPE	CHAR	2		Type of the posting account destination. It should be defined in the 'ACCOUNT_TYPE_LIST' table.
19	POSTING_ACCOUNT_SEQUENCE	NUMBER	2		Sequence of the posting account for payment instruments with multiple accounts. For payment instruments with single account, the sequence default value is '00'.
20	CUSTOMER_SEGMENT_CODE	CHAR	4		Customer segment code as criterion for the transaction posting rule. It should be defined in the 'CUSTOMER_SEGMENT' table.  Note Null value indicates that all customer segments are concerned.
21	VIP_CODE	CHAR	1		This is the VIP status applicable as criterion for the transaction posting rule. It should be defined in the 'VIP_LIST' table.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					 Note Null value indicates that all VIPs are concerned.
22	HUNTING_SCENARIO	CHAR	3		This column is reserved for future use.
23	USER_CREATE	VARCHAR2	15		ID of the user when record created.
24	DATE_CREATE	DATE	7		Record creation date and time.
25	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
26	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.2.12 ISS_TRANSACTION_FEES_PARAM

This parameter table defines the calculation methods of the fees to be generated automatically on transactions posted to financial accounts not managed by PowerCARD (For example Debit PAN linked to bank checking account, or saving account, ...etc). Those fees are generated based on defined criteria such as Transaction category, Product, Origin, Currency, etc.

Refer to "[Transaction fees group](#)" section in UG1019-Catalogue user guide for more details.

Each column of this table is described in detail in the next section.

13.2.12.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	SEQUENCE_ID	NUMBER	10		Sequence identification number.
2	TRANSACTION_FEE_INDEX	VARCHAR2	7		Code identifying the transaction fees. As defines in 'ISS_TRANSACTION_FEES_INDEX' table.
3	FEE_TYPE	CHAR	10		This column is not used in V3.5.
4	ISSUER_BANK_CODE	CHAR	6		This is the issuer financial institution for which the transaction fees criteria are being defined. It must be defined in the 'BANK' table.
5	CARD_PRODUCT_CODE	CHAR	3		This is the PAN product code applicable as criterion for the transaction fee generation. This column must be defined in 'CARD_PRODUCT' table.
6	PRODUCT_IDENTIFIER	CHAR	6		This column is not used in V3.5.
7	TRANSACTION_CODE	CHAR	2		Transaction code used to generate the resulted fee transaction. As defined in 'TRANSACTION_DEFINITION' table.
8	REVERSAL_FLAG	CHAR	1		This is the reversal flag applicable as criterion for the transaction fee generation. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'N' = Normal, 'R' = Reversal.
9	CURRENCY_CODE_TRANSACTION	CHAR	3		This is the transaction currency code criterion of the transaction fee generation. It must be defined in 'CURRENCY_TABLE' table.
10	TCC	CHAR	1		This is the Transaction category code. Possible values are: A' = Rent car, 'C' = Cash Advance, 'F' = Restaurants, 'H' = Hotel, 'L' = Rail/Road, 'O' = Education, 'P' = Petrol, 'R' = Purchase, 'T' = Phone & mail order, 'U' = Unique, 'X' = Travel, 'Z' = ATM.
11	ORIGIN_CODE	CHAR	1		This is the Transaction origin code. Possible values are: '0' = ONUS card / local merchant, '1' = ONUS card / local other bank merchant, '2' = ONUS card / foreign merchant.
12	MCC	CHAR	4		This is the Merchant Category Code applicable as criterion for the transaction fee generation.
13	MCC_GROUP	CHAR	4		This is the MCC group Code applicable as criterion for the transaction fee generation.
14	ACQUIRER_COUNTRY	CHAR	3		This column is not used in V3.5.
15	DESCRIPTION	VARCHAR2	32		This is the description of the transaction fee being setup.
16	PROCESSING_RULES	CHAR	1		This column indicates if the fee should be generated the separately transaction or not. Possible values are: 'T' = Generate separate transaction, 'I' = Include fees in billing amount, 'F' = Include fees in fees field.
17	TRANSACTION_FEES_CODE	CHAR	2		In case of PROCESSING_RULES = 'T' (Generate separately transaction),

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					this column indicates the Fee transaction code.
18	SINGLE_FEE_INDICATOR	CHAR	1		In case of PROCESSING_RULES = 'T' (Generate separately transaction), this column indicates whether the Fee transaction should be generated as a single fee transaction or combined with other fees generated for the same original transaction when applicable. Possible values are: 'Y' = Yes, Generate a single fee, 'N' = No, Generate for each transaction.
19	TAX_CALCULATION	CHAR	1		This column indicates whether the tax should be calculated for the fee or not. Possible values are: 'Y' = Calculation of tax, 'N' = No calculation.
20	CURRENCY_CODE_FEES	CHAR	3		In case of PROCESSING_RULES = 'T' (Generate separately transaction), this column indicates the Fee transaction currency. It must be defined in 'CURRENCY_TABLE' table.
21	RATE	NUMBER	9	6	Rate to be applied on the basic amount (In this case the basic amount is the original transaction amount).
22	FIXED_AMOUNT	NUMBER	18	3	This is the amount that will be added to the result before comparing to the minimum, maximum and grace amount.
23	MIN_AMOUNT	NUMBER	18	3	This is the minimum amount that will be compared to the final result in order to bring this result in line with the minimum amount, if the final result is less than this Minimum (If the final result is less than the Minimum amount, then the final result gets the Minimum value).
24	MAX_AMOUNT	NUMBER	18	3	This is the maximum amount that will be compared to the final result in order to bring this result in line with the maximum amount, if the final result is greater than this Maximum (If the final result is greater than the Maximum amount, then the final result gets the Maximum value).
25	GRACE_AMOUNT	NUMBER	18	3	This is the amount under which the final result is brought to zero (If the final result is less or equal than the Grace amount, then the final result gets zero value).
26	RULE_IDENTIFIER	CHAR	3		This is to indicate the rule that applies for the Issuer transaction fee calculation. Possible values are: 'STD' = Standard Rule,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'MIN' = Minimum Rule, 'MAX' = Maximum Rule. Refer to " PowerCARD's Calculation Rules " section for detailed description of calculation rule options.
27	ROUNDED_METHOD_IDENTIFIER	CHAR	1		This is to indicate the rounding method to be applied on the issuer transaction fee calculation resulted amount. Possible values are: 'H' = High value, 'L' = Low value, 'N' = Normal, 'E' = Exponent (Default standard method). Refer to " Rounded methods " section for detailed description of rounded methods.
28	THRESHOLD_AMOUNT	NUMBER	18	3	This is the input amount threshold under which the system does not undergo the Issuer transaction fee calculation and the result is set to zero.
29	SENSITIVE_OPERATION_RECORD	CHAR	1		Sensitive operation record code. Possible values are: 'I' = Insertion 'M' = Modification 'X' = Internal usage
30	USER_CREATE	VARCHAR2	15		ID of the user when record created.
31	DATE_CREATE	DATE	7		Record creation date and time.
32	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
33	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.2.13 ISS_TRANSACTION_FEES_PARAM

This parameter table defines the calculation methods of the fees to be generated automatically on transactions posted to financial accounts not managed by PowerCARD (For example Debit PAN linked to bank checking account, or saving account, ...etc). Those fees are generated based on defined criteria such as Transaction category, Product, Origin, Currency, etc.

Refer to "[Transaction fees group](#)" section in UG1019-Catalogue user guide for more details.

Each column of this table is described in detail in the next section.

13.2.13.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	SEQUENCE_ID	NUMBER	10		Sequence identification number.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
2	TRANSACTION_FEE_INDEX	VARCHAR2	7		Code identifying the transaction fees. As defines in 'ISS_TRANSACTION_FEES_INDEX' table.
3	FEE_TYPE	CHAR	10		This column is not used in V3.5.
4	ISSUER_BANK_CODE	CHAR	6		This is the issuer financial institution for which the transaction fees criteria are being defined. It must be defined in the 'BANK' table.
5	CARD_PRODUCT_CODE	CHAR	3		This is the PAN product code applicable as criterion for the transaction fee generation. This column must be defined in 'CARD_PRODUCT' table.
6	PRODUCT_IDENTIFIER	CHAR	6		This column is not used in V3.5.
7	TRANSACTION_CODE	CHAR	2		Transaction code used to generate the resulted fee transaction. As defined in 'TRANSACTION_DEFINITION' table.
8	REVERSAL_FLAG	CHAR	1		This is the reversal flag applicable as criterion for the transaction fee generation. Possible values are: 'N' = Normal, 'R' = Reversal.
9	CURRENCY_CODE_TRANSACTION	CHAR	3		This is the transaction currency code criterion of the transaction fee generation. It must be defined in 'CURRENCY_TABLE' table.
10	TCC	CHAR	1		This is the Transaction category code. Possible values are: A' = Rent car, 'C' = Cash Advance, 'F' = Restaurants, 'H' = Hotel, 'L' = Rail/Road, 'O' = Education, 'P' = Petrol, 'R' = Purchase, 'T' = Phone & mail order, 'U' = Unique, 'X' = Travel, 'Z' = ATM.
11	ORIGIN_CODE	CHAR	1		This is the Transaction origin code. Possible values are: '0' = ONUS card / local merchant, '1' = ONUS card / local other bank merchant,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'2' = ONUS card / foreign merchant.
12	MCC	CHAR	4		This is the Merchant Category Code applicable as criterion for the transaction fee generation.
13	MCC_GROUP	CHAR	4		This is the MCC group Code applicable as criterion for the transaction fee generation.
14	ACQUIRER_COUNTRY	CHAR	3		This column is not used in V3.5.
15	DESCRIPTION	VARCHAR2	32		This is the description of the transaction fee being setup.
16	PROCESSING_RULES	CHAR	1		This column indicates if the fee should be generated the separately transaction or not. Possible values are: 'T' = Generate separate transaction, 'I' = Include fees in billing amount, 'F' = Include fees in fees field.
17	TRANSACTION_FEES_CODE	CHAR	2		In case of PROCESSING_RULES = 'T' (Generate separately transaction), this column indicates the Fee transaction code.
18	SINGLE_FEE_INDICATOR	CHAR	1		In case of PROCESSING_RULES = 'T' (Generate separately transaction), this column indicates whether the Fee transaction should be generated as a single fee transaction or combined with other fees generated for the same original transaction when applicable. Possible values are: 'Y' = Yes, Generate a single fee, 'N' = No, Generate for each transaction.
19	TAX_CALCULATION	CHAR	1		This column indicates whether the tax should be calculated for the fee or not. Possible values are: 'Y' = Calculation of tax, 'N' = No calculation.
20	CURRENCY_CODE_FEES	CHAR	3		In case of PROCESSING_RULES = 'T' (Generate separately transaction), this column indicates the Fee transaction currency. It must be defined in 'CURRENCY_TABLE' table.
21	RATE	NUMBER	9	6	Rate to be applied on the basic amount (In this case the basic amount is the original transaction amount).
22	FIXED_AMOUNT	NUMBER	18	3	This is the amount that will be added to the result before comparing to the minimum, maximum and grace amount.
23	MIN_AMOUNT	NUMBER	18	3	This is the minimum amount that will be compared to the final result in order to bring this result in line with the minimum

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					amount, if the final result is less than this Minimum (If the final result is less than the Minimum amount, then the final result gets the Minimum value).
24	MAX_AMOUNT	NUMBER	18	3	This is the maximum amount that will be compared to the final result in order to bring this result in line with the maximum amount, if the final result is greater than this Maximum (If the final result is greater than the Maximum amount, then the final result gets the Maximum value).
25	GRACE_AMOUNT	NUMBER	18	3	This is the amount under which the final result is brought to zero (If the final result is less or equal than the Grace amount, then the final result gets zero value).
26	RULE_IDENTIFIER	CHAR	3		This is to indicate the rule that applies for the Issuer transaction fee calculation. Possible values are: 'STD' = Standard Rule, 'MIN' = Minimum Rule, 'MAX' = Maximum Rule. Refer to " PowerCARD's Calculation Rules " section for detailed description of calculation rule options.
27	ROUNDED_METHOD_IDENTIFIER	CHAR	1		This is to indicate the rounding method to be applied on the issuer transaction fee calculation resulted amount. Possible values are: 'H' = High value, 'L' = Low value, 'N' = Normal, 'E' = Exponent (Default standard method). Refer to " Rounded methods " section for detailed description of rounded methods.
28	THRESHOLD_AMOUNT	NUMBER	18	3	This is the input amount threshold under which the system does not undergo the Issuer transaction fee calculation and the result is set to zero.
29	SENSITIVE_OPERATION_RECORD	CHAR	1		Sensitive operation record code. Possible values are: 'I' = Insertion 'M' = Modification 'X' = Internal usage
30	USER_CREATE	VARCHAR2	15		ID of the user when record created.
31	DATE_CREATE	DATE	7		Record creation date and time.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
32	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
33	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.2.14 MARKUP_INDEX

This table is used to store the markup referential defined by institution.

Each column of this table is described in detail in the next section.

13.2.14.1 Columns description

Seq.	Column Name	Data Type	Len	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Institution concerned by the mark-up rate. It should be defined in 'BANK' table.
2 	MARKUP_FEE_INDEX	CHAR	3		Numeric identification of the Mark-up Fee Index.
3	ABRV_WORDING	VARCHAR2	16		Markup shortened description.
4	WORDING	VARCHAR2	32		Markup wording.
58	USER_CREATE	VARCHAR2	15		ID of the user when record created.
59	DATE_CREATE	DATE	7		Record creation date and time.
60	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
61	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.2.15 MULTI_RANGE_PRODUCTS

This table is used to store the payment instrument product codes sharing the same PAN range. Refer to ["PAN range"](#) in Catalogue product section under the UG1020-Payment instrument user guide for more details. Each column of this table is described in detail in the next section.

13.2.15.1 Columns description

Seq.	Column Name	Data type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which parameters are being defined. It should be defined in the 'BANK' table.
2	CATALOGUE_PRODUCT	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P'
3	CATALOGUE_PRODUCT_VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P'

Seq.	Column Name	Data type	Len.	Sc.	Column Description
4 	PRODUCT_CODE	CHAR	3		Code that uniquely identifies the product for the issuing institution. It should be defined in 'CARD_PRODUCT' table.
5 	MIN_RANGE	VARCHAR2	22		This numeric column indicates the low limit of the PAN range. It must be already defined in 'CARD_RANGE' table.
6 	MAX_RANGE	VARCHAR2	22		This numeric column indicates the high limit of the PAN range. It must be already defined in 'CARD_RANGE' table.
7 	NETWORK_CODE	CHAR	2		Network for which parameters are being defined. It should be defined in 'NETWORK' table.
8	USER_CREATE	VARCHAR2	15		ID of the user when record created.
9	DATE_CREATE	DATE	7		Record creation date and time.
10	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
11	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.2.16 PCRD_CARD_PROD_PARAM

PAN production parameters are identified using the Payment instrument Product code and the Plastic Type. They defines the PIN mailer print options (printed by HSM or generated in a file), PIN mailer format sending options (never sent to the HSM, sent for each Product, or sent once), PIN mailer format code, the prefix and suffix for the PIN mailer file if generated and the option for saving file generation.

This parameter table also contains Payment instrument production parameters that define how the personalization files will be generated. It is mainly used to provide for each plastic type defined by the following information:

- The path where the personalization file is generated in the server
- The name of file
- How the PIN is generated and which PIN mailer format should be used

Refer to ["PAN production"](#) section in UG1020-payment instrument for more details.

Each column of this table is described in detail in the next section.

13.2.16.1 Columns description

Seq.	Column Name	Data type	Len.	Sc.	Column Description
1 	PCRD_CARD_PROD_PARAM_ID	NUMBER	10		Internal code identifying the PAN production uniquely for the issuing Bank.
2	BANK_CODE	CHAR	6		Issuer financial institution for which the PAN Production parameters are being set-up. This code must be defined in the 'BANK' table.
3	CARD_PRODUCT_CODE	CHAR	3		Payment instrument product for which set up is being made. It must be present in 'CARD_PRODUCT' table.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
4	PLASTIC_CODE	CHAR	3		Code of Plastic used for the Payment instrument product. It must be present in 'PLASTIC_LIST' table.
5	DESCRIPTION	VARCHAR2	32		Wording of the personalization process.
6	PIN_MAILER_ON_HSM	CHAR	1		Way by which the Personal Identification Number (PIN) mailer will be printed. Possible values are: 'H' = HSM (in case the administrator do not want to print pin mailer) 'F' = File (to request the system to print pin mailer)  Note In case the card type is virtual, this field is not used.
7	PIN_FORMAT_SEND_FLAG	CHAR	1		This column defines if the system should send the Personal Identification Number (PIN) Mailer format to the HSM and how Possible values are: 'N' = Never (PIN Mailer format will never be sent to the HSM. In this case, FORMAT_PIN_MAILER_CODE column is not used) 'E' = For each product (PIN Mailer format will be linked to the product. The HSM will use the format indicated by the FORMAT_PIN_MAILER_CODE field) 'T' = One time (The HSM will always use the PIN format once received the first time)  Note If the PIN_MAILER_ON_HSM column is set to 'F', this column is not used.
8	FORMAT_PIN_MAILER_CODE	CHAR	3		Personal Identification Number (PIN) mailer format associated to this plastic and card product. Must be defined in 'PIN_MAILER_FORMAT' table. Mandatory only when PIN_FORMAT_SEND_FLAG # 'N'  Note If the PIN_MAILER_ON_HSM column is set to 'F', this column is not used.
9	FILE_NAME_PROD	VARCHAR2	40		Name of the personalization file. It is required only when the SAVE_PROD_FILE field is set to 'Y'.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					 Note this column is used to compose the generated spool file name by the system as follows "PTextS" where P= PREFIX_PROD and S= SUFFIX_PROD. For Example, PRFileProduct001 means that P='PR', FILE_NAME_PROD='FileProduct' and S='001'.
10	PREFIX_PROD	VARCHAR2	3		This column is used to enter the prefix indicator of the personalization file.
11	SUFFIX_PROD	VARCHAR2	3		This column is used to enter the suffix indicator of the personalization file.
12	SAVE_PROD_FILE	CHAR	1		This column is not used in V3.5.
13	FILE_NAME_PIN	VARCHAR2	40		Name of the spool file if used. It is required only when the PIN_MAILER_ON_HSM # 'F'  Note This column is used to compose the generated spool file name by the system as follows "PTextS" where P= PREFIX_PIN and S= SUFFIX_PIN. For Example, PRFileProduct001 means that P='PR', FILE_NAME_PIN='FileProduct' and S='001'.
14	PREFIX_PIN	VARCHAR2	3		This column is used to enter the prefix indicator of the PIN Mailer file generated by the PIN batch.  Note This column is used to compose the generated spool file name by the system as follows "PTextS" where P= PREFIX_PIN and S= SUFFIX_PIN. For Example, PRFileProduct001 means that P='PR', FILE_NAME_PIN='FileProduct' and S='001'.
15	SUFFIX_PIN	VARCHAR2	3		This column is used to enter the suffix indicator of the PIN Mailer file generated by the PIN batch.  Note This column is used to compose the generated spool file name by the system as follows "PTextS" where

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					P= PREFIX_PIN and S= SUFFIX_PIN. For Example, PRFileProduct001 means that P='PR', FILE_NAME_PIN= 'FileProduct' and S='001'.
16	SAVE_PIN_FILE	CHAR	1		This column is not used in V3.5.
17	CATALOGUE_PRODUCT_CODE	CHAR	6		Code identifying the Payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table.
18	CATALOGUE_PRODUCT_VERSION	NVARCHAR2	10		Version of the Payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table
19	USER_CREATE	VARCHAR2	15		ID of the user when record created.
20	DATE_CREATE	DATE	7		Record creation date and time.
21	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
22	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.2.17 PLASTIC_LIST

This table defines the payment instrument physical characteristics, including the texts and logos. The system is batching the production files according to the plastic type. Usually, for each production file different plastics have to be used in the personalization machine.

Records of this table concerns the payment instrument parameters setup, part of PowerCARD issuer system.

Refer to "[Plastic list](#)" section in UG1020-Payment Instrument for more details.

Each column of this table is described in detail in the next section.

13.2.17.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. It must be in the 'BANK' table
2 	PLASTIC_CODE	CHAR	3		Internal code identifying the plastic uniquely for the issuing institution.
3	ABRV_WORDING	VARCHAR2	16		Shortened description used for information, for reporting or on other tables.
4	WORDING	VARCHAR2	32		Description of plastic PAN is for information only
5	LOGO_IND	VARCHAR2	40		In case of need to show a specific logo on the plastic (for co-branded PANs for example), this field contains the identification required to be present in the embossing encoding file.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					 Note This column is used in case of need to print information on the face or on the back of the plastic, this information is passed to the embossing/encoding machine on the personalization file generated by PowerCARD.
6	PRODUCTION_IND	CHAR	2		Code to be translated in specific command to the embossing/encoding machine. This of course is passed to the personalization machine on the embossing and encoding machine. Possible values are: 'VC' = Virtual payment instrument (No plastic will be generated) 'EE' = Embossing & encoding (For an embossing payment instrument) 'PE' = Printing & encoding (For a printed payment instrument)
7	FREE_TEXT_1	VARCHAR2	32		The 1st text to be printed on the face of the concerned payment instrument.
8	FREE_TEXT_POSITION_1	CHAR	2		The position into which the 1st text will be printed on the face of the concerned payment instrument.
9	FREE_TEXT_2	VARCHAR2	32		The 2nd text to be printed on the back of the concerned payment instrument.
10	FREE_TEXT_POSITION_2	CHAR	2		The position into which the 2nd text will be printed on the back of the concerned payment instrument.
11	USER_CREATE	VARCHAR2	15		ID of the user when record created.
12	DATE_CREATE	DATE	7		Record creation date and time.
13	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
14	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.2.18 PRODUCT_EMV_TAGS

This table is used to store the link between an EMV application of a catalog product and its EMV tags. At this level, it should be indicated if the value of a tag is fixed and the fixed value should be provided, or if the value should be calculated based on the execution of an exit function by referencing the exit function ID.

Refer to "[Shared/Contact/Contactless interfaces tab data description](#)" section under the EMV application group description in UG1019-Catalogue user guide for more details.

Each column of this table is described in detail in the next section.

13.2.18.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which parameters are being defined. It should be present in the 'BANK' table.
2 	PRODUCT_CODE	CHAR	3		This is the payment instrument Product code for which the EMV tags parameters are being defined. It should be present in the 'CARD_PRODUCT' table.
3 	ICC_APPLICATION_ID	CHAR	4		Unique code identifying the ICC application. It should be present in the 'EMV_ICC_APPLICATION_IDENTIFIER' table.
4 	TAG_ID	VARCHAR2	10		EMV tag identification. It should be present in the 'EMBOSSING_TAG_REF' table.
5 	TAG_USE_TYPE	CHAR	4		Interface to which the tag is linked. Possible values are: 'SHIT' = Shared interface, 'CTIT' = Contact interface, 'CLIT' = Contactless interface.
6	TAG_LENGTH	VARCHAR2	32		Length of the tag's value.
7	TAG_VALUE_TYPE	CHAR	1		How the value of the Tag can be retrieved. Possible values are: 'F' = Fixed (In this case the user have to capture the Tag value related), 'E' = Exit function (In this case the user should specify the function name. The value of the current tag will be automatically calculated based on the function selected).
8	VALUE	VARCHAR2	512		This is the Tag value to be used by the system for the current tag.  Note This column is applicable only if TAG_VALUE_TYPE = 'F' (Fixed).
9	EXIT_FUNCTION_ID	CHAR	6		In case TAG_VALUE_TYPE = 'E' (Exit function), this column defines the code identifying the function that will be executed to calculate the value of the current tag. It should be present in the 'EXIT_FUNCTIONS_SOURCE' table.
10	TABLE_NAME	VARCHAR2	30		This column is not used in V3.5.
11	FIELD_NAME	VARCHAR2	30		This column is not used in V3.5.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
12	USER_CREATE	VARCHAR2	15		ID of the user when record created.
13	DATE_CREATE	DATE	7		Record creation date and time.
14	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
15	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.2.19 PWC_TOKEN_FORMAT

In PowerCARD, the format of the token code is parametrized by interface and by financial institution in this table.

Refer to "[Token format](#)" section in UG1020-Payment instrument user's guide for more details.

Each column of this table is described in detail in the next section.

13.2.19.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. It should be defined in 'BANK' table.
2 	INTERFACE_NAME	VARCHAR2	60		PowerCARD interface for which, the Token format parameters are setup. Possible values are: 'DF_INTERFACE' = Default interface, 'BOARDING_INTERFACE' = Boarding process file, 'CARD_EMBOSsing' = PAN embossing XML file, 'DWH_INTERFACE' = Data warehouse file interface, 'WS_INTERFACE' = Web service interface, 'GEN_ACCOUNTING_FILE' = Accounting file.
3	TOKEN_LENGTH	NUMBER	2		Global size of the interface name.
4	HEADER_LENGTH	NUMBER	2		Size of the header part of the interface name.
5	TRAILER_LENGTH	NUMBER	2		Size of the trailer part of the interface name
6	BODY_TYPE	CHAR	2		Type of the body part. Possible values are: 'AN' = Alphanumeric, 'NC' = Numeric.
7	CHECK_DIGIT_FLAG	CHAR	1		This is used to indicate whether a check digit must be added at the end of generated token or not. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'Y' = Add a check digit at the end, 'N' = Don't add a check digit at the end.
8	USER_CREATE	VARCHAR2	15		ID of the user when record created.
9	DATE_CREATE	DATE	7		Record creation date and time.
10	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
11	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.2.20 PWC_TOKEN_INTERFACE_SETUP

This table defines the alias PAN managed by PowerCARD Tokenization module. On PAN creation, a token is generated by Institution for each defined interface.

Refer to "[Token interface setup](#)" section in UG1020-Payment instrument user's guide for more details.

Each column of this table is described in detail in the next section.

13.2.20.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. It should be defined in 'BANK' table.
2 	INTERFACE_NAME	VARCHAR2	60		Name of the interface for which the Token interface generation parameters are setup. Possible values are: 'DF_INTERFACE' = Default interface, 'BOARDING_INTERFACE' = Boarding process file, 'CARD_EMBOSsing' = PAN embossing XML file, 'DWH_INTERFACE' = Data warehouse file interface, 'WS_INTERFACE' = Web service interface, 'GEN_ACCOUNTING_FILE' = Accounting file.
3	TOKEN_INTERFACE_ACTIVE	CHAR	1		This column gives the status of tokenization with a given interface. Possible values are: 'Y' = Tokenization is active, 'N' = Tokenization is inactive.
4	INTERFACE_PARENT	VARCHAR2	60		Interface Parent. It means that the current interface uses the token of the parent interface. Possible values are: 'DF_INTERFACE' = Default interface,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'BOARDING_INTERFACE' = Boarding process file, 'CARD_EMBOSING' = PAN embossing XML file, 'DWH_INTERFACE' = Data warehouse file interface, 'WS_INTERFACE' = Web service interface, 'GEN_ACCOUNTING_FILE' = Accounting file.
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.2.21 REPLACEMENT_REASON_CODE

This table contains the management's parameters of payment instrument replacement reasons and the actions related to each reason. Parameters within this table include the replacement wording, an indicator for PAN change, and the associated amount fee type.

Refer to ["Replacement reason"](#) section in UG1020-Payment Instrument user's guide for more details.

Each column of this table is described in detail in the next section.

13.2.21.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which the parameters are being defined. It must be defined in 'BANK' table.
2 	REASON_CODE	CHAR	2		Unique code identifying the reason code.
3	WORDING	VARCHAR2	32		Description of card replacement reason.
4	ABRV_WORDING	VARCHAR2	16		Shortened description used for information, for reporting or on other tables.
5	REPLACEMENT_FLAG	CHAR	1		This is used to specify whether a new PAN should be generated or not. Possible values are: 'S' = Same PAN (the replacement will be performed with the same PAN (e.g. damaged card)), 'N' = New PAN (the replacement will be performed with a new PAN. (e.g. card stolen)).
6	AMOUNT_FEES_TYPE	CHAR	2		The type of fee to retrieve. The type of fees checked will be used to generate the replacement fees amount.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Possible values are: 'DA' = Damaged replacement fees, 'ER' = Erroneous replacement fees, 'LO' = Lost replacement fees, 'ST' = Stolen replacement fees, 'CO' = Counterfeit replacement fees, 'EM' = Emergency Replacement fees, 'OT' = Others replacement fees, 'CH' = Change Product.
7	EXPIRY_MONTH	NUMBER	2		Number of months' validity of the emergency PAN (Number of months to expiry). This column is used only when AMOUNT_FEES_TYPE = 'EM' (Emergency Replacement fees).
8	USER_CREATE	VARCHAR2	15		ID of the user when record created.
9	DATE_CREATE	DATE	7		Record creation date and time.
10	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
11	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.2.22 STOP_LIST_FEES_PARAM

This table contains all fees that might be charged to PAN holders when using stop list services.

Each column of this table is described in detail in the next section.

13.2.22.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		This is the financial institution for which the stop-list fees parameters are being defined. It should be present in the 'BANK' table.
2 	FEES_CODE	CHAR	3		Code identifying the stop-list fees.
3	ABRV_WORDING	VARCHAR2	16		Stop-list fees short description.
4	WORDING	VARCHAR2	32		Stop-list fees description.
5	CURRENCY_CODE	CHAR	3		Stop-list fees currency. It should be present in the 'CURRENCY_TABLE' table.
6	STOP_LIST_FEES	NUMBER	18		The fees amount to be charged to the PAN holder for stop-list service according to the above criteria.
7	CARD_PRODUCT_CODE	CHAR	3		Payment instrument product which can be used as a criterion to define the stop-list fees. It should be present in the 'CARD_PRODUCT' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
8	CUSTOMER_SEGMENT_INDEX	CHAR	3		Client Customer segment which can be used as a criterion to define the stop-list fees. It should be present in the 'CUSTOMER_SEGMENT' table.
9	VIP_LEVEL	CHAR	1		Client VIP level which can be used as a criterion to define the stop-list fees. It should be present in the 'VIP_LIST' table.
10	STOP_LIST_REASON_CODE	CHAR	2		Stop-list reason which can be used as a criterion to define the stop-list fees. It should be present in the 'STOP_LIST_REASON_CODE' table.
11	USER_CREATE	VARCHAR2	15		ID of the user when record created.
12	DATE_CREATE	DATE	7		Record creation date and time.
13	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
14	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.2.23 STOP_RENEWAL_CRITERIA

This table is used to define the criteria for PAN stop renewal management.

Each column of this table is described in detail in the next section.

13.2.23.1 Columns description

Seq.	Column Name	Data type	Len.	Sc.	Column Description
1	STOP_RENEWAL_CRITERIA_ID	NUMBER	10		Identification of the stop renewal criteria
2	BANK_CODE	CHAR	6		Financial institution for which the PAN stop renewal criteria are being set-up. It must be present in the 'BANK' table.
3	CARD_PRODUCT_CODE	CHAR	3		PAN product for which set up is being made. Null value indicates that all PAN products defined for the institution are concerned. This field must be present in the 'CARD_PRODUCT' table
4	SHADOW_ACCOUNT_PROFILE_CODE	CHAR	3		This is used to specify the financial account product for which the PAN stop renewal criteria are being set-up. Null value indicates that all Financial account products defined for the institution are concerned. This field must be existing in 'CR_PROFILE' table
5	STATUS_TYPE	CHAR	1		Status type for which the criteria are being setup. Possible values are: 'B' = Balance (Overdrawn, Critical Overdrawn, Credit balance, Debtor balance, etc.): used to control the account, linked to the PAN subject to renewal or replacement, which should not be over limit.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					'U' = Unpaid terms (Normal, 1st to 9th outstanding): used to control the account, linked to the card subject to replacement, which should not be X Days Payment Due (DPD). X should be parameter-driven in the INTERVAL_DATE field below, 'F' = Payment failed (Normal, Failed payment), 'L' = Late payment (Normal, Late payment), 'C' = Change address 'S' = Restricted PAN (PAN in Stop list), 'H' = High Risk Country 'A' = Administrative (Normal, Delinquent, Collection, Supervision, Deceased, Upgraded/Closed, Cancelled, Lost/Stolen, Write-off, Untraceable): used to control the account, linked to the card subject to renewal or replacement, which should not have a specific administrative status (for instance: 'Write-off' level).
6	STATUS	CHAR	1		This column depends on the status type. The level can be selected with the allowed levels associated to the previously selected status type and presented in the STATUS_TYPE field description. Possible values are: when status type = 'B' '4' = Allowed overdrawn '5' = Critical overdrawn Possible values are: when status type = 'U' '0' = Normal From '1' to '9' = First unpaid to 9th unpaid or more Possible values are: when status type = 'F' '0' = Normal '1' = Failed payment Possible values are: when status type = 'L' '0' = Normal '1' = Late payment Possible values are: when status type = 'A' '0' = Normal '1' = Supervision '2' = Delinquent '3' = Collection

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					'4' = Lost/Stolen '5' = Deceased '6' = Canceled '7' = Upgrade/Closed '8' = Write off '9' = Intracable  Note This column became not used when STATUS_TYPE is set to 'S', 'C' or to 'H'.
7	INTERVAL_DATE	NUMBER	3	0	This is used to determine the number of days after which the renewal of the PAN should be blocked; in other words, if the date of change of status/address exceeds the specified number of days, renewal will be stopped.  Note This column became not used when STATUS_TYPE is set to 'A', 'S', 'C' or to 'H'.
8	USER_CREATE	VARCHAR2	15		ID of the user when record created.
9	DATE_CREATE	DATE	7		Record creation date and time.
10	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
11	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.3 Operation tables

13.3.1 CARD

This table is used to store and maintain Payment instruments data such as:

- Contract data (Payment instrument product, Application ID:, Contract element ID:...),
- Demographics (Birth date, birth city,, customer segment...),
- Contacts (Phones, emails)- Indicators (activation, delivery,expiry date...),
- Status- Indexes (Transaction fees, Authorization fees, PAN fees...),
- Embossing (Embossed name, Plastic code, Priority code...).

Refer to "[Payment instruments](#)" section in UG1020-Payment instrument user's guide for more details.

Each column of this table is described in detail in the next section.

13.3.1.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	CARD_NUMBER	VARCHAR2	22		Unique identification of the payment instrument (PAN).
2	CARD_SEQ	NUMBER	3		Sequence number of the payment instrument. It is set to '1' at the creation and increased by '+1' on every time a new payment instrument with the same PAN is produced.
3	CLIENT_CODE	VARCHAR2	24		Unique code of the client (the owner of the payment instrument). It must be present in the 'CLIENT' table.
4	CLIENT_HOST_ID	VARCHAR2	24		Unique identification of the customer in the institution's host, as defined in 'CLIENT' table.
5	BANK_CODE	CHAR	6		This is the institution to which the payment instrument belongs. It must be present in the 'BANK' table.
6	BRANCH_CODE	CHAR	6		Branch to which the payment instrument belongs. It must be present in the 'BRANCH' table.
7	APPLICATION_ID	VARCHAR2	24		Application identifier generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
8	APPLICATION_CONTRACT_ID	VARCHAR2	24		Application contract identification generated from boarding. It must be defined in 'BOARDING_CARD_APP' table.
9	CARD_PRODUCT_CODE	CHAR	3		This is to indicate the current payment instrument product. It must be defined in the 'CARD_PRODUCT' table.
10	FORMER_PRODUCT_CODE	CHAR	3		The previous payment instrument product. The null value indicates that the product has never been changed for the payment instrument. It must be defined in 'CARD_PRODUCT' table
11	CHANGE_PRODUCT_REFERENCE	VARCHAR2	12		Reference of change product, that is the business date in the format DDMMRRHH24MISS. It is applicable only in case of product change.
12	CHANGE_PRODUCT_DATE	DATE	7		This is used to store the Changed product date for a payment instrument.
13	PARTNER_BRAND_ID	VARCHAR2	15		Partner brand to which the payment instrument is associated. This Co-branded should be defined in 'PARTNER_BRAND' table.
14	CORPORATE_ID	VARCHAR2	15		Unique corporate identification number to which the payment instrument is linked. It should be defined in 'CORPORATE' table or be NULL.
15	LIABILITY_INDICATOR	CHAR	1		This column is not used in V3.5.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
16	CARD_FEES_CODE	CHAR	3		Payment instrument fee code. It must be defined in the 'CARD_FEES' table.
17	CARD_ISSUING_FEE_CURRENCY	CHAR	3		This column is not used in V3.5.
18	CARD_ISSUING_FEE_AMOUNT	NUMBER	18	3	This column is not used in V3.5.
19	BASIC_CARD_NUMBER	VARCHAR2	22		Client's Primary PAN. The primary payment instrument should already be created in the database and should be defined in the 'CARD' table.
20	OLD_CARD_NUMBER	VARCHAR2	22		This displays the old PAN that was used before replacing it with the current PAN.
21	SPONSOR_CARD_NUMBER	VARCHAR2	22		This column is not used in V3.5.
22	PLASTIC_CODE	CHAR	3		This is to indicate the plastic to use for the payment instrument. It must be present in the 'PLASTIC_LIST' table.
23	ICC_APPLICATION_INDEX	CHAR	4		This is to define the ICC application indicator. It must be defined in 'ICC_APPLICATION_PAR_INDEX' table.
24	VIP_LEVEL	CHAR	1		VIP level of the cardholder. It must be defined in 'VIP_LIST' table.
25	OWNER_CODE	CHAR	2		This is to indicate who owns the PAN (Individual, corporate...). It must be defined in 'OWNER_LIST' table.
26	OWNER_CATEGORY	CHAR	1		Owner category. Possible values are: 'I' = Individual, 'B' = Business, 'S' = Staff, 'P' = Professional, 'N' = Company, 'C' = Corporate, 'T' = Corporate travel, 'L' = International corporate, 'R' = Procurement, 'X' = Others 1, 'Y' = Others 2, 'Z' = Others 3.
27	RELATIONSHIP_CODE	CHAR	1		Relationship between the Primary cardholder and the secondary cardholder. Possible values are: 'C' = Child, 'S' = Spouse, 'P' = Parent, 'F' = Family member,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'N' = Not applicable, 'O' = Others.
28	TITLE_CODE	CHAR	2		This is to indicate the title of the cardholder. It must be defined in 'TITLE_LIST' table.
29	GENDER	CHAR	1		This is to indicate the client's gender code. Possible values are: 'M' = Male, 'F' = Female, 'N' = Not applicable.
30	FAMILY_NAME	VARCHAR2	40		The client's family name.
31	FIRST_NAME	VARCHAR2	40		The client's first name.
32	EMBOSSSED_NAME	VARCHAR2	26		Client name, as it should appear embossed on the payment instrument.
33	ENCODED_NAME	VARCHAR2	26		Client name, as it should be encoded on the ISO I track of the payment instrument.
34	BIRTH_DATE	DATE	7		The client's birth date.
35	BIRTH_CITY	VARCHAR2	30		The client's birth city.
36	BIRTH_COUNTRY	VARCHAR2	30		The client's birth country.
37	DOCUMENT_CODE	CHAR	2		This column is not used in V3.5.
38	ISSUING_DOCUM_DATE	DATE	7		This column is not used in V3.5.
39	ISSUING_DOCUM_CITY	VARCHAR2	30		This column is not used in V3.5.
40	LEGAL_ID	VARCHAR2	30		Legal identification number of the guarantor.
41	NATIONALITY_CODE	CHAR	3		This field indicates the client's nationality. It must be defined in 'COUNTRY' table.
42	STATEMENT_CODE	CHAR	2		This is to specify the statement code. It must be defined in 'STATEMENT_PARAMETERS' table.
43	LANGUAGE_CODE	CHAR	3		The client's language. It must be defined in 'LANGUAGE_LIST' table.
44	PR_CARE_OF	VARCHAR2	64		Mail recipient in the primary address (To: ..).
45	PR_LINE_1	VARCHAR2	64		Primary address line 1.
46	PR_LINE_2	VARCHAR2	64		Primary address line 2.
47	PR_LINE_3	VARCHAR2	64		Primary address line 3.
48	PR_LINE_4	VARCHAR2	64		Primary address line 4.
49	PR_ZIP_CODE	VARCHAR2	10		Zip code in the primary address. It must be defined in 'ZIP_CODE' table.
50	PR_REGION_CODE	CHAR	3		The region representing the administrative division of the country

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					where the primary address is located. It should be defined in 'REGION' table.
51	PR_REGION_NAME	CHAR	40		The region name.
52	PR_COUNTRY_CODE	CHAR	3		The country where the primary address is located. It must be defined in 'COUNTRY' table.
53	PR_CITY_CODE	CHAR	5		The city where the primary address is located.
54	PR_EMAIL	VARCHAR2	50		This is to indicate the email address of the customer.
55	PR_URL	VARCHAR2	60		URL of the client's website.
56	PR_PHONE_1	VARCHAR2	20		The client's phone number 1. It's controlled by the system to ensure they do not contain letters.
57	PR_PHONE_1_TYPE	CHAR	1		The phone type 1.
58	PR_PHONE_2	VARCHAR2	20		The client's phone number 2. It's controlled by the system to ensure they do not contain letters.
59	PR_PHONE_2_TYPE	CHAR	1		This is used to define the phone type 2.
60	PR_PHONE_3	VARCHAR2	20		The client's phone number 3. It's controlled by the system to ensure they do not contain letters.
61	PR_PHONE_3_TYPE	CHAR	1		The phone type 3.
62	PR_PHONE_4	VARCHAR2	20		The client's phone number 4. It's controlled by the system to ensure they do not contain letters.
63	PR_PHONE_4_TYPE	CHAR	1		This is used to define the phone type 4.
64	PR_ADDRESS_TYPE	CHAR	2		Type of the primary address. It must be defined in 'ADDRESS_TYPE_LIST' table.
65	PR_FAX	VARCHAR2	20		The client fax.
66	PR_SENDING_MODE	CHAR	1		Sending mode for communication with the client. Possible values are: 'M' = Mail, 'E' = Email, 'F' = Fax, 'O' = Other. It should be defined in 'SENDING_MODE_LIST' table.
67	PR_CITY_NAME	VARCHAR2	32		Name of city where the primary address is located.
68	PR_DEFAULT_USAGE	CHAR	2		Determines the usage of the primary address with 'M' as default value. Possible values are: 'M' = Mail, 'S' = Statement,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'D' = Dispute, 'L' = Loyalty.
69	PR_STATUS	CHAR	1		Primary address status.
70	PR_STATUS_START_DATE	DATE	7		Start date for active or normal primary address status.
71	PR_STATUS_END_DATE	DATE	7		End date for inactive primary address status.
72	PR_IS_MANDATORY	CHAR	1		This is to indicate that the primary address, with the assigned primary address type, is mandatory as defined in the Client Mandatory Addresses configuration. Possible values are: 'Y' (Yes) or Null.
73	ADVANCED_ADDRESS_FLAG	VARCHAR2	10		This column is not used in V3.5.
74	ADDRESS_LIST_ID	VARCHAR2	10		This is used to link the payment instrument with its secondary address (if any).
75	SOCIO_PROF_CODE	CHAR	4		Socio-professional code of the client. It is used for the segmentation of clients based on such criteria as job industry, and professional qualification. It must be present in the 'SOCIOPROF_LIST' table.
76	ACTIVITY_CODE	CHAR	4		This is to indicate the client's activity code. It helps to categorize clients based on their professional occupation. It must be present in the 'CLIENT_ACTIVITY_SET' table.
77	STAFF_ID	VARCHAR2	20		Staff identifier of the person who signed the client contract.
78	CUSTOMER_SEGMENT_INDEX	CHAR	3		Customer segments to which the client belongs. This column is used mainly for marketing segmentation purposes. Assignable values must be previously defined in the 'CUSTOMER_SEGMENT' table.
79	START_VAL_DATE	DATE	7		Start validity period of the card, in MMYYYY format.
80	EXPIRY_DATE	DATE	7		Expiry date of the card in MMYYYY format.
81	FORMER_EXPIRY_DATE	DATE	7		Former expiry date of the card in MMYYYY format.
82	INITIAL_SUBSCRIPTION_DATE	DATE	7		Date of the initial subscription of the client.
83	APPLICATION_DATE	DATE	7		Date of the boarding application.
84	AGREEMENT_DATE	DATE	7		The payment instrument agreement date.
85	RENEWAL_OPTION	CHAR	1		This flag defines whether the renewal is allowed or not.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Possible values are: 'Y' = Renewal allowed, 'N' = Renewal not allowed.
86	RENEWAL_NUMBER	NUMBER	2		Number of times the payment instrument has been renewed.
87	RENEWAL_DELIVERY_DATE	DATE	7		Date when the last renewed payment instrument is delivered.
88	RENEWAL_ACTIVATION_FLAG	CHAR	1		This column indicates whether the renewed payment instrument has been activated or not. Possible values are: 'Y'= Yes, 'N'= No.
89	RENEWAL_ACTIVATION_DATE	DATE	7		Date when the last renewed payment instrument is activated.
90	RENEWAL_DEACTIVATION_DATE	DATE	7		Date when the last renewed payment instrument is deactivated.
91	LAST_RENEW_DATE	DATE	7		Last date in which the payment instrument has been renewed.
92	STOP_RENEWAL_REASON_CODE	CHAR	1		The reason for which the payment instrument is stopped from renewal. Possible values are: 'S' = Card in stop list, 'B' = Balance, 'U' = Unpaid terms, 'F' = Payment failed, 'L' = Late payment, 'C' = Change address, 'H' = High Risk Country, 'D' = Debit Account cancelled.
93	DELIVERY_MODE	CHAR	1		Mode of payment instrument delivery. Possible values are: 'B' = Branch, 'P' = Processing Center, 'M' = Mail, 'C' = Customer selection.
94	DELIVERY_BRANCH	CHAR	6		Branch code where the payment instrument will be sent post production. It is applicable only when DELIVERY_MODE is set to 'B' (Branch). It must be present in 'BRANCH' table
95	FILE_NUMBER	VARCHAR2	20		In case the payment instrument application is loaded from a file, this column indicates the reference number of the payment instrument request

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					in the file that has been loaded into PowerCARD database.
96	DELIVERY_CARD_FLAG	CHAR	1		This column indicates whether the card has been delivered to the costumer or not. In fact, the delivery flag at this level depends on the DELIVERY_FLAG column, part of 'CARD_PRODUCT' table. Possible values are: 'N' = No, 'Y' = Yes. Note The payment instrument can be considered to have been delivered as soon as it is produced and mailed to the cardholder, or once produced it is kept in the processing center or the branch and considered to have been delivered when the client comes to collect it.
97	RENEW_DELIVERY_CARD_FLAG	CHAR	1		This column indicates whether the renewed payment instrument was delivered or not. Possible values are: 'N' = No, 'Y' = Yes.
98	DELIVERY_CARD_DATE	DATE	7		Delivery date of the payment instrument.
99	DELIVERY_PIN_MAILER_FLAG	CHAR	2		This column indicates whether the PIN code has been delivered to the cardholder or not. Possible values are: 'NN' = PIN not requested yet (either no pin has to be produced or the Pin not yet requested), 'WN' = PIN requested and waiting response, 'CY' = PIN delivered, 'PY' = Confirmation not managed.
100	PIN_MAILER_DELIVERY_DATE	DATE	7		Delivery date of the PIN mailer.
101	PIN_PROCESS_DATE	DATE	7		Date when the PIN mailer was processed.
102	ACTIVATION_FLAG	CHAR	1		This column indicates whether the payment instrument has been activated by the cardholder or not. Possible values are: 'Y' = Yes, 'N' = No.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
103	ACTIVATION_DATE	DATE	7		The activation date of the payment instrument.
104	DEACTIVATION_DATE	DATE	7		Deactivation date of the payment instrument.
105	SERVICES_SETUP_INDEX	CHAR	4		Service setup index that defines the card supported authorization and utility payment services. It must be present in the 'P7_SERVICES_SETUP' table.
106	LIMITS_INDEXES	CHAR	4		Limit index identifying the limits applied on the payment instrument. It must be defined in 'P7_LIMITS_SETUP_TOTAL' table or NULL.
107	FEES_INDEXES	CHAR	3		It is used to link an existing card fee index (non catalogue index) to the new payment instrument.
108	PERIODICITY_CODE	CHAR	3		This column is not used in V3.5.
109	IMAGE_REF_NUMBER	VARCHAR2	12		The image reference number.
110	PHOTO_REFERENCE_NUMBER	VARCHAR2	24		This is used to indicate the internal reference number of cardholder photography.
111	PHOTO_PRINT_INDICATOR	CHAR	1		This flag indicates whether the photo must be printed or not in the payment instrument. Possible values are: 'Y' = Yes, 'N' = No.
112	MAIDEN_NAME	VARCHAR2	40		Mother's maiden name.
113	CHANNEL_NUMBER	VARCHAR2	15		This is to indicate the channel number through which the concerned cardholder's contract has been initiated. It is a distinct number of the sales channel used to attract the customer. This code must be previously defined in 'CHANNEL' table.
114	OFFER_NUMBER	VARCHAR2	15		This column is not used in V3.5.
115	ORIGINAL_DECISION_FLAG	CHAR	1		This column is not used in V3.5.
116	DECISION_DATE	DATE	7		Date on which the decision has been made. This column is not used in V3.5.
117	DECISION_USER	VARCHAR2	15		This column is not used in V3.5.
118	DECISION_DETAIL	CHAR	2		This column is not used in V3.5.
119	BLOOD_GROUP	VARCHAR2	2		This column is not used in V3.5.
120	BLOOD_RH	CHAR	1		This column is not used in V3.5.
121	DATA_DISCLOSURE	CHAR	2		This is to indicate the costumer data disclosure option. Possible values are: 'NC' = No choice,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'ND' = No disclosure, 'HI' = Handling information, 'TI' = Transmission of the information, 'HT' = Handling/Transmission of the information.
122	LAST_PROD_DATE	DATE	7		Payment instrument production date. It is updated during the payment instrument production batch processing.
123	LAST_BATCH_PROD_NUM	VARCHAR2	8		Latest production batch number where the payment instrument production details are treated. It is updated during the payment instrument production batch processing.
124	LAST_CALC_DATE	DATE	7		PIN calculation date. It is updated during the PIN calculation batch processing.
125	LAST_BATCH_CALC_NUM	VARCHAR2	8		Latest production batch number where the PIN mailer is treated. It is updated during the PIN calculation batch processing.
126	LAST_MODIF_DATE	DATE	7		This is to indicates for whatever modification action on the concerned payment instrument, the last payment instrument modification date. It is updated during the payment instrument modification batch processing.
127	LAST_BATCH_MODIF_NUM	VARCHAR2	8		This is to indicates, for whatever modification action on the concerned payment instrument, the last payment instrument modification operation batch number. It is updated during the payment instrument modification batch processing.
128	LAST_BILLING_DATE	DATE	7		Date of last billing related the membership fee for the concerned PAN. It is updated with the payment instrument batch processing.
129	LAST_TRANSACTION_T_DATE	DATE	7		Date of the last transaction carried out with the payment instrument.
130	LAST_TRANSACTION_B_DATE	DATE	7		Business date of last transaction.
131	LAST_TRANSACTION_ARN	VARCHAR2	23		Acquirer Reference Number of the last transaction carried out with the payment instrument.
132	LAST_TRANSACTION_ARN_SEQ	NUMBER	4		Microfilm reference sequence of last transaction.
133	SECURITY_CHK_DATAP_1	VARCHAR2	16		Security data for internal usage.
134	SECURITY_CHK_DATAP_2	VARCHAR2	16		Security data for internal usage.
135	SECURITY_CHK_DATAP_3	VARCHAR2	32		Security data for internal usage.
136	SECURITY_CHK_DATAP_4	VARCHAR2	64		Security data for internal usage.
137	RECORD_ORIGINE	CHAR	1		Origin record data capture code. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'M' = First Migration, 'O' = Bank systems, 'C' = PowerCARD Data capture.
138	STATUS_CODE	CHAR	1		Payment instrument status code. It must be present in 'STATUS_LIST' table with CH_ENTITY column's value set to 'Y' (Yes).
139	STATUS_DATE	DATE	7		Date of last modification of STATUS_CODE field.
140	STATUS_REASON	CHAR	2		Status reason. It must be present in 'STATUS_REASON_LIST' table.
141	CANCELLATION_REQUEST_DATE	DATE	7		This column is not used in V3.5.
142	CANCELLATION_LETTER_DATE	DATE	7		This column is not used in V3.5.
143	CANCELLATION_USER_CODE	VARCHAR2	15		This column is not used in V3.5.
144	RETURN_CARD_FLAG	CHAR	1		This column is not used in V3.5.
145	RETURN_ADDITIONAL_CARD_FLAG	CHAR	1		This column is not used in V3.5.
146	NB_ACCOUNT_LINKS	NUMBER	2		Number of account links with the payment instrument.
147	CARD_ADDENDUM_FLAG	CHAR	1		This column is not used in V3.5.
148	ENTITY_CODE	CHAR	2		The address entity code. It set always to 'CH' value.
149	MARKUP_CODE	CHAR	3		This is the mark-up fees code. It must be defined in 'MARKUP_INDEX' table.
150	PWRCD_INTERNAL_REFERENCE	VARCHAR2	12		PowerCARD internal loading reference. It is used in case the applications are loaded from a file.
151	PWRCD_INTERNAL_SEQUENCE	NUMBER	6		PowerCARD internal loading sequence. It is used in case the applications are loaded from a file.
152	FIRST_NAME_2	VARCHAR2	40		The client's second first name.
153	FAMILY_NAME_2	VARCHAR2	40		The client's second family name.
154	PRIVATE_DATA_1	VARCHAR2	32		PowerCARD private data element. It is reserved for future use.
155	PRIVATE_DATA_2	VARCHAR2	32		PowerCARD private data element. It is reserved for future use.
156	PRIVATE_DATA_3	VARCHAR2	32		PowerCARD private data element. It is reserved for future use.
157	PRIVATE_DATA_4	VARCHAR2	32		PowerCARD private data element. It is reserved for future use.
158	PRIVATE_DATA_5	DATE	7		PowerCARD private data element. It is reserved for future use.
159	PRIVATE_DATA_6	DATE	7		PowerCARD private data element. It is reserved for future use.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
160	PRIVATE_DATA_7	DATE	7		PowerCARD private data element. It is reserved for future use.
161	PRIVATE_DATA_8	DATE	7		PowerCARD private data element. It is reserved for future use.
162	PRIVATE_DATA_9	NUMBER	18	3	PowerCARD private data element. It is reserved for future use.
163	PRIVATE_DATA_10	NUMBER	18	3	PowerCARD private data element. It is reserved for future use.
164	PRIVATE_DATA_11	NUMBER	18	3	PowerCARD private data element. It is reserved for future use.
165	PRIVATE_DATA_12	NUMBER	18	3	PowerCARD private data element. It is reserved for future use.
166	PRIVATE_TLV_DATA	VARCHAR2	250		PowerCARD private data element. It is reserved for future use.
167	PRIORITY_INDICATOR	CHAR	3		The priority level code with which the embossing of a payment instrument should be treated. This code must be previously defined in the 'PRIORITY_INDICATOR' table.
168	PROMOTION_CODE	CHAR	10		The promotion or the campaign to which the payment instrument belongs. When provided, it will be validated against the list defined at bank level.
169	PLASTIC_DELIVERY_METHOD	CHAR	3		The kind of mailing method used to deliver the plastic (for example: Assured mail, Ordinary mail, Airmail...). It must be defined in 'ELIGIBLE_DELIVERY_METHOD' table.
170	PIN_DELIVERY_METHOD	CHAR	3		The kind of mailing method used to deliver the PIN (for example: Assured mail, Ordinary mail, Airmail...). It must be defined in 'ELIGIBLE_DELIVERY_METHOD' table.
171	PHONE_1	VARCHAR2	30		First phone number of the client. It must be defined in 'ADDRESS_DETAILS' table.
172	PHONE_1_TYPE	CHAR	2		Phone type for the captured first phone number. Possible values are: '01' = Office phone, '02' = Mobile phone, '03' = Home phone, '04' = Private or personal phone, '05' = Others.
173	PHONE_2	VARCHAR2	30		Second phone number of the client. It must be defined in 'ADDRESS_DETAILS' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
174	PHONE_2_TYPE	CHAR	2		Phone type for the captured second phone number. Possible values are: '01' = Office phone, '02' = Mobile phone, '03' = Home phone, '04' = Private or personal phone, '05' = Others.
175	PHONE_3	VARCHAR2	30		Third phone number of the client. It must be defined in 'ADDRESS_DETAILS' table.
176	PHONE_3_TYPE	CHAR	2		Phone type for the captured third phone number. Possible values are: '01' = Office phone, '02' = Mobile phone, '03' = Home phone, '04' = Private or personal phone, '05' = Others.
177	PHONE_4	VARCHAR2	30		Fourth phone number of the client. It must be defined in 'ADDRESS_DETAILS' table.
178	PHONE_4_TYPE	CHAR	2		Phone type for the captured fourth phone number. Possible values are: '01' = Office phone, '02' = Mobile phone, '03' = Home phone, '04' = Private or personal phone, '05' = Others.
179	EMAIL_1	VARCHAR2	256		This is the Customer's 1st email address. It must be defined in 'ADDRESS_DETAILS' table.
180	EMAIL_2	VARCHAR2	256		This is the Customer's 2nd email address. It must be defined in 'ADDRESS_DETAILS' table.
181	LINK_FLAG	CHAR	1		This column is not used in V3.5.
182	LINK_ADDRESS_CLASS	CHAR	1		This column is not used in V3.5.
183	LINK_ENTITY_CODE	CHAR	2		This column is not used in V3.5.
184	LINK_LIST_ID	VARCHAR2	15		This column is not used in V3.5.
185	LINK_ADDRESS_SEQ	VARCHAR2	15		This column is not used in V3.5.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
186	TRANSACTION_FEE_INDEX	VARCHAR2	7		index of fees to apply on transaction for the debit payment instruments only. It must be defined on the 'ISS_TRANSACTION_FEES_PARAM' table.
187	CATALOGUE_OFFER	CHAR	3		This column is reserved for future use.
188	CATALOGUE_PRODUCT	CHAR	6		Catalogue product with which the Payment instrument is being created. It should be defined in 'CATALOGUE_PRODUCT' table.
189	CATALOGUE_PRODUCT_VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P' (Payment instrument).
190	EMBOSSSED_NAME_2	VARCHAR2	26		Second embossed name.
191	CATALOGUE_PACK	CHAR	6		Identification number of the pack.
192	PIN_DELIVERY_FLAG	CHAR	1		This column indicates whether the PIN is delivered or not. Possible values are: 'Y' = Yes, 'N' = Not delivered.
193	ALIAS_PAN	VARCHAR2	22		This is used for management of token.
194	SENSITIVE_OPERATION_RECORD	CHAR			Sensitive operation record code. Possible values are: 'I' = Insertion, 'M' = Modification, 'S' = Cancellation, 'F' = Replacement with fees, 'R' = Replacement without fees, 'N' = Renewal, 'C' = PIN calculation Without Fees, 'A' = PIN calculation cancellation, 'L' = Delivery card, 'P' = Card production cancellation, 'J' = Package request, 'W' = Manual renewal request, 'X' = Internal usage, 'Y' = PIN calculation with fees.
195	USER_CREATE	VARCHAR2			ID of the user when record created.
196	DATE_CREATE	DATE			Record creation date and time.
197	USER_MODIF	VARCHAR2			ID of the last user who modified the record.
198	DATE_MODIF	DATE			Date and time when the last record modification occurred.

13.3.2 CARD_CONTRACT

This table is used to store the changes history of the XML object related to the payment instrument contract. These changes take place when there is a contract renegotiation.

Refer to "[Renegotiation](#)" section in UG1020-Payment instrument user guide.

Each column of this table is described in detail in the next section.

13.3.2.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	CARD_NUMBER	VARCHAR 2	22		Unique identification of the card. It must be defined in 'CARD' table.
2	BANK_CODE	CHAR	6		Issuer institution code. It should be defined in the 'BANK' table.
3	CATALOGUE_PRODUCT	CHAR	6		Code identifying the payment instrument product code. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P' (Payment Instrument).
4	CATALOGUE_VERSION	VARCHAR2	10		Version of the payment instrument product. Valid values must be retrieved from 'CATALOGUE_PRODUCT' table with 'PRODUCT_TYPE' = 'P' (Payment Instrument).
5	BOARDING_DATE	DATE	7		Date of the application boarding.
6	VALIDATED_XML	CLOB	4000		This column stores the XML object inherited from catalogue and with which the contract has been initially validated in boarding. It will be different from the one in catalogue product in case there has been a negotiation of the contract during boarding.
7	VALIDATION_DATE	DATE	7		Payment instrument contract validation date when on boarding.
8	MODIFIED_XML	CLOB	4000		This column stores the modified XML object in case the payment instrument contract is being renegotiated.
9	MODIFICATION_STATUS	CHAR	1		Status of the payment instrument contract. Possible values are: 'O' = Ongoing (Renegotiation is ongoing), 'V' = Valid.
10	MODIFICATION_DATE	DATE	7		This column refers to the last modification date of the contract in case of renegotiation.
11	USER_CREATE	VARCHAR2	15		ID of the user when record created.
12	DATE_CREATE	DATE	7		Record creation date and time.
13	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
14	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.3.3 CARDBATCH

This table is used to define a batch where users' recordings shall be stored until the execution of the batch processing program.

Each column of this table is described in detail in the next section.

13.3.3.1 Columns description

Seq.	Column Name	Data type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		This is the financial institution concerned by the PAN. It must be present in the 'BANK' table.
2 	BATCH_NUMBER	VARCHAR2	8		This is the identification number of the batch where the users' action movement recordings shall be stored until the execution of the batch processing program. A current open batch already created can be also specified.
3	DESCRIPTION	VARCHAR2	32		Batch description.
4	BATCH_STATUS	CHAR	1		Status of the current batch. Possible values are: 'I' =In use (The batch is currently in use by another user and cannot be accessed), 'T' =To be processed (Default value - The batch is open, not yet processed and currently not in use by another user), 'P' =Processed (The batch is already processed and closed), 'S' = Not to be Processed (The batch is not to be processed until its status is manually set to 'T' value).  Note Only the 'T' and 'S' statuses can be set manually.
5	CREATE_DATE	DATE	7		Batch creation date and time.
6	PROCESSING_DATE	DATE	7		Processing date and time for processed batches (BATCH_STATUS field's value is set to 'P' (Processed)).
7	USER_OWNER	VARCHAR2	15		Batch owner.
8	CARDBATCH_TYPE	CHAR	1		This is to indicate the processing type of the batch. Possible values are:

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					'A' = Automatic (The Card batch will be processed during normal batch processing), 'M' = Manual (Manual action is required to process the Card batch individually).
9	NUMBER_CREATE	NUMBER	6		Number of PAN creations.
10	NUMBER_REPLACE	NUMBER	6		Number of PAN replacements.
11	NUMBER_MODIF	NUMBER	6		Number of PAN modifications.
12	NUMBER_CANCEL	NUMBER	6		Number of PAN cancellations.
13	NUMBER_PROD_REQUEST	NUMBER	6		Number of PAN production requests.
14	NUMBER_PIN_REQUEST	NUMBER	6		Number of PIN requests.
15	NUMBER_RENEW	NUMBER	6		Number of renewals.
16	NUMBER_PROD	NUMBER	6		Number of PANs produced.
17	PROD_DATE	DATE	7		production date.
18	NUMBER_PIN_CALCUL	NUMBER	6		number of PIN calculated.
19	PIN_CALCUL_DATE	DATE	7		PIN calculation date.
20	CARDS_RETURN_DATE	DATE	7		PAN receptions date.
21	MEMO	VARCHAR2	128		This is the memo regarding the current PAN batch.
22	USER_CREATE	VARCHAR2	15		ID of the user when record created.
23	DATE_CREATE	DATE	7		Record creation date and time.
24	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
25	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.3.4 CARD_PRODUCT_CHANGE

This table is used to store the payment instrument product change operations. Product change can be performed for example during an upgrade scenario as upgrading from gold to platinum.

Each column of this table is described in detail in the next section.

13.3.4.1 Columns description

Seq.	Column Name	Data type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which parameters are being defined. It should be defined in the 'BANK' table.
2	INITIAL_PRODUCT_CODE	CHAR	3		Source marketable catalog payment instrument product. It should be defined in the 'CARD_PRODUCT' table.
3 	CARD_NUMBER	VARCHAR2	22		PAN concerned by the product change operation. It must be defined in 'CARD' table.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
4	NEW_PRODUCT_CODE	CHAR	3		Destination Payment instrument product. It should be defined in the 'CARD_PRODUCT' table.
5	NEW_PROFILE_CODE	CHAR	3		Destination financial account product. It should be defined in the 'CR_PROFILE' table. Note  It is available only in case the change product request concerns a credit PAN.
6	CARD_FEES_CODE	CHAR	3		Code identifying the PAN fees. It should be defined in 'CARD_FEES' table
7	CURRENCY_LIMIT	CHAR	3		Currency code with which the credit limit amounts are expressed. It must be defined in 'CURRENCY_TABLE' table. Note  It is available only in case the change product request concerns a credit PAN.
8	CREDIT_LIMIT	NUMBER	15		In case the change product request concerns a Credit PAN, this column indicates the new Credit limit at the account level. This Credit limit prevails on the one defined at the Credit profile level. However, this limit cannot exceed the Credit limit ceiling defined at the Credit profile level.
9	CASH_TRANSFER_LIMIT	NUMBER	15		In case the change product request concerns a Credit PAN, this column indicates the new Cash/transfer limit at the account level. This Cash/transfer limit is defined as part of the Credit limit and therefore, cannot exceed the Credit limit.
10	LOAN_LIMIT	NUMBER	15		In case the change product request concerns a Credit PAN, this column indicates the new Loan limit at the account level. This Loan limit can be defined as a separate limit or as part of the Credit limit but cannot exceed the Credit limit in any case.
11	CHANGING_MODE	CHAR	1		This column indicates when the product change should take place. Possible values are: 'I' = Immediate (By default), 'B' = Periodic fee anniversary, 'R' = Renewal time.
12	ADDITIONAL_CARD_CODE_1	VARCHAR2	22		This column is not used in V3.5.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
13	ADDITIONAL_PRINT_CODE1_FLAG	CHAR	1		This column is not used in V3.5.
14	ADDITIONAL_CARD_CODE_2	VARCHAR2	22		This column is not used in V3.5.
15	ADDITIONAL_PRINT_CODE2_FLAG	CHAR	1		This column is not used in V3.5.
16	ADDITIONAL_CARD_CODE_3	VARCHAR2	22		This column is not used in V3.5.
17	ADDITIONAL_PRINT_CODE3_FLAG	CHAR	1		This column is not used in V3.5.
18	ADDITIONAL_CARD_CODE_4	VARCHAR2	22		This column is not used in V3.5.
19	ADDITIONAL_PRINT_CODE4_FLAG	CHAR	1		This column is not used in V3.5.
20	ADDITIONAL_CARD_CODE_5	VARCHAR2	22		This column is not used in V3.5.
21	ADDITIONAL_PRINT_CODE5_FLAG	CHAR	1		This column is not used in V3.5.
22	ADDITIONAL_CARD_CODE_6	VARCHAR2	22		This column is not used in V3.5.
23	ADDITIONAL_PRINT_CODE6_FLAG	CHAR	1		This column is not used in V3.5.
24	COBRANDER_PRODUCT_DESC	VARCHAR2	15		This column is not used in V3.5.
25	BANK_FEE_AMOUNT_PART	NUMBER	18	3	This is to indicate the remaining fee amount based on the initial product.
26	NEW_MONTHLY_CARD_FEE	NUMBER	18	3	This is to indicate the new fee amount based on the new changed product.
27	CHANGING_AMT_CURRENCY	CHAR	3		Currency code of the new changed product. It must be present in 'CURRENCY_TABLE' table.
28	CHANGING_AMOUNT	NUMBER	18	3	This field is used to store the delta between NEW_MONTHLY_CARD_FEE and BANK_FEE_AMOUNT_PART columns.
29	EXPIRY_DATE	DATE	7		New expiry date.
30	BASIC_CARD_NUMBER	VARCHAR2	22		The primary PAN number. It is available when the product change concerns a supplementary PAN.
31	OWNER_CODE	CHAR	2		Customer type of the PAN. It must be defined in 'OWNER_LIST' table.
32	OWNER_CATEGORY	CHAR	1		Owner category (Individual, Business, Staff, Professional, Company, etc.).
33	REQUEST_DATE	DATE	7		Date of the change product request. This date gets systematically the business date as default date during the change product request.
34	START_VALIDITY_DATE	DATE	7		PAN start validity date.
35	DEACTIVATION_MODE	CHAR	1		This column indicates if the deactivation of the old PAN should be immediately or it should be delayed. Possible values are: 'I' = Immediately, 'R' = Delayed.

Seq.	Column Name	Data type	Len.	Sc.	Column Description
36	NBR_DAYS	NUMBER	18	3	Number of delay days post which the change product should take effect. It is applicable only when DESACTIVATION_MODE = 'R' (Delayed).
37	USER_CREATE	VARCHAR2	15		ID of the user when record created.
38	DATE_CREATE	DATE	7		Record creation date and time.
39	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
40	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.3.5 CARD_REPLACE

PAN replacement is a highly secured function of payment instrument operation management as it is performed by the system considering all specifics it implies. It takes into account all the reasons for replacement as specified by the user. Apparent reasons for card replacement are:

- Damaged card,
- Erroneous card,
- Lost card,
- Stolen card,
- Counterfeit card,
- Emergency replacement,
- Change Product,
- Other replacement reason.

Normally, replacement of payment instruments that present manufacturing defect or has been damaged does not require a different PAN. However, the system is designed in such a way that through parameter based reason code, same or different PAN may be applied to the replaced payment instrument. In any case, the information related to the replaced payment instrument is automatically switched to the new one (Accounts, balances, transactions, billing cycles ...etc) but the system is able to provide the PAN that was linked before the replacement.

Following PAN replacement, the system generates the replacement fee according to the replacement reason parameters that allow setting different fee for each replacement reason. It is also possible to waive the replacement fee during the replacement process.

PAN replacement does not require transfers from the replaced payment instrument's account to there placement payment instrument's account since the account does not change in database for replaced payment instruments. In addition, the replacement of the payment instruments triggers the embossing process, when applicable, in order to produce the new payment instruments and deliver them to the customers.

PowerCARD offers also the possibility to view the replacement history and keeps this information in 'CARD_REPLACE' table. So users can at any time consult the history of replacement of a payment instrument using PowerCARD GUI. This information can be also used for audit purpose.

Refer to ["PAN replacement"](#) section in UG1020-Payment instrument user's guide for more details.

Each column of this table is described in detail in the next section.

13.3.5.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	CARD_NUMBER	VARCHAR2	22		Unique identification of the PAN. It must match with the ISO 7812 norm. This column can refer to: - either the replaced PAN in case of replacement with the same PAN, - or the new generated PAN in case of replacement with new PAN. In both cases this value should exist in 'CARD' table.
2 	REPLACEMENT_SEQUENCE	NUMBER	3	0	Replacement sequence number, as the same PAN can be replaced multiple times.
3	BANK_CODE	CHAR	6		This is the financial institution concerned by the replacement operation. This field is retrieved from the 'CARD' table.
4	DELIVERY_BRANCH	CHAR	6		This is to indicate the branch code where the replaced payment instrument will be sent post production. This column is applicable only when DELIVERY_MODE field at 'CARD' table is set to 'B' (Branch). Must be defined in 'BRANCH' table.
5	PREVIOUS_CARD_NUMBER	VARCHAR2	22		In case of replacement with new PAN, this column stores the old PAN being replaced. In case of replacement with same PAN, this column will be same as CARD_NUMBER above. In both cases this value should exist in 'CARD' table.
6	REASON_CODE	CHAR	2		The reason code used to perform the replacement operation. The value must be predefined in 'REPLACEMENT_REASON_CODE' table.
7	DATE_REPLACE	DATE	7		Replacement date that systematically gets the business date during the replacement request.
8	FEES_INDICATOR	CHAR	1		This column indicates whether the replacement fee should be generated or waived. Possible values are: 'R' = Replacement without fees, 'F' = Replacement with fees.
9	REPLACEMENT_FEE_CURRENCY	CHAR	3		Currency code of replacement fee. The value is available only when FEES_INDICATOR = 'F' (Replacement with fees). The value must be predefined in 'CURRENCY_TABLE' table.
10	REPLACEMENT_FEE_AMOUNT	NUMBER	18	3	Replacement fee amount.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					The value is available only when FEES_INDICATOR = 'F' (Replacement with fees).
11	EXPIRY_DATE	DATE	7		The expiry date of the new payment instrument, calculated according to the catalog product parameters setup.
12	EXPIRY_DATE_OF_PREV_CARD	DATE	7		The expiry date of the previous (Replaced) payment instrument.
13	PRINT_FLAG	CHAR	1		This column indicates if the replacement operation was generated in reports or not yet. Possible values are: 'Y' = Yes, 'N' = Not yet.
14	PROCESSING_FLAG	CHAR	1		This column indicates if the fees calculation was processed or not yet. Possible values are: 'Y' = Yes, 'N' = Not yet.
15	REPLACEMENT_ADDRESS_CODE	CHAR	2		The address code where the replaced payment instrument will be sent post production. This value is captured during the replacement request. It should exist in 'ADDRESSES_TYPE_LIST' table.
16	PRIORITY_INDICATOR	CHAR	3		The priority with which the replacement request should be treated during production (Separate production file, express embossing...). It should exist in 'PRIORITY_INDICATOR' table
17	USER_CREATE	VARCHAR2	15		ID of the user when record created.
18	DATE_CREATE	DATE	7		Record creation date and time.
19	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
20	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.3.6 LOST_STOLEN_CASE_DECLAR_HST

This table is used to store the history of all lost or stolen PANs declared on the system.

Refer to ["Lost/Stolen"](#) section in UG1020-Payment instrument user's guide for more details.

Each column of this table is described in detail in the next section.

13.3.6.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	CARD_NUMBER	VARCHAR2	22		The assigned number by the issuer that identifies the lost or stolen PAN. It should be present in the 'CARD' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
2	CLIENT_CODE	VARCHAR2	24		Unique identifier of the Customer owning the lost or stolen PAN. It should be present in the 'CLIENT' table.
3	DECLARATION_STATUS	CHAR	1		Status of the declaration. Possible values are: 'W' = Waiting confirmation, 'C' = Confirmed, 'N' = Canceled.
4	DECLARATION_STATUS_DATE	DATE	7		Date when the operation has been declared.
5	BANK_CODE	CHAR	6		Financial institution concerned by these parameters. It should be present in the 'BANK' table.
6	NETWORK_CODE	CHAR	2		Network code of the parameter being defined. It should be present in the 'NETWORK' table.
7	STATUS_CODE	CHAR	1		PAN status after submitting the declaration. It should be present in the 'STATUS_LIST' table. Note This column is defined depending on values set for the DECLARATION_STATUS column. In case the DECLARATION_STATUS = 'W' (Waiting confirmation), the STATUS_CODE = 'S' (Suspended). In case DECLARATION_STATUS = 'N' (Canceled) the STATUS_CODE = 'N' (Normal). Otherwise, if the DECLARATION_STATUS = 'C' (Confirmed), the STATUS_CODE = 'C' (Canceled).
8	REASON_CODE	CHAR	2		PAN status reason after submitting the declaration. It should be present in the in 'STATUS_REASON_LIST' table.
9	OLD_STATUS_CODE	CHAR	1		The old PAN status code after submitting the declaration. It should be present in the 'STATUS_LIST' table.
10	OLD_REASON_CODE	CHAR	2		The old PAN status reason after submitting the declaration. It should be present in the in 'STATUS_REASON_LIST' table.
11	INIT_STATUS_CODE	CHAR	1		The initial PAN status code after submitting the declaration. It should be present in the 'STATUS_LIST' table.
12	INIT_REASON_CODE	CHAR	2		The initial PAN status reason after submitting the declaration.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					It should be present in the in 'STATUS_REASON_LIST' table.
13	TITLE_CODE	CHAR	2		Title code of the parameter being defined. It should be present in the 'TITLE_LIST' table.
14	FIRST_NAME	VARCHAR2	40		PAN holder first name owner of the lost or stolen PAN. It should be present in the 'CLIENT' table.
15	FAMILY_NAME	VARCHAR2	40		PAN holder family name owner of the lost or stolen PAN. It should be present in the 'CLIENT' table.
16	START_DATE	DATE	7		The opposition start date.
17	END_DATE	DATE	7		The opposition end date.
18	DECLARATION_DATE	DATE	7		Date when the operation has been declared.
19	INCIDENT_DATE	DATE	7		Date of the lost/stolen PAN.
20	STOPLIST_REASON_CODE	CHAR	2		The status list reason after submitting the declaration. It should be present in the 'STOP_LIST_REASON_CODE' table.
21	REP_CARDHOLDER_FLAG	CHAR	1		This column indicates if the lost stolen case has been reported by the cardholder or somebody else. Possible values are: 'Y' = Yes, 'N' = No.  Note When this column is defined, the next REPORTER_NAME column contains automatically the full name of the cardholder.
22	REPORTER_NAME	VARCHAR2	40		The name of the person who reported lost PAN.
23	COUNTRY_CODE	CHAR	3		Country where the PAN has been lost or found. It should be present in the 'COUNTRY' table.
24	CITY_NAME	VARCHAR2	40		City where the PAN has been lost or found. It should be present in the 'CITY' table.
25	REPORTER_COMMENT	VARCHAR2	1024		It is a free text that contains the feedback from the person who found and reported the concerned lost/stolen PAN.
26	POLICE_DECLARATION_FLAG	CHAR	1		This column indicates if the cardholder has made a police declaration. Possible values are: 'Y' = Yes, 'N' = No.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
27	POLICE_DECLARATION_ID	VARCHAR2	32		Identifier of the police report. Note  This column becomes mandatory when POLICE_DECLARATION_FLAG = 'Y' (Yes).
28	POLICE_DECLARATION_DATE	DATE	7		Date of police report.
29	PLACE	VARCHAR2	128		The place where the police incident has been reported.
30	STATE_PROVINCE	VARCHAR2	128		The state/province where the PAN has been lost or found. It should be present in the 'REGION' table.
31	REPLACEMENT_OPTION_CODE	CHAR	1		The lost/stolen case replacement option linked to the selected PAN status reason. Possible values are: '1' = Force replacement, '2' = Restrict replacement, '3' = Allow replacement.
32	NEW_CARD_NUMBER	VARCHAR2	22		The new PAN number to issue. Note  This column is used when the REPLACEMENT_OPTION_CODE = '1' (Force replacement) or '2' (Restrict replacement).
33	PRIORITY_INDICATOR	CHAR	3		Priority level with which this operation must be treated. It should be present in the 'PRIORITY_INDICATOR' table.
34	REPLACEMENT_REASON_CODE	CHAR	2		Replacement reason after submitting the declaration.
35	USER_CREATE	VARCHAR2	15		ID of the user when record created.
36	DATE_CREATE	DATE	7		Record creation date and time.
37	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
38	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.3.7 LOST_STOLEN_CASE_DECLARATION

This table contains lost or stolen PANs declared on the system.

Refer to the ["Lost/Stolen"](#) section in the UG1020-Payment instrument user's guide for more details.

Each column of this table is described in detail in the next section.

13.3.7.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	CARD_NUMBER	VARCHAR2	22		The assigned number by the issuer that identifies the lost or stolen PAN. It should be present in the 'CARD' table.
2	CLIENT_CODE	VARCHAR2	24		Unique identifier of the Customer owning the lost or stolen PAN. It should be present in the 'CLIENT' table.
3	DECLARATION_STATUS	CHAR	1		Status of the declaration. Possible values are: 'W' = Waiting confirmation, 'C' = Confirmed, 'N' = Canceled.
4	DECLARATION_STATUS_DATE	DATE	7		Date when the operation has been declared.
5	BANK_CODE	CHAR	6		Financial institution concerned by these parameters. It should be present in the 'BANK' table.
6	NETWORK_CODE	CHAR	2		Network code of the parameter being defined. It should be present in the 'NETWORK' table.
7	STATUS_CODE	CHAR	1		PAN status after submitting the declaration. It should be present in the 'STATUS_LIST' table. Note This column is defined depending on values set for the DECLARATION_STATUS column. In case the DECLARATION_STATUS = 'W' (Waiting confirmation), the STATUS_CODE = 'S' (Suspended). In case DECLARATION_STATUS = 'N' (Canceled) the STATUS_CODE = 'N' (Normal). Otherwise, if the DECLARATION_STATUS = 'C' (Confirmed), the STATUS_CODE = 'C' (Canceled).
8	REASON_CODE	CHAR	2		PAN status reason after submitting the declaration. It should be present in the in 'STATUS_REASON_LIST' table.
9	OLD_STATUS_CODE	CHAR	1		The old PAN status code after submitting the declaration. It should be present in the 'STATUS_LIST' table.
10	OLD_REASON_CODE	CHAR	2		The old PAN status reason after submitting the declaration. It should be present in the 'STATUS_REASON_LIST' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
11	INIT_STATUS_CODE	CHAR	1		The initial PAN status code after submitting the declaration. It should be present in the 'STATUS_LIST' table.
12	INIT_REASON_CODE	CHAR	2		The initial PAN status reason after submitting the declaration. It should be present in the 'STATUS_REASON_LIST' table.
13	TITLE_CODE	CHAR	2		Title code of the parameter being defined. It should be present in the 'TITLE_LIST' table.
14	FIRST_NAME	VARCHAR2	40		PAN holder first name owner of the lost or stolen PAN. It should be present in the 'CLIENT' table.
15	FAMILY_NAME	VARCHAR2	40		PAN holder family name owner of the lost or stolen PAN. It should be present in the 'CLIENT' table.
16	START_DATE	DATE	7		The opposition start date.
17	END_DATE	DATE	7		The opposition end date.
18	DECLARATION_DATE	DATE	7		Date when the operation has been declared.
19	INCIDENT_DATE	DATE	7		Date of the lost/stolen PAN.
20	STOPLIST_REASON_CODE	CHAR	2		Status list reason after submitting the declaration. It should be present in the 'STOP_LIST_REASON_CODE' table.
21	REP_CARDHOLDER_FLAG	CHAR	1		This column indicates if the lost stolen case has been reported by the cardholder or somebody else. Possible values are: 'Y' = Yes, 'N' = No. Note  When this column is defined, the next REPORTER_NAME column contains automatically the full name of the cardholder.
22	REPORTER_NAME	VARCHAR2	40		Name of the person who reported lost PAN.
23	COUNTRY_CODE	CHAR	3		Country where the PAN has been lost or found. It should be present in the 'COUNTRY' table.
24	CITY_NAME	VARCHAR2	40		City where the PAN has been lost or found. It should be present in the 'CITY' table.
25	REPORTER_COMMENT	VARCHAR2	1024		It is a free text that contains the feedback from the person who found and reported the concerned lost/stolen PAN.
26	POLICE_DECLARATION_FLAG	CHAR	1		This column indicates if the cardholder has made a police declaration. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'Y' = Yes, 'N' = No.
27	POLICE_DECLARATION_ID	VARCHAR2	32		Identifier of the police report.  Note This column becomes mandatory when POLICE_DECLARATION_FLAG = 'Y' (Yes).
28	POLICE_DECLARATION_DATE	DATE	7		Date of police report.
29	PLACE	VARCHAR2	128		The place where the police incident has been reported.
30	STATE_PROVINCE	VARCHAR2	128		The state/province where the PAN has been lost or found. It should be present in the 'REGION' table.
31	REPLACEMENT_OPTION_CODE	CHAR	1		The lost/stolen case replacement option linked to the selected PAN status reason. Possible values are: '1' = Force replacement, '2' = Restrict replacement, '3' = Allow replacement.
32	NEW_CARD_NUMBER	VARCHAR2	22		The new PAN number to issue.  Note This column is used when the REPLACEMENT_OPTION_CODE = '1' (Force replacement) or '2' (Restrict replacement).
33	PRIORITY_INDICATOR	CHAR	3		Priority level with which this operation must be treated. It should be present in the 'PRIORITY_INDICATOR' table.
34	REPLACEMENT_REASON_CODE	CHAR	2		Replacement reason after submitting the declaration. It should be present in the 'REPLACEMENT_REASON_CODE' table.
35	USER_CREATE	VARCHAR2	15		ID of the user when record created.
36	DATE_CREATE	DATE	7		Record creation date and time.
37	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
38	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.3.8 NEGOC_MARKUP_CALCUL

This table is used to store conversion fees negotiated by PAN.

Each column of this table is described in detail in the next section.

13.3.8.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which negotiated markup fee calculation parameters are being defined. It should be defined in the 'BANK' table.
2 	CARD_NUMBER	VARCHAR2	24		This is the assigned number by the issuer that identifies a PAN holder's account and for which negotiated markup fee calculation parameters are being set-up. The entry must be numeric, and it refers to the PAN number used during the transaction. For Onus Cards, this number must be present in 'CARD' table.
3 	MARKUP_ID_SEQ	CHAR	10		Sequence identification of the markup fee. It should be defined in 'MARKUP_CALCUL' table.
4	DESCRIPTION	VARCHAR2	32		The markup description.
4	CURRENCY_NOTIN	VARCHAR2	6		List of currencies that can be included in or excluded from the markup fee calculation. Possible values are: 'IN' = Included, 'NOT IN' = Excluded.
6	DEFAULT_BUYING_RATE	NUMBER	9	6	The buying rate that will be applied on the converted transaction amount.
7	DEFAULT_BUYING_FIX	NUMBER	18	3	The buying amount of fixed fee to be levied on the converted transaction amount.
8	DEFAULT_BUYING_MIN	NUMBER	18	3	The buying minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
9	DEFAULT_BUYING_MAX	NUMBER	18	3	The buying maximum amount of markup fees to charge in case the fees calculation result is greater than this maximum amount.
10	DEFAULT_BUYING_GRACE	NUMBER	18	3	The buying grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
11	DEFAULT_SELLING_RATE	NUMBER	9	6	The selling rate that will be applied on the converted transaction amount.
12	DEFAULT_SELLING_FIX	NUMBER	18	3	The selling amount of fixed fee to be levied on the converted transaction amount.
13	DEFAULT_SELLING_MIN	NUMBER	18	3	The selling minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
14	DEFAULT_SELLING_MAX	NUMBER	18	3	The selling maximum amount of markup fees to charge in case the fees

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					calculation result is greater than this maximum amount.
15	DEFAULT_SELLING_GRACE	NUMBER	18	3	The selling grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
16	CASH_BUYING_RATE	NUMBER	9	6	The cash buying rate that will be applied on the converted transaction amount.
17	CASH_BUYING_FIX	NUMBER	18	3	The cash buying amount of fixed fee to be levied on the converted transaction amount.
18	CASH_BUYING_MIN	NUMBER	18	3	The cash buying minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
19	CASH_BUYING_MAX	NUMBER	18	3	The cash buying maximum amount of markup fees to charge in case the fees calculation result is greater than this maximum amount.
20	CASH_BUYING_GRACE	NUMBER	18	3	The cash buying grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
21	CASH_SELLING_RATE	NUMBER	9	6	The cash selling rate that will be applied on the converted transaction amount.
22	CASH_SELLING_FIX	NUMBER	18	3	The cash selling amount of fixed fee to be levied on the converted transaction amount.
23	CASH_SELLING_MIN	NUMBER	18	3	The cash selling minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
24	CASH_SELLING_MAX	NUMBER	18	3	The selling maximum amount of markup fees to charge in case the fees calculation result is greater than this maximum amount.
25	CASH_SELLING_GRACE	NUMBER	18	3	The cash selling grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
26	CENTRAL_BANK_BUYING_RATE	NUMBER	9	6	The central bank buying rate that will be applied on the converted transaction amount.
27	CENTRAL_BANK_BUYING_FIX	NUMBER	18	3	The central bank buying amount of fixed fee to be levied on the converted transaction amount.
28	CENTRAL_BANK_BUYING_MIN	NUMBER	18	3	The central bank buying minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
29	CENTRAL_BANK_BUYING_MAX	NUMBER	18	3	The central bank buying maximum amount of markup fees to charge in case

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					the fees calculation result is greater than this maximum amount.
30	CENTRAL_BANK_BUYING_GRACE	NUMBER	18	3	The central bank buying grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
31	CENTRAL_BANK_SELLING_RATE	NUMBER	9	6	The central bank selling rate that will be applied on the converted transaction amount.
32	CENTRAL_BANK_SELLING_FIX	NUMBER	18	3	The central bank selling amount of fixed fee to be levied on the converted transaction amount.
33	CENTRAL_BANK_SELLING_MIN	NUMBER	18	3	The central bank selling minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
34	CENTRAL_BANK_SELLING_MAX	NUMBER	18	3	The central bank selling maximum amount of markup fees to charge in case the fees calculation result is greater than this maximum amount.
35	CENTRAL_BANK_SELLING_GRACE	NUMBER	18	3	The central bank selling grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
36	INTER_TRANSFER_BUYING_RATE	NUMBER	9	6	The account transfer buying rate that will be applied on the converted transaction amount.
37	INTER_TRANSFER_BUYING_FIX	NUMBER	18	3	The account transfer buying amount of fixed fee to be levied on the converted transaction amount.
38	INTER_TRANSFER_BUYING_MIN	NUMBER	18	3	The account transfer buying minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
39	INTER_TRANSFER_BUYING_MAX	NUMBER	18	3	The account transfer buying maximum amount of markup fees to charge in case the fees calculation result is greater than this maximum amount.
40	INTER_TRANSFER_BUYING_GRACE	NUMBER	18	3	The account transfer buying grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
41	INTER_TRANSFER_SELLING_RATE	NUMBER	9	6	The account transfer selling rate that will be applied on the converted transaction amount.
42	INTER_TRANSFER_SELLING_FIX	NUMBER	18	3	The account transfer selling amount of fixed fee to be levied on the converted transaction amount.
43	INTER_TRANSFER_SELLING_MIN	NUMBER	18	3	The account transfer selling minimum amount of markup fees to charge in case

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					the fees calculation result is between the grace amount and this minimum amount.
44	INTER_TRANSFER_SELLING_MAX	NUMBER	18	3	The account transfer selling maximum amount of markup fees to charge in case the fees calculation result is greater than this maximum amount.
45	INTER_TRANSFER_SELLING_GRACE	NUMBER	18	3	The account transfer selling grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
46	SPECIAL_BUYING_RATE	NUMBER	9	6	The individual buying rate that will be applied on the converted transaction amount.
47	SPECIAL_BUYING_FIX	NUMBER	18	3	The individual buying amount of fixed fee to be levied on the converted transaction amount.
48	SPECIAL_BUYING_MIN	NUMBER	18	3	The individual buying minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
49	SPECIAL_BUYING_MAX	NUMBER	18	3	The individual buying maximum amount of markup fees to charge in case the fees calculation result is greater than this maximum amount.
50	SPECIAL_BUYING_GRACE	NUMBER	18	3	The individual buying grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
51	SPECIAL_SELLING_RATE	NUMBER	9	6	The individual selling rate that will be applied on the converted transaction amount.
52	SPECIAL_SELLING_FIX	NUMBER	18	3	The individual selling amount of fixed fee to be levied on the converted transaction amount.
53	SPECIAL_SELLING_MIN	NUMBER	18	3	The individual selling minimum amount of markup fees to charge in case the fees calculation result is between the grace amount and this minimum amount.
54	SPECIAL_SELLING_MAX	NUMBER	18	3	The individual selling maximum amount of markup fees to charge in case the fees calculation result is greater than this maximum amount.
55	SPECIAL_SELLING_GRACE	NUMBER	18	3	The individual selling grace amount, i.e. the amount below which no mark-up fee would be charged if the fees calculation result is less than that grace amount.
56	RULE_IDENTIFIER	CHAR	12		The fee calculation rule as follows: 'STD' = Standard, 'MIN' = Minimum, 'MAX' = Maximum.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Note  Refer to "PowerCARD's Calculation Rules" section for detailed description of calculation rule options.
57	ROUNDED_METHOD_IDENTIFIER	CHAR	4		This is to indicate the rounding method to be applied on the VISA interchange fee calculation result. Possible values are: 'H' = High value, 'L' = 'Low value, 'N' = Normal, 'E' = Exponent (Default standard method). Note  Refer to "Rounded methods" section for detailed description of rounded methods.
58	THRESHOLD_AMOUNT	NUMBER	18	3	This is the transaction amount threshold under which the system does not undergo the interchange fee calculation and the result is set to zero.
59	COUNTRY_VERIFICATION	CHAR	1		This flag indicates the address county verification. Possible values are: 'Y' = Yes, 'N' = No.
60	USER_CREATE	VARCHAR2	15		ID of the user when record created.
61	DATE_CREATE	DATE	7		Record creation date and time.
62	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
63	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.3.9 NEGOC_MARKUP_ELLIGIBLE_CURS

This table stores the negotiated currencies for which the markup fee index is eligible. The same markup fee calculation logic will apply for all the currencies defined in this table within the markup fee index.

Refer to ["Transaction conversion markup group"](#) section in UG1019-Catalogue user guide for more details.

Each column of this table is described in detail in the next section.

13.3.9.1 Columns description

Seq.	Column Name	Data type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		Financial institution for which parameters are being defined. It should be defined in the 'BANK' table.
2 	CARD_NUMBER	VARCHAR2	24		This is the assigned number by the issuer that identifies a cardholder's account. The entry must be numeric, and it refers to the PAN number used during the transaction. For Onus Cards, this number must be present in 'CARD' table.
3 	MARKUP_ID_SEQ	CHAR	10		Sequence identification of the markup fee. It should be defined in 'MARKUP_CALCUL' table.
4 	CURRENCY_CODE	CHAR	3		Currency code of the parameter being defined. It must be defined in 'CURRENCY_TABLE' table.
5	USER_CREATE	VARCHAR2	15		ID of the user when record created.
6	DATE_CREATE	DATE	7		Record creation date and time.
7	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
8	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.3.10 NEGOCIATED_CARD_FEES

This table contains negotiated fees parameters defined by PAN.

Each column of this table is described in detail in the next section.

13.3.10.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	BANK_CODE	CHAR	6		Financial institution for which negotiated card fees parameters are being set-up. It must be present in the 'BANK' table.
2 	CARD_NUMBER	VARCHAR24	24		This is the assigned number by the issuer that identifies a PAN holder's account and for which negotiated card fees parameters are being set-up. The value must be numeric, and it refers to the PAN number used during the transaction. For On-Us PANs, this number must be present in 'CARD' table.
3	ABRV_DESCRIPTION	VARCHAR2	16		The fee's shortened description used for information and reports.
4	DESCRIPTION	VARCHAR2	32		The fee's description. It is for information only.
5	STATUS	CHAR	1		The fee billing status. Possible values are: 'U' = Not used (the system does not generate any fee),

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'A' = Advanced (the system uses the corporate scheme), 'N' = Normal (the system generates fee). Note  This column is defaulted to 'N' (Normal).
6	CARD_FEES_BILLING_EVT	CHAR	1		The event triggering the fees posting. Possible values are: 'M' = Manufacturing (At the payment instrument manufacture process), 'U' = First transaction (At PAN usage only), 'G' = After grace period (After a grace period if the payment instrument is not canceled), 'A' = On PAN activation (When PAN is activated). Note  'U' (First transaction) and 'G' (After grace period) options can be used in case of mass issuance on new product.
7	CARD_FEES_GRACE_PERIOD	NUMBER	3		number of days before starting fees billing. This field is mandatory if CARD_FEES_BILLING_EVT = 'G' (After grace period).
8	CARD_FEES_BILLING_DATE	CHAR	1		The billing process is totally independent for renewal process. In case of payment instrument usage or grace period payment instrument fees generation triggers, this column enables the system to set the next billing date. Possible values are: 'X' = Bill at period end, 'V' = Bill at period start.
9	CARD_FEES_BILLING_PERIOD	CHAR	1		The period when the Annual Membership Fee amount is charged. The following period options are offered: 'M' = Monthly, 'Q' = Quarterly, 'S' = By semester, 'Y' = Yearly.
10	NUMBER_OF_YEAR	NUMBER	1		This column is not used in V3.5.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
11	CURRENCY_CODE	CHAR	3		Subscription and periodical membership currency code in which the fees are going to be expressed. It should be defined in 'CURRENCY_TABLE' table.
12	SUBSCRIPTION_AMOUNT	NUMBER	18	3	Subscription fee paid for the first issuance of main PI and supplementary. It is not charged on annual membership fee and renewals. (Default: 0).
13	FEES_AMOUNT_FIRST	NUMBER	18	3	Periodic fee amount that is paid during the first issuance validity period of the Payment instrument (PI). This amount is not added to the subscription fee. When the PI is created, only the subscription is generated. (Default: 0).
14	FEES_AMOUNT_RENEW	NUMBER	18	3	The fee amount that is charged to the cardholder for the first renewal of the Payment instrument (PI). The renewal amount is also used to generate periodic fees for the second validity period.
15	SUBSEQUENT_RENEWAL_FEES	NUMBER	18	3	The fees amount that is charged to the cardholder for subsequent renewals of the payment instrument. It is valid for the second renewal and above. The subsequent amount is also used to generate periodic fees for the third (and subsequent) validity period.
16	PLASTIC_FEES	NUMBER	18	3	This column gives the possibility to enter in the system the cost of the payment instrument. This is appreciated in term of accounting since the system will be able to provide the payment instrument fees plastic cost excluded. These fees are added to the different amounts each time a payment instrument is produced.
17	PLASTIC_FEES_INDICATOR	CHAR	1		This column gives the possibility to hide the plastic cost to the customer or let the system show two transactions on the customer statement. In case of separation, it can be coupled to the fact of not charging the service fee, only plastic fee in case on card replacement. Possible values are: 'I' = Fees included in the card fees, 'S' = Fees billed separately.
18	PHOTO_FEES	NUMBER	18	3	The cost of putting a photo on a card. This is appreciated in term of accounting since the system will be able to provide the card fees photo cost excluded. This column is automatically generated by the system with this amount and with 'F1' as transaction code.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
19	PHOTO_FEES_INDICATOR	CHAR	1		This column gives the possibility to hide the photo cost to the customer or in the contrary show it on the customer statement. Possible values are: 'I' = Fees included in the card fees, 'S' = Fees billed separately.
20	PROMOTION_STARTING_DATE	DATE	7		This column is not used in V3.5.
21	PROMOTION_ENDING_DATE	DATE	7		This column is not used in V3.5.
22	PROMOTION_FEES_AMOUNT	NUMBER	18	3	This column is not used in V3.5.
23	DAMAGED_REPLACEMENT_FEES	NUMBER	18	3	The damaged replacement fees used to generate the replacement fees amount. (Default: 0).
24	ERRONEOUS_REPLACEMENT_FEES	NUMBER	18	3	The erroneous card replacement fees used to generate the replacement fees amount. (Default: 0).
25	LOST_REPLACEMENT_FEES	NUMBER	18	3	The lost card replacement fees used to generate the replacement fees amount. (Default: 0).
26	STOLEN_REPLACEMENT_FEES	NUMBER	18	3	The stolen card replacement fees used to generate the replacement fees amount. (Default: 0).
27	COUNTREFEIT_REPLACEMENT_FEES	NUMBER	18	3	The counterfeit card replacement fees used to generate the replacement fees amount. (Default: 0).
28	EMERGENCY_REPLACEMENT_FEES	NUMBER	18	3	The emergency card replacement fees used to generate the replacement fees amount. (Default: 0).
29	PIN_REPLACEMENT_FEES	NUMBER	18	3	PIN Replacement Fees used to generate the replacement fees amount. (Default: 0).
30	OTHER_REPLACEMENT_FEES	NUMBER	18	3	The other replacement fees used to generate the replacement fees amount. (Default: 0).
31	OTHER_FEES_1	NUMBER	18	3	This column is not used in V3.5.
32	OTHER_FEES_1_INDICATOR	CHAR	1		This column is not used in V3.5.
33	OTHER_FEES_2	NUMBER	18	3	This column is not used in V3.5.
34	OTHER_FEES_2_INDICATOR	CHAR	1		This column is not used in V3.5.
35	OTHER_FEES_3	NUMBER	18	3	This column is not used in V3.5.
36	OTHER_FEES_3_INDICATOR	CHAR	1		This column is not used in V3.5.
37	OTHER_FEES_4	NUMBER	18	3	This column is not used in V3.5.
38	OTHER_FEES_4_INDICATOR	CHAR	1		This column is not used in V3.5.
39	USER_CREATE	VARCHAR2	15		ID of the user when record created.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
40	DATE_CREATE	DATE	7		Record creation date and time.
41	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
42	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.3.11 NEGOC_CORP_POSTING_RULES

This table is used to store negotiated custom posting rules for transactions performed by a given corporate's PANs.

Each column of this table is described in detail in the next section.

13.3.11.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	CORPORATE_ID	VARCHAR2	15		The corporate ID as criterion for the negotiated corporate transaction posting rule. It should be defined in the 'CORPORATE' table.
2 	SEQUENCE_ID	NUMBER	10		Sequence number identifying the negotiated corporate transaction posting rule criteria parameters.
3	BANK_CODE	CHAR	6		Financial institution for which parameters are being defined. This code must be defined in 'BANK' table.
4	DESCRIPTION	VARCHAR2	64		Shortened description of the negotiated corporate transaction posting rule.
5	MCC	CHAR	4		The merchant category code and description. It must be defined in 'MCC' table.
6	MCC_GROUP	CHAR	4		The merchant category group Code. It should be defined in 'MCC_RANGE' table.
7	TRANSACTION_CODE	CHAR	2		The transaction code (Purchase, ATM Cash, Cash Advance ... etc.). It should be defined in 'TRANSACTIONS_DEFINITION' table.
8	TRANSACTION_CATEGORY	NUMBER	2		The transaction category. Possible values are: '1' = Airline, '2' = Lodging, '3' = Rent car, '4' = Restaurant, '5' = Medical, '6' = Mail order, '7' = Purchase, '8' = Other purchase, '9' = Withdrawal, '10' = Quasi cash,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'11' = Cash, '12' = Transfer, '13' = E-com, '14' = T&E.
9	TRANSACTION_CURRENCY	CHAR	3		The transaction currency applicable for this negotiated rule. It should be defined in 'CURRENCY_TABLE' table.
10	ACQUIRER_COUNTRY_CODE	CHAR	3		The Local/foreign country indicator applicable as criterion for the negotiated corporate transaction posting rule. It should be defined in 'COUNTRY' table.
11	CURRENCY_FLAG	CHAR	1		The transaction currency (Local or foreign currency) as a criterion for the negotiated corporate transaction posting rule (Cross border territory). Possible values are: 'F' = Foreign currency, 'L' = Local currency, Or NULL for any currency.
12	COUNTRY_FLAG	CHAR	1		The country territory indicator applicable as criterion for the negotiated corporate transaction posting rule. It is to indicate whether the transaction acquiring country is a local or foreign country. Possible values are: 'F' = Foreign country, 'L' = Local country, Or NULL for any country.
13	LIST_PRODUCT_CODE	VARCHAR2	15		This column is not used in V3.5.
14	POSTING_DESTINATION	CHAR	2		This column is not used in V3.5.
15	CORPORATE_LEVEL	NUMBER	2		This column is not used in V3.5.
16	POSTING_ACCOUNT_TYPE	CHAR	2		This column is not used in V3.5.
17	POSTING_ACCOUNT_SEQUENCE	NUMBER	2		This column is not used in V3.5.
18	DESTINATION_ACCOUNT_NBR	VARCHAR2	24		The account number where transaction are going to be posted.
19	USER_MODIF	VARCHAR2	15		ID of the user when record created.
20	DATE_CREATE	DATE	7		Record creation date and time.
21	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
22	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.3.12 FLEET_VEHICLE_CARD

Records of this table contains the link between a corporate fleet PAN and a vehicle.

Refer to '[PAN/Vehicle link](#)' section in UG1020-Payment Instrument for more details.

Each column of this table is described in detail in the next section.

13.3.12.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	CARD_NUMBER	VARCHAR2	22		PAN to which the vehicle is linked. It must be present in the 'CARD' table
2	BANK_CODE	CHAR	6		Financial institution identification code. It should be present in 'BANK' table.
3	CORPORATE_ID	VARCHAR2	15		The fleet corporate associated to the PAN and the vehicle. It must be present in the 'CORPORATE' table.
4	REGISTRATION_NUMBER	VARCHAR2	20		Vehicle registration plate number.
5	SERVICE_INDICATOR	CHAR	3		The magnetic stripe track. As defined in 'BOARD_FLEET_VEHICLE_CARD' table.
6	USER_MODIF	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_CREATE	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

13.3.13 PWC_TOKEN_VAULT

13.3.13.1 PWC_TOKEN_VAULT

This table is used to save the sensitive value of the entity, its type and the generated token id. The token id is unique, and it is generated by institution and by interface.

Each column of this table is described in detail in the next section.

13.3.13.2 Columns description

Seq.	Column Name	Data type	Len.	Sc.	Column Description
1 	BANK_CODE	CHAR	6		This is the financial institution for which the parameters are being defined. It should be defined in 'BANK' table.
2 	INTERFACE_NAME	VARCHAR2	60		Name of the interface. Possible values are: 'DF_INTERFACE' = Default interface 'BOARDING_INTERFACE' = Boarding process file 'CARD_EMBOSsing' = PAN embossing XML file 'DWH_INTERFACE' = Data warehouse file interface 'WS_INTERFACE' = Web service interface

Seq.	Column Name	Data type	Len.	Sc.	Column Description
					'GEN_ACCOUNTING_FILE' = Accounting file.
3 	SENSITIVE_VALUE	VARCHAR2	40		The sensitive value, it can be a PAN number as it can be an account number or a customer name.
5 	SENSITIVE_TYPE	CHAR	2		Type of the sensitive value. Possible values are: 'CH' = PAN number, 'AC' = Account number.
1 	TOKEN_VALUE	VARCHAR2	40		Token identifier. it is the identifier generated by a specific algorithm that allows its uniqueness, and which will be used when communicating with a defined interface instead of using the PAN number or account number, or other sensitive value.
6	USER_CREATE	VARCHAR2	15		ID of the user when record created.
7	DATE_CREATE	DATE	7		Record creation date and time.
8	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
9	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

14 Transaction

14.1 Operation tables

14.1.1 TRANSACTION_HIST

In PowerCARD, transactions may come from different sources:

- Internal transactions captured via the screen by an end user, those transactions are first controlled then moved to this table.
- Internal transactions created via system events or batch processing: for instance, fees on transactions, discounts...
- External transactions coming from card network links such as Visa and MasterCard: all those transactions are received in the incoming files then processed by the system and stored in this table
- External transactions from posting files received from merchants. For instance, electronic commerce transactions, Airline transactions...
- External transactions from batches sent by merchants via their point-of-sales terminals.
-

Regardless of the acquiring or issuing context, this table contains most transactions processed by the platform. The few exceptions of transactions not present in this table include:

1. Transactions captured via screen for credit product only. These transactions are stored in 'CR_TRANSACTION' table. A table used to store transactions for credit products.
2. Card fees transactions for debit products, for instance period fees, insurance fees
 - All those transactions are stored in 'TRANSACTION_HIST_CARD' table.
3. Some special merchant fees that are stored in some separate PowerCARD tables
 - All other transactions are held in this table.

Refer to "[Transactions view](#)" section in UG1190-Issuer transactions management user's guide for more details.



Note

- For more information about the Visa mapping, refer to the TRANSACTION_HIST_VISA_MAPPING.xls file attached to this document.
- For more information about the Mastercard mapping, refer to the TRANSACTION_HIST_MASTERCARD_MAPPING.xls file attached to this document.
- For more information about the CB2C mapping, refer to the TRANSACTION_HIST_CB2C_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

14.1.1.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	MICROFILM_REF_NUMBER	CHAR	23		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate an assign a unique ARN for any

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					transaction generated by the system for instance in an issuing context.
2 	MICROFILM_REF_SEQ	NUMBER	4		Sequence number. To guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and the second presentment have the same ARN, the sequence might be used to distinguish between the two transactions.
3	LINKUP_CODE	VARCHAR2	12		The linkup code. It is used to group several batches of transactions.
4	BATCH_NUMBER	VARCHAR2	8		The batch number to which belong the transaction.
5	REMITTANCE_SEQUENCE	NUMBER	12		Remittance sequence number in the submitted batch.
6	VOUCHER_SEQUENCE	NUMBER	6		The transaction sequence number in the remittance.
7	REMITTANCE_NUMBER	VARCHAR2	8		The remittance number to which belongs the transaction.
8	VOUCHER_NUMBER	VARCHAR2	8		The voucher number. In case of manual transaction, this number is assigned to the transaction.
9	REMITTANCE_ORIGIN	CHAR	1		The origin of the transaction remittance. Possible values are: 'C' = Basic Captured Transactions, 'V' = Credit Voucher Captured Transactions, 'G' = Chargebacks, 'A' = Airline Captured Transactions, 'R' = Rent Car Captured Transactions, 'P' = Petrol Captured Transactions, 'L' = Lodging Captured Transactions, 'F' = Food Captured Transactions, 'O' = POS transactions, 'T' = ATM transactions, 'I' = Railroad Captured Transactions, 'E' = Telecom Captured Transactions, 'S' = Posting File Received Transactions, 'N' = Potential Loan Transactions.
10	FILE_NAME	VARCHAR2	64		The original File Name of the transaction. It might contain the file name that contains the original transactions. This column could be used for reconciliation purpose.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
11	ACQUIRER_CENTER_CODE	CHAR	2		The center of the acquirer bank as defined in the system. It must contain a valid value that should be previously defined in the 'CENTER' table.
12	ACQUIRER_GROUPING_CODE	CHAR	1		The acquirer grouping code. It is One-character flag that indicates whether the acquiring center is: 'L' = Local bank, 'N' = National bank, 'F' = Foreign bank.
13	ACQUIRER_BANK_CODE	CHAR	6		The acquirer institution code. It is a code identifying the acquirer institution in the system. This column must contain a valid value that should be previously defined in the 'BANK' table.
14	CHAIN_CODE	VARCHAR2	15		Chain code. It refers to the code of the group of merchants to which belong the merchant where the transaction is made. This column must contain a valid value that should be previously defined in the 'CHAIN' table.
15	MERCHANT_NUMBER	VARCHAR2	15		Code identifying the merchant where the transaction happened. In case of Onus merchant, this code must be a valid value previously defined in the 'MERCHANT' table.
16	OUTLET_NUMBER	VARCHAR2	15		The outlet number or Point of sale, it refers to the location where goods or services are purchased. In case of Onus merchant, this column must contain a valid value previously defined in the 'MER_ACCEPTOR_POINT' table.
17	TERMINAL_ID	VARCHAR2	15		Terminal identification (ATM or POS terminal). It is the identification of the terminal recording and transmitting the transactions to the acquirer. This column might contain a value previously defined in 'TERMINAL_POS' or 'TERMINAL_ATM' tables if the terminal belongs to an Onus merchant
18	FILE_NUMBER	VARCHAR2	6		The File Number. It is the identification of the file containing the transaction in case of electronic transaction (ATM, POS machine, etc.).
19	MERCHANT_ACRONYM	VARCHAR2	40		PAN acceptor acronym. It should contain the name of the merchant where the transaction was made.
20	MERCHANT_COUNTRY_CODE	CHAR	3		The merchant country code where the transaction occurred. This column must contain a valid value that should be previously defined in the 'COUNTRY' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
21	MERCHANT_CITY_CODE	VARCHAR2	5		The merchant city code where the transaction occurred. This column must contain a valid value that should be previously defined in the 'CITY' table.
22	MERCHANT_CITY_NAME	VARCHAR2	32		The merchant city name where the transaction occurred. It might be empty in case of non-onus merchant.
23	MERCHANT_ZIP_CODE	VARCHAR2	10		The Postal code of the merchant where the transaction took place. The entry must be alphanumeric; may be null if not provided. If present, this column must contain a valid value that should be previously defined in the 'ZIP_CODE' table.
24	MERCHANT_REGION	CHAR	3		Merchant region code identifying the region of the merchant where the transaction took place. The entry must be alphanumeric; may be null if not provided. If present, this column must contain a valid value that should be previously defined in the 'REGION' table. For non-onus merchants, this column will be empty.
25	MCC	CHAR	4		Merchant Category Code (MCC) indicating merchant's type of business product or service. The column must contain a valid four-digit numeric Merchant Category Code (MCC) that should be previously defined in the 'MCC' table.
26	TCC	CHAR	1		Transaction category code indicating the category to which the transaction belongs mainly for filtering and grouping purposes. Possible values are: 'A' = Rent car, 'C' = Cash Advance, 'F' = Restaurants, 'H' = Hotel, 'L' = Rail/Road, 'O' = Education, 'P' = Petrol, 'R' = Purchase, 'T' = Phone & mail order, 'U' = Unique, 'X' = Travel, 'Z' = ATM.
27	MCC_GROUP	CHAR	4		Merchant category group. It's a Code indicating the MCC group to which the transaction type belongs mainly for filtering and grouping purposes. This column must contain a valid value that

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					should be previously defined in the 'MCC_RANGE' table.
28	ACTIVITY_CODE	CHAR	4		Merchant activity code. It indicates the merchant's type of activity where the merchant is operating. If present, this column should be previously defined in the 'MERCHANT_ACTIVITY_SET' table.
29	MERCHANT_ACCOUNT_ENTITY_CODE	CHAR	2		The entity code of the acquirer posting account to which the transaction will be posted. Possible values are: 'MC' = Merchant, 'OL' = Outlet, 'CA' = Chain, 'PB' = Partner brand. Depending on the code provided in this column, the value of the next column will correspond to a different PowerCARD entity including a Merchant, Point of Sale, Chain or a Partner Brand.
30	MERCHANT_ACCOUNT_ENTITY_ID	VARCHAR2	24		The entity ID of acquirer posting account. It depends on the value provided in the previous column. For instance, if the previous column is equal to 'MC' (Merchant), it means that this column would contain valid merchant number that needs to be present in 'MERCHANT' table. If this equal to 'OL' (Outlet), it means that this column would contain a valid Merchant Acceptor Point Identification that needs to be present in 'MER_ACCEPTOR_POINT' table.
31	MERCHANT_ACCOUNT_SEQUENCE	NUMBER	2		It refers to the sequence of the acquirer account as defined in 'ACCOUNTS_LINK' table.
32	MERCHANT_ACCOUNT_TYPE	CHAR	2		It refers to the type of the acquirer account as defined in 'ACCOUNTS_LINK' table. If present, this column must contain a valid value that should be previously defined in the 'ACCOUNT_TYPE_LIST' table.
33	MERCHANT_ACCOUNT_NUMBER	VARCHAR2	24		The internal acquirer banking account number to which the transaction is being posted.
34	MERCHANT_ACCOUNT_BANK_CODE	CHAR	6		The acquirer banking account bank code. If present, this column must contain a valid value that should be previously defined in the 'BANK' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
35	MERCHANT_ACCOUNT_CURRENCY	CHAR	3		The merchant banking account currency that must be empty or a valid currency ISO numeric code representing the currency of the acquirer account to which the transaction has been posted. Valid values should be previously defined in the 'CURRENCY_TABLE' table.
36	MERCHANT_PROFILE_CODE	CHAR	3		This column is not used in V3.5.
37	MERCHANT_ID_1	VARCHAR2	15		First merchant identifier that refers to an external identification of the merchant in a third-party system. PowerCARD offers the possibility to define several external identifiers per each merchant. More details with regards to those external parties are present in 'MERCHANT_LABEL_ID' table under the acquiring parameters section. Each Id from 1 to 8 refers to a separate third party.
38	MERCHANT_ID_2	VARCHAR2	15		Second Merchant Identifier.
39	MERCHANT_ID_3	VARCHAR2	15		Third Merchant Identifier.
40	MERCHANT_ID_4	VARCHAR2	15		Fourth Merchant Identifier.
41	MERCHANT_ID_5	VARCHAR2	15		Fifth Merchant Identifier.
42	MERCHANT_ID_6	VARCHAR2	15		Sixth Merchant Identifier.
43	MERCHANT_ID_7	VARCHAR2	15		Seventh Merchant Identifier.
44	MERCHANT_ID_8	VARCHAR2	15		The height Merchant Identifier.
45	SETTLE_TRX_BAL_MODE	CHAR	1		The settlement transaction balance mode that indicates the type of settlement mode used by the merchant. Possible values are: 'B' = Settlement by balance, 'T' = Settlement by transaction, 'N' = Normal settlement.
46	ISSUER_CENTER_CODE	CHAR	2		Issuer center code that refers to the code identifying the center to which belong the issuer bank. If present, this column must contain a valid value that should be previously defined in the 'CENTER' table.
47	ISSUER_GROUPING_CODE	CHAR	1		Issuer grouping code. It is a One-character flag that indicates whether the issuing center is: 'L' = Local bank, 'N' = National bank, 'F' = Foreign bank.
48	ISSUER_BANK_CODE	CHAR	6		Issuer bank code identifying the bank who issued the card. This column must contain a valid value that should be previously defined in the 'BANK' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
49	CLIENT_CODE	VARCHAR2	24		Unique identifier of the customer owning the card in the system.
50	CARD_NUMBER	VARCHAR2	22		This is the assigned number by the issuer that identifies a cardholder's account. The entry must be numeric, and it refers to the card number used during the transaction. For Onus Cards, this number must be present in 'CARD' table.
51	CARD_SEQUENCE_NUMBER	NUMBER	3		The card sequence number. For a new card this value is set to 1, it is then incremented by one each time the card was renewed.
52	PRODUCT_CODE	CHAR	3		The card product code. It contains the product code associated with the card. This code must be defined in the 'CARD_PRODUCT' table.
53	PRODUCT_TYPE	CHAR	2		Type of product associated with the card. Possible values are: 'DC' = Debit, 'DD' = Differed debit, 'CC' = Charge card, 'CR' = Credit revolving, 'BC' = Charge/Credit, 'IC' = Installment Card.
54	BASIC_CARD_FLAG	CHAR	1		The primary card indicator indicating whether the card is primary card or a supplementary card.
55	NETWORK_CODE	CHAR	2		The card network code that contains the network identification to which the card is associated. This code must be previously defined in the 'NETWORK' table.
56	NETWORK_CARD_TYPE	CHAR	3		The card type according to the network standards. This code must be previously defined in the 'CARD_TYPE' table.
57	CARD_TYPE	CHAR	1		The card type according to PowerCARD parameter set-up. Possible values are: '1' = Debit, '2' = Credit, '3' = Prepaid.
58	CARD_INDICATOR	CHAR	1		The flag indicating if the card making the transaction is a prepaid one. (Used for VISA Interchange) Possible values are: 'D' = Cash Disposal Card purchase transaction,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'P' = Prepaid Card, 'R' = Cash Reloadable Card, Empty = Not applicable.
59	SPECIAL_CONDICATOR_IND	CHAR	2		The special Condition Indicator. (Used for VISA interchange). Possible values are: Position 1: Risk Identification indicator '.' = RIS indicator not required for the merchant, '1' = 0 floor limit required, '2' = Full unaltered magnetic track, '3' = 1 & 2. Position 2: Merchant transaction indicator '.' = None of the specified conditions are present, 'B' = Qualifying for medium level charge back protection, 'D' = Qualifying for lowest level charge back protection, 'S' = Qualifying for highest level charge back protection, 'F' = Facsimile Draft provider, 'H' = Lodging services -- Special floor limit, 'L' = Lodging services – Merchant.
60	EXPIRY_DATE	DATE	7		The expiration date for the cardholder's PAN.
61	ISSUER_ID	VARCHAR2	11		Issuer identification. This is the first 6 digit of the card number.
62	ISSUER_ICA	VARCHAR2	6		Issuer Interbank Card Association number (ICA). A four-digit number assigned by MasterCard to a financial institution. The column is used only in case of a MasterCard transaction.
63	CARD_ACCOUNT_ENTITY_CODE	CHAR	2		The entity code of issuer account to which the transaction will be posted. Possible values are: 'CH' = Cardholder, 'CL' = Client, 'CO' = Corporate, 'NL' = Channel, 'PB' = Partner brand. Depending of the code provided in this column, the value of the next column will correspond to a different

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					PowerCARD entity including a Cardholder, Client, ...
64	CARD_ACCOUNT_ENTITY_ID	VARCHAR2	24		Entity ID of issuing posting account. It depends on the value provided in the previous column. For instance, if the previous column is equal to 'CH' (Chain), it means that this column would contains a valid Card Number that must be present in 'CARD' table.
65	CARD_ACCOUNT_SEQUENCE	NUMBER	2		It refers to the sequence of the card's account as defined in 'ACCOUNTS_LINK' table.
66	CARD_ACCOUNT_TYPE	CHAR	2		It refers to the type of the card's account as defined in 'ACCOUNTS_LINK' table. (Ex: Current account, Saving account, etc.) If present, this column must contain a valid value that should be previously defined in the 'ACCOUNT_TYPE_LIST' table.
67	CARD_ACCOUNT_NUMBER	VARCHAR2	24		This column should contain the banking account number to which the transaction is being posted. It might contain a PowerCARD Shadow Account in case of a credit or a prepaid account.
68	CARD_ACCOUNT_BANK_CODE	CHAR	6		Code of the bank managing the account. If present, this column must contain a valid value that should be previously defined in the 'BANK' table.
69	CARD_ACCOUNT_PROFILE_CODE	CHAR	3		The card account profile code. It is only present in case of a credit or a prepaid card. It identifies the credit profile assigned to the credit account. If present, this column must contain a valid value that should be previously defined in the 'CR_PROFILE' table.
70	PROCESSING_CODE	VARCHAR2	6		The processing center code used to define the transaction type then the source and the destination account type. Positions 1-2: Transaction Type '00' = Purchases & Services, '01' = Withdrawal, '02' = Debit adjustment, '03' = Check guarantee, '04' = Check verification, '05' = Euro check, '06' = Traveler's check, '07' = Letter of credit,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'08' = Funds wire, '09' = Cash back, '11' = Quasi cash, '17' = Cash advance, '18' = Document deposit, '19' = Fee collection – debit, '20' = Refund (purchase return), '21' = Deposit, '22' = Credit adjustment, '23' = Check deposit guarantee, '24' = Check deposit, '29' = Funds disbursement, '30' = Authentication request, '31' = Balance inquiry, '32' = Address verification, '33' = Tele code verification, '34' = RIB request, '35' = Account list, '36' = ATM statement, '37' = Statement request, '38' = Short statement request, '39' = Checkbook request, '40' = Account transfer, '50' = Bill payment, '58' = Account verification (ePay), '59' = Payment return (ePay), '90' = E-commerce cardholder certificate request, '91' = PIN change request, '92' = Loan request, '93' = Loan refund, '94' = Redemption. Positions 3-4: Account Type (from) '00' = Not specified, '10' = Savings account, '20' = Checking account, '30' = Credit card account, '38' = Loan account, '40' = Universal account, '50' = Investment account, '62' = Spending power account, '90' = Revolving loan account,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'91' = Installment loan account, '92' = Real estate loan account. Positions 5-6: Account Type (to) '00' = Not specified, '10' = Savings account, '20' = Checking account, '30' = Credit card account, '38' = Loan account, '40' = Universal account, '50' = Investment account, '62' = Spending power account, '90' = Revolving loan account, '91' = Installment loan account, '92' = Real estate loan account.
71	ORIGINE_CODE	CHAR	1		Transaction issuer/acquirer indicator. Possible values are: '0' = ONUS card / local merchant, '1' = ONUS card / local other bank merchant, '2' = ONUS card / foreign merchant, '3' = Local other bank card / local merchant, '4' = Foreign card / local merchant.
72	TRANSACTION_CODE	CHAR	2		The appropriate transaction code identifying the type of the transaction. Possible values must be defined in the 'TRANSACTIONS_DEFINITION' table.
73	CAPTURE_REASON_CODE	CHAR	2		Transaction Capture Reason Code used during the capture of a manual transaction in the system to indicate the reason for this transaction capture. It is a 2-alpha numeric code that must be present in the 'TRANS_REASON_CODE' table.
74	TRANSACTION_SIGN	CHAR	1		The cardholder transaction sign. Possible values are: 'D' = Debit, 'C' = Credit.
75	MERCHANT_TRANSACTION_SIGN	CHAR	1		Code that represents the sign of the transaction with respect to the merchant. Possible values are: 'D' = Debit, 'C' = Credit.
76	REVERSAL_FLAG	CHAR	1		This column indicates whether the transaction is a reversal

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					transaction or not. In case of a reversal transaction, the original transaction must be present in the system and identified using the columns ORIG_MICROFILM_REF_NUMBER & ORIG_MICROFILM_REF_SEQ Possible values are: 'N' = Normal, 'R' = Reversal.
77	REVERSAL_REASON_CODE	CHAR	2		The reversal reason code (data capture) used for reversals to indicate the reason for that reversal transaction. It must be present in 'TRANS_REASON_CODE' table.
78	TRANSACTION_WORDING	VARCHAR2	40		Transaction wording mainly used to describe the type of the transaction. In most cases the system attributes the same wording as defined in the 'TRANSACTIONS_DEFINITION' table where all PowerCARD transaction code are being defined.
79	TRANSACTION_DESCRIPTION	VARCHAR2	128		Transaction description used to describe in detail the transaction. In most cases, this column is equal the one below unless users would like to put more details with regards to the transaction, this column might be used.
80	POS_DATA	VARCHAR2	12		The specific conditions that are (or were) present at the time the transaction occurred. The column is composed from 12 positions, each position has a meaning. See below for more details Position 1: Card Data Entry Capability '0' = Not specified, '1' = Manual, no terminal, '2' = Magnetic stripe read, '3' = Bar code, '4' = OCR, '5' = ICC and magnetic stripe, '6' = PAN key entry, '7' = PAN key entry & magnetic stripe, '8' = PAN key entry, magnetic stripe, & EMV-compatible ICC reader, '9' = EMV-compatible ICC reader. Position 2: Cardholder Authentication Capability '0' = No authentication, '1' = PIN, '2' = Signature verification. Position 3: Card Retention Capability

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'0' = No, '1' = Yes, '9' = Unknown. Position 4: Operating Environment '0' = No terminal used, '1' = On premises of card acceptor, Attended, '2' = On premises of card acceptor, Unattended, '3' = Off premises of card acceptor, Attended, '4' = Off premises of card acceptor, Unattended, '5' = On premises of card owner, Unattended, '9' = Unknown', 'S' = CAT level 1, unattended, 'T' = CAT level 2, unattended, 'U' = CAT level 3, unattended, 'V' = CAT level 4, unattended, '9' = Unknown. Position 5: Cardholder Presence Indicator '0' = Cardholder present, '1' = Cardholder not present, '2' = Cardholder not present, mail order, '3' = Cardholder not present, phone order, '4' = Cardholder not present, authorized, '5' = Electronic order. Position 6: Card Presence Indicator '0' = Card not present, '1' = Card present. Position 7: Card Data Input Mode '0' = Unspecified, '1' = Manual, no terminal, '2' = Magnetic stripe read, '3' = Barcode, '4' = OCR, '5' = ICC, CVV reliable read EMV compliant terminal, '6' = PAN key entry, '7' = Track I read,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'8' = mode used as fallback to PAN auto entry via ICC when the IC could not be used, '9' = E-Commerce, 'F' = Credentials on file, 'J' = ICC, CVV unreliable, 'K' = PAN auto-entry via mobile application, 'U' = Electronic Commerce, no security, 'V' = Electronic Commerce, channel encryption (e.g. SSL), 'S' = Electronic Commerce, SET without cardholder certificate, 'T' = Electronic Commerce, SET with cardholder certificate, 'W' = Unaltered track provided, 'A' = PAN auto-entry via, contactless magnetic stripe, 'M' = PAN auto-entry via contactless M/Chip, 'R' = PAN entry via electronic commerce, including remote chip, 'X' = PAN auto entry via server (issuer, acquirer, or third party vendor system), Position 8: Cardholder Authentication Method '0' = Not authenticated, '1' = PIN, '2' = Electronic signature verification, '3' = Biometrics, '4' = Biography, '5' = Manual signature verification, '6' = Other manual verification (e.g. driver's license). Position 9: Cardholder Authentication Entity '0' = Not authenticated, '1' = ICC, '2' = Card acceptor center or terminal, '3' = Card acquiring center, or payment scheme, '4' = Merchant, '5' = Other, '9' = Unknown. Position 10: Rewrite Capability '0' = Unspecified, '1' = None,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'2' = Track III rewrite capability, '3' = ICC rewriting capability. Position 11: Terminal Output Capability '0' = Unspecified, '1' = None, '2' = Printing capability, '3' = Display capability, '4' = Both. Position 12: PIN Entry Capability '0' = No PIN capture capability, '1' = Device PIN capture capability / unknown, '4' = Four characters, '5' = Five characters, '6' = Six characters or more, 'C' = Twelve characters, 'S' = PIN pad down, 'T' = PIN verified by terminal device.
81	POS_ENTRY_MODE	VARCHAR2	4		Original POS entry mode at the point of service (Depending of Network). This value corresponds to the same value received or sent to the network (Visa, MasterCard, JCB...).
82	POS_CONDITION_CODE	CHAR	2		Original POS Condition code at the point of service (Depending of Network). This value corresponds to the same value received or sent to the network (Visa, MasterCard, JCB...).
83	ACQUIRER_ID	VARCHAR2	11		Acquiring Institution ID Code that identifies a transaction acquirer in the system.
84	CLEARING_PARTNER_ID	CHAR	6		This is a code that identifies the clearing institution.
85	ACQUIRER_ICA	CHAR	6		Acquiring Institution ID Code that identifies a transaction acquirer in MasterCard system.
86	CLEARING_BIN	VARCHAR2	11		This is a BIN that identifies the clearing institution.
87	TRANSACTION_DATE	DATE	7		Date at which the transaction took place at the card acceptor location.
88	ACQUIRER_SETTLEMENT_DATE	DATE	7		Date at which the transaction is being settled with the merchant.
89	ISSUER_SETTLEMENT_DATE	DATE	7		Date at which the transaction is being settled with the cardholder.
90	PROCESSING_DATE	DATE	7		Date that PowerCARD processes the transaction in the system.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
91	BATCH_DATE	DATE	7		Date of the batch being sent by the merchant.
92	REMITTANCE_DATE	DATE	7		This is the date when the merchant remittance has been sent to the processor.
93	VALUE_DATE_CARDHOLDER	DATE	7		It refers to the date when the transaction will be posted to the cardholder account.
94	VALUE_DATE_MERCHANT	DATE	7		It refers to the date when the transaction will be posted to the merchant account.
95	TRANSACTION_AMOUNT	NUMBER	18	3	This column identifies the submitted transaction amount in the transaction currency.
96	TRANSACTION_CURRENCY	CHAR	3		The currency code used in the transaction. The column must contain a valid currency ISO numeric code that must be already present in the 'CURRENCY_TABLE' table.
97	TRANSACTION_CURRENCY_EXP	NUMBER	1		The currency exponent in accordance with the ISO 4217 standard.
98	INTERCHANGE_FEES	NUMBER	18	3	The amount of interchange fees associated to the settlement (in the settlement currency of the member) calculated by the network for this transaction.
99	INTERCHANGE_FEES_CURRENCY	CHAR	3		The currency code used for the interchange fee amount above. The column must contain a valid currency ISO numeric code that must be already present in the 'CURRENCY_TABLE' table.
100	INTERCHANGE_FEES_CURRENCY_EXP	NUMBER	1		The currency exponent in accordance with the ISO 4217 standard.
101	INTERCHANGE_FEES_SIGN	CHAR	1		This column specifies if the interchange fee amount is a credit or a debit for the receiving member. Possible values are: 'D' = Debit, 'C' = Credit.
102	DISCOUNT_CODE	CHAR	3		This column is not used in V3.5.
103	DISCOUNT_RATE	NUMBER	9	6	This column is not used in V3.5.
104	DISCOUNT_FIXED_AMOUNT	NUMBER	18	3	This column is not used in V3.5.
105	DISCOUNT_MIN_AMOUNT	NUMBER	18	3	This column is not used in V3.5.
106	DISCOUNT_MAX_AMOUNT	NUMBER	18	3	This column is not used in V3.5.
107	DISCOUNT_AMOUNT_HT	NUMBER	18	3	This column is not used in V3.5.
108	DISCOUNT_AMOUNT_TTC	NUMBER	18	3	This column is not used in V3.5.
109	CH_TRANSACTION_FEES_HT	NUMBER	18	3	The cardholder transaction fees amount calculated in local currency before tax.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
110	CH_TRANSACTION_FEES_TTC	NUMBER	18	3	The cardholder transaction fees amount calculated in local currency tax included.
111	CONVERSION_FEES	NUMBER	18	3	The conversion fees amount. It's calculated by the system; This column must contain the conversion fees applied on an international transaction. The amount is in local currency.
112	BILLING_AMOUNT	NUMBER	18	3	The amount to be charged to the issuer in billing currency.
113	BILLING_CURRENCY	CHAR	3		The billing currency code. It must be defined in the 'CURRENCY_TABLE' table.
114	BILLING_CURRENCY_EXP	NUMBER	1		The billing currency exponent.
115	ACQUIRER_SETTLEMENT_AMOUNT	NUMBER	18	3	The acquirer settlement amount.
116	ACQUIRER_SETTLEMENT_CURRENCY	CHAR	3		Currency code of the acquirer settlement amount. It must be defined in the 'CURRENCY_TABLE' table.
117	ACQUIRER_SETTLEMENT_EXPONENT	NUMBER	1		The acquirer Settlement currency exponent.
118	SETTLEMENT_AMOUNT	NUMBER	18	3	The settlement amount in settlement currency.
119	SETTLEMENT_CURRENCY	CHAR	3		The settlement currency code. It must be defined in the 'CURRENCY_TABLE' table.
120	SETTLEMENT_CURRENCY_EXP	NUMBER	1		The settlement currency exponent.
121	LOCAL_AMOUNT	NUMBER	18	3	Transaction local amount in local currency.
122	LOCAL_CURRENCY	CHAR	3		ISO alphanumeric code of the local amount currency.
123	LOCAL_CURRENCY_EXP	NUMBER	1		Local currency exponent.
124	RECONCILIATION_AMOUNT	NUMBER	18	3	The reconciliation amount between the issuer and the acquirer in local currency.
125	RECONCILIATION_CURRENCY	CHAR	3		The reconciliation currency code.
126	RECONCILIATION_CURRENCY_EXP	NUMBER	1		The reconciliation currency exponent.
127	AUTHORIZATION_AMOUNT	NUMBER	18	3	The authorized amount in authorization currency.
128	AUTHORIZATION_CURRENCY	CHAR	3		The authorization currency code.
129	AUTHORIZATION_CURRENCY_EXP	NUMBER	1		The authorization currency exponent.
130	TIPS_AMOUNT	NUMBER	18	3	The authorization the tips amount.
131	CASH_BACK_AMOUNT	NUMBER	18	3	The authorization the cash back amount.
132	ACQ_MARKUP_AMOUNT	NUMBER	18	3	The authorization acquirer markup amount (Calculated during the conversion from the transaction amount

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					currency to the acquirer settlement currency).
133	ACQ_MARKUP_RATE	NUMBER	9	6	The authorization the acquirer markup rate.
134	ACQ_AMOUNT_1	NUMBER	18	3	This column is reserved for future use.
135	ACQ_AMOUNT_1_CURRENCY	CHAR	3		The acquirer amount 1 currency.
136	ACQ_AMOUNT_1_CURRENCY_EXP	NUMBER	1		The acquirer amount 1 currency exponent.
137	ACQ_AMOUNT_2	NUMBER	18	3	The acquirer amount 2.This column is reserved for future use.
138	ACQ_AMOUNT_2_CURRENCY	CHAR	3		The acquirer amount 2 currency.
139	ACQ_AMOUNT_2_CURRENCY_EXP	NUMBER	1		The acquirer amount 2 currency exponent.
140	ACQ_AMOUNT_3	NUMBER	18	3	The acquirer amount 3.This column is reserved for future use.
141	ACQ_AMOUNT_3_CURRENCY	CHAR	3		The acquirer amount 3 currency.
142	ACQ_AMOUNT_3_CURRENCY_EXP	NUMBER	1		The acquirer amount 3 currency exponent.
143	ACQ_AMOUNT_4	NUMBER	18	3	The acquirer amount 4. This column is reserved for future use.
144	ACQ_AMOUNT_4_CURRENCY	CHAR	3		The acquirer amount 4 currency.
145	ACQ_AMOUNT_4_CURRENCY_EXP	NUMBER	1		The acquirer amount 4 currency exponent.
146	ISS_MARKUP_AMOUNT	NUMBER	18	3	Issuer markup amount (Calculated during the conversion from the transaction amount currency to the billing currency).
147	ISS_MARKUP_RATE	NUMBER	9	6	Issuer markup rate.
148	ISS_AMOUNT_1	NUMBER	18	3	Issuer amount 1.This column is reserved for future use.
149	ISS_AMOUNT_1_CURRENCY	CHAR	3		Issuer amount 1 currency.
150	ISS_AMOUNT_1_CURRENCY_EXP	NUMBER	1		Issuer amount 1 currency exponent.
151	ISS_AMOUNT_2	NUMBER	18	3	Issuer amount 2.This column is reserved for future use.
152	ISS_AMOUNT_2_CURRENCY	CHAR	3		Issuer amount 2 currency.
153	ISS_AMOUNT_2_CURRENCY_EXP	NUMBER	1		Issuer amount 2 currency exponent.
154	ISS_AMOUNT_3	NUMBER	18	3	Issuer amount 3.This column is reserved for future use.
155	ISS_AMOUNT_3_CURRENCY	CHAR	3		Issuer amount 3 currency.
156	ISS_AMOUNT_3_CURRENCY_EXP	NUMBER	1		Issuer amount 3 currency exponent.
157	ISS_AMOUNT_4	NUMBER	18	3	Issuer amount 4.This column is reserved for future use.
158	ISS_AMOUNT_4_CURRENCY	CHAR	3		Issuer amount 4 currency.
159	ISS_AMOUNT_4_CURRENCY_EXP	NUMBER	1		Issuer amount 4 currency exponent.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
160	AUTHO_FLAG	CHAR	1		The authorization flag. Possible values are: 'A' = Authorized, 'N' = Not authorized.
161	FUNCTION_CODE	CHAR	3		This is used to define the function code. Possible values are: '200' = Initial financial advice, '205' = 1st presentation, '206' = 2nd presentation, '207' = 3rd presentation.
162	AUTHORIZATION_SOURCE	CHAR	2		This column contains two information data Authorization mode & source: First Digit: Authorization capture mode 'T' = Telex, 'V' = VAP, 'P' = Phone, 'A' = Auto-telex, 'E' = Electronic. First Digit: Authorization deliver source '0' = Issuer, '1' = Stand in by an international network, '2' = Stand in by the processing center, Mandatory presence.
163	AUTHORIZATION_CODE	CHAR	6		The external identifier of the authorization by the issuer for any approved authorization.
164	ACTION_CODE	CHAR	3		The authorization response code.
165	AUTHORIZATION_DATE	DATE	7		The authorization date & time.
166	REFERENCE_NUMBER	CHAR	12		The internal reference of the authorization.
167	INTERNAL_STAN	CHAR	6		The internal audit traces number of the authorization.
168	EXTERNAL_STAN	CHAR	6		The external audit traces number of the authorization.
169	ROUTING_CODE	CHAR	6		The internal routing code of the authorization message, identifying the resource used during the authorization request. It must be defined in the 'RESOURCES' table.
170	CAPTURE_CODE	CHAR	6		The input mode of the authorization request: VAP, Phone, Auto- telex, Electronics. It must be defined in the 'RESOURCES' table.
171	SECURITY_VERIF_RESULT	VARCHAR2	32		The verification result with respect to the authenticity of the authorization.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Position 1: CVV1 Result '0' = Correct CVV1, '1' = Invalid CVV1, '2' = Cryptographic Error, '3' = System malfunction. Position 2: CVV2 Result '0' = Correct CVV2, '1' = Invalid CVV2, '2' = Cryptographic Error, '3' = System malfunction. Position 3: PIN Result '0' = Correct PIN, '1' = Invalid PIN, '2' = Cryptographic Error, '3' = System malfunction. Position 4: Cryptogram Result '0' = Correct Cryptogram, '1' = Invalid Cryptogram, '2' = Cryptographic Error, '3' = System malfunction. Position 5: Address verification result 'A' = Address correct, Code postal incorrect, 'E' = Error, address et code postal incorrect, 'R' = System unavailable, please retry, 'U' = Issuer unavailable, 'Y' = Address correct, 'Z' = Code postal correct, address incorrect. Position 6: Telecode verification results '0' = Telecode correct, '1' = Card non-existent, '2' = Telecode incorrect, '3' = Maximum number of tries reached, '4' = Maximum daily usage number reached.
172	CPS_ACI	CHAR	1		The customer payment service authorization characteristics indicator (Used only for SMS).
173	CPS_TRANSACTION_ID	CHAR	15		The numeric identifier of the transaction (Valid only for VISA SMS transactions).

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
174	CPS_VALIDATION_CODE	CHAR	4		The credit transaction validation code as per CPS (Valid only for VISA SMS transactions).
175	TIME_STAMP_PLUS_MESSAGE	VARCHAR2	14		It is used for the tracking information required in messages PLUS transactions processed through the PLUS Switch (Valid only for VISA PLUS SMS transactions).
176	CLEARING_STAN	CHAR	6		System Trace Audit Number associated with the clearing and sent in outgoing file or received in incoming file.
177	CONTROL_STATUS_BUFFER	VARCHAR2	256		The buffer containing control statuses results of the transaction. Check FLAG_POSITION column of the 'TRANS_DEF_REJECT_FLAG' table.
178	CHARGEBACK_STATUS	CHAR	1		The chargeback status. Possible values are: '0' = RAS, '1' = Bank, '2' = Merchant, '3' = Issuer, '4' = Cardholder, '5' = Arbitration.
179	SETTLEMENT_FLAG	CHAR	1		This is the settlement flag. Possible values are: '0' = VISA international clearing, '1' = Integrated clearing and net settlement, '2' = EC Net Settlement, '3' = INET Clearing and Settlement, '4' = Bilateral national clearing, '5' = Bilateral international clearing, '6' = Net national clearing, '7' = Default clearing mode chosen by VISA, '8' = Diners Clearing and Settlement.
180	MESSAGE_REASON_CODE	CHAR	4		The message reason code. Reversals: '4000' = Transaction cancelled by cardholder, '4001' = Not specified, '4002' = Malfunction suspected, '4004' = Partially processed, '4006' = Response received too late, '4007' = Card acceptor device unable to complete transaction,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'4013' = Cannot deliver message to point of sale, '4014' = Malfunction suspected / Card retained, '4015' = Malfunction suspected / Card returned, '4016' = Malfunction suspected / Track III not updated, '4017' = Malfunction suspected / Cash not dispensed, '4018' = Card returned / Cardholder time out / Cash not dispensed, '4019' = Card retained / Cardholder time out / Cash not dispensed, '4020' = Invalid response, no action, '4200' = Transaction has not completed (request or advice timed out or ATM malfunctioned), '4201' = No confirmation from point of service, '4202' = Potential duplicate financial transaction, '4203' = Duplicate financial transaction, '4300' = Network advice: APS error; unable to deliver response, '4301' = Network advice: APS error; no APS 0180/0280 ACK, '4302' = Network advice: IPS time out error, '4303' = Zero dispense: card returned; no receipt issued, '4304' = Zero dispense: card retained; no receipt issued, '4307' = Zero dispense: card retained; ATM time out, '4308' = Zero dispense: card retained; ATM time out, '4309' = Partial dispense; card returned, '4310' = Partial dispense; card retained, '4311' = Transaction cancelled; card retained, '4312' = APS time out; card returned, '4313' = APS time out; card retained, '4400' = Error, '4401' = System malfunction. Re-presentment: '4700' = Invalid chargeback, '4701' = Response to cardholder dispute chargeback (original transaction valid).

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Adjustment: '6200' = Transaction voided by cardholder, '6201' = Wrong amount due to ATM misdispense, '6202' = Acquirer correction, '6203' = Approved transaction (previously reversed when no confirmation received from point of sale, did complete), '6204' = Reversal of a previous credit adjustment, '6204' = Reversal of a previous debit adjustment. Fee Collection '7300' = Telex, telephone & cable charges, '7301' = Auto-telex charges, '7302' = Lost/stolen card report fees, '7303' = Merchant service fees, '7304' = Recovered card handling fees/ rewards, '7305' = Invalid CAB chargeback handling fee, '7306' = Recovery of copy/original or substitute draft fees, '7307' = Emergency replacement card distribution fee, '7308' = Emergency cash disbursement handling fee, '7309' = Arbitration/compliance/ resolution case decision or request fee, '7310' = Incorrect merchant identification/transaction handling fee, '7311' = Funds disbursement transactions, '7312' = Corporate indemnification of settlement risk. VSDC transaction '9300' = Offline decline from an issuer, '9301' = Offline approval from an acquirer.
181	INTERCHANGE_FILE_NUMBER	VARCHAR2	25		Interchange file number (VISA, INET, ECCF, AMEX, HOST, etc.) containing the transaction.
182	MERCHANT_DESCRIPTION	VARCHAR2	64		The merchant description.
183	SETTLEMENT_DESTINATION	CHAR	2		The settlement destination.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
184	SETTLEMENT_DATA	VARCHAR2	256		The settlement data. For Diners interchange transactions, this column contains the description of charge.
185	TRANSACTION_FEE_RULE	CHAR	4		Interchange fee calculation rule for the transaction.
186	FORWARDING_MEMBER_ID	VARCHAR2	11		The forwarding member identification.
187	RECEIVING_MEMBER_ID	VARCHAR2	11		The receiving member identification.
188	PROCESSING_CLASS	CHAR	4		The ECCF Processing rules applied to transaction. Possible values are: 'ECDR' = Pay later (EUROCARD, MasterCard), 'EDCM' = Pay now retail (Maestro), 'ECHA' = Pay later ATM and manual cash advance (EUROCHECK Pictogram, cirrus, Maestro), 'ECHT' = EUROCHECK check, truncated, 'ECHN' = EUROCHECK check, non-truncated, Note  For Diners Interchange it contains the charge type of the transaction.
189	CONV_RATE_RECONCILIATION	VARCHAR2	8		The conversion rate against the reconciliation currency.
190	CONV_DATE_RECONCILIATION	DATE	7		The conversion date to reconciliation.
191	CONV_RATE_SETTLEMENT	VARCHAR2	8		The conversion rate against the settlement currency.
192	CONV_DATE_SETTLEMENT	DATE	7		The conversion date to settlement.
193	CONV_RATE_BILLING	VARCHAR2	8		The conversion rate against the billing currency.
194	CONV_DATE_BILLING	DATE	7		The conversion date to billing.
195	CONV_RATE_LOCAL	VARCHAR2	8		The conversion rate against the local currency.
196	CONV_DATE_LOCAL	DATE	7		The conversion date to local.
197	ORIGINAL_REFERENCE	VARCHAR2	23		The original reference of the transaction in interfaced system.
198	ORIGINAL_ARN_DATA	CHAR	3		The IRI and LUHN key of the original ARN.
199	SERVICE_CODE	VARCHAR2	44		Track information.
200	ADDENDUM_CHIP_DATA	CHAR	1		The addendum chip data indicator. Possible values are: 'Y' = Yes, 'N' = No.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
201	ADDENDUM_INDICATOR	CHAR	2		The addendum data indicator. Possible values are: 'AL' = Addendum AIRLINE, 'LG' = Addendum LODGING, 'RC' = Addendum RENTCAR, 'PT' = Addendum PETROL, 'TL' = Addendum TELECOM, 'RL' = Addendum RAIL/ROAD, 'FD' = Addendum Food/Restaurant, Empty = No addendum data.
202	SETTLEMENT_CUTOFF_ACC	VARCHAR2	8		Accounting cutoff processing ID.
203	SETTLEMENT_CUTOFF_CRD	VARCHAR2	8		Credit cutoff processing ID.
204	SETTLEMENT_CUTOFF_OUTG	VARCHAR2	8		Outgoing cutoff processing ID.
205	SETTLEMENT_CUTOFF_MER	VARCHAR2	8		Account merchant cutoff processing ID.
206	SETTLEMENT_CUTOFF_IS	VARCHAR2	8		Information system cutoff processing ID.
207	SETTLEMENT_CUTOFF_STAT	VARCHAR2	8		Statistics cutoff processing ID.
208	SETTLEMENT_CUTOFF_RISK	VARCHAR2	8		Risk management cutoff processing ID.
209	SETTLEMENT_CUTOFF_SCO	VARCHAR2	8		Collection/scoring cutoff processing ID.
210	SETTLEMENT_CUTOFF_INC	VARCHAR2	8		Incoming cutoff processing ID.
211	SETTLEMENT_CUTOFF_BANK	VARCHAR2	8		Bank cutoff processing ID.
212	SETTLEMENT_FLAG_ACC	CHAR	1		Accounting cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
213	SETTLEMENT_FLAG_CRD	CHAR	1		Credit revolving cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
214	SETTLEMENT_FLAG_OUTG	CHAR	1		Outgoing cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
215	SETTLEMENT_FLAG_MER	CHAR	1		Merchant account cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
216	SETTLEMENT_FLAG_IS	CHAR	1		Information system cutoff processing flag. Possible values are: 'N' = Not yet processed,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'Y' = Processed.
217	SETTLEMENT_FLAG_STAT	CHAR	1		Statistics cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
218	SETTLEMENT_FLAG_RISK	CHAR	1		Risk management cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
219	SETTLEMENT_FLAG_SCO	CHAR	1		Collection/scoring cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
220	SETTLEMENT_FLAG_INC	CHAR	1		Incoming cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
221	SETTLEMENT_FLAG_BANK	CHAR	1		Bank cutoff processing flag. Possible values are: 'N' = Not yet processed, 'Y' = Processed.
222	TOT_PARTIAL_INDICATOR	CHAR	1		This column indicates if the chargeback or second presentment are partials or totals Possible values are: 'P' = Partial, 'T' = Total.
223	LOYALTY_PROGRAM_CODE	VARCHAR2	6		Loyalty program code. It must be defined in the 'LOYALTY_PROGRAM' table.
224	LIST_PRODUCT_CODE_1	VARCHAR2	15		This column is not used in V3.5.
225	LIST_PRODUCT_AMOUNT_1	NUMBER	18	3	This column is not used in V3.5.
226	LIST_PRODUCT_CURRENCY_1	CHAR	3		This column is not used in V3.5.
227	LIST_PRODUCT_CURRENCY_EXP_1	NUMBER	1		This column is not used in V3.5.
228	LIST_PRODUCT_CODE_2	VARCHAR2	15		This column is not used in V3.5.
229	LIST_PRODUCT_AMOUNT_2	NUMBER	18	3	This column is not used in V3.5.
230	LIST_PRODUCT_CURRENCY_2	CHAR	3		This column is not used in V3.5.
231	LIST_PRODUCT_CURRENCY_EXP_2	NUMBER	1		This column is not used in V3.5.
232	LIST_PRODUCT_CODE_3	VARCHAR2	15		This column is not used in V3.5.
233	LIST_PRODUCT_AMOUNT_3	NUMBER	18	3	This column is not used in V3.5.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
234	LIST_PRODUCT_CURRENCY_3	CHAR	3		This column is not used in V3.5.
235	LIST_PRODUCT_CURRENCY_EXP_3	NUMBER	1		This column is not used in V3.5.
236	LIST_PRODUCT_CODE_4	VARCHAR2	15		This column is not used in V3.5.
237	LIST_PRODUCT_AMOUNT_4	NUMBER	18	3	This column is not used in V3.5.
238	LIST_PRODUCT_CURRENCY_4	CHAR	3		This column is not used in V3.5.
239	LIST_PRODUCT_CURRENCY_EXP_4	NUMBER	1		This column is not used in V3.5.
240	LIST_PRODUCT_CODE_5	VARCHAR2	15		This column is not used in V3.5.
241	LIST_PRODUCT_AMOUNT_5	NUMBER	18	3	This column is not used in V3.5.
242	LIST_PRODUCT_CURRENCY_5	CHAR	3		This column is not used in V3.5.
243	LIST_PRODUCT_CURRENCY_EXP_5	NUMBER	1		This column is not used in V3.5.
244	TRANSACTION_CATEGORY	NUMBER	2		Transaction category code associated to a sign of transactions' accounting entries to the cardholder, the merchant and the bank. Possible values are: '1' = Airline, '2' = Lodging, '3' = Rent car, '4' = Restaurant, '5' = Medical, '6' = Mail order, '7' = Purchase, '8' = Other purchase, '9' = Withdrawal, '10' = Quasi cash, '11' = Cash, '12' = Transfer, '13' = Ecom, '14' = T&E.
245	LOYALTY_POINT_GAINED	NUMBER	9		Loyalty points gained from purchase transactions during the cycle.
246	LOYALTY_POINT_REDEMPTION	NUMBER	9		Loyalty points redeemed or used during the cycle.
247	ACQUIRER_PARTNER_BRAND_ID	VARCHAR2	15		Acquirer partner brand Identification. It must be defined in the 'PARTNER_BRAND' table.
248	ISSUER_CORPORATE_ID	VARCHAR2	15		Corporation ID in case of Corporate Card. It must be defined in the 'CORPORATE' table.
249	ISSUER_PARTNER_BRAND_ID	VARCHAR2	15		Card's Brand partner ID when applicable. It must be defined in the 'PARTNER_BRAND' table.
250	ISSUER_CHANNEL_NUMBER	VARCHAR2	15		Issuer channel identification. It must be defined in the 'CHANNEL' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
251	ACQUIRER_CHANNEL_NUMBER	VARCHAR2	15		Acquirer channel identification. It must be defined in the 'CHANNEL' table.
252	ACQ_POSTING_DESTINATION	CHAR	2		Acquirer posting entity: Chain, Merchant or Acceptance Point.
253	ISS_POSTING_DESTINATION	CHAR	2		Code of the bank managing the cardholder account.
254	AUTHO_ORIGINAL_TABLE_INDICATOR	VARCHAR2	3		Record original location. Possible values are: 'ATM' = AUTHO_ACTIVITY_ATM, 'ASM' = AUTHO_ACTIVITY_ASM, 'ADM' = AUTHO_ACTIVITY_ADM, 'TRN' = AUTHO_ACTIVITY_TRN, 'MSC' = AUTHO_ACTIVITY_MSC, 'HST' = AUTHO_ACTIVITY_HST, 'FEE' = AUTHO_ACTIVITY_FEE, 'SAF' = AUTHO_ACTIVITY_SAF, Otherwise NULL
255	INDICATOR_STATUS	CHAR	1		The indicator status of transaction. Possible values are: '0' = Normal, '1' = Reversed, '2' = Subject to retrieval request, '3' = Subject to retrieval request cancellation, '4' = Subject retrieval request response, '5' = Subject to retrieval request response reversal, '6' = Subject to a chargeback, '7' = Subject to a chargeback reversal, '8' = Subject to a second presentment, '9' = Subject to a second presentment reversal, 'A' = Subject to a second chargeback, 'B' = Subject to a second chargeback reversal, 'C' = Subject to a third chargeback, 'D' = Subject to a third chargeback reversal, 'E' = Subject to a third presentment, 'F' = Subject to a third presentment reversal.
256	REMITTANCE_TYPE	CHAR	1		The remittance type. Possible values are: 'A' = ATM, 'P' = POS,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'M' = Manual, 'E' = Electronic Commerce, 'C' = CAT.
257	SERVICING_BANK_CODE	CHAR	6		The servicing institution code.
258	SERVICING_BRANCH_CODE	CHAR	6		The servicing branch code.
259	ORIG_MICROFILM_REF_NUMBER	CHAR	23		Original Microfilm Reference Number (Filled only when the transaction is reversal).
260	ORIG_MICROFILM_REF_SEQ	NUMBER	4		Original Microfilm Reference Sequence (Filled only when the transaction is reversal).
261	EXTERNAL_REFERENCE_ID	VARCHAR2	23		External Reference ID of the transaction.
262	EXTERNAL_TRANSACTION_TYPE	CHAR	1		This column contains any external code assigned to the transaction type.
263	PRODUCT_IDENTIFIER	CHAR	3		Card Network Product Identifier. It corresponds to the card type to define the card product criterion within a rule. Some product codes, depending on the networks are: For VISA, it's the card type defined in the tables 'VISA_BIN', 'VISA_PLUS' and 'VISA_ARDEF'. For MasterCard, it's the product definitions in the 'MCI_MPE_ICA_BIN' table. For CUP, it's the card type defined in the 'CUP_BIN' table.
264	ALLOC_TRX_SCENARIO_ID	NUMBER	10		The allocation transaction scenario internal identifier used to define the necessary rules used by the system to redirect after control, valid transactions received from different acceptance points to a given acquirer that will ensure the clearing and settlement process.
265	ACCEPTOR_BANK_CODE	CHAR	6		This is the bank accepting the batch containing the transaction (Acceptance bank may be the acquirer bank or an intermediary bank).
266	ACCEPTOR_CENTER_CODE	CHAR	2		The acquirers processing center code.
267	REGULATION_CONTEXT_TYPE	CHAR	1		Regulation context type. It allows to include in the outgoing file only the transactions having the associated regulation context type. Possible values are: '0' = Intra-bank (acquirer = issuer), '1' = Intra-group (acquirer and issuer are in the same group), '2' = Intra platform (acquirer and issuer in the same platform),

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'3' = Interbank (acquirer onus and issuer offus), '4' = Interbank (issuer onus and acquirer offus). '5' = Multiple (Ex: International payment).
268	CLEARING_SCENARIO_ID	NUMBER	10		Clearing Scenario Internal Identifier set to define the necessary rules used by the system to associate a transaction to a network, an exchange format, an interchange scenario and an IIB (Bank institution identification) for the destination (Issuer) bank.
269	CLEARING_NETWORK	CHAR	2		Clearing Network code, this column identifies uniquely the network in the system as defined in the 'NETWORK' table.
270	COMMISSION_SCENARIO	CHAR	3		Rule to be applied for the calculation of the interchange fee (A standard network rule or Private rule agreed between the issuer and the acquirer and defined in the system).
271	CLEARING_FORMAT	CHAR	2		The clearing/exchange format to be used for this scenario. For all the non-private exchange system, the format will automatically be filled and cannot be changed. In case of a private exchange system, all the existing formats within the system will be proposed. Possible values are: 'CB' = CB, CB2C, 'B2' = VISA BASE II, 'IP' = MCI IPM, 'CP' = CUP.
272	CONTRACT_ELMT_ID	VARCHAR2	15		Internal contract element ID.
273	ACTIVITY_ID	VARCHAR2	15		Merchant activity system internal identification number.
274	MER_LEGAL_ID	VARCHAR2	20		Legal identification number assigned to the merchant (where the transaction has been performed).
275	MER_ACC_LEGAL_ID	VARCHAR2	15		Merchant Internal Identifier.
276	ACTIVITY_EXTERNAL_ID	VARCHAR2	20		External ID of the merchant activity; for example, NAF ID in the French context.
277	ACQ_SITE_ID	VARCHAR2	15		Acceptance Site Identifier (Merchant Site Identifier).
278	ACQ_SITE_EXTERNAL_ID	VARCHAR2	15		Acceptance Site External ID (Merchant Site External Identifier).
279	SITE_REGION_CODE	VARCHAR2	5		Acceptance Site region.
280	SITE_ZIP_CODE	VARCHAR2	10		Acceptance Site ZIP code.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
281	SITE_CITY_CODE	VARCHAR2	5		Acceptance Site City.
282	SITE_STREET	VARCHAR2	50		Acceptance Ste street.
283	NETWORK_CARD_LENGTH	NUMBER	2		The card length as indicated in the network.
284	ISSUER_COUNTRY	VARCHAR2	3		Issuer country code.
285	AUTHORIZATION_NETWORK	CHAR	2		The authorization network. It must be defined in the 'NETWORK' table.
286	PAYMENT_MODE	CHAR	1		Card payment mode. Possible values are: 'C' = Credit Card, 'D' = Debit Card, 'P' = Prepaid Card.
287	CLASS_LEVEL	NUMBER	1		Card class as provided by the payment systems. Possible values are: '0' = Unknown (Authorization required), '1' = Classic, '2' = Silver, '3' = Gold / Premier, '4' = Platinum, '5' = Diamond, '6' = Infinite / Premium.
288	APPLIED_CONTROLS	VARCHAR2	256		The detail of controls performed on the transaction. This column is not used in V3.5.
289	CONTROLS_VALUES	VARCHAR2	256		The rejection setting values in the transaction processing.
290	CONTROLS_RESULT	VARCHAR2	256		The results of the transaction's evaluation.
291	ECOM_SECURITY_LEVEL	CHAR	3		The e-commerce security level (In case of e-commerce: Secured "3D Secure" or Not Secured transaction).
292	RECCURENT_PAYMENT_IND	CHAR	1		The recurring payment flag. Possible values are: 'R' = Recurring, Null.
293	ACQUIRER_REGION	CHAR	1		This is the region to which belongs the acquiring institution. It must be defined in 'REGION' table.
294	ACQUIRER_SUB_REGION	CHAR	1		The acquirer sub region. It must be defined in 'REGION' table.
295	ISSUER_REGION	CHAR	1		This is the issuer country for which parameters are being defined. It must be defined in 'REGION' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
296	ISSUER_SUB_REGION	CHAR	1		Issuer sub region. It must be defined in 'REGION' table.
297	PROGRAM_IDENTIFIER	CHAR	6		The internal identification number of the program as given by the network. It specifies which program has been used to define the interchange rule.
298	MER_EXTERNAL_ID_1	VARCHAR2	80		The first merchant ID within the distributor's information system. It's controlled by the system as a unique identifier with regards to the bank.
299	MER_EXTERNAL_ID_2	VARCHAR2	80		The second merchant ID within the distributor's information system. When multiple instances of the merchant ID are encountered, the list of merchants is displayed along with information on the merchant corporate name and location.
300	CONTRACT_EXTERNAL_ID_1	VARCHAR2	80		The first External Merchant Contract Elements Identifier.
301	CONTRACT_EXTERNAL_ID_2	VARCHAR2	80		The second External Merchant Contract Elements Identifier.
302	ACC_PT_EXTERNAL_ID_1	VARCHAR2	80		This is the first external identifier of the Acceptance Point. This number is unique for the "Acceptance ELC / Acceptance Site / Activity" association. Once the first PA created from this association, this column is generated sequentially assigned to the cardholder's bank.
303	ACC_PT_EXTERNAL_ID_2	VARCHAR2	80		This is the second external identifier of the Acceptance Point. If another Acceptance Point is created from the same "Acceptance ELC / Acceptance Site / Activity" association, this column gets automatically the same access number as the existing PA.
304	PRIVATE_DATA_1	VARCHAR2	32		This is the Private Data 1. This column is reserved for future use.
305	PRIVATE_DATA_2	VARCHAR2	32		This is the Private Data 2. This column is reserved for future use.
306	PRIVATE_DATA_3	DATE	7		This is the Private Data 3. This column is reserved for future use.
307	PRIVATE_DATA_4	DATE	7		This is the Private Data 4. This column is reserved for future use.
308	PRIVATE_DATA_5	NUMBER	18	3	This is the Private Data 5. This column is reserved for future use.
309	PRIVATE_DATA_6	NUMBER	18	3	This is the Private Data 6. This column is reserved for future use.
310	PRIVATE_TLV_DATA_AUTHO	VARCHAR2	1024		This is the Private TLV data from authorization. This column is reserved for future use.
311	PRIVATE_TLV_DATA	VARCHAR2	256		This is the Private TLV data. This column is reserved for future use.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
312	CURRENT_TABLE_NAME	VARCHAR2	3		This is the current table ID.
313	FORCING_FLAG	CHAR	1		This is the forcing flag. Possible values are: 'A' = Authorized, 'N' = Not authorized.
314	FORCING_USER	VARCHAR2	15		In case the transaction is forced, this field indicates the user who forces it.
315	FORCING_REASON_CODE	CHAR	2		This is the reason code for the transaction forcing.
316	TRANSACTION_SEQUENCE	NUMBER	4		This is the transaction sequence counter (Maintained by the Card application).
317	PRINT_CODE	NUMBER	1		This column is not used in V3.5.
318	CLEARING_DATE	DATE	7		This is the transaction clearing date.
319	UPLOAD_DATE	DATE	7		This is the transaction upload date.
320	CONTROL_DATE_1	DATE	7		This is the control processing date for the first bank control process execution.
321	CONTROL_DATE_2	DATE	7		This is the control processing date for the second bank control process execution.
322	CONTROL_DATE_3	DATE	7		This is the control processing date for the last bank control process execution.
323	RECYCLE_DATE	DATE	7		This is the first recycling date. The user may need to make several corrections and recycling on the same transaction to see it passing the control process. Only the data related to the first recycling are displayed in this column.
324	RECYCLE_USER	VARCHAR2	15		The user in charge of recycling.
325	PRECLEARING_DATE	DATE	7		This is the transaction pre-clearing date.
326	SETTLEMENT_DATE	DATE	7		This is the transaction settlement date.
327	CLEARING_DATE_PROC	DATE	7		This is the transaction clearing date processing.
328	CANCEL_USER	VARCHAR2	15		This column is not used in V3.5.
329	SUBJECT_TO_DISCOUNT	CHAR	1		This is the discount retro-cession flag. Possible values are: 'N' = The discount already generated won't be reversed, 'Y' = The system will reverse the merchant discount already generated.
330	USER_CREATE	VARCHAR2	15		ID of the user when record created.
331	DATE_CREATE	DATE	7		Record creation date and time.
332	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
333	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

14.1.2 TRANSACTION_HIST_CARD

This table concerns the PAN fee or any PAN linked to auxiliary product fee transaction history data, part of PAN management module.

Each column of this table is described in detail in the next section.

14.1.2.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	MICROFILM_REF_NUMBER	CHAR	23		Card transaction Microfilm reference number.
2 	MICROFILM_REF_SEQ	NUMBER	4		Microfilm reference sequence. Used to differentiate between transactions having the same Microfilm reference number.
3	LINKUP_CODE	VARCHAR2	12		Transaction concerned 'Linkup code' or 'Batch agent'.
4	BATCH_NUMBER	VARCHAR2	8		Transaction concerned 'Batch group number'.
5	REMITTANCE_SEQUENCE	NUMBER	4		Transaction concerned Batch sequence.
6	VOUCHER_SEQUENCE	NUMBER	4		Transaction concerned Voucher sequence.
7	REMITTANCE_NUMBER	VARCHAR2	8		Transaction concerned Batch number.
8	VOUCHER_NUMBER	VARCHAR2	8		Transaction concerned Voucher number.
9	ISSUER_CENTER_CODE	CHAR	2		Issuer center code. It should be defined in 'CENTER' table.
10	ISSUER_GROUPING_CODE	CHAR	1		Issuer grouping code if applicable.
11	ISSUER_BANK_CODE	CHAR	6		The issuer bank code concerned. It should be defined in the 'BANK' table under PowerCARD General parameters section.
12	CLEARING_PARTNER_ID	CHAR	6		Clearing partner identification. Not used in case of Card related fee transactions.
13	ISSUER_CORPORATE_ID	VARCHAR2	15		Corporate identification code. It should be defined in 'CORPORATE' table.
14	ISSUER_PARTNER_BRAND_ID	VARCHAR2	15		Partner brand identification code. It should be defined in 'PARTNER_BRAND' table.
15	ISSUER_CHANNEL_NUMBER	VARCHAR2	15		Concerned internal Channel identification number. It should be defined in 'CHANNEL' table.
16	CARD_NUMBER	VARCHAR2	22		Card number concerned by the transaction. It should be defined in 'CARD' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
17	CARD_NUMBER_SEQUENCE	NUMBER	3		Card number sequence.
18	CARD_FEES_CODE	CHAR	3		Concerned Card fees code. It should be defined in 'CARD_FEES' table.
19	CLIENT_CODE	VARCHAR2	24		The Client identification code concerned. It should be defined in 'CLIENT' table.
20	PRODUCT_CODE	CHAR	3		Card product code. It should be defined in 'CARD_PRODUCT' table.
21	PRODUCT_TYPE	CHAR	2		Product type possible values are: 'DC'= Debit Card, 'DD'= Deferred Debit Card, 'CC'= Charge Card, 'CR'= Credit Revolving Card, 'IC' = Installment Card, 'PP'= Prepaid Card.
22	BASIC_CARD_FLAG	CHAR	1		Indicates whether the concerned card is a basic (Primary) or supplementary card. Possible values are: 'B'= Basic (Primary) card, 'S'= Supplementary card.
23	NETWORK_CODE	CHAR	2		Card network code. It should be defined in 'NETWORK' table.
24	NETWORK_CARD_TYPE	CHAR	2		Network Card type. It should be defined in 'CARD_TYPE' table.
25	VIP_LEVEL	CHAR	1		VIP level assigned to the client owner. It should be defined in 'VIP_LIST' table.
26	CARD_TYPE	CHAR	1		The card type according to PowerCARD parameter set-up. Possible values are: '1'= Debit card, '2'= Credit card, '3'= Prepaid card.
27	EXPIRY_DATE	DATE	7		Card expiry date.
28	CARD_ACCOUNT_ENTITY_CODE	CHAR	2		Card account entity code possible values are: 'CH'= Cardholder, 'CL'= Client, 'CO'= Corporate, 'NL'= Channel, 'PB'= Partner Brand.
29	CARD_ACCOUNT_ENTITY_ID	VARCHAR2	24		Issuer posting account entity ID depending on Card account entity code.
30	CARD_ACCOUNT_SEQUENCE	NUMBER	2		Issuer account sequence as defined in 'ACCOUNTS_LINK' table.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
31	CARD_ACCOUNT_TYPE	CHAR	2		Card account type as defined in 'ACCOUNT_TYPE_LIST' table.
32	CARD_ACCOUNT_NUMBER	VARCHAR2	24		Card banking account number.
33	CARD_ACCOUNT_BANK_CODE	CHAR	6		Card account bank code. It should be defined in the 'BANK' table under PowerCARD General parameters section.
34	TRANSACTION_CODE	CHAR	2		Transaction code as defined in 'TRANSACTION_DEFINITION' table.
35	TRANSACTION_SIGN	CHAR	1		Transaction sign possible values are: 'D'= Debit, 'C'= Credit.
36	REVERSAL_FLAG	CHAR	1		Indicates whether the concerned transaction is a normal or reversal transaction. Possible values are: 'R'= Reversal, 'N'= Normal.
37	REVERSAL_REASON_CODE	CHAR	2		Transaction reversal reason code should be defined in 'TRANS_REASON_CODE' table.
38	TRANSACTION_AMOUNT	NUMBER	18		Transaction amount.
39	TRANSACTION_CURRENCY	CHAR	3		Transaction currency code. It should be defined in 'CURRENCY_TABLE' table.
40	TRANSACTION_CURRENCY_EXP	NUMBER	1		Transaction currency exponent.
41	BILLING_AMOUNT	NUMBER	18		Transaction billing amount.
42	BILLING_CURRENCY	CHAR	3		Transaction billing currency code. It should be defined in 'CURRENCY_TABLE' table.
43	BILLING_CURRENCY_EXP	NUMBER	1		Transaction billing currency exponent.
44	TRANSACTION_DATE	DATE	7		Transaction date.
45	PROCESSING_DATE	DATE	7		Transaction processing date.
46	REMITTANCE_DATE	DATE	7		Transaction remittance date.
47	VALUE_DATE_CARDHOLDER	DATE	7		Transaction value date at the Card account level.
48	PRODUCT_IDENTIFIER	CHAR	6		Card auxiliary product identifier. It should be defined in 'LINKED_PROD_DESC' table.
49	M_INSTITUTION_CODE	VARCHAR2	15		Institution code owner of the auxiliary product. It should be defined in 'M_INSTITUTION_LIST' table.
50	SETTLEMENT_CUTOFF_ACC	VARCHAR2	8		Accounting settlement cutoff processing id.
51	SETTLEMENT_FLAG_ACC	CHAR	1		Accounting settlement cutoff processing flag. 'N' = Not yet processed, 'Y' = processed.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
52	SETTLEMENT_CUTOFF_CRD	VARCHAR2	8		Credit settlement cutoff processing id.
53	SETTLEMENT_FLAG_CRD	CHAR	1		Credit settlement cutoff processing flag. 'N' = Not yet processed, 'Y' = processed.
54	SETTLEMENT_CUTOFF_OUTG	VARCHAR2	8		Outgoing settlement cutoff processing id.
55	SETTLEMENT_FLAG_OUTG	CHAR	1		Outgoing settlement cutoff processing flag. 'N' = Not yet processed, 'Y' = processed.
56	SETTLEMENT_CUTOFF_MER	VARCHAR2	8		Merchant settlement cutoff processing id.
57	SETTLEMENT_FLAG_MER	CHAR	1		Merchant settlement cutoff processing flag. 'N' = Not yet processed, 'Y' = processed.
58	SETTLEMENT_CUTOFF_IS	VARCHAR2	8		Information system settlement cutoff processing id.
59	SETTLEMENT_FLAG_IS	CHAR	1		Information system settlement cutoff processing flag. 'N' = Not yet processed, 'Y' = processed.
60	SETTLEMENT_CUTOFF_STAT	VARCHAR2	8		Statistics settlement cutoff processing id.
61	SETTLEMENT_FLAG_STAT	CHAR	1		Statistics settlement cutoff processing flag. 'N' = Not yet processed, 'Y' = processed.
62	SETTLEMENT_CUTOFF_RISK	VARCHAR2	8		Risk settlement cutoff processing id.
63	SETTLEMENT_FLAG_RISK	CHAR	1		Risk settlement cutoff processing flag. 'N' = Not yet processed, 'Y' = processed.
64	SETTLEMENT_CUTOFF_SCO	VARCHAR2	8		Collection/Scoring settlement cutoff processing id.
65	SETTLEMENT_FLAG_SCO	CHAR	1		Collection/Scoring settlement cutoff processing flag. 'N' = Not yet processed, 'Y' = processed.
66	CONTRACT_NUMBER	VARCHAR2	16		Contract number of the cardholder to the Auxiliary (Insurance) product.
67	SUB_CONTRACT_NUMBER	VARCHAR2	16		Sub-Contract number of the cardholder to the Auxiliary (Insurance) product.
68	ISS_POSTING_DESTINATION	CHAR	2		The issuer entity supporting the transaction. Possible values are: 'CO'= Corporate,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'SA'= Shadow account.
69	USER_CREATE	VARCHAR2	15		ID of the user when record created.
70	DATE_CREATE	DATE	7		Record creation date and time.
71	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
72	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

14.1.3 TRANSACTION_HIST_ADD_FRAUD

This table is used to store Transaction additional data following transaction processing. The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ).

Data (Partial) is loaded from TC05/TC06/TC07 - TCR0 & TCR1-additional data

It is utilized as part of the process for reporting fraud to Visa (Visa Fraud Reporting)



Note

- For more information about the Visa mapping, refer to the TRANSACTION_HIST_VISA_MAPPING.xls file attached to this document.
- For more information about the Mastercard mapping, refer to the TRANSACTION_HIST_MASTERCARD_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

14.1.3.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	MICROFILM_REF_NUMBER	CHAR	23		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate an assign a unique ARN for any transaction generated by the system for instance in an issuing context.
2	MICROFILM_REF_SEQ	NUMBER	4		Sequence number. To guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and the second presentment have the same ARN, the sequence might be used to distinguish between the two transactions.
3	REIMB_ATTRIBUTE	CHAR	1		This field must contain A through Z or 0 through 9. If 1, 2, G, or H is entered, the Merchant Category Code must be 6011 and the transaction must be a cash disbursement (TC 07, 17, 27, 37). If a 6, 7, or J is entered, the transaction

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					cannot be a cash disbursement (TC 07, 17, 27, and 37). If a 7 is entered, the transaction cannot be an original purchased or credit voucher except in the EU region. If 8, 9, A, B, C, or J is entered, the transaction must be a sales draft (TC 05, 15, 25, 35) or a credit voucher (TC 06, 16, 26, 36). If A is entered, the transaction must be participating in a custom payment service (that is, the Authorization Characteristics Indicator cannot equal N). Regional—CEMEA: If C is entered, the MCC must be classified as an International Airline. VIC Edit, Intraregional EU and Domestic EU: C is valid for all airline MCCs for domestic and intraregional airline transactions. National—U.S.: If 4 is entered, the Merchant Category Code must be 5411. MCCs 5962, 5966, and 5967 cannot be submitted with a Reimbursement Attribute of A, D, or J. Transactions from U.S. acquirers for nonsecured electronic commerce (Moto/EC Indicator 8) must contain Reimbursement Attribute 0. VIC Edit: If A is entered, the transaction must meet all qualification criteria for the PSIRF rate. VIC Edit, National—U.S.: If 3 is entered, the Merchant Category Code must be valid for EPS transactions. VIC Edit, Regional—Asia Pacific: A 7 is not valid on original transactions (TC 05, 06, 25, 26; usage code 1). If 3 is entered, the Merchant Category Code must be valid for EPS transactions. VIC Edit, National—Malaysia, Hong Kong, Macau, Australia, New Zealand, Thailand, India, and Indonesia: If 3 is entered, the Merchant Category Code must be valid for EPS transactions. Note: Refer to BASE II Clearing Data Codes for Reimbursement Attribute definitions.
4	CARD_ACCEPTOR_ID	CHAR	15		Code that identifies the card acceptor operating the POS terminal. This field must contain an acquirer-assigned alphanumeric code that identifies the Card Acceptor. This field must not be all zeros or spaces. Merchant Integrity Control: Acquirers must assign a unique card acceptor

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					ID (CAID) in this field for merchants categorized under high-risk designated merchant category codes (MCCs), or to card not present (CNP) sub-merchants operating under a payment facilitator that generates a payment volume of \$1M or more annually for any MCCs. Dispute Financial This field must be retained and returned when it was provided in the original transaction. Dispute Response Financials This field must be retained and returned when it was provided in the dispute financial transaction.
5	CARDHOLDER_ID_METHOD	CHAR	1		Indicates method used to identify cardholder (e.g., signature, Personal Identification Number (PIN), etc.). The field must contain a space or 1 through 4. Refer to the BASE II Clearing Data Codes manual for a list of valid codes. National—Brazil: I CPS/Retail and CPS/Restaurant originals and their reversals must contain a 1. I CPS/Direct Marketing originals and their reversals must contain a 4. National—U.S.: I EIRF originals and their reversals (except those reclassified CPS/Auto Rental (Card Not Present), CPS/Hotel (Card Not Present), and CPS/ Passenger Transport) must contain 1 through 4. I CPS/Retail, CPS/Hotel (Card Present), CPS/Car Rental (Card Present) originals and their reversals must contain a 1 through 3. I CPS/Card Not Present originals and their reversals must contain a 4. I CPS/Automated Fuel Dispenser originals and their reversals must contain a 3. I CPS/Hotel (Card Not Present), CPS/Car Rental (Card Not Present) originals and their reversals must contain a space or a 1. I CPS/Passenger Transport originals and their reversals must contain a space or 1 through 4. I Custom payment service and EIRF credit vouchers may contain a space. VIC Edit, National—U.S.: EPS and Supermarket originals and reversals must contain 1 through 3. Dispute Response Financials, Dispute Financials The entry is not required, but if it is present it must be a space or one of the permitted values.
6	POS_TERM_CAPABILITY	CHAR	1		Indicates the capability of the point-of-sale (POS) terminal (for example, terminal was not used, terminal can read magnetic stripe, terminal can read chip, etc.)

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					The field must contain a space, 0 through 5, 8, or 9. Refer to the BASE II Clearing Data Codes manual for a list of valid codes. For CPS Participating Countries: If ACI = M, P, R, or V, this field may contain any valid value. Otherwise, CPS originals and their reversals, except CPS/ATM, must contain a 2 through 5, 8 or 9. CPS credit vouchers may contain a space. For CPS/ATM transactions: CPS/ATM may contain any valid value. National—U.S.: EIRF originals and their reversals must contain 0 through 5, 8, or 9. EIRF credit vouchers may contain a space. Contactless original transactions must contain 8. VIC Edit, National—U.S.: EPS and Supermarket originals and reversals must contain 2 through 5, 8, or 9. Dispute Response Financials, Dispute Financials The entry is not required, but if it is present it must be a valid value.
7	CASHBACK_AMOUNT	NUMBER	11	2	Cashback amount. This entry must be numeric and equal to or less than the Source Amount. Two decimals are implied. For cashback originals and their reversals this field must contain the cashback amount submitted in the authorization request. For all other transactions, including partial authorizations where the cashback amount was not authorized, this field must contain zeros. VIC Edit: For Custom Payment Service and the Electronic Data Quality Program original purchase transactions and their reversals, this field must have the same contents as that in the Authorization Response (V.I.P. field 61.1 converted to unpacked numeric). If multiple authorizations were submitted, this field must contain the Cashback from the first authorization response
8	CARD_ACTIV_TERM_IND	CHAR	1		Used to indicate if the rule is allowed for Unattended Cardholder Activated Terminals Possible values are: Space = Not applicable to this transaction '1' = Unattended cardholder-activated, no authorization, below floor-limit transaction '2' = Unattended chip and PIN transactions (VE only)

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					'3' = Unattended cardholder-activated, authorized transaction '4' = Remote Indicator '5' = Unattended Consumer Device (LAC use only) '9' = Mobile Acceptance Solution.
9	MAIL_PHONE_IND	CHAR	1		Indicates transaction performed by mail order, telephone, or electronic commerce. The field must contain a space or 1 through 9. If the Merchant Category Code on an original transaction is 5960, 5962, or 5964 through 5969, the entry cannot be a space, unless R is present in the POS Environment code (TCR1, position 168). VIC Edit: This field must contain 1, 2, 3, 5, 6, 7, or 8 to qualify for CPS/ Card Not Present or CPS/Direct Marketing PSIRF. National—U.S.: This field must contain 1, 2, 3, 5, 6, or 7 to qualify for CPS/ Card Not Present rate. National—U.S.: If Requested Payment Service is A and POS Entry Mode is 01 or 10, this field must contain a space. Europe: This field must contain 8 or 9 to qualify for the secure MOTO fees.
10	USER_CREATE	VARCHAR2	15		ID of the user when record created.
11	DATE_CREATE	DATE			Record creation date and time.
12	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
13	DATE_MODIF	DATE			Date and time when the last record modification occurred.

14.1.4 TRANSACTION_HIST_ADD_TCR01

This table is used to store Transaction additional data following transaction processing. The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ). Data is loaded from Visa TCR1-Additional data

It is utilized as part of Quarety report process, Suspend trx mng, Chargeback generation process



Note

- For more information about the Visa mapping, refer to the TRANSACTION_HIST_VISA_MAPPING.xls file attached to this document.
- For more information about the Mastercard mapping, refer to the TRANSACTION_HIST_MASTERCARD_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

14.1.4.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	MICROFILM_REF_NUMBER	CHAR	23		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate an assign a unique ARN for any transaction generated by the system for instance in an issuing context.
2 	MICROFILM_REF_SEQ	NUMBER	4		Sequence number. To guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and the second presentment have the same ARN, the sequence might be used to distinguish between the two transactions.
3 	TRANSACTION_CODE	CHAR	2		The appropriate transaction code identifying the type of the transaction.
4 	PROCESSING_BIN	CHAR	6		Indicates the financial institution BIN
5 	PROCESSING_DATE	CHAR	5		Indicates the business date when the record has been processed.
6 	INCOMING_FILE_ID	CHAR	3		Incoming file ID
7 	SEQUENCE_NUMBER	NUMBER	8		The field must contain a 1
8	BATCH_NUMBER	NUMBER	6		Batch number
9	TR_CODE_QUALIFIER	NUMBER	1		This field must contain one of these values: 0 = Default 1 = Account Funding 2 = Original Credit
10	TR_COMP_SEQ_NUMBER	NUMBER	1		The field must contain a 1.
11	ISS_WORKSTATION_BIN	CHAR	6		Reserved.
12	ACQ_WORKSTATION_BIN	CHAR	6		Reserved.
13	CHARGEBACK_REF_NUMBER	CHAR	6		Reserved.
14	DOC_INDICATOR	CHAR	1		This is a 1-position code identifying the status of supporting documentation. For originals, the entry must be a space.  Note This field is required for international transactions. Dispute Response Financials, Dispute Financials The field must contain a space.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Note  Space = No support documentation required Refer to Visa Core Rules and Visa Product and Service Rules Reversals The entry must be the same as the transaction being reversed
15	MEMBER_MESG_TEXT	CHAR	50		This field is used to send text messages. All members must be able to receive and process this field. If used, the entry must be left justified. Characters must be EBCDIC. Note  See BASE II Clearing Data Codes for Dispute Reason Codes and Visa Core Rules and Visa Product and Service Rules for further information. National—Brazil: Tax ID: positions 24–37 (14 digits), Merchant Legal Name: positions 38–73. Market Place Data: Position 50-52: F^^ (Foreign Retailer Indicator) Note  The client will not have any explicit field or flag to know whether the populated data is Market Place data or Member Message Text sent by the client.
16	NATIONAL_REF_NUMBER	CHAR	22		Numeric entry indicating a fee for a National Settlement transaction. It must be zeros unless the transaction is a National Settlement transaction for a country using this capability. Two decimal positions are implied. Implementation of this capability requires pre-notification to the Visa Regional office.
17	MERCHANT_CODE	VARCHAR2	20		Reserved
18	TIPS_AMOUNT	NUMBER	9		Member Message TextPositions: 31–39
19	CO_CHARGEBACK_REASON_CODE	NUMBER	2		Member Message TextPositions: 40–41
20	CAPTURE_TYPE_CODE	CHAR	1		Member Message TextPositions: 42–42
21	BASE_IVA_TAX	NUMBER	8		Reserved.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
22	SPECIAL_COND_IND	CHAR	2		This subfield supplies extra information regarding dispute financials (validation reject advices). The entry must begin with a space or 1, 2, or 3. The field's second position must be a space, F, H, L, 7, 8 or 9. National—U.S.: The above edit applies, but the second position cannot be an H. Note  See BASE II Clearing Data Codes for Special Condition Indicators.
23	RESERVED1	CHAR	5		Reserved.
24	CARD_ACCEPTOR_ID	CHAR	15		Code that identifies the card acceptor operating the POS terminal. This field must contain an acquirer-assigned alphanumeric code that identifies the Card Acceptor. This field must not be all zeros or spaces. Merchant Integrity Control: Acquirers must assign a unique card acceptor ID (CAID) in this field for merchants categorized under high-risk designated merchant category codes (MCCs), or to card not present (CNP) sub-merchants operating under a payment facilitator that generates a payment volume of \$1M or more annually for any MCCs. Dispute Financial This field must be retained and returned when it was provided in the original transaction. Dispute Response Financials This field must be retained and returned when it was provided in the dispute financial transaction.
25	TERMINAL_ID	CHAR	8		Code that identifies the card acceptor terminal or ATM. For electronic point-of-sale or point-of-service (POS) terminals, when the ID is not unique to a specific terminal, Card Acceptor Identification Code can be used along with this field. ATM terminal IDs must be unique within the acquirer's network. An identification code of fewer than 8 positions must be left justified and the remainder of the field spacefilled. National—U.S.: This field is required if the Card Acceptor ID in a EIRF original does not fully identify the terminal. National—CPS Participating: This field is required and must identify a specific terminal if the card acceptor identified by the Card Acceptor ID in a

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Custom Payment Service original has multiple terminals.
26	NATIONAL_REIMB_FEE	NUMBER	12		Numeric entry indicating a fee for a National Settlement transaction. It must be zeros unless the transaction is a National Settlement transaction for a country using this capability. Two decimal positions are implied. Implementation of this capability requires pre-notification to the Visa Regional office.
27	MAIL_PHONE_IND	CHAR	1		Indicates transaction performed by mail order, telephone, or electronic commerce. The field must contain a space or 1 through 9. If the Merchant Category Code on an original transaction is 5960, 5962, or 5964 through 5969, the entry cannot be a space, unless R is present in the POS Environment code (TCR1, position 168). VIC Edit: This field must contain 1, 2, 3, 5, 6, 7, or 8 to qualify for CPS/ Card Not Present or CPS/Direct Marketing PSIRF. National—U.S.: This field must contain 1, 2, 3, 5, 6, or 7 to qualify for CPS/ Card Not Present rate. National—U.S.: If Requested Payment Service is A and POS Entry Mode is 01 or 10, this field must contain a space. Europe: This field must contain 8 or 9 to qualify for the secure MOTO fees.
28	SPECIAL_CHARGEBACK_IND	CHAR	1		This subfield supplies extra information regarding dispute financials (validation requests and advices). Originals, Reversals of Originals The field must contain a space. Dispute Financials, Dispute Financial Reversals, Dispute Response Financials, Dispute Response Financial Reversals Values are: - Space = Field not applicable - P = Partial amount
29	INTERFACE_TRACE_NUMBER	CHAR	6		Conversion Date + Additional Token ResponseInformation
30	CARD_ACTIV_TERM_IND	CHAR	1		Indicates type of acceptance terminal. The field must contain a space, 1 through 5 or 9. Values: Space = Not applicable to this transaction

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					1 = Unattended cardholder activated, no authorization, below-floor-limit transaction 2 = Unattended chip and PIN transactions (VE use only) 3 = Unattended cardholder activated, authorized transaction 4 = Remote Indicator (Remote Terminal) 5 = Unattended Consumer Device (LAC use only) 9 = Mobile Acceptance Solution
31	PREPAID_CARD_IND	CHAR	1		Indicates type of prepaid card. Values: Space = Not applicable P = Prepaid card L = Prepaid Load
32	RESERVED2	CHAR	1		Indicates type of commerce. Values: 0 = Not used 1 = Electronic Commerce 2 = In-Flight Commerce 5 = Transponder-Initiated 6 = Relationship Participant 7 = Deferred Billing Indicator
33	AVS_RESPONSE_CODE	CHAR	1		Contains the response to an Address Verification Service (AVS) request, indicating matches or discrepancies between addresses and ZIP codes. The entry must contain a valid value. See BASE II Clearing Data Codes for a listing of AVS Response Codes. Note: Effective 14 April 2007, Canadian Acquirers participating in the Address Verification Service populated the Address Verification Service results code received in the V.I.P. Authorization Response message in a Transaction's corresponding BASE II Clearing Record.
34	AUTH_SOURCE_CODE	CHAR	1		Indicates whether authorization was obtained and the source of the authorization. The allowable entries are V, 6, 7, 9, B, E, F, G, N, and L. See BASE II Clearing Data Codes for the list of codes that are defined for use by the clients. National—U.S.: For EIRF originals and reversals, the entry may be a space. The entry may also be a space for credit vouchers and credit reversals.* National—CPS Participating: For CPS originals and their reversals, the entry may be a

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					space. The entry may also be a space for credit vouchers and their reversals.* VIC Edit, National—U.S.: For EPS and Supermarket originals and their reversals, the entry may be a space.* *Space though deprecated and will not signify anything Visa would still allow to be submitted in the field.
35	PURCHASE_ID_FORMAT	CHAR	1		Indicates the format of additional identifying information for purchases, such as order number or invoice number, etc. Format can include free text or type of number. This field must be a space or 0, 1, 3, 4, 5 or 6. See BASE II Clearing Data Codes for a listing of the Purchase Identifier Format codes. VIC Edit National—U.S.: For original purchase transactions and their reversals: I To qualify for CPS/Car Rental (Card Not Present), CPS/Car Rental (Card Present), CPS/Retail, or CPS/Retail Debit Card PSIRF, this field must contain a 3. I To qualify for CPS/Hotel (Card Not Present), CPS/Hotel (Card Present), CPS/Retail, or CPS/Retail Debit Card PSIRF, this field must contain a 4. I To qualify for CPS/Card Not Present PSIRF, this field must contain a 1.
36	ATM_ACCOUNT_SELECTION	CHAR	1		Indicates type of account (savings, checking, etc.). For TC07 with MCC = 6011 this field must be: 0 = Unavailable 1 = Savings Account 2 = Checking Account 3 = Credit Card Account "Plus" issuers must retain and return this field in subsequent U.S. national dispute financials. For POS draft transactions, this field must contain: Space = Not Applicable 0 = Unavailable 1 = Savings Account 2 = Checking Account 3 = Credit Card Account D = Debit (Line of credit) (for POS only) P = Prepaid (Electronic Purse) (For POS only)
37	INSTALL_PAYMENT_COUNT	CHAR	2		If installment purchase, indicates the number of installments. This edit applies only to the LAC and Caribbean Region, including Crediario installment transactions. VIC Edit: For National Bilateral and National Net transactions (Settlement Flag 6 or 8), the entry must be 00 through 99, or spaces
38	PURCHASE_IDENTIFIER	CHAR	25		Used to send information identifying the purchase to the issuer and cardholder. Indicates the type of identifying information (order number, invoice number, text description, etc.). If this field is not used, it should contain spaces. The entry must be left justified. Unused positions of the field should be space-filled. If the Purchase Identifier Format field contains a value of 1, 3, 4, or 5, this field must not be all

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					spaces. VIC Edit, National—U.S.: If the Purchase Identifier Format of a U.S. original is spaces or 0, the Purchase Identifier can be spaces or nonblank. For original purchase transactions and their reversals: I To qualify for CPS/Car Rental (Card Not Present) or CPS/Car Rental (Card Present) this field must contain the rental agreement number. I To qualify for CPS/Hotel (Card Not Present) or CPS/Hotel (Card Present), this field must contain the hotel folio number. I To qualify for CPS/Card Not Present PSIRF, this field must contain the order number.
39	CONSUMO_TAX	NUMBER	9		Purchase Identifier Positions: 133–141
40	IVA_TAX_AMOUNT	NUMBER	9		Purchase Identifier Positions: 142-150
41	CO_RESERVED_1	NUMBER	7		Purchase Identifier Positions: 151-156
42	CASHBACK	NUMBER	9		Cashback amount. This entry must be numeric and equal to or less than the Source Amount. Two decimals are implied. For cashback originals and their reversals this field must contain the cashback amount submitted in the authorization request. For all other transactions, including partial authorizations where the cashback amount was not authorized, this field must contain zeros. VIC Edit: For Custom Payment Service and the Electronic Data Quality Program original purchase transactions and their reversals, this field must have the same contents as that in the Authorization Response (V.I.P. field 61.1 converted to unpacked numeric). If multiple authorizations were submitted, this field must contain the Cashback from the first authorization response
43	TRANSACTION_COST_IND	NUMBER	1		Reserved.
44	EMV_TRANSACTION_IND	NUMBER	1		Reserved.
45	CO_RESERVED_2	NUMBER	7		Reserved.
46	CHIP_CONDITION_CODE	CHAR	1		Provides information about magnetic stripe-read transactions of VSDC cards at VSDC ATMs ("fallback" transactions). It does not apply to VSDC transactions where the chip is read. Values: Space or 0 = unknown/not applicable 1 = magnetic stripe service code begins with 2 or 6, last transaction at the chip-capable terminal was a successful chip read, or was not a chip transaction. 2 = magnetic stripe service code begins with 2 or 6, last transaction at the chip-

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					capable terminal was an unsuccessful chip read.
47	RESERVED3	CHAR	1		Reserved.
48	USER_CREATE	VARCHAR2	15		ID of the user when record created.
49	DATE_CREATE	DATE			Record creation date and time.
50	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
51	DATE_MODIF	DATE			Date and time when the last record modification occurred.

14.1.5 TRANSACTION_HIST_AL

This table contains additional information related to airline transactions

The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ).

For one initial transaction, several airline rows can exist. The distinction is done through the column "RECORD_NUMBER". TRANSACTION_HIST.ADDENDUM_INDICATOR allows to know if a row in TRANSACTION_HIST_AL is present for the initial transaction. (i.e transaction_hist.addendum_indicator is 'AL' which means **TCR3 Business Format Code (Positions 17-18) is 'AI'**)



Note

- For more information about the Visa mapping, refer to the TRANSACTION_HIST_VISA_MAPPING.xls file attached to this document.
- For more information about the Mastercard mapping, refer to the TRANSACTION_HIST_MASTERCARD_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

14.1.5.1 Column description

Seq.	Field Name	Data Type	Len	Sc	Description
1	MICROFILM_REF_NUMBER	CHAR	23		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate an assign a unique ARN for any transaction generated by the system for instance in an issuing context.
2	MICROFILM_REF_SEQ	NUMBER	4	0	Sequence number. To guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and the second presentment have the same ARN, the sequence might be used to distinguish between the two transactions.

Seq.	Field Name	Data Type	Len	Sc	Description
3 	RECORD_NUMBER	NUMBER	4		Record number.
4	CUSTOMER_CODE	CHAR	27		Traveler customer code.
5	TRAVEL_AGENCY_CODE	VARCHAR2	8		Travel agency code issuing the airline ticket.
6	TRAVEL_AGENCY_NAME	VARCHAR2	25		Travel agency name issuing the airline ticket.
7	PASSENGER_NAME	VARCHAR2	49		Traveler's name and surname.
8	PASSENGER_SPEC_DATA	VARCHAR2	29		Passenger specific data. Agency or airline specified information associated to the passenger.
9	DEPARTURE_TIME	DATE	7		Travel date.
10	TRANSACTION_CODE	VARCHAR2	4		Transaction code. A code to indicate the type of transaction being reported.
11	TICKET_NUMBER	VARCHAR2	14		Ticket number as issued by the airline company.
12	AIRLINE_ID	CHAR	3		Ticket airline code.
13	CARRIER_CODE_1	CHAR	3		Airline carrier code.
14	SERVICE_CLASS_1	CHAR	1		Class of service.
15	STOP_OVER_1	CHAR	1		Travel stopover indicator. It indicates whether or not the passenger is entitled to make a stopover.
16	FARE_BASIS_CODE_1	VARCHAR2	15		Travel fare basis. It is a series of characters to define the entitlement of the passenger based on the fare charged.
17	ORIGINATION_CITY_AIRPORT_1	CHAR	5		Origin Airport/City Code. The airport or city code for the point of embarkation of the flight segment.
18	DESTINATION_CITY_AIRPORT_1	CHAR	5		Destination Airport/City Code. The airport or city code for the point of disembarkation of the flight segment.
19	FLIGHT_TRAVEL_DATE_1	DATE	7		Travel date.
20	AERIAL_COMPANY_CODE_1	CHAR	5		Airline company code.
21	AIRPORT_CODE_1	CHAR	5		Airport code.
22	FLIGHT_CLASS_1	CHAR	15		Travel class.
23	DESTINATION_AIRPORT_1	CHAR	5		Destination airport code.
24	LANDING_1	CHAR	5		Landing airport.
25	RESERV_BOOKING_DESIGN_1	CHAR	2		Flight booking status.
26	CARRIER_CODE_2	CHAR	3		Airline carrier code.
27	SERVICE_CLASS_2	CHAR	1		Class of service.
28	STOP_OVER_2	CHAR	1		Travel stopover indicator. It indicates whether or not the passenger is entitled to make a stopover.

Seq.	Field Name	Data Type	Len	Sc	Description
29	FARE_BASIS_CODE_2	VARCHAR2	15		Travel fare basis. It is a series of characters to define the entitlement of the passenger based on the fare charged.
30	ORIGINATION_CITY_AIRPORT_2	CHAR	5		Origin Airport/City Code. The airport or city code for the point of embarkation of the flight segment.
31	DESTINATION_CITY_AIRPORT_2	CHAR	5		Destination Airport/City Code. The airport or city code for the point of disembarkation of the flight segment.
32	FLIGHT_TRAVEL_DATE_2	DATE	7		Travel date.
33	AERIAL_COMPANY_CODE_2	CHAR	5		Airline company code.
34	AIRPORT_CODE_2	CHAR	5		Airport code.
35	FLIGHT_CLASS_2	CHAR	15		Travel class
36	DESTINATION_AIRPORT_2	CHAR	5		Destination airport code.
37	LANDING_2	CHAR	5		Landing airport.
38	RESERV_BOOKING_DESIGN_2	CHAR	2		Flight booking status.
39	CARRIER_CODE_3	CHAR	3		Airline carrier code.
40	SERVICE_CLASS_3	CHAR	1		Class of service.
41	STOP_OVER_3	CHAR	1		Travel stopover indicator. It indicates whether or not the passenger is entitled to make a stopover.
42	FARE_BASIS_CODE_3	VARCHAR2	15		Travel fare basis. It is a series of characters to define the entitlement of the passenger based on the fare charged.
43	ORIGINATION_CITY_AIRPORT_3	CHAR	5		Origin Airport/City Code. The airport or city code for the point of embarkation of the flight segment.
44	DESTINATION_CITY_AIRPORT_3	CHAR	5		Destination Airport/City Code. The airport or city code for the point of disembarkation of the flight segment.
45	FLIGHT_TRAVEL_DATE_3	DATE	7		Travel date.
46	AERIAL_COMPANY_CODE_3	CHAR	5		Airline company code.
47	AIRPORT_CODE_3	CHAR	5		Airport code.
48	FLIGHT_CLASS_3	CHAR	15		Travel class.
49	DESTINATION_AIRPORT_3	CHAR	5		Destination airport code.
50	LANDING_3	CHAR	5		Landing airport.
51	RESERV_BOOKING_DESIGN_3	CHAR	2		Flight booking status.
52	CARRIER_CODE_4	CHAR	3		Airline carrier code.
53	SERVICE_CLASS_4	CHAR	1		Class of service.
54	STOP_OVER_4	CHAR	1		Travel stopover indicator. It indicates whether or not the passenger is entitled to make a stopover.

Seq.	Field Name	Data Type	Len	Sc	Description
55	FARE_BASIS_CODE_4	VARCHAR2	15		Travel fare basis. It is a series of characters to define the entitlement of the passenger based on the fare charged.
56	ORIGINATION_CITY_AIRPORT_4	CHAR	5		Origin Airport/City Code. The airport or city code for the point of embarkation of the flight segment.
57	DESTINATION_CITY_AIRPORT_4	CHAR	5		Destination Airport/City Code. The airport or city code for the point of disembarkation of the flight segment.
58	FLIGHT_TRAVEL_DATE_4	DATE	7		Travel date.
59	AERIAL_COMPANY_CODE_4	CHAR	5		Airline company code.
60	AIRPORT_CODE_4	CHAR	5		Airport code.
61	FLIGHT_CLASS_4	CHAR	15		Travel class.
62	DESTINATION_AIRPORT_4	CHAR	5		Destination airport code.
63	LANDING_4	CHAR	5		Landing airport.
64	RESERV_BOOKING_DESIGN_4	CHAR	2		Flight booking status.
65	STATISTICAL_CODE	CHAR	3		The statistical code is a code to identify the type of transaction (given by airline company).
66	REASON_ISSUANCE_CODE	CHAR	1		Reason for Issuance Code.
67	ROUTINE_DOM_INTERNATIONAL_IND	CHAR	1		Routing Domestic/International Indicator. Indicator used to differentiate the itinerary routing of the sold document. For example: "D": if the document routing is Domestic (all board and off point within the same country). "I": if the document routing is International (all board and off point not within the same country) Blank: with no routing.
68	CREDIT_CARD_CODE	CHAR	2		Credit Card Code.
69	EXTENDED_PAYEMENT_CODE	CHAR	2		Extended payment code A code to indicate the number of months over which the customer wishes to pay when permitted by the card company.
70	RELATED_TICKET_NUMBER	VARCHAR2	14		Related ticket/document number.
71	CONJUNCTION_TICKET_IND	CHAR	3		Conjunction Ticket Indicator. It is an indicator to specify that the document/Electronic document is a continuation of the itinerary of the previous document/Electronic document.
72	SOURCE_APPROVAL_CODE	CHAR	1		Source of Approval Code.

Seq.	Field Name	Data Type	Len	Sc	Description
					This code identifies how the approval code for a payment card sale was obtained. Note  This element is only reported if form of payment is a payment card.
73	PAYMENT_TRANS_FORM_ID	VARCHAR2	25		Form of Payment Transaction Identifier. It is the unique transaction information as supplied to the System Provider by the Card Company authorization response message for payment card transactions.
74	ADDITIONAL_DATA	VARCHAR2	64		This column is reserved for future use.
75	CARD_AUTH_SEQ_NUMBER	VARCHAR2	2		Card Authentication Sequence Number. A sequence number to identify each occurrence of the 3D Secure Card Authentication Data elements within a payment card transaction.
76	CARD_AUTH_INFORMATION	VARCHAR2	229		This column is reserved for future use.
77	CARD_3DS_AUTH_INFO	VARCHAR2	99		3D Secure Authentication and Additional Card Payment Data. This element contains 3D Secure Authentication and Additional Card Payment Information.
78	RESERVED	VARCHAR2	126		This column is reserved for future use.
79	NB_OF_RECORD	NUMBER	4		Transaction identifier / Network identifier.
80	TRANSACTION_TID	VARCHAR2	15		This column is reserved for future use.
81	E_TICKET_INDICATOR	VARCHAR2	1		This column is reserved for future use.
82	FARE_SEGMENT_1	NUMBER	15		Segment identifier for the #1 Flight coupon. This column is reserved for future use.
83	FARE_SEGMENT_2	NUMBER	15		Segment identifier for the #2 Flight coupon. This column is reserved for future use.
84	FARE_SEGMENT_3	NUMBER	15		Segment identifier for the #3 Flight coupon. This column is reserved for future use.
85	FARE_SEGMENT_4	NUMBER	15		Segment identifier for the #4 Flight coupon. This column is reserved for future use.
86	CONJUNCTION_TICKET	VARCHAR2	1		Conjunction ticket indicator. This column is reserved for future use.
87	AIRLINE_INVOICE_NUMBER	VARCHAR2	7		This column is reserved for future use.

Seq.	Field Name	Data Type	Len	Sc	Description
88	TRAVEL_TRANSACTION _TYPE_CODE	VARCHAR2	3		This column is reserved for future use..
89	TICKET_ISSUE_CITY	VARCHAR2	18		The name of the city where the agent is located. This column is reserved for future use.
90	NUMBER_IN_PARTY	NUMBER	3		This column is reserved for future use.
91	TRAVEL_DOCUMENT_TYPE_CODE	VARCHAR2	2		This column is reserved for future use.
92	AIRLINE_DOCUMENT_NUMBER	NUMBER	2		This column is reserved for future use.
93	AIRLINE_DOCUMENT_PARTS	VARCHAR2	2		This column is reserved for future use.
94	TICKET_ISSUE_DATE	VARCHAR2	8		Issue date. This column is reserved for future use.
95	EXCHANGED_TICKET_NUMBER	VARCHAR2	14		Ticket number for the exchanged ticket. This column is reserved for future use.
96	STOP_OVER_INDICATOR_5	VARCHAR2	1		This column is reserved for future use.
97	ANCILLARY_FEE_CODE	VARCHAR2	5		This column is reserved for future use.
98	ANCILLARY_FEE_AMOUNT	NUMBER	18		This column is reserved for future use.
99	USER_CREATE	VARCHAR2	15		ID of the user when record created.
100	DATE_CREATE	DATE	7		Record creation date and time.
101	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
102	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

14.1.6 TRANS_HIST_NAT_SETTLEMENT

This table is used to store National Settlement Draft Data

The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ).

Data is loaded in the table TRANS_HIST_NAT_SETTLEMENT from VISA TCR2



Note

For more information about the Visa mapping, refer to the TRANSACTION_HIST_VISA_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

14.1.6.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	MICROFILM_REF_NUMBER	CHAR	23		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate an assign a unique ARN for any

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					transaction generated by the system for instance in an issuing context.
2 	MICROFILM_REF_SEQ	NUMBER	4		Sequence number. To guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and the second presentment have the same ARN, the sequence might be used to distinguish between the two transactions.
3 	RECORD_NUMBER	NUMBER	4		Indicates the record number.
4	ISSUER_BANK_CODE	CHAR	6		Indicates the issuer bank code.
5	NAT_NET_SALES_TAX_AMNT	NUMBER	12		Reserved for future use
6	COUNTRY_CODE	CHAR	3		Code that represents the country involved.
7	NAT_NET_OTHER_AMNT_TYPE	CHAR	1		Conditional. Indicates the type of other amount. Must be present if "National Net Miscellaneous Amount" is present. Values: T = Tip C = Cashback A = Airport Charge Space = n/a
8	NAT_NET_IMPACT_TYPE	CHAR	1		Reserved for future use
9	NAT_NET_OTHER_AMNT	NUMBER	12		Reserved for future use
10	NAT_NET_IRF_CAL_BASE_AMNT	NUMBER	12		Reserved for future use
11	NAT_NET_DOMESTIC_TOKEN	CHAR	123		Reserved for future use
12	USER_CREATE	VARCHAR2	15		ID of the user when record created.
13	DATE_CREATE	DATE			Record creation date and time.
14	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
15	DATE_MODIF	DATE			Date and time when the last record modification occurred.

14.1.7 TRANS_HIST_FIN_PROMO_DATA

This table is used to store Supplemental Financial and Promotion Draft Data

The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ).



Note

The TCR 4 is not delivered if Business Format Code (TCR4 (Positions 15-16)) is not Promotion Data (PD) or SMS Data (SD) or SMS and Promotion Data (SP) or Dispute

Financial Data (DF).Data is loaded in the table TRANS_HIST_FIN_PROMO_DATA from VISA TCR4

**Note**

For more information about the Visa mapping, refer to the TRANSACTION_HIST_VISA_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

14.1.7.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	MICROFILM_REF_NUMBER	CHAR	23		Acquirer Reference Number (ARN).
2	MICROFILM_REF_SEQ	NUMBER	4		Sequence number.
3	RECORD_NUMBER	NUMBER	4		Incremental number to distinguish several airline rows for the same initial transaction.
4	BUSINESS_FORMAT_CODE	CHAR	2		Code indicating the type of business that is applicable to this transaction. This field must contain SP (SMS and Promotion Data)
5	NETWORK_IDENTIFICATION_CODE	CHAR	4		Indicates brand of debit product being used (Visa, Plus, Discover, etc.). The entry must be numeric and may be zeros. This field is mapped to the V.I.P. Network ID field and is included in all non-Visa original full financial transactions acquired by V.I.P. Values: 0002 = Visa (the default if the TCR 4 is not included) 0003 = Interlink 0004 = Plus 0006 = Mastercard 0040 = American Express 0041 = Discover Card 0042 = AFFN 0043 = Diner's club
6	CONTACT_INFO	CHAR	25		Contact for information for Plus transactions.
7	ADJ_PROCESSING_IND	CHAR	1		Indicates if adjustment processing occurred. Values: Space = No adjustment A = Adjustment
8	PLUS_MIS_CAS_CODE	CHAR	4		Message reason code explaining the reason for sending a reversal, adjustment, dispute financial, dispute financial reversal, dispute response

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					financial, or fee collection/funds disbursement (Visa only).
9	SURCHARGE_AMOUNT	CHAR	8		Used for POS transactions with promotion data. This field contains an acquirer-assessed POS transaction surcharge for informational purposes only. When POS surcharge is assessed in the authorization, the acquirer must include the fee information in the TCR 4 and the amount must be the same as in Field 28 of the authorization request.
10	SURCHARGE_CR_DB_IND	CHAR	2		If surcharge, indicates if debit or credit. The entry is optional, but if the field is used, the entry should be CR or DB
11	PROMOTION_TYPE	CHAR	2		Defines the type of promotion associated with the transaction. Reserved for Visa use only.
12	PROMOTION_CODE	CHAR	25		Code to indicate the promotion to which the financial institution is registered
13	SURCHARGE_AMT_CAH_BILL_CUR	NUMBER	8		This field will contain the access fee amount in the cardholder billing currency.
14	MONEY_TRANSFER_F_EX_FEE	NUMBER	8		This field will contain Senders Payment Account Reference on original and exception transactions.
15	USER_CREATE	VARCHAR2	15		ID of the user when record created.
16	DATE_CREATE	DATE			Record creation date and time.
17	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
18	DATE_MODIF	DATE			Date and time when the last record modification occurred.

14.1.8 TRANS_HIST_LIMIT_USE_DATA

This table is used to store Limited-Use Data (TCR6)

The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ).

Data is loaded in the table TRANS_HIST_LIMIT_USE_DATA from VISA TCR6



Note

For more information about the Visa mapping, refer to the TRANSACTION_HIST_VISA_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

14.1.8.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	MICROFILM_REF_NUMBER	CHAR	23		Acquirer Reference Number (ARN).

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
2 	MICROFILM_REF_SEQ	NUMBER	4		Sequence number.
3 	RECORD_NUMBER	NUMBER	4		Incremental number to distinguish several airline rows for the same initial transaction.
4	LOCAL_TAX	NUMBER	12	2	This field may be used by acquirers to indicate the amount of state or provincial tax included in the transaction amount. This amount must be expressed in the same currency as the source amount. This field must be numeric. It may contain zeros. This field contains two implied decimal places.
5	LOCAL_TAX_INCLUDED	NUMBER	1		Indicates if local tax is included or not. Values: 0 = Tax not included 1 = State or Provincial Tax included 2 = Transaction is not subject to tax.
6	NATIONAL_TAX	NUMBER	12	2	This field may be used by acquirers to indicate the amount of National Tax included in the transaction amount. This amount must be expressed in the same currency as the source amount.
7	NATIONAL_TAX_INCLUDED	NUMBER	1		Indicates if national tax is included or not. Values: 0 = not subject to tax 1 = subject to tax
8	MERCHANT_VAT_REG_SBRN	CHAR	20		Contains the merchant's VAT registration number or Single Business Reference Number (SBRN).
9	CUSTOM_VAT_REG	CHAR	13		Contains the customer's value-added tax registration number.
10	VISA_MERCHANT_IDENTIFIER	CHAR	8		Not used.
11	SUMM_COMMODITY_CODE	CHAR	4		Contains the national standard coding structure for the description of goods
12	OTHER_TAX	NUMBER	12	2	Indicates other taxes.
13	MESSAGE_IDENTIFIER	CHAR	15		If additional data is provided in the TC 50, this field must contain the Message Identifier used to link the transactions
14	TIME_PURCHASE	NUMBER	4		Indicates time the purchase was made.
15	CUSTOMER_REFERENCE_IDENTIFIER	CHAR	17		A reference number or code that identifies the customer or consumer.
16	NON_FUEL_PRODUCT_CODE_1	CHAR	2		This field contains a code for the non-fuel product.
17	NON_FUEL_PRODUCT_CODE_2	CHAR	2		This field contains a code for the non-fuel product.
18	NON_FUEL_PRODUCT_CODE_3	CHAR	2		This field contains a code for the non-fuel product.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
19	NON_FUEL_PRODUCT_CODE_4	CHAR	2		This field contains a code for the non-fuel product.
20	NON_FUEL_PRODUCT_CODE_5	CHAR	2		This field contains a code for the non-fuel product.
21	NON_FUEL_PRODUCT_CODE_6	CHAR	2		This field contains a code for the non-fuel product.
22	NON_FUEL_PRODUCT_CODE_7	CHAR	2		This field contains a code for the non-fuel product.
23	NON_FUEL_PRODUCT_CODE_8	CHAR	2		This field contains a code for the non-fuel product.
24	MERCHANT_POSTAL_CODE	CHAR	11		Contains the postal code to identify the merchant location of commercial card transactions.
25	USER_CREATE	VARCHAR2	15		ID of the user when record created..
26	DATE_CREATE	DATE			Record creation date and time.
27	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record..
28	DATE_MODIF	DATE			Date and time when the last record modification occurred..

14.1.9 TRANSACTION_HIST_ADD_CHIP

This table is used to store Transaction Chip addendum data when VISA sends chip-related transaction details 'TCR7 Chip Card Transaction Data. It is triggered if the ADDENDUM_CHIP_DATA field in the TRANSACTION_HIST table is set to 'Yes'.

The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ).

Data in the table TRANSACTION_HIST_ADD_CHIP is loaded from VISA TCR7



Note

- For more information about the Visa mapping, refer to the TRANSACTION_HIST_VISA_MAPPING.xls file attached to this document.
- For more information about the Mastercard mapping, refer to the TRANSACTION_HIST_MASTERCARD_MAPPING.xls file attached to this document.
- For more information about the CB2C mapping, refer to the TRANSACTION_HIST_CB2C_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

14.1.9.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1	MICROFILM_REF_NUMBER	CHAR	23		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate an assign a unique ARN for any

Seq.	Column Name	Data Type	Len	Sc	Column Description
					transaction generated by the system for instance in an issuing context.
2 	MICROFILM_REF_SEQ	NUMBER	4		Sequence number. To guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and the second presentment have the same ARN, the sequence might be used to distinguish between the two transactions.
3	CHIP_APPLICATION_CRYPTOGAM	VARCHAR2	16		Cryptogram generated by the pan in response to a GENERATE AC command.
4	CHIP_CRYPTOGAM_INFO_DATA	VARCHAR2	2		Type of cryptogram and the actions to be performed by the terminal.
5	CHIP_TRANSACTION_CURRENCY_CODE	VARCHAR2	4		Chip transaction currency code.
6	CHIP_TRANSACTION_DATE	VARCHAR2	6		Chip transaction date.
7	CHIP_TRANSACTION_TYPE	VARCHAR2	2		Chip transaction type.
8	CHIP_TRANSACTION_AMOUNT	VARCHAR2	12		Chip transaction amount.
9	CHIP_ATC	VARCHAR2	4		Application Transaction Counter.
10	CHIP_UNPREDICTABLE_NUMBER	VARCHAR2	8		A value to provide variability and uniqueness to the generated cryptogram.
11	CHIP_CATEGORY_CODE	VARCHAR2	2		Transaction Category Code (TCC, tag = '9F53'). A MasterCard proprietary data element used for Card Risk Management.
12	CHIP_TVR	VARCHAR2	10		Terminal Verification Results. It shows the status of the different functions as seen from the terminal.
13	CHIP_TERMINAL_COUNTRY_CODE	VARCHAR2	4		Terminal country code indicates the country of the terminal, represented according to ISO 3166.
14	CHIP_AIP	VARCHAR2	4		Application Interface Profile. Indicates the capabilities of the ICC to support specific functions in the application.
15	CHIP_CVM_RESULTS	VARCHAR2	12		Panholder Verification Method (CVM) results.
16	CHIP_TERMINAL_CAPABILITY	VARCHAR2	6		Card data input, CVM, and security capabilities of the terminal.
17	CHIP_TERMINAL_TYPE	VARCHAR2	4		Environment of the terminal, its communications capability, and its operational control.
18	CHIP_APPLI_IDENTIFIER	VARCHAR2	32		Application as described in ISO/IEC 7816-5.
19	CHIP_APPLI_VERSION_NUMBER	VARCHAR2	4		Version number assigned by the payment system for the application.

Seq.	Column Name	Data Type	Len	Sc	Column Description
20	CHIP_IFD_SERIAL_NUMBER	VARCHAR2	8		Unique and permanent serial number assigned to the Interface Device (IFD) by the manufacturer.
21	CHIP_TRX_SEQ_COUNTER	VARCHAR2	8		Counter maintained by the terminal. It is incremented by 1 for each transaction.
22	CHIP_ISSUER_APPLICATION_DATA	VARCHAR2	64		Proprietary application data for transmission to the issuer in an online transaction.
23	CHIP_OTHER_AMOUNT	VARCHAR2	12		Other amount associated with the transaction representing a cash-back amount.
24	CHIP_CARD_AUTHEN_RESULT	VARCHAR2	4		Chip card authentication result.
25	CHIP_CONDITION_CODE	VARCHAR2	4		Chip condition code. Possible values are: '1' = The magnetic stripe service code begins with 2 or 6 and the last read at a VSDC terminal was a successful chip read or was not a chip transaction, '2' = The magnetic stripe service code begins with 2 or 6 and the last read at a VSDC terminal was an unsuccessful chip read, '0' = Neither 1 nor 2 are applicable.
26	CHIP_CCPS_TRANSACTION_IND	VARCHAR2	4		Chip Transaction Indicator. Acquirers set the value in this column to 1 in request messages to identify VSDC transactions.
27	CHIP_CARD_AUTHEN_RELIABIL_IND	VARCHAR2	4		Chip PAN authentication result reliability indicator. Acquirers set this column to 1 when a merchant or a specific terminal is experiencing difficulty with VSDC processing and the audit trail data used for PAN Authentication may be unreliable.
28	CHIP_DERIVATION_KEY_INDEX	VARCHAR2	4		Chip derivation key index.
29	CHIP_ISSUER_AUTHENT_DATA	VARCHAR2	32		Data sent to the ICC for online issuer authentication.
30	CHIP_ARPC_RESPONSE_CODE	VARCHAR2	20		The ARPC Response Code informs the application about the actions that the issuer decided. The ARPC Response Code is sent to the application in the Issuer Authentication Data.
31	CHIP_ISSUER_SCRIPT_RESULT	VARCHAR2	40		Result of the terminal script processing.
32	FORM_FACTOR_IND	VARCHAR2	8		Form factor indicator.
33	CHIP_FFI_9F6E	VARCHAR2	8		This tag is personalized on the card or device and carries additional information about the contactless device, its security features, and the technology used to acquire the transaction.
34	USER_CREATE	VARCHAR2	15		ID of the user when record created.

Seq.	Column Name	Data Type	Len	Sc	Column Description
35	DATE_CREATE	DATE			Record creation date and time.
36	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
37	DATE_MODIF	DATE			Date and time when the last record modification occurred.

14.1.10 TRANS_HIST_MVT_MISC

This table contains additional information to the initial transaction, data that were not stored in the TRANSACTION_HIST table. It has the same structure as the '[TRANSACTION_HIST_MISC](#)' table.

The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ)



Note

For more information about the Visa mapping, refer to the TRANSACTION_HIST_VISA_MAPPING.xls file attached to this document.

14.1.10.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	MICROFILM_REF_NUMBER	CHAR	23		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate an assign a unique ARN for any transaction generated by the system for instance in an issuing context.
2	MICROFILM_REF_SEQ	NUMBER	4		Sequence number. To guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and the second presentment have the same ARN, the sequence might be used to distinguish between the two transactions.
3	DCC_INDICATOR	CHAR	1		This DCC (Dynamic Currency Conversion) indicator allows to know if the cardholder agreed to do a DCC transaction or not. Possible values are: Y=Cardholder agreed the conversion D=Cardholder declined the conversion
4	VISA_FEE_PROGRAM_INDICATOR	VARCHAR2	3		For Visa transaction: it is the Fee Program Indicator.
5	TRANSACTION_INTEGRITY_CLASS	VARCHAR2	2		For Mastercard transaction: it is the integrity class received in the authorization and sent in clearing to the scheme. (PDS 0017).
6	PAYMENT_ACCOUNT_REFERENCE	VARCHAR2	29		For Visa transaction: it is the payment account reference. As mentioned in Visa documentation: "It will contain

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					Senders Payment Account Reference on original and exception transactions".
7	TOKEN_INDICATOR	CHAR	1		Indicator to know if the transaction is done with a card number or a token or for an ACH Transaction.Possible values are: C = Card NumberT = Token providedH = ACH transaction
8	TOKEN_REQUESTOR_ID	NUMBER	11		For Visa transaction: it is the token requestor ID. As mentioned in Visa documentation: "it will contain TokenRequestor ID for Purchase and Credit Voucher token transactions"
9	DIGITAL_ACCOUNT_REFERENCE_NUMBER	VAR	19		For Mastercard transaction : it is the PDS 0014 (Digital Account Reference Number).As mentioned in MC documentation "PDS 0014 (Digital Account Reference Number) is provided in a Mastercard Merchant Presented QR (MPQR) payment transaction to allow receiving institutions the ability to initiate a refund to the consumer via the originating institution"
10	SINGLE_MESSAGE_INDICATOR	CHAR	1		Indicator to know if the transaction is done in Dual Message or Single Message.Possible values are: 'Y' = Single message'N' = Not single message
11	ACCOUNT_FUNDING_SOURCE	CHAR	1		For Visa transaction: it is the ACCOUNT FUNDING SOURCEprovided by the table VISA ARDEF. Possible values are:'C' = Credit 'D' = Debit 'P' = Prepaid 'H' = Charge'R' = Deferred Debit
12	CARD_PROGRAM_ID	CHAR	3		For Mastercard transaction, it is the CARD PROGRAM ID provided by the table MCI_MPE_ICA_BIN.Possible values are: 'CIR'= Cirrus'DMC'= Debit Mastercard 'MCC'= Mastercard Credit 'MSI'= Maestro'PRO'= Sweden domestic brand'PVL'= Private label
13	PAY_FAC_ID	VARCHAR2	15		MERCHANT_NUMBER inside PowerCARD-Acquirer for the payment Facilitator.
14	PAY_FAC_NETWORK_ID	VARCHAR2	11		Payment Facilitator Identification provided by the scheme.
15	SUB_MERCHANT_ID	VARCHAR2	15		MERCHANT_NUMBER inside PowerCARD-Acquirer of the Sub Merchant = the merchant for which the Payment Facilitator sends its transactions to the scheme.
16	MER_ORIGIN_COUNTRY	CHAR	3		COUNTRY_CODE of the merchant. It is not the COUNTRY CODE of its address but the origination of the merchant.Example: For an embassy.The embassy is for the country USA MER_ORIGIN_COUNTRYBut the

[illegible]

Seq.	Column Name	Data Type	Len.	Sc.	Column Description

14.1.11 TRANS_HIST_MVT_PT

This table contains additional information related to lodging transactions. It has the same structure as the '[TRANSACTION_HIST_PT](#)' table.

The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ).

For one initial transaction, several lodging rows can exist. The distinction is done through the column "RECORD_NUMBER".

TRANSACTION_HIST.ADDENDUM_INDICATOR allows to know if a row in TRANSACTION_HIST_LG is present for the initial transaction.(i.e transaction_hist.addendum_indicator is 'LG' which means **TCR3-Business Format Code (Positions 17-18) is 'LG')**



Note

For more information about the Visa mapping, refer to the TRANSACTION_HIST_VISA_MAPPING.xls file attached to this document.

14.1.11.1 Column description

Seq.	Field Name	Data Type	Len	Sc	Description
1	MICROFILM_REF_NUMBER	CHAR	23		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate an assign a unique ARN for any transaction generated by the system for instance in an issuing context.
2	MICROFILM_REF_SEQ	NUMBER	4	0	Sequence number. To guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and the second presentment have the same ARN, the sequence might be used to distinguish between the two transactions.
3	COMPANY_CODE	NUMBER	6		Reserved.
4	COMPANY_NAME	VARCHAR2	25		Reserved.
5	STATION_CODE	CHAR	6		Reserved.
6	STATION_NAME	VARCHAR2	25		Reserved.
7	CAR_TYPE	CHAR	1		Reserved.
8	CAR_IDENTIFICATION	VARCHAR2	17		Reserved.
9	FUEL_TYPE_CODE	CHAR	2		Type of fuel (unleaded regular, diesel, gasohol, etc.)
10	OTHER_SERVICE_TYPE	CHAR	1		Reserved.

Seq.	Field Name	Data Type	Len	Sc	Description
11	QUANTITY	NUMBER	10		Reserved.
12	PROGRAM_CODE	CHAR	2		Reserved.
13	ODOMETER_READING	VARCHAR2	8		Reading taken from vehicle's odometer.
14	ODOMETER_UNIT	CHAR	1		Reserved.
15	SERVICE_TYPE	CHAR	1		Identifies type of service at the fuel station
16	FUEL_PRODUCT_CODE	CHAR	3		Reserved.
17	FUEL_UNIT_PRICE	NUMBER	18	6	Cost of fuel per unit of measure (for example, dollars per gallon).
18	FUEL_AMOUNT	NUMBER	18	6	Gross fuel price.
19	FUEL_QUANTITY	NUMBER	12	4	Quantity of fuel being billed.
20	FUEL_QUANTITY_EXP	NUMBER	1		Reserved.
21	UNIT_MEASURE	CHAR	1	0	Unit of measure used for fuel.
22	OIL_UNIT_PRICE	NUMBER	18	3	Reserved.
23	OIL_AMOUNT	NUMBER	18	3	Reserved.
24	OIL_QUANTITY	NUMBER	6		Reserved.
25	OIL_UNIT_MEASURE	CHAR	1		Reserved.
26	TIRE_UNIT_PRICE	NUMBER	18	3	Reserved.
27	TIRE_QUANTITY	NUMBER	6		Reserved.
28	TIRE_AMOUNT	NUMBER	18	3	Reserved.
29	BATTERY_AMOUNT	NUMBER	18	3	Reserved.
30	GARAGE_AMOUNT	NUMBER	18	3	Reserved.
31	OTHER_SERV_AMOUNT	NUMBER	18	3	Reserved.
32	INVOICE_NUMBER	VARCHAR2	12		Reserved.
33	FUEL_TAX_AMOUNT	NUMBER	18	3	Fuel tax being charged
34	NON_FUEL_TAX_AMOUNT	NUMBER	18	3	Tax being charged for non-fuel items.
35	DISCOUNT_AMOUNT	NUMBER	18	3	Reserved.
36	DRIVER_NUMBER	VARCHAR2	17		Reserved.
37	EXPANDED_FUEL_TYPE	CHAR	4		This field contains the Expanded Fuel Type
38	TYPE_PURCHASE	CHAR	1		Type of purchase (gas, non-fuel item, etc.).
39	NET_FUEL_PRICE	NUMBER	18	6	Net fuel price
40	GROSS_NON_FUEL_PRICE	NUMBER	18	6	Gross price of non-fuel items
41	NET_NON_FUEL_PRICE	NUMBER	18	6	Net price of non-fuel items
42	VAT_RATE	NUMBER	9	6	Value Added Tax or other tax on amount being charged.
43	PRODUCT_QUALIFIER	CHAR	6		This field contains the Product Qualifier
44	MISC_FUEL_TAX_EXEMPT_STATUS	CHAR	1		Indicates whether the fuel purchase was exempt from fuel tax.

Seq.	Field Name	Data Type	Len	Sc	Description
					Values: Blank = Default 0 = Non-Exempt 1 = Exempt
45	MISC_NFUEL_TAX_EXEMPT_STATUS	CHAR	1		Indicates whether the non-fuel purchase was exempt from tax. Values: 0 = Non-Exempt 1 = Exempt
46	PRIVATE_DATA_1	VARCHAR2	32		Reserved.
47	PRIVATE_DATA_2	VARCHAR2	32		Reserved.
53	USER_CREATE	VARCHAR2	15		ID of the user when record created.
54	DATE_CREATE	DATE	7		Record creation date and time.
55	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
56	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

14.1.12 TRANSACTION_HIST_LG

This table contains additional information related to lodging transactions for Visa network.

The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ).

For one initial transaction, several lodging rows can exist. The distinction is done through the column "RECORD_NUMBER".

TRANSACTION_HIST.ADDENDUM_INDICATOR allows to know if a row in TRANSACTION_HIST_LG is present for the initial transaction. (i.e transaction_hist.addendum_indicator is 'LG' which means **TCR3-Business Format Code (Positions 17-18) is 'LG'**)



Note

For more information about the Visa mapping, refer to the TRANSACTION_HIST_VISA_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

14.1.12.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	MICROFILM_REF_NUMBER	CHAR	23		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate an assign a unique ARN for any transaction generated by the system for instance in an issuing context.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
2 	MICROFILM_REF_SEQ	NUMBER	4		Sequence number. To guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and the second presentment have the same ARN, the sequence might be used to distinguish between the two transactions.
3 	RECORD_NUMBER	NUMBER	4		Incremental number to distinguish several airline rows for the same initial transaction.
4	CUSTOMER_CODE	VARCHAR2	32		Standard abbreviation for the airline or railway carrier providing the service.
5	FOLIO_NUMBER	CHAR	12		Total of any cash advances charged against the folio.
6	PROPERTY_PHONE_NUMBER	CHAR	12		Contact number of the property.
7	CUSTOMER_PHONE_NUMBER	CHAR	12		Contact number of the customer.
8	BILLING_ADJUSTEMENT_IND	CHAR	1		Indicates whether any additional charges were incurred after the cardholder departure. Possible values are: Space = unknown Y = additional charges N = no additional charges
9	BILLING_ADJUSTEMENT_AMNT	CHAR	12		Indicates the total amount of charges in a lodging stay that have been added after the cardholder's departure. This element will be numeric and non-zero if the billing adjustment indicator is set to Y. Decimal alignment is based on the exponent.
10	ARRIVAL_DATE	DATE	7		Scheduled arrival date.
11	DEPARTURE_DATE	DATE	7		Scheduled departure date.
12	NO_SHOW_INDICATOR	CHAR	1		Indicates transaction due to no-show charges.
13	ROOM_RATE	NUMBER	18	3	Daily room rate for hotel in Card transaction.
14	ROOM_TAX	NUMBER	18	3	Represents the total amount of all room taxes applied against this transaction.
15	PROGRAM_CODE	CHAR	2		Lodging program code.
16	EXTRA_CHARGES	CHAR	6		Type of additional charges applied to a customer's bill after checkout. Each of the six positions in the code may indicate a type of charge.
17	CALLS_CHARGES	NUMBER	18	3	Charges related to Telephone or Office service (e.g., electricity, internet access)

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
18	RESTAURANT_CHARGES	NUMBER	18	3	Fees amount of restaurant/Room service.
19	BAR_MINI_BAR_CHARGES	NUMBER	18	3	Total charges for in-room mini-bar food and beverage expenses.
20	GIFT_SHOP_CHARGES	NUMBER	18	3	Total charges of gift shop and merchandise purchases.
21	LAUNDRY_CHARGES	NUMBER	18	3	Fees amount of laundry service (e.g., cleaning, washing, drying, etc.)
22	OTHER_SERVICE_CODE	CHAR	3		Other service code
23	OTHER_SERVICES_CHARGES	NUMBER	18	3	Fees amount of other addition services utilized during the lodging.
24	ADDRESS_1	VARCHAR2	30		Contains the first address line.
25	ADDRESS_2	VARCHAR2	30		Contains the second address line.
26	ADDITIONAL_DATA	VARCHAR2	64		Additional data stored for information.
27	NB_OF_RECORD	NUMBER	4		Number of records.
28	TRANSACTION_TID	VARCHAR2	15		Transaction TID
29	LODGING_CHARGE_TYPE_CODE	NUMBER	1		Lodging charge type code
30	LODGING_CHECK_IN_TIME	VARCHAR2	6		Registration and arrival time at the accommodation.
31	LODGING_CHECK_OUT_TIME	VARCHAR2	6		Time of the end of stay at the accommodation.
32	LODGING_STAY_DURATION	NUMBER	2		Duration of the stay at a lodging. It is typically measured in days, nights, or weeks, from the check-in date to the check-out date.
33	LODGING_ROOM_RATE_2	NUMBER	15		Charges for a room in an accommodation for a specified period of time (per night).
34	LODGING_ROOM_RATE_3	NUMBER	15		Charges for a room in an accommodation for a specified period of time (per night).
35	NUMBER_NIGHTS_ROOM_RATE_1	NUMBER	2		Total count of nights that are billed at the first (or primary) rate.
36	NUMBER_NIGHTS_ROOM_RATE_2	NUMBER	2		Total count of nights that are billed at the second (or primary) rate.
37	NUMBER_NIGHTS_ROOM_RATE_3	NUMBER	2		Total count of nights that are billed at the third (or primary) rate.
38	ROOM_NIGHTS	NUMBER	2		Number of nights for which a room was contracted during a lodging stay.
39	USER_CREATE	VARCHAR2	15		ID of the user when record created..
40	DATE_CREATE	DATE			Record creation date and time.
41	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record..
42	DATE_MODIF	DATE			Date and time when the last record modification occurred..

14.1.13 TRANSACTION_HIST_ADD_LG

This table contains additional information related to lodging transactions for Mastercard network.

**Note**

For more information about the Mastercard mapping, refer to the TRANSACTION_HIST_MASTERCARD_MAPPING.xls file attached to this document.

14.1.13.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	MICROFILM_REF_NUMBER	CHAR	23		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate an assign a unique ARN for any transaction generated by the system for instance in an issuing context.
2	MICROFILM_REF_SEQ	NUMBER	4		Sequence number. To guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and the second presentment have the same ARN, the sequence might be used to distinguish between the two transactions.
3	FUNCTION_CODE	CHAR	3		DE 24 (Function Code) indicates the specific purpose for a message
4	ACQUIRING_INST_ID	VARCHAR2	11		DE 32 (Acquiring Institution ID Code) identifies the transaction acquirer.
5	FORWARDING_INST_ID	VARCHAR2	11		DE 33 (Forwarding Institution ID Code) identifies a message's forwarding institution. A forwarding institution is the institution in a transaction flow that sends a message forward from the originating institution.
6	ADDITIONAL_DATA	VARCHAR2	999		DE 48 (Additional Data) contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service data for which a specific ISO data element is unavailable.
7	ORIGINATING_MSG_FORMAT	NUMBER	1		PDS 0191 (Originating Message Format) provides the message format in which the clearing system received a message.
8	TRANSACTION_DESCRIPTION	NUMBER	16		PDS 0501 (Transaction Description) contains information describing the type of addendum data that is presented.
9	CUSTOM_IDENTIFIER	VARCHAR2	82		PDS 0502 (Custom Identifier) enables customers to provide custom information pertinent to the transaction.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
10	FLIGHT_NUMBER	CHAR	5		the number that the operating or marketing carrier assigned.
11	ARRIVAL_DATE	DATE	7		the cardholder check-in date. In the YYMMDD format
12	DEPARTURE_DATE	DATE	7		the cardholder checkout date. In the YYMMDD format
13	FOLIO_NUMBER	VARCHAR2	25		the acceptor's internal invoice or billing ID reference number.
14	BILLING_ADJUST_IND	CHAR	1		Indicates whether any additional charges were incurred after the cardholder's departure.
15	BILLING_ADJUST_AMOUNT	CHAR	12		The total amount of the charges added after the departure. If BILLING_ADJUST_IND is a Y, BILLING_ADJUST_AMOUNT must be numeric and greater than zero
16	ROOM_RATE_AMOUNT	CHAR	13		The daily room charges exclusive of taxes and fees.
17	TOTAL_ROOM_TAX	CHAR	14		Tax amount information such as the daily room tax, occupancy tax, energy tax, and tourist tax amounts.
18	TOTAL_CHARGES_AMOUNT	CHAR	14		The total amount of the room charges.
19	TOTAL_NON_ROOM_CHARGES	CHAR	14		The total amount of the non-room charges.
20	PHONE_CHARGES	CHAR	14		The total amount of charges for all phone calls.
21	RESTAURANT_CHARGES	CHAR	14		The total amount of all restaurant charges.
22	MINI_BAR_CHARGES	CHAR	14		The total amount of in-room mini-bar service charges.
23	GIFT_SHOP_CHARGES	CHAR	14		The total amount of all gift shop and specialty shop charges.
24	CLEANING_CHARGES	CHAR	14		The total amount of cleaning charges.
25	NO_SHOW_INDICATOR	CHAR	1		Indicator noting that the individual did not show up after making a reservation for a vehicle or lodging.
26	TOTAL_AUTHORIZED_AMOUNT	CHAR	12		The amount reserved on a credit card to cover the anticipated charges associated with the rental of a vehicle or lodging stay
27	TOTAL_ROOM_NIGHTS	CHAR	4		The total number of nights for which a room was contracted during a lodging stay.
28	PREPAID_EXPENSES	CHAR	12		The amount of deposit or other prepaid amounts for the lodging stay
29	TOTAL_NON_ROOM_TAX_AMOUNT	CHAR	12		The total amount of taxes for all items not specifically associated with the room rental during the lodging stay.
30	CASH_ADVANCES	CHAR	12		The amount of cash received during the lodging stay

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
31	VALET_CHARGES	CHAR	12		The charges associated with the use of valet services.
32	MOVIE_CHARGES	CHAR	12		The amount charged for in-room movies.
33	BUSINESS_CENTER_CHARGES	CHAR	12		The amount charged for business center use and supplies.
34	HEALTHCLUB_CHARGES	CHAR	12		The amount charged for health club use and supplies.
35	PASSENGER_NAME	VARCHAR2	29		PDS 0502 (Custom Identifier) enables customers to provide custom information pertinent to the transaction.
36	TICKET_NUMBER	CHAR	15		Ticket number as issued by the airline company.
37	ISSUING_CARRIER	CHAR	4		Code for the carrier issuing the ticket. Cannot contain all spaces.
38	CARRIER_CODE	VARCHAR2	25		PDS 0521 (Carrier Code) is the standard abbreviation for the airline or railway carrier providing the service.
39	ISSUE_DATE	DATE	7		The date the ticket was issued to the customer. If unknown defaults to the transaction date. YYYY-MM-DD.
40	TRAVEL_AGENCY_CODE	CHAR	8		Travel agency code issuing the airline ticket.
41	TRAVEL_AGENCY_NAME	VARCHAR2	25		Travel agency name issuing the airline ticket.
42	TOTAL_FARE	NUMBER	12		The cost of the ticket. Decimal alignment is based on the exponent.
43	TOTAL_FEES	NUMBER	12		Amount of the fees associated with the cost of the ticket. Decimal alignment is based on the exponent.
44	TOTAL_TAXES	NUMBER	12		PDS 0514 (Total Taxes) is the amount of all the taxes associated with the ticket.
45	TOTAL_TAX_AMOUNT	CHAR	14		PDS 0699 (Lodging Total Tax Amount) provides the total taxes paid during a lodging stay.
46	TOTAL_TAX_COLLECTED_IND	CHAR	1		PDS 0598 (Total Tax Collected Indicator) reflects total sales tax capture and reporting information such as whether sales tax was included in the purchase amount or if goods and services were not taxable.
47	COMMODITY_CODE	VARCHAR2	15		Provides the identifier assigned by the card acceptor that best categorizes the items being purchased in a standardized commodity group.
48	TAX_EXEMPT_INDICATOR	CHAR	1		Indicator that the goods/services were tax exempt. Possible values are:• 0 = not applicable (default)• 1 = tax exempt
49	RESTRICTED_TICKET_INDICATOR	CHAR	1		Indicates if a ticket has any restrictions.Values: 0 = no

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					restrictions(default) 1 = ticket has restrictions
50	EXCHANGE_TICKET_AMOUNT	CHAR	12		Amount of new ticket purchase on an exchanged ticket. Decimal alignment is based on the exponent.
51	TRAVEL_AUTHORIZATION_CODE	VARCHAR2	64		PDS 0716 (Travel Authorization Code) indicates the code provided by the company to a travel agent authorizing ticket issuance.
52	IATA_CLIENT_CODE	VARCHAR2	17		IATA code that identifies the airline servicing this leg.
53	DETAIL_TAX_AMOUNT_1	VARCHAR2	46		Amount of tax associated with this transaction in original Currency.
54	DETAIL_TAX_AMOUNT_2	VARCHAR2	46		Amount of tax associated with this transaction in original Currency.
55	DETAIL_TAX_AMOUNT_3	VARCHAR2	46		Amount of tax associated with this transaction in original Currency.
56	DETAIL_TAX_AMOUNT_4	VARCHAR2	46		Amount of tax associated with this transaction in original Currency.
57	DETAIL_TAX_AMOUNT_5	VARCHAR2	46		Amount of tax associated with this transaction in original Currency.
58	DETAIL_TAX_AMOUNT_6	VARCHAR2	46		Amount of tax associated with this transaction in original Currency.
59	ADDITIONAL_DATA_2	VARCHAR2	999		Additional data elements.
60	TRANSACTION_LIFE_CYCLE_ID	VARCHAR2	20		DE 63 (Transaction Life Cycle ID) contains subfields that allow for transaction life cycle control. All life cycle messages such as authorizations, financials, reversals, retrievals, fulfillments, and chargebacks are linked with the Life Cycle Support Indicator and Trace ID subfields.
61	MESSAGE_NUMBER	NUMBER	8		Error code returned by the accounting job if the related function has failed during execution.
62	TRANSACTION_DEST_INST_ID	VARCHAR2	11		DE 93 (Transaction Destination Institution ID Code) identifies the transaction destination institution
63	TRANSACTION_ORIG_INST_ID	VARCHAR2	11		DE 94 (Transaction Originator Institution ID Code) identifies the transaction originator institution
64	RECEIVING_INST_ID_CODE	VARCHAR2	11		DE 100 (Receiving Institution ID Code) identifies the receiving institution
65	ADDITIONAL_DATA_3	VARCHAR2	999		Additional data elements.
66	ADDITIONAL_DATA_4	VARCHAR2	999		Additional data elements.
67	ADDITIONAL_DATA_5	VARCHAR2	999		Additional data elements.
68	DATE_MODIF	DATE		-	

14.1.14 TRANSACTION_HIST_RC

This table is used to store data related to Car Rental Draft Data in the scope of Visa network.

The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ).

TRANSACTION_HIST.ADDENDUM_INDICATOR allows to know if a row in TRANS_HIST_RC is present for the initial transaction. (i.e transaction_hist.addendum_indicator is 'RC' which means **TCR3-Business Format Code (Positions 17-18) is 'CA'**)



Note

For more information about the Visa mapping, refer to the TRANSACTION_HIST_VISA_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

14.1.14.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	MICROFILM_REF_NUMBER	CHAR	23		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate an assign a unique ARN for any transaction generated by the system for instance in an issuing context.
2	MICROFILM_REF_SEQ	NUMBER	4		Sequence number. To guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and the second presentment have the same ARN, the sequence might be used to distinguish between the two transactions.
3	RECORD_NUMBER	NUMBER	4		Incremental number to distinguish several rows for the same initial transaction.
4	CUSTOMER_CODE	VARCHAR2	32		Customer code.
5	RENTAL_AGREEMENT_NB	VARCHAR2	64		Indicates the vehicle rental agreement number.
6	RENTER_NAME	CHAR	116		Name of person renting the vehicle.
7	RENTAL_RETURN_CITY	CHAR	120		City where car is scheduled to be returned.
8	RENTAL_RETURN_COUNTRY	CHAR	12		Country where vehicle is to be returned.
9	RENTAL_RETURN_DATE	DATE	7		Date vehicle is scheduled to be returned.
10	RENTAL_LOCATION_ID	VARCHAR2	128		ID number for location where vehicle is scheduled to be returned.
11	CUSTOMER_PHONE_NUMBER	CHAR	48		Phone number of the customer rented the vehicle

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
12	ADJUSTEMENT_IND	CHAR	4		Indicates whether any miscellaneous charges were incurred after the vehicle was returned.
13	ADJUSTEMENT_AMNT	CHAR	48		Indicates whether any miscellaneous charges were incurred after the vehicle was returned.
14	NO_SHOW_INDICATOR	NUMBER	22	0	Indicator noting that the individual did not show up after making a reservation for a vehicle or lodging.
15	EXTRA_CHARGES	CHAR	24		Vehicle rental charge for miles in excess of those provided free of charge.
16	CHECK_OUT_DATE	DATE	7		Indicates the date of vehicle rental.
17	RENTAL_CLASSE	CHAR	16		Indicates the class of vehicle rental.
18	DAILY_RENTAL_RATE	NUMBER	22	3	Daily rental rate for vehicle.
19	MILE_KM_INDICATOR	CHAR	4		Indicator of measurement shows distance traveled in either miles or kilometers for a vehicles
20	RENT_PER_MILES	NUMBER	22	3	Rate per mile applied to rental charges in original currency. Decimal alignment is based on the exponent.
21	TOTAL_MILES	NUMBER	22	0	Miles used by the renter/lessee.
22	MAXIMUM_FREE_MILES	NUMBER	22	0	Indicates the number of maximum free miles for car rental.
23	INSURANCE_CODE	CHAR	4		Code identifying the car rental insurance.
24	INSURANCE_CHARGE	NUMBER	22	3	Amount paid for car rental insurance in original currency. Decimal alignment is based on the exponent.
25	PROGRAM_CODE	CHAR	8		Program code.
26	AMOUNT_REFUELING_CHARGE	NUMBER	22	3	Fees applied by the car rental when the vehicle is returned without refueling.
27	CITY_RETAIL	CHAR	100		Urban or city environment where the car rental service was operated.
28	ADDITIONAL_DATA	VARCHAR2	256		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service data for which a specific ISO data element is unavailable.
29	NB_OF_RECORD	NUMBER	22	0	Number of records.
30	TRANSACTION_TID	VARCHAR2	60		Transaction TID
31	AUTO_RENTAL_REGION_CODE	VARCHAR2	12		Code used to identify the geographic region or location where a rented vehicle should be returned.
32	AUTO_RENTAL_PICKUP_REGION	VARCHAR2	12		Code that identifies the region where a car rental vehicle will be picked up.
33	AUTO_RENTAL_PICKUP_COUNTR	VARCHAR2	12		Code that identifies the country where a car rental vehicle will be picked up.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
34	AUTO_RENTAL_PICKUP_TIME	VARCHAR2	24		Scheduled time when a customer picks up the rental vehicle from the car rental company.
35	AUTO_RENTAL_RETURN_REGION	VARCHAR2	12		Code used to identify the geographic region or location where a rented vehicle should be returned.
36	AUTO_RENTAL_RETURN_COUNTY	VARCHAR2	12		Specific code that identifies the country where the rented vehicle should be returned.
37	AUTO_RENTAL_RETURN_TIME	VARCHAR2	24		Time on which a rented vehicle must be returned to the car rental company.
38	AUTO_RENTAL_RENTER_NAME	VARCHAR2	104		Names of the individuals who have rented a vehicle from a car rental company
39	TAXI_VEHICLE_IDENTIFICATION	VARCHAR2	80		Unique identification number assigned to a taxi vehicle
40	TAXI_DRIVER_IDENTIFICATION	VARCHAR2	80		Unique identification number assigned to a taxi driver for tax and legal purposes.
41	TAXI_DRIVER_TAX_ID_NUMBER	VARCHAR2	80		Unique identification number assigned to a taxi vehicle.
42	TAXI_DROPOFF_LOCATION	VARCHAR2	152		Specific location where a taxi driver supposed to drop off the customer.
43	PICKUP_LOCATION	VARCHAR2	152		Specific place where a customer scheduled the taxi ride services.
44	AUTO_RENTAL_DISTANCE_UNIT	VARCHAR2	4		Distance traveled during the rental period.
45	DAYS_RENTED	NUMBER	22	0	Indicates the total number of days the vehicle was rented.
46	WEEKLY_RENTAL_RATE	NUMBER	22	3	Rate charged for a seven day period.
39	USER_CREATE	VARCHAR2	15		ID of the user when record created..
40	DATE_CREATE	DATE			Record creation date and time.
41	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record..
42	DATE_MODIF	DATE			Date and time when the last record modification occurred..

14.1.15 TRANSACTION_HIST_ADD_RC

This table is used to store data related to Car Rental Draft Data in the scope of Mastercard network.



Note

For more information about the Mastercard mapping, refer to the TRANSACTION_HIST_MASTERCARD_MAPPING.xls file attached to this document.

14.1.15.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	MICROFILM_REF_NUMBER	CHAR	23		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate an assign a unique ARN for any transaction generated by the system for instance in an issuing context.
2 	MICROFILM_REF_SEQ	NUMBER	4		Sequence number. To guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and the second presentment have the same ARN, the sequence might be used to distinguish between the two transactions.
3	FUNCTION_CODE	CHAR	3		DE 24 (Function Code) indicates the specific purpose for a message.
4	ACQUIRING_INST_ID	VARCHAR2	11		DE 32 (Acquiring Institution ID Code) identifies the transaction acquirer.
5	FORWARDING_INST_ID	VARCHAR2	11		DE 33 (Forwarding Institution ID Code) identifies a message's forwarding institution. A forwarding institution is the institution in a transaction flow that sends a message forward from the originating institution.
6	ADDITIONAL_DATA	VARCHAR2	999		DE 48 (Additional Data) contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service data for which a specific ISO data element is unavailable.
7	ORIGINATING_MSG_FORMAT	NUMBER	1		PDS 0191 (Originating Message Format) provides the message format in which the clearing system received a message.
8	TRANSACTION_DESCRIPTION	NUMBER	16		PDS 0501 (Transaction Description) contains information describing the type of addendum data that is presented.
9	RENTAL_AGREEMENT_NUMBER	CHAR	9		PDS 0544 (Rental Agreement Number) contains the original vehicle rental agreement invoice number
10	RENTER_NAME	VARCHAR2	40		PDS 0545 (Renter Name) is the name of the individual making the vehicle rental agreement.
11	RENTAL_RETURN_CITY	VARCHAR2	25		PDS 0546 (Rental Return City) is the city where the vehicle was returned to the rental agency.
12	RENTAL_RETURN_STATE_PROVINCE	CHAR	3		PDS 0547 (Rental Return State/Province) is the state or province where the vehicle was returned to the rental agency.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
13	RENTAL_RETURN_COUNTRY	CHAR	3		PDS 0548 (Rental Return Country) is the country where the vehicle was returned to the rental agency.
14	RENTAL_RETURN_LOCATION_ID	CHAR	10		PDS 0549 (Rental Return Location ID) contains the agency code, phone number, or address abbreviation used to identify the vehicle rental return location.
15	RENTAL_RETURN_DATE	DATE	7		PDS 0550 (Rental Return Date) indicates the date when the vehicle was returned to the rental agency.
16	RENTAL_CHECKOUT_DATE	DATE	7		PDS 0551 (Rental Check-Out Date) is the date when the vehicle was originally rented.
17	CUST_SERV_TOLLFREE_NUMBER	CHAR	17		PDS 0552 (Customer Service Toll-Free [800] Number) contains the customer service phone number used to resolve cardholder questions and disputes.
18	RENTAL_RATE_INDICATOR	CHAR	1		If PDS 0553 is present, subfield 1 (Rental Rate Indicator) must contain one of the values listed in this table.
19	RENTAL_RATE	CHAR	12		If PDS 0553 is present, subfield 2 (Rental Rate) must be numeric and may contain all zeros
20	RATE_PER_MILE	CHAR	12		PDS 0555 (Rate Per Mile [or Per Kilometer]) contains the rate charged for each mile or kilometer. It may be a daily, weekly, or monthly rate.
21	TOTAL_MILES_KILOMETERS	CHAR	4		PDS 0556 (Total Miles [or Kilometers]) contains the total miles or kilometers that the customer drove.
22	MAXIMUM_FREE_MILES	CHAR	4		PDS 0557 (Maximum Free Miles [or Kilometers]) contains the free miles or kilometers allowed to a customer for the duration of the vehicle rental agreement.
23	MILESKILOMETER_INDICATOR	CHAR	1		PDS 0558 (Miles/Kilometers Indicator) shows whether the miles fields are expressed in miles or kilometers.
24	INSURANCE_INDICATOR	CHAR	1		If PDS 0559 is present, subfield 1 (Insurance Indicator) must contain one of the values listed in this table Y Yes (insurance was purchased) N No (insurance was not purchased) spaces Unknown or unreported
25	INSURANCE_CHARGES	CHAR	12		If PDS 0559, subfield 1 is Y, PDS 0559, subfield 2 (Insurance Charges) cannot contain all spaces or all zeros.
26	ADJUSTED_AMOUNT_INDICATOR	CHAR	1		PDS 0561 (Adjusted Amount) indicates whether any miscellaneous charges were incurred after the vehicle was returned.
27	ADJUSTED_AMOUNT	CHAR	12		PDS 0561 (Adjusted Amount) indicates whether any miscellaneous charges

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					were incurred after the vehicle was returned.
28	PROGRAM_CODE	CHAR	2		PDS 0563 (Program Code) identifies special circumstances, such as frequent renter.
29	RENTAL_LOCATION_CITY	VARCHAR2	25		PDS 0564 (Rental Location City) indicates where the vehicle was rented.
30	RENTAL_LOCATION_STATE_PROVIN	CECHAR	3		PDS 0565 (Rental Location State/Province) indicates the state or province where the vehicle was rented.
31	RENTAL_LOCATION_COUNTRY	CHAR	3		PDS 0566 (Rental Location Country) indicates the country where the vehicle was rented.
32	RENTAL_LOCATION_ID	CHAR	10		PDS 0567 (Rental Location ID) contains the agency code, phone number, or address abbreviation used to identify the rental location.
33	RENTAL_CLASS_ID	CHAR	4		PDS 0568 (Rental Class ID) contains the classification, such as midsize or luxury, of the vehicle rented.
34	COMMODITY_CODE	VARCHAR2	15		PDS 0679 (Commodity Code) provides the identifier assigned by the acceptor that best categorizes the items being purchased in a standardized commodity group.
35	TAX_EXEMPT_INDICATOR	CHAR	1		PDS 0686 (Tax Exempt Indicator) provides the indicator noting whether the goods or services were tax-exempt or tax was not collected.
36	CORPORATE_IDENTIFIER	VARCHAR2	12		PDS 0689 (Corporate Identifier) provides the unique identifier of the corporation or entity renting the vehicle.
37	NO_SHOW_INDICATOR	CHAR	1		PDS 0690 (No Show Indicator) provides an indicator noting that the individual did not show up after making a reservation for a vehicle or lodging.
38	DAYS_RENTED	CHAR	4		PDS 0691 (Days Rented) provides the number of days that the vehicle was rented
39	WEEKLY_RENTAL_AMOUNT	CHAR	12		PDS 0692 (Weekly Rental Amount) provides the amount charged for a seven-day rental period.
40	TOTAL_AUTHORIZED_AMOUNT	CHAR	14		PDS 0693 (Total Authorized Amount) provides the amount reserved on a credit card to cover the anticipated charges associated with the rental of a vehicle or lodging stay.
41	ONE_WAY_DROP_OFF_CHARGE	CHAR	12		PDS 0694 (One Way Drop Off Charge) provides a charge associated with not returning a vehicle to the original rental location.
42	REGULAR_MILEAGE_CHARGE	CHAR	12		PDS 0695 (Regular Mileage Charge) provides the amount charged for

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					regular miles traveled during vehicle rental.
43	EXTRA_MILEAGE_CHARGE	CHAR	12		PDS 0696 (Extra Mileage Charge) provides the amount charged for miles exceeding maximum allowed miles traveled during vehicle rental.
44	LATE_CHARGE	CHAR	12		PDS 0697 (Late Charge) provides the amount charged for returning a vehicle after its anticipated date of return.
45	FUEL_CHARGE	CHAR	12		PDS 0698 (Fuel Charge) provides the amount charged for fuel used during vehicle rental
46	TOWING_CHARGES	CHAR	12		PDS 0700 (Towing Charges) provides the amount charged to tow the rental vehicle.
47	EXTRA_CHARGES	CHAR	12		PDS 0701 (Extra Charges) provides the extra charges associated with the vehicle rental.
48	OTHER_CHARGES	CHAR	12		PDS 0702 (Other Charges) provides the other charges associated with the vehicle rental
49	DETAIL_TAX_AMOUNT_1	VARCHAR2	46		Not used.
50	DETAIL_TAX_AMOUNT_2	VARCHAR2	46		Not used.
51	DETAIL_TAX_AMOUNT_3	VARCHAR2	46		Not used.
52	DETAIL_TAX_AMOUNT_4	VARCHAR2	46		PDS 0751 (Detail Tax Amount 4) contains the tax amount, tax rate, tax type applied, and acceptor tax ID.
53	DETAIL_TAX_AMOUNT_5	VARCHAR2	46		PDS 0752 (Detail Tax Amount 5) contains the tax amount, tax rate, tax type applied, and acceptor tax ID.
54	DETAIL_TAX_AMOUNT_6	VARCHAR2	46		PDS 0753 (Detail Tax Amount 6) contains the tax amount, tax rate, tax type applied, and acceptor tax ID.
55	ADDITIONAL_DATA_2	VARCHAR2	999		DE 62 (Additional Data 2) contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is unavailable.
56	TRANSACTION_LIFE_CYCLE_ID	VARCHAR2	20		DE 63 (Transaction Life Cycle ID) contains subfields that allow for transaction life cycle control. All life cycle messages such as authorizations, financials, reversals, retrievals, fulfillments, and chargebacks are linked with the Life Cycle Support Indicator and Trace ID subfields.
57	MESSAGE_NUMBER	NUMBER	8		The transaction originator assigns the DE 71 (Message Number) to data messages in a file. DE 71 monitors the integrity and continuity of the files being exchanged.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
58	TRANSACTION_DEST_INST_ID	VARCHAR2	11		DE 93 (Transaction Destination Institution ID Code) identifies the transaction destination institution.
59	TRANSACTION_ORIG_INST_ID	VARCHAR2	11		DE 94 (Transaction Originator Institution ID Code) identifies the transaction originator institution.
60	RECEIVING_INST_ID_CODE	VARCHAR2	11		DE 100 (Receiving Institution ID Code) identifies the receiving institution
61	ADDITIONAL_DATA_3	VARCHAR2	999		DE 123 (Additional Data 3) contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is not available.
62	ADDITIONAL_DATA_4	VARCHAR2	999		DE 124 (Additional Data 4) contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is not available.
63	ADDITIONAL_DATA_5	VARCHAR2	999		DE 125 (Additional Data 5) contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is not available.

14.1.16 BASE2_INCOMING_TABLE_HIST

This table contains the transactions received in the Visa incoming file (Base 2 incoming) that failed the batch controls.

Each column of this table is described in detail in the next section.

14.1.16.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	GROUP_CODE	CHAR	6		Jobs chain identifier.
2	TRANSACTION_CODE	CHAR	2		Unique code identifying the transaction code.
3	PROCESSING_BIN	CHAR	6		Indicates the concerned Visa BIN processor. It is used to identify the member at Visa Network. It is also used for Incoming and Outgoing Visa Files. It is unique by member.
4	PROCESSING_DATE	CHAR	5		BASE II central processing date.
5	INCOMING_FILE_ID	CHAR	3		Incoming file id of the incoming file header. For VISA (TC90, positions: 77 to 79 of the TCR0).
6	SEQUENCE_NUMBER	NUMBER	8		Sequence number of the transaction being returned as it appears in the batch.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
7	DATA_TCR_A	VARCHAR2	168		The transaction incoming details of the transaction component record 0 (TRC0). Those information include: Transaction code, Business format code, Charge-back reference number, etc.
8	DATA_TCR_B	VARCHAR2	168		The transaction incoming details of the transaction component record 1 (TRC1). Those information include: Transaction code, Business format code, Charge-back reference number, etc.
9	DATA_TCR_C	VARCHAR2	168		The transaction incoming details of the transaction component record 2 (TRC2). Those information include: Transaction code, Business format code, Charge-back reference number, etc.
10	DATA_TCR_D	VARCHAR2	168		The transaction incoming details of the transaction component record 3 (TRC3). Those information include: Transaction code, Business format code, Charge-back reference number, etc.
11	DATA_TCR_E	VARCHAR2	168		The transaction incoming details of the transaction component record 4 (TRC4). Those information include: Transaction code, Business format code, Charge-back reference number, etc.
12	DATA_TCR_F	VARCHAR2	168		The transaction incoming details of the transaction component record 5 (TRC5). Those information include: Transaction code, Business format code, Charge-back reference number, etc.
13	DATA_TCR_G	VARCHAR2	168		The transaction incoming details of the transaction component record 6 (TRC6). Those information include: Transaction code, Business format code, Charge-back reference number, etc.
14	DATA_TCR_H	VARCHAR2	168		The transaction incoming details of the transaction component record 7 (TRC7). Those information include: Transaction code, Business format code, Charge-back reference number, etc.
15	DATA_TCR_I	VARCHAR2	168		The transaction incoming details of the transaction component record 8 (TRC8). Those information include: Transaction code, Business format code, Charge-back reference number, etc.
16	DATA_TCR_J	VARCHAR2	168		The transaction incoming details of the transaction component record 9 (TRC9). Those information include: Transaction code, Business format

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					code, Charge-back reference number, etc.
17	RECYCLE_FLAG	CHAR	1		This flag contains the status of the incoming file. When the file is rejected, the initial value is Reject . Once the user makes the necessary corrections, this value can be changed to Recycle . Possible values are: 'N' = Reject 'Y' = Recycle
18	REJECT_LEVEL	CHAR	1		Indicates if the transaction in the incoming file is a 1st presentment or 2nd presentment. Possible values are: 'A' = 1st presentment 'B' = 2nd presentment
19	USER_CREATE	VARCHAR2	15		ID of the user when record created.
20	DATE_CREATE	DATE	7		Record creation date and time.
21	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
22	DATE_MODIF	DATE	7		Date and time when the last record modification occurred.

14.1.17 TRANS_HIST_ADD_CAR_RENTAL

This table is used to store Text Message Commercial Card - Car Rental Data (TC50-TCR0).

The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ).

MESSAGE_IDENTIFIER in TRANS_HIST_LIMIT_USE_DATA (TCR6) & MESSAGE_ID in TRANS_HIST_ADD_CAR_RENTAL are used to link the transactions.

Data is loaded in the table TRANS_HIST_ADD_CAR_RENTAL from TC50-TCR0 in case TC 50-TCR 0 Service Identifier (Positions 17-22) is 'CORPCA'



Note

For more information about the Visa mapping, refer to the TRANSACTION_HIST_VISA_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

14.1.17.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	MICROFILM_REF_NUMBER	CHAR	23		Acquirer Reference Number (ARN).
2	MICROFILM_REF_SEQ	NUMBER	22	0	Sequence number.
3	DESTINATION_IDENTIFIER	CHAR	6		Destination identifier.
4	SOURCE_IDENTIFIER	NUMBER	22	0	Transaction source identifier.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
5	SERVICE_IDENTIFIER	VARCHAR2	24		Service identifier.
6	MESSAGE_ID	VARCHAR2	60		Message identifier.
7	ITEM_SEQ_NUMBER	NUMBER	22	0	Item sequence number.
8	AUTO_TOWING	NUMBER	22	2	Amount charged to tow the rental vehicle.
9	REGULAR_MILEAGE_CHARGES	NUMBER	22	2	Amount charged for regular miles traveled during vehicle rental.
10	EXTRA_MILEAGE_CHARGES	NUMBER	22	2	Amount charged for miles exceeding maximum allowed miles traveled during vehicle rental.
11	LATE_RET_CHARGES_HOURLY_R	NUMBER	22	2	Amount charged for returning a vehicle after its anticipated date of return.
12	LOCATION_CAR_RETURNED_TO	VARCHAR2	100		City where the vehicle was returned to the rental agency.
13	TOTAL_TAX_VAT	NUMBER	22	2	Total amount of sales tax or value added tax (VAT) on the total purchase amount.
14	TELEPHONE_CHARGES	NUMBER	22	2	Amount of telephone charges.
15	OTHER_CHARGES	NUMBER	22	2	Amount of other charges.
16	CORPORATE_ID	NUMBER	22	2	Corporation ID in case of Corporate Card.
17	RESERVED	VARCHAR2	28		Reserved for future use.
18	USER_CREATE	VARCHAR2	15		ID of the user when record created..
19	DATE_CREATE	DATE			Record creation date and time.
20	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record..
21	DATE_MODIF	DATE			Date and time when the last record modification occurred..

14.1.18 TRANS_HIST_ADD_LODGING

This table is used to store Text Message Commercial Card - Lodging (Additional Data Elements) (TC50-TCR0)

The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ).

MESSAGE_IDENTIFIER in TRANS_HIST_LIMIT_USE_DATA (TCR6) & TRANS_HIST_ADD_LODGING is used to link the transactions

Data is loaded in the table TRANS_HIST_ADD_LODGING from VISA TC 50 - TCR 0 - Commercial Card - Lodging in case TC 50-TCR 0 Service Identifier (Positions 17-22) is 'CORPLG'



Note

For more information about the Visa mapping, refer to the TRANSACTION_HIST_VISA_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

14.1.18.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	MICROFILM_REF_NUMBER	CHAR	23		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate an assign a unique ARN for any transaction generated by the system for instance in an issuing context.
2 	MICROFILM_REF_SEQ	NUMBER	4		Sequence number. To guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and the second presentment have the same ARN, the sequence might be used to distinguish between the two transactions.
3	DESTINATION_IDENTIFIER	NUMBER	6	0	Destination identifier.
4	SOURCE_IDENTIFIER	NUMBER	6	0	Transaction source identifier.
5	SERVICE_IDENTIFIER	VARCHAR2	6		Service identifier.
6	MESSAGE_IDENTIFIER	VARCHAR2	15		Message identifier.
7	ITEM_SEQUENCE_NUMBER	NUMBER	3	0	Item sequence number.
8	VALET_PARKING_CHARGES	NUMBER	12	2	Total charges for valet and parking.
9	MINIBAR_CHARGES	NUMBER	12	2	Total charges for in-room mini-bar food and beverage expenses.
10	LAUNDRY_CHARGES	NUMBER	12	2	Fees amount of laundry service (e.g., cleaning, washing, drying, etc.)
11	TELEPHONE_CHARGES	NUMBER	12	2	Total charges for telephony.
12	GIFT_SHOP_PURCHASES	NUMBER	12	2	Total charges of gift shop and merchandise purchases.
13	MOVIE_CHARGES	NUMBER	12	2	Total charges for movie renting.
14	BUSINESS_CENTER_CHARGES	NUMBER	12		Total charges of business center purchases.
15	HEALTH_CLUB_CHARGES	NUMBER	12	2	Total charges of health club purchases.
16	OTHER_CHARGES	NUMBER	12	2	Fees amount of other addition services utilized during the lodging.
17	TOTAL_NON_ROOM_CHARGES	NUMBER	12	2	Total amount of non-room charges.
18	RESERVED	VARCHAR2	8		Reserved for future use.
19	USER_CREATE	VARCHAR2	15		ID of the user when record created.
20	DATE_CREATE	DATE			Record creation date and time.
21	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
22	DATE_MODIF	DATE			Date and time when the last record modification occurred.

14.1.19 TRANS_HIST_ADD_GENERIC

This table is used to store Text Message Commercial Card - Generic Data (TC50-TCR0)

The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ).

MESSAGE_IDENTIFIER in TRANS_HIST_LIMIT_USE_DATA (TCR6) & TRANS_HIST_ADD_GENERIC are used to link the transactions

Data is loaded in the table TRANS_HIST_ADD_GENERIC from VISA TC 50 - TCR 0 - Commercial Card - Generic Data in case Service Identifier (Positions 17-22) is 'COMMGN'

**Note**

For more information about the Visa mapping, refer to the TRANSACTION_HIST_VISA_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

14.1.19.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	MICROFILM_REF_NUMBER	CHAR	23		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate an assign a unique ARN for any transaction generated by the system for instance in an issuing context.
2	MICROFILM_REF_SEQ	NUMBER	4		Sequence number. To guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and the second presentment have the same ARN, the sequence might be used to distinguish between the two transactions.
3	DESTINATION_IDENTIFIER	NUMBER	6	0	Destination identifier.
4	SOURCE_IDENTIFIER	NUMBER	6	0	Transaction source identifier.
5	SERVICE_IDENTIFIER	VARCHAR2	6		Service identifier.
6	MESSAGE_IDENTIFIER	VARCHAR2	15		Message identifier.
7	ITEM_SEQUENCING_FIELD	NUMBER	4	0	Item sequence number.
8	ACCOUNT_NUMBER	NUMBER	16	0	Account number.
9	ACCOUNT_NUMBER_EXTENSION	NUMBER	3	0	Account number extension.
10	PURCHASE_DATE	CHAR	4		Date of the purchase.
11	SOURCE_AMOUNT	NUMBER	12	2	Transaction amount
12	MERCHANT_NAME	VARCHAR2	25		Merchant name.
13	MERCHANT_CATEGORY_CODE	NUMBER	4	0	Merchant category code.
14	MERCHANT_ZIP_CODE	NUMBER	5	0	Merchant zip code.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
15	MERCHANT_ORDER_NUMBER	VARCHAR2	25		Merchant order number.
16	LOCAL_TAX	NUMBER	12	2	This field may be used by acquirers to indicate the amount of state or provincial tax included in the transaction amount.
17	NATIONAL_TAX	NUMBER	12	2	This field may be used by acquirers to indicate the amount of National Tax included in the transaction amount. This amount must be expressed in the same currency as the source amount.
18	SUMMARY_COMMODITY_CODE	VARCHAR2	4		Contains the national standard coding structure for the description of goods.
19	RESERVED	VARCHAR2	5		Reserved for future use.
20	USER_CREATE	VARCHAR2	15		ID of the user when record created.
21	DATE_CREATE	DATE			Record creation date and time.
22	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
23	DATE_MODIF	DATE			Date and time when the last record modification occurred.

14.1.20 TRANS_HIST_ADD_PASSENGER_IT

This table is used to store Text Message Commercial Card - Passenger Itinerary Data (TC50-TCR0)

The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ).

MESSAGE_IDENTIFIER in TRANS_HIST_LIMIT_USE_DATA (TCR6) & TRANS_HIST_ADD_GENERIC are used to link the transactions

Data is loaded in the table TRANS_HIST_ADD_PASSENGER_IT from VISA TC 50 - TCR 0 - Commercial Card - Passenger Itinerary Data in case TC 50-TCR 0 Service Identifier (Positions 17-22) is 'COMMAG'



Note

For more information about the Visa mapping, refer to the TRANSACTION_HIST_VISA_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

14.1.20.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	MICROFILM_REF_NUMBER	CHAR	23		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate an assign a unique ARN for any transaction generated by the system for instance in an issuing context.
2	MICROFILM_REF_SEQ	NUMBER	4		Sequence number. To guarantee the uniqueness of the entry in the table,

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and the second presentment have the same ARN, the sequence might be used to distinguish between the two transactions.
3	DESTINATION_IDENTIFIER	NUMBER	22	0	Destination identifier.
4	SOURCE_IDENTIFIER	NUMBER	22	0	Transaction source identifier.
5	SERVICE_IDENTIFIER	VARCHAR2	24		Service identifier.
6	MESSAGE_IDENTIFIER	VARCHAR2	60		Message identifier.
7	ITEM_SEQUENCING_FIELD	NUMBER	22	0	Item sequence number.
8	ACCOUNT_NUMBER	NUMBER	22	0	Account number.
9	ACCOUNT_NUMBER_EXTENSION	NUMBER	22	0	Account number extension.
10	PASSENGER_NAME	VARCHAR2	80		Generic name given to records created by aircraft operators or their authorized agents for each journey booked by or on behalf of any passenger.
11	TOTAL_FARE_AMOUNT	NUMBER	22	2	Total amount of the ticket and should equal the total amount of the transaction.
12	TOTAL_TAX_AMOUNT	NUMBER	22	2	Total amount of sales tax or value added tax (VAT) on the total purchase amount.
13	NATIONAL_TAX_AMOUNT	NUMBER	22	2	This field may be used by acquirers to indicate the amount of National Tax included in the transaction amount. This amount must be expressed in the same currency as the source amount.
14	TOTAL_FEE_AMOUNT	NUMBER	22	2	Amount of the fees associated with the ticket.
15	CURRENCY_CODE	VARCHAR2	12		The currency code used in the transaction.
16	EXCHANGE_TICKET_NUMBER	VARCHAR2	52		Ticket number for the exchanged ticket. Reserved for future use.
17	EXCHANGE_TICKET_AMOUNT	NUMBER	22	2	Amount of the new ticket purchase on an exchanged ticket.
18	TRAVEL_AGENCY_CODE	VARCHAR2	32		Travel agency code issuing the airline ticket.
19	INTERNET_INDICATOR	VARCHAR2	4		Passenger internet indicator
20	ELECTRONIC_TICKET_INDICATO	VARCHAR2	4		Passenger electronic ticket indicator.
21	RESERVED	VARCHAR2	8		Reserved for future use.
22	USER_CREATE	VARCHAR2	15		ID of the user when record created.
23	DATE_CREATE	DATE			Record creation date and time.
24	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
25	DATE_MODIF	DATE			Date and time when the last record modification occurred.

14.1.21 TRANS_HIST_ADD_PASSENGER_LEG

This table is used to store Text Message Commercial Card - Passenger Itinerary Data - Leg-Specific (TC50-TCR0)

The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ).

MESSAGE_IDENTIFIER in TRANS_HIST_LIMIT_USE_DATA (TCR6) & TRANS_HIST_ADD_PASSENGER_LEG are used to link the transactions

Data is loaded in the table TRANS_HIST_ADD_PASSENGER_LEG from VISA TC 50 - TCR 0 - Commercial Card - Passenger Itinerary Data - Leg-Specific in case TC 50-TCR 0 Service Identifier (Positions 17-22) is 'COMMAS'



Note

For more information about the Visa mapping, refer to the TRANSACTION_HIST_VISA_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

14.1.21.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	MICROFILM_REF_NUMBER	CHAR	23		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate an assign a unique ARN for any transaction generated by the system for instance in an issuing context.
2	MICROFILM_REF_SEQ	NUMBER	4		Sequence number. To guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and the second presentment have the same ARN, the sequence might be used to distinguish between the two transactions.
3	DESTINATION_IDENTIFIER	NUMBER	22	0	Destination identifier.
4	SOURCE_IDENTIFIER	NUMBER	22	0	Transaction source identifier.
5	SERVICE_IDENTIFIER	VARCHAR2	24		Service identifier.
6	MESSAGE_IDENTIFIER	VARCHAR2	60		Message identifier.
7	ITEM_SEQUENCING_FIELD	NUMBER	22	0	Item sequence number.
8	CONJUNCTION_TICKET_NUMBER	VARCHAR2	52		This indicator is used to indicate that the current document is a continuation of the previous one. Possible values are:

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					- Blank: in first primary document record - CNJ: when the document is the continuity of another one.
9	COUPON_NUMBER_1	NUMBER	22	0	Coupon identifier.
10	CARRIER_CODE_1	VARCHAR2	8		Carrier code.
11	FLIGHT_NUMBER_1	VARCHAR2	20		Flight identifier.
12	SERVICE_CLASS_1	VARCHAR2	8		The service type (coach,first class...).
13	ORIGINCITY_AIRPORT_CODE_1	VARCHAR2	20		City code of the original city of departure.
14	STOP_OVER_CODE_1	CHAR	1		Travel stopover indicator. It indicates whether or not the passenger is entitled to make a stopover.
15	DEST_CITY_AIRPORT_CODE_1	VARCHAR2	20		Code of the destination airport.
16	FARE_BASIS_CODE_1	VARCHAR2	32		A series of characters defining the entitlement of the passenger.
17	DEPARTURE_DATE_1	VARCHAR2	24		Flight departure date.
18	DEPARTURE_TIME_1	VARCHAR2	16		Flight departure time.
19	ARRIVAL_TIME_1	VARCHAR2	16		Flight arrival date.
20	COUPON_NUMBER_2	NUMBER	22	0	Coupon identifier.
21	CARRIER_CODE_2	VARCHAR2	8		Carrier code.
22	FLIGHT_NUMBER_2	VARCHAR2	20		Flight identifier.
23	SERVICE_CLASS_2	VARCHAR2	8		The service type (coach,first class...).
24	ORIGIN_CITY_AIRPORT_CODE_2	VARCHAR2	20		City code of the original city of departure.
25	STOP_OVER_CODE_2	CHAR	1		Travel stopover indicator. It indicates whether or not the passenger is entitled to make a stopover.
26	DEST_CITY_AIRPORT_CODE_2	VARCHAR2	20		Code of the destination airport.
27	FARE_BASIS_CODE_2	VARCHAR2	32		A series of characters defining the entitlement of the passenger.
28	DEPARTURE_DATE_2	VARCHAR2	24		Flight departure date.
29	DEPARTURE_TIME_2	VARCHAR2	16		Flight departure time.
30	ARRIVAL_TIME_2	VARCHAR2	16		Flight arrival date.
31	CONTROL_ID	VARCHAR2	52		Control indicator.
32	RESERVED_1	VARCHAR2	24		Reserved for future use.
33	TICKET_ISSUE_DATE	VARCHAR2	32		Ticket issue date.
34	RESERVED_2	CHAR	1		Reserved for future use.
35	USER_CREATE	VARCHAR2	15		ID of the user when record created.
36	DATE_CREATE	DATE			Record creation date and time.
37	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
38	DATE_MODIF	DATE			Date and time when the last record modification occurred.

14.1.22 TRANS_HIST_ADD_INVOICE_HS

This table is used to store Text Message Commercial Card - Invoice (Header And Summary) (TC50-TCR0)

The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ).

MESSAGE_IDENTIFIER in TRANS_HIST_LIMIT_USE_DATA (TCR6) & TRANS_HIST_ADD_INVOICE_HS are used to link the transactions

Data is loaded in the table TRANS_HIST_ADD_INVOICE_HS from VISA TC 50 - TCR 0 - Commercial Card - Invoice (Header And Summary) in case TC 50-TCR 0 Service Identifier (Positions 17-22) is 'PURCHA' or 'COMMXA'



Note

For more information about the Visa mapping, refer to the TRANSACTION_HIST_VISA_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

14.1.22.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	MICROFILM_REF_NUMBER	CHAR	23		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate an assign a unique ARN for any transaction generated by the system for instance in an issuing context.
2	MICROFILM_REF_SEQ	NUMBER	22		Sequence number. To guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and the second presentment have the same ARN, the sequence might be used to distinguish between the two transactions.
3	DESTINATION_ID	NUMBER	22	0	Destination identifier.
4	SOURCE_ID	NUMBER	22	0	Transaction source identifier.
5	SERVICE_ID	VARCHAR2	24		Service identifier.
6	MESSAGE_IDENTIFIER	VARCHAR2	60		Message identifier.
7	ITEM_SEQUENCING_FIELD	NUMBER	22	0	Item sequence number.
8	DISCOUNT_AMOUNT	NUMBER	22	2	Amount of the discount applied.
9	FREIGHT_SHIPPING_AMOUNT	NUMBER	22	2	Amount of the freight shipping fees.
10	DUTY_AMOUNT	NUMBER	22	2	Amount of the duty fees.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
11	DESTINATION_ZIP_CODE	VARCHAR2	40		Zip code of the destination place.
12	SHIP_FROM_ZIP_CODE	VARCHAR2	40		Zip code of the departure place.
13	DESTINATION_COUNTRY_CODE	VARCHAR2	12		Destination country code.
14	UNIQUE_VAT_INVOICE_REF_NBR	VARCHAR2	60		Provides an additional sub-element that is used to identify the value-added tax (VAT) invoice or tax receipt.
15	ORDER_DATE	NUMBER	22	0	Date the item was ordered.
16	ACCOUNT_NUMBER	NUMBER	22	0	Account number.
17	ACCOUNT_NUMBER_EXTENSION	VARCHAR2	12		Account number extension.
18	VAT_TAX_AMNT_FREIGHT_SHIPPING	NUMBER	22	2	VAT amount for the freight shipping.
29	VAT_TAX_RATE_FREIGHT_SHIPPING	NUMBER	22	2	VAT rate for the freight shipping.
20	AUTHORIZATION_CODE	VARCHAR2	24		Transaction authorization code.
21	RESERVED	VARCHAR2	4		Reserved for future use.
22	USER_CREATE	VARCHAR2	15		ID of the user when record created.
23	DATE_CREATE	DATE			Record creation date and time.
24	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
25	DATE_MODIF	DATE			Date and time when the last record modification occurred.

14.1.23 TRANS_HIST_ADD_INVOICE_DL

This table is used to store Text Message Commercial Card - Invoice (Line Detail) (TC50-TCR0). The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ).

MESSAGE_IDENTIFIER in TRANS_HIST_LIMIT_USE_DATA (TCR6) & TRANS_HIST_ADD_INVOICE_DL are used to link the transactions

Data is loaded in the table TRANS_HIST_ADD_INVOICE_DL from VISA TC 50 - TCR 0 - Commercial Card - Invoice (Line Detail) in case TC 50-TCR 0 Service Identifier (Positions 17-22) is 'PURCHL' or 'COMMXL'



Note

For more information about the Visa mapping, refer to the TRANSACTION_HIST_VISA_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

14.1.23.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1 	MICROFILM_REF_NUMBER	CHAR	23		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate an assign a unique ARN for any

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					transaction generated by the system for instance in an issuing context.
2 	MICROFILM_REF_SEQ	NUMBER	22		Sequence number. To guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and the second presentment have the same ARN, the sequence might be used to distinguish between the two transactions.
3	DESTINATION_IDENTIFIER	NUMBER	22	0	Destination identifier.
4	SOURCE_IDENTIFIER	NUMBER	22	0	Transaction source identifier.
5	SERVICE_IDENTIFIER	VARCHAR2	24		Service identifier.
6	MESSAGE_IDENTIFIER	VARCHAR2	60		Message identifier.
7	ITEM_SEQUENCE_NUMBER	NUMBER	22	0	Item sequence number.
8	ITEM_COMMODITY_CODE	VARCHAR2	48		Provides the identifier assigned by the card acceptor that best categorizes the items being purchased in a standardized commodity group.
9	ITEM_DESCRIPTOR	VARCHAR2	104		Acceptor designated code for the item.
10	PRODUCT_CODE	VARCHAR2	48		The card product code. It contains the product code associated with the card.
11	QUANTITY	NUMBER	22	2	Quantity of the item purchased and the associated decimal point location.
12	UNIT_OF_MEASURE	VARCHAR2	48		Line item unit of measurement code.
13	UNIT_COST	NUMBER	22	2	Price for one unit of the product.
14	VAT_TAX_AMOUNT	NUMBER	22	2	VAT tax amount.
15	VAT_TAX_RATE	NUMBER	22	0	VAT rate.
16	DISCOUNT_PER_LINE_ITEM	NUMBER	22	2	Discount applied per line item.
17	LINE_ITEM_TOTAL	NUMBER	22	2	Total amount presented in the line item detail message
18	LINE_ITEM_DETAIL_INDICATOR	NUMBER	22	0	Line item detail indicator.
19	LINE_ITEM_LEVEL_DISCOUNT_CODE	NUMBER	22	0	Item discount indicator and amount.
20	USER_CREATE	VARCHAR2	15		ID of the user when record created.
21	DATE_CREATE	DATE			Record creation date and time.
22	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
23	DATE_MODIF	DATE			Date and time when the last record modification occurred.

14.1.24 TRANS_HIST_INSTALLMENT

This table is used to store Transaction addendum data when VISA sends installment payment data (TCR D Installment Payment).

The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ).

TRANSACTION_HIST.ADDENDUM_INDICATOR allows to know if a row in TRANS_HIST_INSTALLMENT is present for the initial transaction.(i.e transaction_hist.addendum_indicator is 'IP')

Data is loaded in the table TRANS_HIST_INSTALLMENT from VISA TCR D if TCR D Business Format Code (Positions 5-6) is 'IP'



Note

For more information about the Visa mapping, refer to the TRANSACTION_HIST_VISA_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

14.1.24.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	MICROFILM_REF_NUMBER	CHAR	23		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate an assign a unique ARN for any transaction generated by the system for instance in an issuing context.
2	MICROFILM_REF_SEQ	NUMBER	22		Sequence number. To guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and the second presentment have the same ARN, the sequence might be used to distinguish between the two transactions.
3	INSTALL_PAY_TOTAL_AMOUNT	NUMBER	22	3	Total amount of the installment pay.
4	INSTALL_PAY_CURRENCY_CODE	CHAR	12		Currency in which the payment instrument displayed.
5	NUMBER_OF_INSTALLMENTS	NUMBER	22	0	Number of installment available.
6	AMOUNT_PER_INSTALLMENT	NUMBER	22	3	Amount to be payed in each installment.
7	INSTALLMENT_PAY_NUMBER	NUMBER	22	0	Number of installment pay available.
8	FREQUENCY_OF_INSTALLMENTS	CHAR	4		Determines the interval at which the customer makes payments towards a total amount.
9	PLAN_OWNER	NUMBER	22	0	Owner of plan.
10	PLAN_REGISTRATION_ID	CHAR	40		Identification code of plan registration.
11	USER_CREATE	VARCHAR2	15		ID of the user when record created.
12	DATE_CREATE	DATE			Record creation date and time.
13	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
14	DATE_MODIF	DATE			Date and time when the last record modification occurred.

14.1.25 TRANSACTION_HIST_ADD_RL

This table contains additional information related to Passenger Transport Detail, Rail Data transactions.

The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ).

TRANSACTION_HIST.ADDENDUM_INDICATOR allows to know if a row in TRANSACTION_HIST_ADD_RL is present for the initial transaction.(i.e transaction_hist.addendum_indicator is 'RL' which means **PDS 0501, subelement 1 = 01 and subelement 2 = 002**)



Note

For more information about the Mastercard mapping, refer to the TRANSACTION_HIST_MASTERCARD_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

14.1.25.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	MICROFILM_REF_NUMBER	CHAR	23		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate an assign a unique ARN for any transaction generated by the system for instance in an issuing context.
2	MICROFILM_REF_SEQ	NUMBER	4		Sequence number. To guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and the second presentment have the same ARN, the sequence might be used to distinguish between the two transactions.
3	FUNCTION_CODE	CHAR	3		Specific purpose for a message.
4	ACQUIRING_INST_ID	VARCHAR2	11		Transaction acquirer.
5	FORWARDING_INST_ID	VARCHAR2	11		Identifies a message's forwarding institution. A forwarding institution is the institution in a transaction flow that sends a message forward from the originating institution.
6	ADDITIONAL_DATA	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service data for which a specific ISO data element is unavailable.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
7	ORIGINATING_MSG_FORMAT	NUMBER	1		Message format in which the clearing system received a message
8	TRANSACTION_DESCRIPTION	NUMBER	16		Contains information describing the type of addendum data that is presented.
9	PASSENGER_NAME	VARCHAR2	29		Contains the name of the passenger to whom the ticket was issued.
10	TICKET_NUMBER	CHAR	15		Contains the number on the ticket.
11	TRAVEL_AGENCY_CODE	CHAR	8		Code assigned to the travel agency.
12	TRAVEL_AGENCY_NAME	VARCHAR2	25		Name of the travel agency that issued the ticket.
13	TRAVEL_DATE	DATE	7		Effective ticket date, previously referred to as departure date
14	SEQUENCE_NUMBER	CHAR	3		Sequence number indicating the sequence that this rail segment falls within the trip.
15	PROCEDURE_ID	CHAR	9		Identification of the rail server procedure or the order in which service was booked or cancellation was done.
16	SERVICE_TYPE	CHAR	4		Contains two subfields with codes defined that indicate the type of service and the nature of the service provided.
17	SERVICE_AMOUNT	CHAR	14		Contains three subfields that describe the amount charged for the service.
18	FULL_VAT_AMOUNTS	VARCHAR2	28		Gross amount from which the VAT was calculated and a value added tax at the full tax rate.
19	HALF_VAT_AMOUNTS	VARCHAR2	28		Gross amount from which the VAT was calculated and a value-added tax at the half tax rate.
20	TRAFFIC_CODE	NUMBER	3		Code of the service provider.
21	SAMPLE_NUMBER	NUMBER	4		Type of service reservation.
22	START_STATION	VARCHAR2	30		Name of the railway start station.
23	DESTINATION_STATION	VARCHAR2	30		Name of the railway destination station.
24	GENERIC_DATA	CHAR	46		Contains four subfields regarding general information about the rail service.
25	REDUCTION_DATA	CHAR	26		Contains four subfields that contain information about the rail service.
26	TRANSPORT_OTHER_CODE	CHAR	3		Code of the service provider.
27	PASSENGER_DESCRIPTION	CHAR	5		Contains three subfields to indicate the number of adults, the number of children, and the class of the ticket.
28	TRANSPORT_SERVICE_PROVIDER	VARCHAR2	40		Name of the service provider
29	TRANSPORT_SERVICES_OFFERED	VARCHAR2	40		Services that were offered by the transportation company.
30	DETAIL_TAX_AMOUNT_1	VARCHAR2	46		Not used.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
31	DETAIL_TAX_AMOUNT_2	VARCHAR2	46		Not used.
32	DETAIL_TAX_AMOUNT_3	VARCHAR2	46		Not used.
33	DETAIL_TAX_AMOUNT_4	VARCHAR2	46		Not used.
34	DETAIL_TAX_AMOUNT_5	VARCHAR2	46		Not used.
35	DETAIL_TAX_AMOUNT_6	VARCHAR2	46		Not used.
36	ADDITIONAL_DATA_2	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is unavailable.
37	TRANSACTION_LIFE_CYCLE_ID	VARCHAR2	20		Contains subfields that allow for transaction life cycle control. All life cycle messages such as authorizations, financials, reversals, retrievals, fulfillments, and chargebacks are linked with the Life Cycle Support Indicator and Trace ID subfields.
38	MESSAGE_NUMBER	NUMBER	8		The transaction originator assigns the DE 71 (Message Number) to data messages in a file. DE 71 monitors the integrity and continuity of the files being exchanged.
39	TRANSACTION_DEST_INST_ID	VARCHAR2	11		Transaction destination institution
40	TRANSACTION_ORIG_INST_ID	VARCHAR2	11		Transaction originator institution
41	RECEIVING_INST_ID_CODE	VARCHAR2	11		Receiving institution
42	ADDITIONAL_DATA_3	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is not available.
43	ADDITIONAL_DATA_4	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is not available.
44	ADDITIONAL_DATA_5	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is not available.

14.1.26 TRANSACTION_HIST_ADD_GT

This table contains additional information related to Passenger Transport Detail, General Ticket Information transactions.

The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ).

TRANSACTION_HIST.ADDENDUM_INDICATOR allows to know if a row in TRANSACTION_HIST_ADD_GT is present for the initial transaction . (i.e transaction_hist.addendum_indicator is 'GT' which means **PDS 0501, subelement 1 = 01 and subelement 2 = 000**)

**Note**

For more information about the Mastercard mapping, refer to the TRANSACTION_HIST_MASTERCARD_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

14.1.26.1 Columns description

Seq.	Field Name	Data Type	Len.	Sc.	Field Description
1	MICROFILM_REF_NUMBER	CHAR	23		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate an assign a unique ARN for any transaction generated by the system for instance in an issuing context.
2	MICROFILM_REF_SEQ	NUMBER	4		Sequence number. To guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and the second presentment have the same ARN, the sequence might be used to distinguish between the two transactions.
3	FUNCTION_CODE	CHAR	3		Specific purpose for a message.
4	ACQUIRING_INST_ID	VARCHAR2	11		Transaction acquirer.
5	FORWARDING_INST_ID	VARCHAR2	11		Identifies a message's forwarding institution. A forwarding institution is the institution in a transaction flow that sends a message forward from the originating institution.
6	ADDITIONAL_DATA	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service data for which a specific ISO data element is unavailable.
7	ORIGINATING_MSG_FORMAT	NUMBER	1		Provides the message format in which the clearing system received a message.
8	TRANSACTION_DESCRIPTION	NUMBER	16		Information describing the type of addendum data that is presented.
9	PASSENGER_NAME	VARCHAR2	29		Name of the passenger to whom the ticket was issued.
10	TICKET_NUMBER	CHAR	15		Number on the ticket.
11	ISSUING_CARRIER	CHAR	4		Standard abbreviation for the airline or railway carrier issuing the ticket.

Seq.	Field Name	Data Type	Len.	Sc.	Field Description
12	CUSTOMER_CODE	VARCHAR2	25		Code that the cardholder supplied to the acceptor.
13	ISSUE_DATE	DATE	7		Date the ticket was issued to the customer
14	TRAVEL_AGENCY_CODE	CHAR	8		Code assigned to the travel agency.
15	TRAVEL_AGENCY_NAME	VARCHAR2	25		Name of the travel agency that issued the ticket.
16	TOTAL_FARE	NUMBER	12		Total amount of the ticket and should equal the total amount of the transaction.
17	TOTAL_FEES	NUMBER	12		Amount of the fees associated with the ticket.
18	TOTAL_TAXES	NUMBER	12		Amount of all the taxes associated with the ticket.
19	TOTAL_TAX_AMOUNT	CHAR	14		Total amount of sales tax or value added tax (VAT) on the total purchase amount.
20	TOTAL_TAX_COLLECTED_IND	CHAR	1		Reflects total sales tax capture and reporting information such as whether sales tax was included in the purchase amount or if goods and services were not taxable.
21	COMMODITY_CODE	VARCHAR2	15		Provides the identifier assigned by the acceptor that best categorizes the items being purchased in a standardized commodity group.
22	TAX_EXEMPT_INDICATOR	CHAR	1		Provides the indicator noting whether the goods or services were tax-exempt or tax was not collected.
23	RESTRICTED_TICKET_INDICATOR	CHAR	1		Provides the identifier noting that the ticket purchased has some restriction associated with its use
24	EXCHANGE_TICKET_AMOUNT	CHAR	12		Amount of the new ticket purchase on an exchanged ticket.
25	TRAVEL_AUTHORIZATION_CODE	VARCHAR2	64		Code provided by the company to a travel agent authorizing ticket issuance.
26	IATA_CLIENT_CODE	VARCHAR2	17		Provides the International Air Transport Association (IATA) code identifying the company that purchased the ticket.
27	DETAIL_TAX_AMOUNT_1	VARCHAR2	46		Additional tax information such as tax rate, tax amounts, and tax type.
28	DETAIL_TAX_AMOUNT_2	VARCHAR2	46		Additional tax information such as tax rate, tax amounts, and tax type.
29	DETAIL_TAX_AMOUNT_3	VARCHAR2	46		Additional tax information such as tax rate, tax amounts, and tax type.
30	DETAIL_TAX_AMOUNT_4	VARCHAR2	46		Tax amount, tax rate, tax type applied, and acceptor tax ID.
31	DETAIL_TAX_AMOUNT_5	VARCHAR2	46		Tax amount, tax rate, tax type applied, and acceptor tax ID.

Seq.	Field Name	Data Type	Len.	Sc.	Field Description
32	DETAIL_TAX_AMOUNT_6	VARCHAR2	46		Tax amount, tax rate, tax type applied, and acceptor tax ID.
33	ADDITIONAL_DATA_2	VARCHAR2	999		One or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is unavailable.
34	TRANSACTION_LIFE_CYCLE_ID	VARCHAR2	20		Contains subfields that allow for transaction life cycle control. All life cycle messages such as authorizations, financials, reversals, retrievals, fulfillments, and chargebacks are linked with the Life Cycle Support Indicator and Trace ID subfields.
35	MESSAGE_NUMBER	NUMBER	8		The transaction originator assigns the DE 71 (Message Number) to data messages in a file. DE 71 monitors the integrity and continuity of the files being exchanged.
36	TRANSACTION_DEST_INST_ID	VARCHAR2	11		Transaction destination institution
37	TRANSACTION_ORIG_INST_ID	VARCHAR2	11		Transaction originator institution
38	RECEIVING_INST_ID_CODE	VARCHAR2	11		Receiving institution
39	ADDITIONAL_DATA_3	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is not available.
40	ADDITIONAL_DATA_4	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is not available
41	ADDITIONAL_DATA_5	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is not available.

14.1.27 TRANSACTION_HIST_ADD_CF

This table contains additional information related to lodging transactions.

The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ).

TRANSACTION_HIST.ADDENDUM_INDICATOR allows to know if a row in TRANSACTION_HIST_ADD_CF is present for the initial transaction.(i.e transaction_hist.addendum_indicator is 'CF' which means **PDS 0501, subelement 1 = 98 and subelement 2 = 002**)

**Note**

For more information about the Mastercard mapping, refer to the TRANSACTION_HIST_MASTERCARD_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

14.1.27.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	MICROFILM_REF_NUMBER	CHAR	23		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate an assign a unique ARN for any transaction generated by the system for instance in an issuing context.
2	MICROFILM_REF_SEQ	NUMBER	4		Sequence number. To guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and the second presentment have the same ARN, the sequence might be used to distinguish between the two transactions.
3	FUNCTION_CODE	CHAR	3		Specific purpose for a message
4	ACQUIRING_INST_ID	VARCHAR2	11		Transaction acquirer
5	FORWARDING_INST_ID	VARCHAR2	11		Identifies a message's forwarding institution. A forwarding institution is the institution in a transaction flow that sends a message forward from the originating institution.
6	ADDITIONAL_DATA	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service data for which a specific ISO data element is unavailable.
7	ORIGINATING_MSG_FORMAT	NUMBER	1		Provides the message format in which the clearing system received a message.
8	TRANSACTION_DESCRIPTION	NUMBER	16		Information describing the type of addendum data that is presented.
9	TOTAL_TAX_AMOUNT	CHAR	14		Total amount of sales tax or value added tax (VAT) on the total purchase amount.
10	OIL_COMPANY_BRAND_NAME	CHAR	4		Four-digit code that indicates the acceptor oil company brand name.
11	PURCHASE_TIME	CHAR	4		Time of day the purchase was made.
12	MOTOR_FUEL_SERVICE_TYPE	CHAR	1		Type of service received at the acceptor site

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
13	MOTOR_FUEL_PRODUCT_CODE	CHAR	3		Acquirer's motor fuel product code translated from the information the attendant entered.
14	MOTOR_FUEL_UNIT_PRICE	CHAR	12		Acquirer's motor fuel product code translated from the information the attendant entered.
15	MOTOR_FUEL_UNIT_OF_MEASURE	CHAR	1		Acquirer's motor fuel product code translated from the information the attendant entered.
16	MOTOR_FUEL_QUANTITY	CHAR	7		Acquirer's motor fuel product code translated from the information the attendant entered.
17	MOTOR_FUEL_SALE_AMOUNT	CHAR	12		Acquirer's motor fuel product code translated from the information the attendant entered.
18	ODOMETER_READING	VARCHAR2	7		Vehicle odometer reading the purchaser entered.
19	VEHICLE_NUMBER	VARCHAR2	17		Number assigned to the vehicle by the business using the Mastercard Corporate Fleet Card® and entered by the cardholder at the point of interaction.
20	DRIVER_NUMBER	VARCHAR2	17		Number assigned to the driver by the business using the Mastercard Corporate Fleet Card® and entered by the cardholder at the point of interaction.
21	PRODUCT_TYPE_CODE	CHAR	1		Code read from a card magnetic stripe that indicates prompts that occur at the point of interaction.
10	COUPON_DISCOUNT_AMOUNT	CHAR	12		Coupon or discount dollar amount.
11	NET_FUEL_PRICE	CHAR	13		Price of fuel net of any taxes.
12	COMMODITY_CODE	VARCHAR2	15		Provides the identifier assigned by the acceptor that best categorizes the items being purchased in a standardized commodity group.
13	TAX_EXEMPT_INDICATOR	CHAR	1		Provides the indicator noting whether the goods or services were tax-exempt or tax was not collected.
14	DETAIL_TAX_AMOUNT_1	VARCHAR2	46		Additional tax information such as tax rate, tax amounts, and tax type.
15	DETAIL_TAX_AMOUNT_2	VARCHAR2	46		Additional tax information such as tax rate, tax amounts, and tax type.
16	DETAIL_TAX_AMOUNT_3	VARCHAR2	46		Additional tax information such as tax rate, tax amounts, and tax type.
17	DETAIL_TAX_AMOUNT_4	VARCHAR2	46		Tax amount, tax rate, tax type applied, and acceptor tax ID
18	DETAIL_TAX_AMOUNT_5	VARCHAR2	46		Tax amount, tax rate, tax type applied, and acceptor tax ID.
19	DETAIL_TAX_AMOUNT_6	VARCHAR2	46		Tax amount, tax rate, tax type applied, and acceptor tax ID

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
20	ADDITIONAL_DATA_2	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is unavailable.
21	TRANSACTION_LIFE_CYCLE_ID	VARCHAR2	20		Contains subfields that allow for transaction life cycle control. All life cycle messages such as authorizations, financials, reversals, retrievals, fulfillments, and chargebacks are linked with the Life Cycle Support Indicator and Trace ID subfields.
22	MESSAGE_NUMBER	NUMBER	8		Transaction originator assigns the DE 71 (Message Number) to data messages in a file. DE 71 monitors the integrity and continuity of the files being exchanged
23	TRANSACTION_DEST_INST_ID	VARCHAR2	11		Transaction destination institution
24	TRANSACTION_ORIG_INST_ID	VARCHAR2	11		Transaction originator institution
25	RECEIVING_INST_ID_CODE	VARCHAR2	11		Receiving institution
26	ADDITIONAL_DATA_3	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is not available.
27	ADDITIONAL_DATA_4	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is not available.
28	ADDITIONAL_DATA_5	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is not available.

14.1.28 TRANSACTION_HIST_ADD_TP

This table contains additional information related to Temporary Services.

The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ).

TRANSACTION_HIST.ADDENDUM_INDICATOR allows to know if a row in TRANSACTION_HIST_ADD_TP is present for the initial transaction.(i.e transaction_hist.addendum_indicator is 'TP' **which means PDS 0501, subelement 1 = 07**)



Note

For more information about the Mastercard mapping, refer to the TRANSACTION_HIST_MASTERCARD_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

14.1.28.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	MICROFILM_REF_NUMBER	CHAR	23		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate an assign a unique ARN for any transaction generated by the system for instance in an issuing context.
2	MICROFILM_REF_SEQ	NUMBER	4		Sequence number. To guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and the second presentment have the same ARN, the sequence might be used to distinguish between the two transactions.
3	FUNCTION_CODE	CHAR	3		Specific purpose for a message.
4	ACQUIRING_INST_ID	VARCHAR2	11		Transaction acquirer.
5	FORWARDING_INST_ID	VARCHAR2	11		Identifies a message's forwarding institution. A forwarding institution is the institution in a transaction flow that sends a message forward from the originating institution.
6	ADDITIONAL_DATA	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service data for which a specific ISO data element is unavailable.
7	ORIGINATING_MSG_FORMAT	NUMBER	1		Provides the message format in which the clearing system received a message
8	TRANSACTION_DESCRIPTION	NUMBER	16		Contains information describing the type of addendum data that is presented
9	CUSTOMER_CODE	VARCHAR2	25		Code that the cardholder supplied to the acceptor.
10	TOTAL_TAX_AMOUNT	CHAR	14		Total amount of sales tax or value added tax (VAT) on the total purchase amount.
11	TOTAL_TAX_COLLECTED_INDICATOR	CHAR	1		Total sales tax capture and reporting information such as whether sales tax was included in the purchase amount or if goods and services were not taxable.
12	TAX_EXEMPT_INDICATOR	CHAR	1		Provides the indicator noting whether the goods or services were tax-exempt or tax was not collected.
13	COMMODITY_CODE	VARCHAR2	15		Provides the identifier assigned by the acceptor that best categorizes the items

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					being purchased in a standardized commodity group.
14	EMPLOYEE_ID	VARCHAR2	40		Name or ID associated with the individual working in a temporary capacity.
15	EMPLOYEE_SOCIAL_SECURITY_ID	VARCHAR2	30		Identifier associated with the individual working in a temporary capacity.
16	MISCELLANEOUS_EXPENSE_1	VARCHAR2	54		Description and an amount for miscellaneous expenses - 1
17	MISCELLANEOUS_EXPENSE_2	VARCHAR2	54		Description and an amount for miscellaneous expenses - 2
18	MISCELLANEOUS_EXPENSE_3	VARCHAR2	54		Description and an amount for miscellaneous expenses - 3
19	MISCELLANEOUS_EXPENSE_4	VARCHAR2	54		Description and an amount for miscellaneous expenses - 4
20	JOB_DESCRIPTION	VARCHAR2	40		Description of the job or task of the individual working in a temporary capacity.
21	JOB_CODE	VARCHAR2	20		Contains an indicator identifying the job or task of the individual working in a temporary capacity.
22	FLAT_RATE_INDICATOR	CHAR	1		Contains an indicator noting that the fee for the individual working in a temporary capacity is a flat rate.
23	REGULAR_HOURS_WORKED	CHAR	7		Amount of time worked during a normal operation for the task or job.
24	REGULAR_HOURS_RATE	CHAR	7		Amount paid per regular hours worked.
25	OVERTIME_HOURS_WORKED	CHAR	7		Number of hours worked in excess of regular hours
26	OVERTIME_HOURS_RATE	CHAR	7		Amount paid per overtime hour worked
27	TEMP_START_DATE	DATE	7		Date for the beginning of the pay period.
28	TEMP_WEEK_ENDING	DATE	7		Date of the end of the billing cycle.
29	REQUESTER_NAMEORID	VARCHAR2	40		Name of the individual requesting temporary services.
30	SUPERVISOR_REPORTS_TO	VARCHAR2	40		Name of the individual supervising the temporary staff.
31	TIMESHEET_NUM	VARCHAR2	20		Identification of the time sheet.
32	DISCOUNT_AMOUNT	CHAR	18		Amount and type of discount
33	SUB_TOTAL_AMOUNT	CHAR	14		Subtotal of amounts associated with the services
34	DETAIL_TAX_AMOUNT_1	VARCHAR2	46		Not used.
35	DETAIL_TAX_AMOUNT_2	VARCHAR2	46		Not used.
36	DETAIL_TAX_AMOUNT_3	VARCHAR2	46		Not used.
37	DETAIL_TAX_AMOUNT_4	VARCHAR2	46		Tax amount, tax rate, tax type applied, and acceptor tax ID

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
38	DETAIL_TAX_AMOUNT_5	VARCHAR2	46		Tax amount, tax rate, tax type applied, and acceptor tax ID.
39	DETAIL_TAX_AMOUNT_6	VARCHAR2	46		Tax amount, tax rate, tax type applied, and acceptor tax ID.
40	ADDITIONAL_DATA_2	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is unavailable.
41	TRANSACTION_LIFE_CYCLE_ID	VARCHAR2	20		Contains subfields that allow for transaction life cycle control. All life cycle messages such as authorizations, financials, reversals, retrievals, fulfillments, and chargebacks are linked with the Life Cycle Support Indicator and Trace ID subfields
42	MESSAGE_NUMBER	NUMBER	8		The transaction originator assigns the DE 71 (Message Number) to data messages in a file. DE 71 monitors the integrity and continuity of the files being exchanged.
43	TRANSACTION_DEST_INST_ID	VARCHAR2	11		Transaction destination institution
44	TRANSACTION_ORIG_INST_ID	VARCHAR2	11		Transaction originator institution
45	RECEIVING_INST_ID_CODE	VARCHAR2	11		Receiving institution
46	ADDITIONAL_DATA_3	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is not available.
47	ADDITIONAL_DATA_4	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is not available.
48	ADDITIONAL_DATA_5	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is not available.

14.1.29 TRANSACTION_HIST_ADD_SH

This table contains additional information related to Shipping/Courier Services transactions.

The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ).

TRANSACTION_HIST.ADDENDUM_INDICATOR allows to know if a row in TRANSACTION_HIST_ADD_SH is present for the initial transaction.(i.e transaction_hist.addendum_indicator is 'SH' which means **PDS 0501, subelement 1 = 08**)

**Note**

For more information about the Mastercard mapping, refer to the TRANSACTION_HIST_MASTERCARD_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

14.1.29.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	MICROFILM_REF_NUMBER	CHAR	23		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate an assign a unique ARN for any transaction generated by the system for instance in an issuing context.
2	MICROFILM_REF_SEQ	NUMBER	4		Sequence number. To guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and the second presentment have the same ARN, the sequence might be used to distinguish between the two transaction.
3	FUNCTION_CODE	CHAR	3		Specific purpose for a message.
4	ACQUIRING_INST_ID	VARCHAR2	11		Transaction acquirer.
5	FORWARDING_INST_ID	VARCHAR2	11		Identifies a message's forwarding institution. A forwarding institution is the institution in a transaction flow that sends a message forward from the originating institution.
6	ADDITIONAL_DATA	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service data for which a specific ISO data element is unavailable.
7	ORIGINATING_MSG_FORMAT	NUMBER	1		Message format in which the clearing system received a message.
8	TRANSACTION_DESCRIPTION	NUMBER	16		Contains information describing the type of addendum data that is presented.
9	CUSTOMER_CODE	VARCHAR2	25		Code that the cardholder supplied to the acceptor.
10	TAX_EXEMPT_INDICATOR	CHAR	1		Provides the indicator noting whether the goods or services were tax-exempt or tax was not collected.
11	TOTAL_TAX_AMOUNT	CHAR	14		Total amount of sales tax or value added tax (VAT) on the total purchase amount.
12	MISCELLANEOUS_EXPENSE_1	VARCHAR2	54		Description and an amount for miscellaneous expenses - 1

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
13	MISCELLANEOUS_EXPENSE_2	VARCHAR2	54		Description and an amount for miscellaneous expenses - 2
14	MISCELLANEOUS_EXPENSE_3	VARCHAR2	54		Description and an amount for miscellaneous expenses - 3
15	MISCELLANEOUS_EXPENSE_4	VARCHAR2	54		Description and an amount for miscellaneous expenses - 4
16	SERVICE_DESCRIPTOR_CODE	VARCHAR2	40		Contains an acceptor designated code for the shipping service provided.
17	TRACKING_PICKUP_NUMBER	VARCHAR2	40		Identification number for the packages being shipped, for tracking and billing purposes.
18	SHIPPING_NET_AMOUNT	CHAR	14		Net amount of the shipping costs.
19	INCENTIVE_AMOUNT	CHAR	14		Amount of the incentive.
20	PICKUP_DATE	DATE	7		Date the package being shipped or sent by courier is picked up.
21	DELIVERY_DATE	DATE	7		Date of delivery for the packages being shipped or sent by courier.
22	NUMBER_OF_PACKAGES	NUMBER	6		Total number of packages.
23	PACKAGE_WEIGHT	CHAR	12		Weight of each package being shipped or sent by courier
24	UNIT_OF_MEASURE	VARCHAR2	3		Identification associated with the type of item being shipped
25	SHIPPING_PARTY_CITY	VARCHAR2	25		City from which the package is shipped or sent by courier. If present, this subfield must be left-justified and cannot contain all spaces or all zeros
26	SHIPPING_PARTY_STATE	CHAR	3		State or province from which the package is shipped or sent by courier. If present, this subfield must be left-justified and cannot contain all spaces or all zeros.
27	SHIPPING_PARTY_COUNTRY	CHAR	3		Country from which the package is shipped or sent by courier. If present, this subfield must be left-justified and cannot contain all spaces or all zeros
28	SHIPPING_PARTY_CONTACT	VARCHAR2	61		Provides information about the individual (or individuals) identified as the shipping party and typically does not contain address information.
29	DELIVERY_PARTY_CITY	VARCHAR2	25		City where the package is to be delivered
30	DELIVERY_PARTY_STATE	CHAR	3		State or province where the package is being delivered.
31	DELIVERY_PARTY_COUNTRY	CHAR	3		Must contain a valid three-character alphabetic code as defined in Chapter 2 of the Quick Reference Booklet. When territories have a defined country code in the Quick Reference Booklet, that country code must be used
32	DELIVERY_PARTY_CONTACT	VARCHAR2	61		Information about the individual (or individuals) identified as the delivery

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					party. This information is typically not address information.
33	DETAIL_TAX_AMOUNT_1	VARCHAR2	46		Additional tax information such as tax rate, tax amounts, and tax type.
34	DETAIL_TAX_AMOUNT_2	VARCHAR2	46		Additional tax information such as tax rate, tax amounts, and tax type.
35	DETAIL_TAX_AMOUNT_3	VARCHAR2	46		Additional tax information such as tax rate, tax amounts, and tax type.
36	DETAIL_TAX_AMOUNT_4	VARCHAR2	46		Tax amount, tax rate, tax type applied, and acceptor tax ID.
37	DETAIL_TAX_AMOUNT_5	VARCHAR2	46		Tax amount, tax rate, tax type applied, and acceptor tax ID.
38	DETAIL_TAX_AMOUNT_6	VARCHAR2	46		Tax amount, tax rate, tax type applied, and acceptor tax ID.
39	ADDITIONAL_DATA_2	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is unavailable.
40	TRANSACTION_LIFE_CYCLE_ID	VARCHAR2	20		Contains subfields that allow for transaction life cycle control. All life cycle messages such as authorizations, financials, reversals, retrievals, fulfillments, and chargebacks are linked with the Life Cycle Support Indicator and Trace ID subfields.
41	MESSAGE_NUMBER	NUMBER	8		The transaction originator assigns the DE 71 (Message Number) to data messages in a file. DE 71 monitors the integrity and continuity of the files being exchanged.
42	TRANSACTION_DEST_INST_ID	VARCHAR2	11		Transaction destination institution.
43	TRANSACTION_ORIG_INST_ID	VARCHAR2	11		Transaction originator institution.
44	RECEIVING_INST_ID_CODE	VARCHAR2	11		Receiving institution.
45	ADDITIONAL_DATA_3	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is not available.
46	ADDITIONAL_DATA_4	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is not available.
47	ADDITIONAL_DATA_5	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is not available.

14.1.30 TRANSACTION_HIST_ADD_TEL_SUM

This table contains additional information related to Telephony Billing Summary.

The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ).

TRANSACTION_HIST.ADDENDUM_INDICATOR allows to know if a row in TRANSACTION_HIST_ADD_TEL_SUM is present for the initial transaction.(i.e transaction_hist.addendum_indicator is 'TL' which means PDS 0501, subelement 1 = 11 and subelement 2 = 000)

**Note**

For more information about the Mastercard mapping, refer to the TRANSACTION_HIST_MASTERCARD_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

14.1.30.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	MICROFILM_REF_NUMBER	CHAR	23		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate an assign a unique ARN for any transaction generated by the system for instance in an issuing context
2	MICROFILM_REF_SEQ	NUMBER	4		Sequence number. To guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and the second presentment have the same ARN, the sequence might be used to distinguish between the two transactions.
3	FUNCTION_CODE	CHAR	3		Specific purpose for a message
4	ACQUIRING_INST_ID	VARCHAR2	11		Transaction acquirer
5	FORWARDING_INST_ID	VARCHAR2	11		Identifies a message's forwarding institution. A forwarding institution is the institution in a transaction flow that sends a message forward from the originating institution.
6	ADDITIONAL_DATA	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service data for which a specific ISO data element is unavailable.
7	ORIGINATING_MSG_FORMAT	NUMBER	1		Message format in which the clearing system received a message.
8	TRANSACTION_DESCRIPTION	NUMBER	16		Contains information describing the type of addendum data that is presented.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
9	TOTAL_TAX_AMOUNT	CHAR	14		Total amount of sales tax or value added tax (VAT) on the total purchase amount.
10	TOTAL_TAX_COLLECTED_INDICATOR	CHAR	1		Total sales tax capture and reporting information such as whether sales tax was included in the purchase amount or if goods and services were not taxable.
11	USER_NAME	VARCHAR2	40		User name related to the telephony billing information
12	USER_ACCOUNT_NUMBER	VARCHAR2	40		User's account number related to the telephony billing information
13	USER_TELEPHONE_NUMBER	VARCHAR2	25		User's telephone number related to the telephony billing information.
14	BILLING_STAT_START_DATE	DATE	7		If present, subfield 1 (Statement Start Date) must be numeric and must be a valid date in the format YYMMDD
15	BILLING_STAT_END_DATE	DATE	7		If present, subfield 2 (Statement End Date) must be numeric and must be a valid date in the format YYMMDD
16	BILLING_EVENT_1	VARCHAR2	54		Contains information pertaining to the telephony billing event
17	BILLING_EVENT_2	VARCHAR2	54		Contains information pertaining to the telephony billing event.
18	BILLING_EVENT_3	VARCHAR2	54		Not used.
19	BILLING_EVENT_4	VARCHAR2	54		Not used.
20	BILLING_EVENT_5	VARCHAR2	54		Not used.
21	BILLING_EVENT_6	VARCHAR2	54		Not used.
22	BILLING_EVENT_7	VARCHAR2	54		Not used.
23	BILLING_EVENT_8	VARCHAR2	54		Not used.
24	BILLING_EVENT_9	VARCHAR2	54		Not used.
25	BILLING_EVENT_10	VARCHAR2	54		Not used.
26	BILLING_EVENT_11	VARCHAR2	54		Not used.
27	BILLING_EVENT_12	VARCHAR2	54		Not used.
28	BILLING_EVENT_13	VARCHAR2	54		Not used.
29	BILLING_EVENT_14	VARCHAR2	54		Not used.
30	BILLING_EVENT_15	VARCHAR2	54		Not used.
31	BILLING_EVENT_16	VARCHAR2	54		Not used.
32	BILLING_EVENT_17	VARCHAR2	54		Not used.
33	BILLING_EVENT_18	VARCHAR2	54		Not used.
34	BILLING_EVENT_19	VARCHAR2	54		Not used.
35	BILLING_EVENT_20	VARCHAR2	54		Not used.
36	LINE_ITEM_TOTAL_AMOUNT	CHAR	14		Total amount presented in the line item detail message.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
37	DETAIL_TAX_AMOUNT_1	VARCHAR2	46		Additional tax information such as tax rate, tax amounts, and tax type.
38	DETAIL_TAX_AMOUNT_2	VARCHAR2	46		Additional tax information such as tax rate, tax amounts, and tax type.
39	DETAIL_TAX_AMOUNT_3	VARCHAR2	46		Additional tax information such as tax rate, tax amounts, and tax type.
40	DETAIL_TAX_AMOUNT_4	VARCHAR2	46		Tax amount, tax rate, tax type applied, and acceptor tax ID
41	DETAIL_TAX_AMOUNT_5	VARCHAR2	46		Tax amount, tax rate, tax type applied, and acceptor tax ID.
42	DETAIL_TAX_AMOUNT_6	VARCHAR2	46		Tax amount, tax rate, tax type applied, and acceptor tax ID.
43	ADDITIONAL_DATA_2	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is unavailable.
44	TRANSACTION_LIFE_CYCLE_ID	VARCHAR2	20		Contains subfields that allow for transaction life cycle control. All life cycle messages such as authorizations, financials, reversals, retrievals, fulfillments, and chargebacks are linked with the Life Cycle Support Indicator and Trace ID subfields.
45	MESSAGE_NUMBER	NUMBER	8		The transaction originator assigns the DE 71 (Message Number) to data messages in a file. DE 71 monitors the integrity and continuity of the files being exchanged.
46	TRANSACTION_DEST_INST_ID	VARCHAR2	11		Transaction destination institution
47	TRANSACTION_ORIG_INST_ID	VARCHAR2	11		Transaction originator institution
48	RECEIVING_INST_ID_CODE	VARCHAR2	11		Receiving institution
49	ADDITIONAL_DATA_3	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is not available.
50	ADDITIONAL_DATA_4	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is not available.
51	ADDITIONAL_DATA_5	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is not available.

14.1.31 TRANSACTION_HIST_ADD_TEL_DT

This table contains additional information related to Telephony Billing Detail.

The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ).

TRANSACTION_HIST.ADDENDUM_INDICATOR allows to know if a row in TRANSACTION_HIST_ADD_TEL_DT is present for the initial transaction.(i.e transaction_hist.addendum_indicator is 'TD' (**which means PDS 0501, subelement 1 = 11 and subelement 2 = 001**))

**Note**

For more information about the Mastercard mapping, refer to the TRANSACTION_HIST_MASTERCARD_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

14.1.31.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	MICROFILM_REF_NUMBER	CHAR	23		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate an assign a unique ARN for any transaction generated by the system for instance in an issuing context
2	MICROFILM_REF_SEQ	NUMBER	4		Sequence number. To guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and the second presentment have the same ARN, the sequence might be used to distinguish between the two transactions.
3	FUNCTION_CODE	CHAR	3		Specific purpose for a message.
4	ACQUIRING_INST_ID	VARCHAR2	11		Transaction acquirer.
5	FORWARDING_INST_ID	VARCHAR2	11		Identifies a message's forwarding institution. A forwarding institution is the institution in a transaction flow that sends a message forward from the originating institution.
6	ADDITIONAL_DATA	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service data for which a specific ISO data element is unavailable.
7	ORIGINATING_MSG_FORMAT	NUMBER	1		Message format in which the clearing system received a message.
8	TRANSACTION_DESCRIPTION	NUMBER	16		Contains information describing the type of addendum data that is presented.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
9	TOTAL_TAX_AMOUNT	CHAR	14		Total amount of sales tax or value added tax (VAT) on the total purchase amount.
10	CALL_DATE	DATE	7		Date of the call related to the telephony billing detail
11	CALL_TIME	CHAR	6		Time of the call related to the telephony billing detail
12	CALL_TO_CITY	CHAR	40		if present, subfield 1 (Call To City) must contain the city to which the call was made. It must be left-justified with trailing spaces and cannot contain all low values, all high values, all spaces, or all zeros.
13	CALL_TO_STATEPROVINCE	CHAR	40		if present, subfield 2 (Call To State/Province) must contain the state/province to which the call was made. It must be left-justified with trailing spaces and cannot contain all low values, all high values, all spaces, or all zeros.
14	CALL_TO_COUNTRYCODE	CHAR	40		if present, subfield 3 (Call To Country) must contain the country to which the call was made. It must be left-justified with trailing spaces and cannot contain all low values, all high values, all spaces, or all zeros.
15	CALL_TO_PHONENUM	CHAR	25		if present, subfield 4 (Call To Number) must contain the phone number called. It must be left-justified with trailing spaces and cannot contain all low values, all high values, all spaces, or all zeros. For transactions acquired in the U.S. or Canada region, subfield 4 must contain a 10-position phone number, left-justified with trailing spaces. The first three positions must be numeric.
16	CALL_TO_TYPE	CHAR	1		If present, subfield 5 (Call To Type) must contain one of the values listed in this table.
17	CALL_DURATION	CHAR	6		Duration of the call related to the telephony billing detail.
18	CALL_TIME_PERIOD	CHAR	2		Period (such as peak or off-peak) of the call related to the telephony billing detail.
19	CALL_FROM_CITY	CHAR	40		City from which the call originated. It must be left-justified with trailing spaces and cannot contain all low values, all high values, all spaces, or all zeros.
20	CALL_FROM_STATEPROVINCE	CHAR	40		If present, subfield 2 (Call From State/Province) must contain the state/province from which the call originated. It must be left-justified with trailing spaces and cannot contain all low values, all high values, all spaces, or all zeros.
21	CALL_FROM_COUNTRYCODE	CHAR	40		If present, subfield 3 (Call From Country) must contain the country from

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					which the call originated. It must be left-justified with trailing spaces and cannot contain all low values, all high values, all spaces, or all zeros.
22	CALL_FROM_PHONENUM	CHAR	45		If present, subfield 4 (Call From Number) must contain the phone number from which the call was originated. It must be left-justified with trailing spaces, and cannot contain all low values, all high values, all spaces, or all zeros. For transactions acquired in the U.S. or Canada region, subfield 4 must contain a 10-position phone number, left-justified with trailing spaces. The first three positions must be numeric.
23	CALL_USAGE_AMOUNT	CHAR	14		Call usage amount information pertaining to the telephony billing event.
24	CALL_LONG_DISTANCE_AMOUNT	CHAR	14		Long distance amount information pertaining to the telephony billing event.
25	CALL_CONNECT_AMOUNT	CHAR	14		Call connect amount information pertaining to the telephony billing event.
26	OTHER_DESCRIPTION	VARCHAR2	60		Additional descriptive information related to the telephony billing information.
27	MISCELLANEOUS_EXPENSE_1	VARCHAR2	54		Description and an amount for miscellaneous expenses - 1
28	MISCELLANEOUS_EXPENSE_2	VARCHAR2	54		Description and an amount for miscellaneous expenses - 2
29	MISCELLANEOUS_EXPENSE_3	VARCHAR2	54		Description and an amount for miscellaneous expenses - 3
30	MISCELLANEOUS_EXPENSE_4	VARCHAR2	54		Description and an amount for miscellaneous expenses - 4
31	LINE_ITEM_TOTAL_AMOUNT	CHAR	14		Total amount presented in the line item detail message.
32	ADDITIONAL_DATA_2	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is unavailable.
33	TRANSACTION_LIFE_CYCLE_ID	VARCHAR2	20		Contains subfields that allow for transaction life cycle control. All life cycle messages such as authorizations, financials, reversals, retrievals, fulfillments, and chargebacks are linked with the Life Cycle Support Indicator and Trace ID subfields.
34	MESSAGE_NUMBER	NUMBER	8		The transaction originator assigns the DE 71 (Message Number) to data messages in a file. DE 71 monitors the integrity and continuity of the files being exchanged.
35	TRANSACTION_DEST_INST_ID	VARCHAR2	11		Transaction destination institution

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
36	TRANSACTION_ORIG_INST_ID	VARCHAR2	11		Transaction originator institution
37	RECEIVING_INST_ID_CODE	VARCHAR2	11		Receiving institution
38	ADDITIONAL_DATA_3	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is not available.
39	ADDITIONAL_DATA_4	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is not available.
40	ADDITIONAL_DATA_5	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is not available.

14.1.32 TRANSACTION_HIST_ADD_CL

This table contains additional information related to Corporate Detail, Corporate Line Item Detail transactions.

The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ).

TRANSACTION_HIST.ADDENDUM_INDICATOR allows to know if a row in TRANSACTION_HIST_ADD_CL is present for the initial transaction.(i.e transaction_hist.addendum_indicator is 'CL' which means PDS 0501, subelement 1 = 98 and subelement 2 = 950)



Note

For more information about the Mastercard mapping, refer to the TRANSACTION_HIST_MASTERCARD_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

14.1.32.1 Columns description

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
1	MICROFILM_REF_NUMBER	CHAR	23		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate an assign a unique ARN for any transaction generated by the system for instance in an issuing context.
2	MICROFILM_REF_SEQ	NUMBER	4		Sequence number. To guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
					the second presentment have the same ARN, the sequence might be used to distinguish between the two transactions.
3	FUNCTION_CODE	CHAR	3		Specific purpose for a message
4	ACQUIRING_INST_ID	VARCHAR2	11		Transaction acquirer.
5	FORWARDING_INST_ID	VARCHAR2	11		Message's forwarding institution. A forwarding institution is the institution in a transaction flow that sends a message forward from the originating institution.
6	ADDITIONAL_DATA	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service data for which a specific ISO data element is unavailable.
7	ORIGINATING_MSG_FORMAT	NUMBER	1		Message format in which the clearing system received a message.
8	TRANSACTION_DESCRIPTION	NUMBER	16		Information describing the type of addendum data that is presented.
9	CUSTOMER_CODE	VARCHAR2	25		Code that the cardholder supplied to the acceptor.
10	TOTAL_TAX_COLLECTED_INDICATOR	CHAR	1		Total sales tax capture and reporting information such as whether sales tax was included in the purchase amount or if goods and services were not taxable.
11	TOTAL_TAX_AMOUNT	CHAR	14		Total amount of sales tax or value added tax (VAT) on the total purchase amount.
12	LINE_ITEM_DATE	DATE	7		Purchase date of the line item referenced in the associated Corporate Card Line Item Detail.
13	SHIP_DATE	DATE	7		Date the merchandise was shipped to the destination.
14	ORDER_DATE	DATE	7		Date the item was ordered.
15	COMMODITY_CODE	VARCHAR2	15		Identifier assigned by the acceptor that best categorizes the items being purchased in a standardized commodity group
16	PRODUCT_CODE	VARCHAR2	15		Product code associated with the card. This code must be defined in the 'CARD_PRODUCT' table
17	ITEM_DESCRIPTION	VARCHAR2	35		Description of the individual item purchased.
18	ITEM_QUANTITY	CHAR	13		Quantity of the item purchased and the associated decimal point location.
19	ITEM_UNIT_OF_MEASURE	VARCHAR2	12		Line item unit of measurement code.
20	UNIT_PRICE	CHAR	13		Price for one unit of the product.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
21	EXTENDED_ITEM_AMOUNT	CHAR	14		Individual item amount that is normally calculated as price multiplied by quantity.
22	ITEM_DISCOUNT	CHAR	20		Item discount indicator and amount.
23	TAX_EXEMPT_INDICATOR	CHAR	1		Indicator noting whether the goods or services were tax-exempt or tax was not collected.
24	UNIQUE_VAT_INVOICE_REFNUM	VARCHAR2	17		Additional subelement that is used to identify the value-added tax (VAT) invoice or tax receipt
25	LINE_ITEM_TOTAL_AMOUNT	CHAR	14		Total amount presented in the line item detail message
26	DETAIL_TAX_AMOUNT_1	VARCHAR2	46		Additional tax information such as tax rate, tax amounts, and tax type.
27	DETAIL_TAX_AMOUNT_2	VARCHAR2	46		Additional tax information such as tax rate, tax amounts, and tax type.
28	DETAIL_TAX_AMOUNT_3	VARCHAR2	46		Additional tax information such as tax rate, tax amounts, and tax type.
29	DETAIL_TAX_AMOUNT_4	VARCHAR2	46		Tax amount, tax rate, tax type applied, and acceptor tax ID.
30	DETAIL_TAX_AMOUNT_5	VARCHAR2	46		Tax amount, tax rate, tax type applied, and acceptor tax ID.
31	DETAIL_TAX_AMOUNT_6	VARCHAR2	46		Tax amount, tax rate, tax type applied, and acceptor tax ID.
32	ADDITIONAL_DATA_2	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is unavailable.
33	TRANSACTION_LIFE_CYCLE_ID	VARCHAR2	20		Contains subfields that allow for transaction life cycle control. All life cycle messages such as authorizations, financials, reversals, retrievals, fulfillments, and chargebacks are linked with the Life Cycle Support Indicator and Trace ID subfields.
34	MESSAGE_NUMBER	NUMBER	8		The transaction originator assigns the DE 71 (Message Number) to data messages in a file. DE 71 monitors the integrity and continuity of the files being exchanged.
35	TRANSACTION_DEST_INST_ID	VARCHAR2	11		Transaction destination institution.
36	TRANSACTION_ORIG_INST_ID	VARCHAR2	11		Transaction originator institution.
37	RECEIVING_INST_ID_CODE	VARCHAR2	11		Receiving institution
38	ADDITIONAL_DATA_3	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is not available.

Seq.	Column Name	Data Type	Len.	Sc.	Column Description
39	ADDITIONAL_DATA_4	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is not available.
40	ADDITIONAL_DATA_5	VARCHAR2	999		Contains one or more PDSs that may be required in a message to provide additional clearing system-related, program-related, or service-related data for which a specific ISO data element is not available.

14.1.33 TRANSACTION_HIST_ADD_CB2C

This table contains additional information related to CB transactions.

The link with the initial transaction is done with the couple (MICROFILM_REF_NUMBER, MICROFILM_REF_SEQ).



Note

- For more information about the CB2C mapping, refer to the TRANSACTION_HIST_CB2C_MAPPING.xls file attached to this document.

Each column of this table is described in detail in the next section.

14.1.33.1 Columns description

Seq.	Column Name	Data Type	Len	Sc	Column Description
1	MICROFILM_REF_NUMBER	VARCHAR2	92		The acquirer reference number (ARN) that is a 23-digit identification number assigned by the acquirer to the transaction. The system may generate and assign a unique ARN for any transaction generated by the system for instance in an issuing context.
2	MICROFILM_REF_SEQ	NUMBER	22	0	Sequence number. To guarantee the uniqueness of the entry in the table, the sequence number is used for that purpose. For instance, in case of a second presentment, and since both transactions; the presentment and the second presentment have the same ARN, the sequence might be used to distinguish between the two transactions.
3	DATE_REGLEMENT	VARCHAR2	24		Requested settlement date
4	ID_BANK_ACQUIREUR	VARCHAR2	28		Acquirer bank ID
5	PROCESSING_CODE	VARCHAR2	24		Code indicating type of operation.
6	ENV_TECHNIQUE_TRX	VARCHAR2	8		Data defining the regulatory and technical environment of the transaction.
7	ID_COMISSION_INTERCHANGE	VARCHAR2	8		Value determining the formula for calculating the interchange paid between banks to be applied to the

Seq.	Column Name	Data Type	Len	Sc	Column Description
					gross amount of the transaction in order to determine the amount cleared.
8	LONGUER_CARTE	VARCHAR2	8		Code indicating the length (number of characters) of the card number.
9	TYPE_FACTURE	VARCHAR2	4		Code identifying the procedure used in certain activities for payment card acceptance.
10	CODE_FORCAGE_TRX	VARCHAR2	4		Information indicating that a transaction was forced by the acceptor following an authorization request or that the authorization number was entered manually.
11	NUM_PRE_AUTH	VARCHAR2	48		Reference number uniquely assigned to a pre-authorized invoice throughout its processing (authorization request, supporting documents related to this invoice, ...).
12	NUM_TRX_SYST_ACC	VARCHAR2	24		Contains the audit number of the initial transaction for authorized transactions.
13	CALCUL_CERTIF	NUMBER	22	0	Amount used for certificate calculation.
14	USAGE_PRIVATIF	VARCHAR2	120		Private data field reserved for issuers in initial payment and withdrawal operations" This refers to a data field that only card issuers can access or use during initial payment transactions and withdrawals
15	TYPE_SITE	VARCHAR2	32		Data that helps identify the sales unit. It characterizes the site and type of location where the transaction takes place.
16	TYPE_AUTH_ECOM	VARCHAR2	8		The "E-commerce Authentication Type code" characterizes the security protocol implemented during a remote payment transaction carried out via e-commerce.
17	TAG_SANS_CONTACT	VARCHAR2	16		Contains the tag of the contactless device.
18	DISPO_SANS_CONTACT	VARCHAR2	8		Contains the Form Factor extracted from the data received from the chip by the terminal.
19	TYPE_TRANSFERT	VARCHAR2	8		Data allowing differentiation of fund transfer types.
20	ID_WALLET	VARCHAR2	24		Digital wallet identification.
21	ID_MOBILE_APP	VARCHAR2	8		Identification of a mobile payment solution
22	APPLICATION_CRYPTOGAM	VARCHAR2	64		Cryptogram returned by the chip card in response to the GENERATE AC command (TC, ARQC, AAC)
23	TYPE_AUTH_3DS	VARCHAR2	8		Indicates the type of 3DS authentication and thus differentiates between an authenticated transaction and a frictionless transaction.

Seq.	Column Name	Data Type	Len	Sc	Column Description
24	DESC_AUTH_3DS	VARCHAR2	4		The merchant preference in a 3DS transaction, it indicates whether the merchant prefers Strong authentication (SCA – Strong Customer Authentication) or a frictionless experience without additional authentication.
25	VERSION_PROTOCOL_3DS	VARCHAR2	4		the specific version of the 3D Secure protocol used in a transaction.
26	ID_REGROUPEMENT	VARCHAR2	60		A unique reference used to group related transactions, typically for tracking or reporting purposes.
27	DATE_AUTHENTIFICATION	VARCHAR2	56		Date and time of authentication. Corresponds to the EMVCo data 'purchaseDate'.
28	DESC_PAIEMENT	VARCHAR2	8		Identification of payment cases
29	MOTIF_EXEMPTION	VARCHAR2	24		Indicates the case(s) of exemption from strong customer authentication for the cardholder specified in the transaction.
30	ID_TRX_DEBIT	VARCHAR2	60		A unique reference associated with a debit transaction that is linked to a credit transaction in a remote payment (VAD).
31	DS_TRANSACTION_ID	VARCHAR2	144		Unique transaction identifier assigned by the Directory Server
32	INITIAL_OP_MINOS_HEADER	VARCHAR2	312		System zone of the initial transaction
33	INITIAL_OP	VARCHAR2	3008		Bank zone of the initial transaction
34	ZONE_SYSTEME_OP_ANNULATION	VARCHAR2	312		System zone of the cancellation.
35	ZONE_BANQUE_OP_ANNULATION	VARCHAR2	3008		Bank zone of the cancellation
36	USER_CREATE	VARCHAR2	15		ID of the user when record created.
37	DATE_CREATE	DATE			Record creation date and time.
38	USER_MODIF	VARCHAR2	15		ID of the last user who modified the record.
39	DATE_MODIF	DATE			Date and time when the last record modification occurred.

15 Appendix - Table list

Table Link
ACCOUNT_TYPE_LIST
ACTION_LIST
ADDRESS_LIST
ADDRESSES_TYPE_LIST
APPLICATION_STATUS_REASON
BANK
BRANCH
CARD
CARD_FEES
CARD_PRODUCT
CARD_TYPE
CATALOGUE_PACK
CATALOGUE_PRODUCT
CITY
CLIENT
CLIENT_ACTIVITY_SET
CLIENT_DOCUMENT_LIST
CONTROL_VERIFICATION_FLAGS
CORP_HIERARCHY_PARAM
CORPORATE
COUNTRY
CR_MIN_DUE_SCHEDULE_INDEX
CR_TRANSACTION_PARAMETER
CUP_BIN
CURRENCY_TABLE
CUSTOMER_SEGMENT
CYCLE_CUTOFF_PARAMETERS
DELIVERY_METHOD
DELIVERY_SUPPLIER_CODE
DOCUMENT_LIST
EMBOSSING_CARD_MATERIALS
EMBOSSING_TAG_REF

Table Link
FUEL_PROVIDER_LIST
FUEL_TYPE
ICC_APPLICATION_PAR_INDEX
ISS_TRANSACTION_FEES_INDEX
LANGUAGE_LIST
LOAN_PROGRAM
LOYALTY_GIFT
LOYALTY_PROGRAM
M_EDUCATION_LIST
MCC
MCC_RANGE
MCI_MPE_ICA_BIN
NETWORK
OWNER_LIST
P7_LIMITS_SETUP_TOTAL
P7_SERVICES_SETUP
PARTNER_BRAND
PIN_MAILER_FORMAT
PLASTIC_LIST
PRIORITY_INDICATOR
PROMOTION_LIST
QUEUE
REGION
REPLACEMENT_REASON_CODE
RESOURCES
SENDING_MODE_LIST
SHADOW_ACCOUNT
SHADOW_ACCOUNT_STATUS
SOCIOPROF_LIST
STATEMENT_PARAMETERS
STATUS_LIST
STATUS_REASON_LIST
STOP_LIST_REASON_CODE
TERMINAL_POS
TITLE_LIST
TRANS_REASON_CODE

Table Link
TRANSACTIONS_DEFINITION
VEHICLE_BRAND_LIST
VEHICLE_CLASS_LIST
VIP_LIST
VISA_BIN
ZIP_CODE

16 Document history

Document version	Status	Date	Modification
0.1	Release	08/06/2020	Initial document
0.2	Draft	10/07/2020	Add database diagrams (MCD) sections
0.3	Draft	24/07/2020	Update MCD diagrams
0.4	Draft	10/11/2020	Boarding and Embossing sections added
0.5	Draft	18/02/2021	Update the document structure: For each tables family a concerned mcd, As in the following example: - Payment instrument - Conceptual data model - Cardholder management (CDM) - Operation tables - Parameter tables.
0.6	Draft	20/05/2021	Add new Payment instrument tables: Operation: - CARDBATCH - PWC_TOKEN_VAULT Parameter: - BATCH_RENEWAL_CRITERIA - CARD_FEES_ADVANCED - CARD_GEN_COUNTERS - ICC_APPLICATION_PAR_INDEX - PCRD_CARD_PROD_PARAM - PWC_TOKEN_FORMAT - PWC_TOKEN_INTERFACE_SETUP - STOP_LIST_FEES_PARAM - STOP_RENEWAL_CRITERIA
0.7	Draft	25/05/2021	Add new Payment instrument tables: Operation: - CARD_CONTRACT - CARD_PRODUCT_CHANGE Parameter: - CARD_PERMITTED_PROD_CHAN - ISS_POSTING_RULES - ISS_TRANSACTION_FEES_PARAM - MARKUP_INDEX - MULTI_RANGE_PRODUCTS - PRODUCT_EMV_TAGS

Document version	Status	Date	Modification
0.8	Draft	01/06/2021	Merge the corporate section with the customer section and keep the name customer for both sections. Add new Customer tables: Parameter: - FUEL_TYPE - FUEL_PROVIDER_LIST - DOCUMENT_LIST - CUSTOMER_SEGMENT - OWNER_LIST - SOCIOPROF_LIST - PROMOTION_LIST - VEHICLE_BRAND_LIST - PRIORITY_INDICATOR Operation: - ELIGIBLE_PACKS_CORP
0.9	Draft	07/06/2021	Addition of Boarding tables : Parameters: - APPLICATION_STATUS_REASON - APPLICATION_STATUS_REASON - APPLICATION_TYPE - CATALOGUE_PACK - CATALOGUE_PACK_ELIGIBILITY
0.10	Draft	20/09/2021	Addition of an Appendix
0.11	Release	02/11/2021	Addition of new transaction tables: - CR_TRANSACTION - CR_TRANSACTION_HIST - CR_SETTLEMENT_TRANSACTION
0.12	Draft	04/01/2022	Addition of new Catalogue tables: Parameter tables: - CATALOGUE_PRODUCT - CATALOGUE_DEFAULTING - CATALOGUE_IDENTIFIERS - CATALOGUE_INJECTORS - CATALOGUE_MAPPING - CATALOGUE_NEGOC_DEFAULTING - CATALOGUE_NEGOC_INJECTORS - CATALOGUE_NEGOC_MAPPING - CATALOGUE_PRODUCT_TEMP - CATALOGUE_INJECTED_PARAM - CATALOGUE_SEQ Operation tables: - CATALOGUE_STATUS_TRAIL

Document version	Status	Date	Modification
			- CATALOGUE_TRACES - CATALOGUE_UPGRADE - CATALOGUE_UPGRADE_INSTRUC - CATALOGUE_UPGRADE_TARGET
0.13	Draft	10/01/2022	Addition of new embossing tables: Parameter tables: - DELIVERY_METHOD - DELIVERY_SUPPLIER_CODE - EMB_CARD_CARRIER - EMB_CHIP_APPL_PARAM - EMB_CHIP_PROFILE_PARAM - EMB_DELIVERY_CENTER - EMB_LETTER_LINE - EMB_LETTER_LINE_COMP - EMB_PLASTIC_LAYOUT_PARAM - EMB_PRINT_LINE_COMP - EMB_TRACK_COMPOSITION - EMB_TRACK_LAYOUT - EMBOSSING_ADDRESSES_PARA - EMBOSSING_ARTICLES - EMBOSSING_ATTACHMENT - EMBOSSING_BARCODE - EMBOSSING_CARD_DATA - EMBOSSING_CARD_MATERIALS - EMBOSSING_ERROR - EMBOSSING_LOGO - EMBOSSING_SPLITTING_PARAM - EMBOSSING_STICKER - EMBOSSING_TAG - STK_INVENTORY_ITEM_DESC - STK_INVENTORY_ITEM_RULE Operation tables> - EMB_RECYCLING - EMBOSSING_ERROR_CARD - STK_INVENTORY_MAINTENANCE
0.14	Draft	21/03/2022	Addition of new Boarding tables: Operation tables: - BOARD_COM_SETUP - BOARD_CR_SCHEDULE Parameter tables: - CATALOGUE_PACK_ELIG_ACTIV - CATALOGUE_PACK_ELIG_BRANC - CATALOGUE_PACK_ELIG_GENDE - CATALOGUE_PACK_ELIG_OWNE - CATALOGUE_PACK_ELIG_PROF - CATALOGUE_PACK_ELIG_SEGME - CATALOGUE_PACK_ELIG_VIP - CATALOGUE_PACK_PRODUCTS

Document version	Status	Date	Modification
			Addition of new Payment instrument tables: Operation tables: • LOST_STOLEN_CASE_DECLARAT • LOST_STOLEN_CASE_DECLAR_H • NEGOCIATED_CARD_FEES • NEGOC_MARKUP_CALCUL • NEGOC_MARKUP_ELLIGIBLE_CU Addition of new Financial account table: Parameter tables: • CR_TRANSACTION_PARAMETER Addition of new Customer table: Parameter tables: • M_EDUCATION_LIST Addition of new Embossing tables: Parameter tables: • EMB_CARD_CARRIER • EMB_DELIVERY_CENTER • EMB_PLASTIC_LAYOUT_PARAM • EMBOSSING_ARTICLES • EMBOSSING_ATTACHMENT • EMBOSSING_BARCODE • EMBOSSING_CARD_MATERIALS • EMBOSSING_LOGO • EMBOSSING_STICKER • EMBOSSING_TAG_REF • EMB_CARD_CARRIER Addition of new Financial account tables: Operation tables: • CR_TRANSACTION • CR_TRANSACTION_HIST
0.15	Draft	08/04/2022	Update "CR_TERM" table: "CUM_BON_CASH_INTEREST"; "CUM_BON_PUR_INTEREST" ; "CUM_BON_OTH_INTEREST", "CUM_BON_INTEREST" fields are not used in V3.5.
0.16	Draft	16/08/2022	Update the following tables: • ISS_POSTING_RULES Addition of new Payment Instrument table:

Document version	Status	Date	Modification
			Operation tables: NEGOC_CORP_POSTING_RULES
0.17	Draft	29/09/2022	Addition of new Catalogue table: Parameter tables: - CHANNEL - CHANNEL_TYPE_LIST
0.18	Draft	05/10/2022	Issuer general parameters section added
0.19	Draft	10/03/2023	Addition of CARD_RANGE_KEY table.
0.20	Review	27/05/2023	Review document: Update columns descriptions and other details
0.21	Draft	20/07/2023	Addition of new V3.5.5 columns in SHADOW_ACCOUNT_ACTIVITY; SHADOW_ACCOUNT_ACTIVITY_DF And a new table SHADOW_ACCOUNT_ACTIVITY_MVT.
0.22	Review	19/09/2023	Review document.
0.23	Draft	26/02/2024	Add new tables: - BOARD_COM_CHANNELS - BOARD_COM_EVENTS - BOARD_COM_SETUP - BOARDING_LOAN_APP - BOARDING_CORPORATE_APP - CARD_BOARDING - BOARD_CARD_LINKED_PROD
0.24	Release	16/08/2024	Addition of the following table: TRANSACTION_HIST_CARD
0.25	Release	25/12/2024	Addition of transaction hist visa mapping
0.26	Release	05/03/2025	Addition of TRANSACTION_HIST_ADD_CB2C