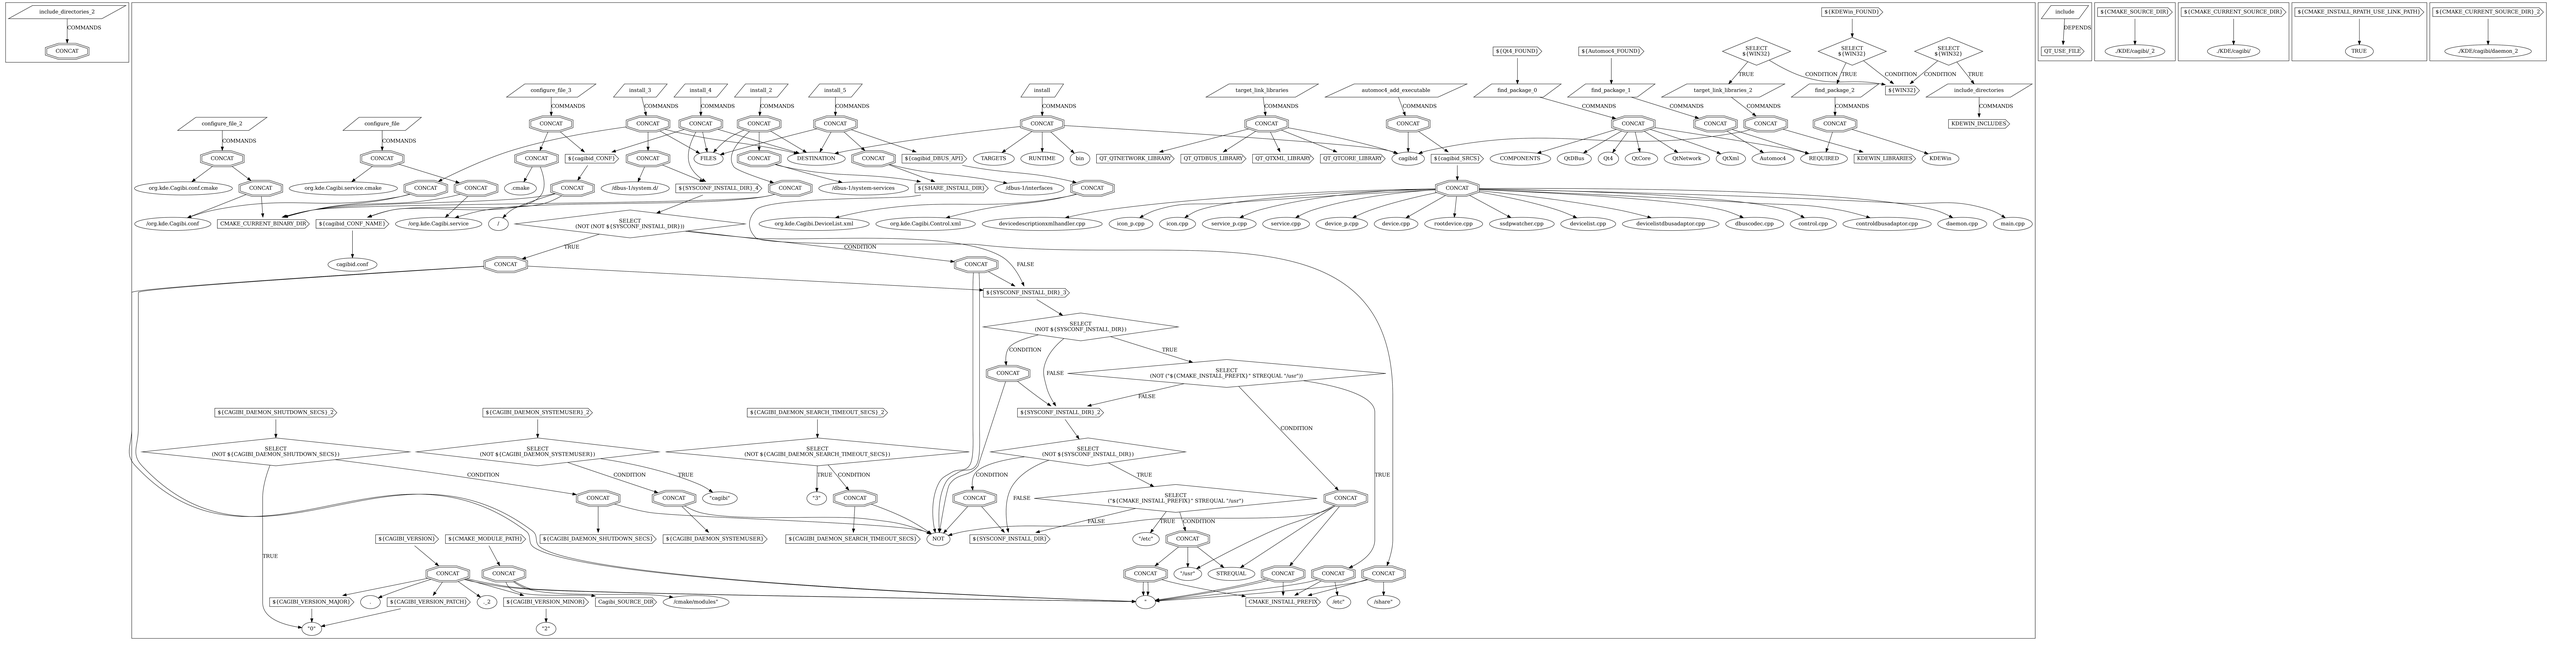
include_directories_2
COMMANDS
CONCAT
configure_file_3
COMMANDS
install_3
COMMANDS
install_4
COMMANDS
install_2
COMMANDS
install_5
COMMANDS
install
COMMANDS
target_link_libraries
COMMANDS
automoc4_add_executable
COMMANDS
${Qt4_FOUND}
find_package_0
${Automoc4_FOUND}
find_package_1
COMMANDS
SELECT
${WIN32}
TRUE
target_link_libraries_2
COMMANDS
SELECT
${WIN32}
CONDITION
TRUE
find_package_2
COMMANDS
${KDEWin_FOUND}
SELECT
${WIN32}
CONDITION
TRUE
include_directories
COMMANDS
KDEWIN_INCLUDES
configure_file_2
COMMANDS
CONCAT
org.kde.Cagibi.conf.cmake
CONCAT
/org.kde.Cagibi.conf
CMAKE_CURRENT_BINARY_DIR
configure_file
COMMANDS
CONCAT
org.kde.Cagibi.service.cmake
CONCAT
/org.kde.Cagibi.service
CONCAT
/
CONCAT
${cagibid_CONF}
.cmake
CONCAT
${cagibid_CONF_NAME}
cagibid.conf
CONCAT
/dbus-1/system.d/
CONCAT
/dbus-1/system-services
CONCAT
/dbus-1/interfaces
CONCAT
FILES
CONCAT
${SYSCONF_INSTALL_DIR}_4
CONCAT
DESTINATION
CONCAT
${SHARE_INSTALL_DIR}
CONCAT
${cagibid_DBUS_API}
TARGETS
RUNTIME
bin
QT_QTNETWORK_LIBRARY
QT_QTDBUS_LIBRARY
QT_QTXML_LIBRARY
QT_QTCORE_LIBRARY
cagibid
${cagibid_SRCS}
COMPONENTS
QDBus
Qt4
QtCore
QtNetwork
QXml
Automoc4
REQUIRED
KDEWIN_LIBRARIES
KDEWin
CONCAT
/org.kde.Cagibi.DeviceList.xml
org.kde.Cagibi.Control.xml
devicedescriptionxmlhandler.cpp
icon_p.cpp
icon.cpp
service_p.cpp
service.cpp
device_p.cpp
device.cpp
rootdevice.cpp
sndpwatcher.cpp
devicelist.cpp
devicelistdbusadaptor.cpp
dbuscodec.cpp
control.cpp
controldbusadaptor.cpp
daemon.cpp
main.cpp
SELECT
(NOT (NOT ${SYSCONF_INSTALL_DIR}))
TRUE
CONDITION
CONCAT
FALSE
${SYSCONF_INSTALL_DIR}_3
SELECT
(NOT ${SYSCONF_INSTALL_DIR})
CONDITION
TRUE
CONCAT
FALSE
SELECT
(NOT ("${CMAKE_INSTALL_PREFIX}" STREQUAL "/usr"))
FALSE
${SYSCONF_INSTALL_DIR}_2
CONDITION
${CAGIBI_DAEMON_SHUTDOWN_SECS}_2
SELECT
(NOT ${CAGIBI_DAEMON_SHUTDOWN_SECS})
TRUE
${CAGIBI_DAEMON_SYSTEMUSER}_2
SELECT
(NOT ${CAGIBI_DAEMON_SYSTEMUSER})
CONDITION
TRUE
${CAGIBI_DAEMON_SEARCH_TIMEOUT_SECS}_2
SELECT
(NOT ${CAGIBI_DAEMON_SEARCH_TIMEOUT_SECS})
TRUE
CONDITION
SELECT
(NOT ${SYSCONF_INSTALL_DIR})
CONDITION
TRUE
CONCAT
CONCAT
"cagibi"
"3"
CONCAT
CONCAT
FALSE
SELECT
("${CMAKE_INSTALL_PREFIX}" STREQUAL "/usr")
CONCAT
TRUE
FALSE
${CAGIBI_DAEMON_SHUTDOWN_SECS}
${CAGIBI_DAEMON_SYSTEMUSER}
${CAGIBI_DAEMON_SEARCH_TIMEOUT_SECS}
NOT
${SYSCONF_INSTALL_DIR}
"/etc"
CONCAT
TRUE
CONDITION
CONCAT
"/usr"
STREQUAL
CONCAT
CONCAT
CONCAT
"/"
CMAKE_INSTALL_PREFIX
"/etc"
/share"
${CAGIBI_VERSION}
${CMAKE_MODULE_PATH}
CONCAT
CONCAT
${CAGIBI_VERSION_MAJOR}
.
${CAGIBI_VERSION_PATCH}
_2
${CAGIBI_VERSION_MINOR}
Cagibi_SOURCE_DIR
/cmake/modules"
"0"
"2"
include
DEPENDS
QT_USE_FILE
${CMAKE_SOURCE_DIR}
./KDE/cagibi_2
${CMAKE_CURRENT_SOURCE_DIR}
./KDE/cagibi
${CMAKE_INSTALL_RPATH_USE_LINK_PATH}
TRUE
${CMAKE_CURRENT_SOURCE_DIR}_2
./KDE/cagibidaemon_2