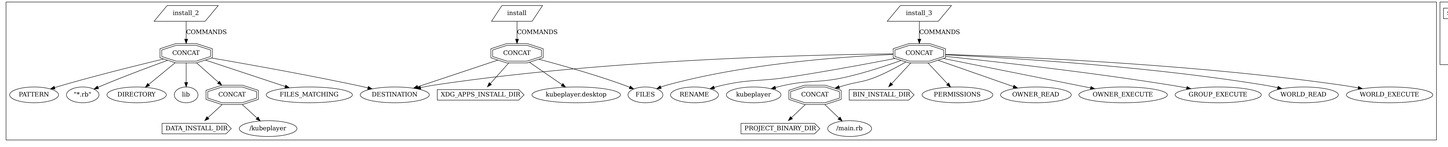
install_2
COMMANDS
CONCAT
PATTERN
"*.rb"
DIRECTORY
lib
CONCAT
FILES_MATCHING
DESTINATION
DATA_INSTALL_DIR
/kubeplayer
install
COMMANDS
CONCAT
XDG_APPS_INSTALL_DIR
kubeplayer.desktop
install_3
COMMANDS
CONCAT
FILES
RENAME
kubeplayer
CONCAT
BIN_INSTALL_DIR
PERMISSIONS
OWNER_READ
OWNER_EXECUTE
GROUP_EXECUTE
WORLD_READ
WORLD_EXECUTE
PROJECT_BINARY_DIR
/main.rb

${CMAKE_CURRENT_SOURCE_DIR}
./KDE/kubeplayer/

${CMAKE_SOURCE_DIR}
./KDE/kubeplayer/_2

${KDE4_FOUND}
find_package_0
COMMANDS
CONCAT
KDE4
REQUIRED


configure_file
COMMANDS
CONCAT
main.rb
main.rb_2

kde4_install_icons
COMMANDS
ICON_INSTALL_DIR


${CMAKE_CURRENT_SOURCE_DIR}_3
./KDE/kubeplayer/data_2


${CMAKE_CURRENT_SOURCE_DIR}_2
./KDE/kubeplayer/lib_2

include
DEPENDS
KDE4Defaults

${CMAKE_CURRENT_SOURCE_DIR}_4
./KDE/kubeplayer/data/icons_2