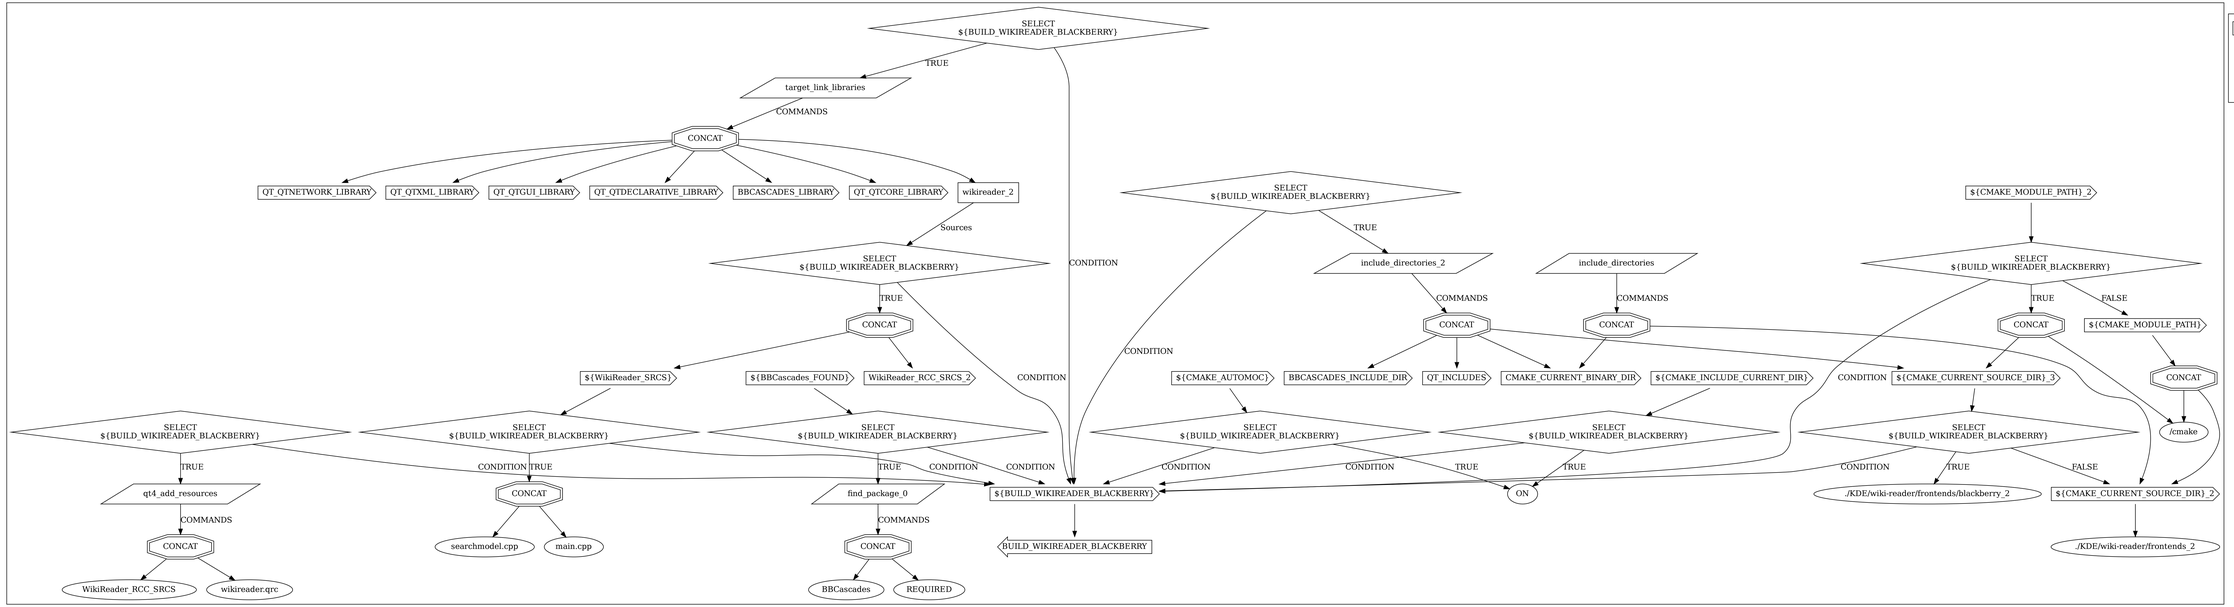
SELECT
${BUILD_WIKIREADER_BLACKBERRY}
TRUE
target_link_libraries
COMMANDS
CONCAT
QT_QTNETWORK_LIBRARY
QT_QTXML_LIBRARY
QT_QTGUI_LIBRARY
QT_QTDECLARATIVE_LIBRARY
BBCASCADES_LIBRARY
QT_QTCORE_LIBRARY
wikireader_2
Sources
SELECT
${BUILD_WIKIREADER_BLACKBERRY}
TRUE
CONCAT
${WikiReader_SRCS}
${BBCascades_FOUND}
WikiReader_RCC_SRCS_2
CONDITION
SELECT
${BUILD_WIKIREADER_BLACKBERRY}
TRUE
qt4_add_resources
COMMANDS
CONCAT
WikiReader_RCC_SRCS
wikireader.qrc
SELECT
${BUILD_WIKIREADER_BLACKBERRY}
CONDITION
TRUE
CONCAT
searchmodel.cpp
main.cpp
SELECT
${BUILD_WIKIREADER_BLACKBERRY}
TRUE
CONDITION
find_package_0
COMMANDS
CONCAT
BBCascades
REQUIRED
${BUILD_WIKIREADER_BLACKBERRY}
BUILD_WIKIREADER_BLACKBERRY
SELECT
${BUILD_WIKIREADER_BLACKBERRY}
TRUE
include_directories_2
COMMANDS
CONCAT
${CMAKE_AUTOMOC}
BBCASCADES_INCLUDE_DIR
QT_INCLUDES
CMAKE_CURRENT_BINARY_DIR
${CMAKE_INCLUDE_CURRENT_DIR}
CONDITION
SELECT
${BUILD_WIKIREADER_BLACKBERRY}
CONDITION
TRUE
ON
include_directories
COMMANDS
CONCAT
${CMAKE_CURRENT_SOURCE_DIR}_3
${CMAKE_MODULE_PATH}_2
SELECT
${BUILD_WIKIREADER_BLACKBERRY}
TRUE
FALSE
CONCAT
${CMAKE_MODULE_PATH}
CONCAT
/cmake
SELECT
${BUILD_WIKIREADER_BLACKBERRY}
CONDITION
TRUE
FALSE
../KDE/wiki-reader/frontends/blackberry_2
${CMAKE_CURRENT_SOURCE_DIR}_2
../KDE/wiki-reader/frontends_2
${CMAKE_CURRENT_SOURCE_DIR}
../KDE/wiki-reader/
${CMAKE_SOURCE_DIR}
../KDE/wiki-reader/_2