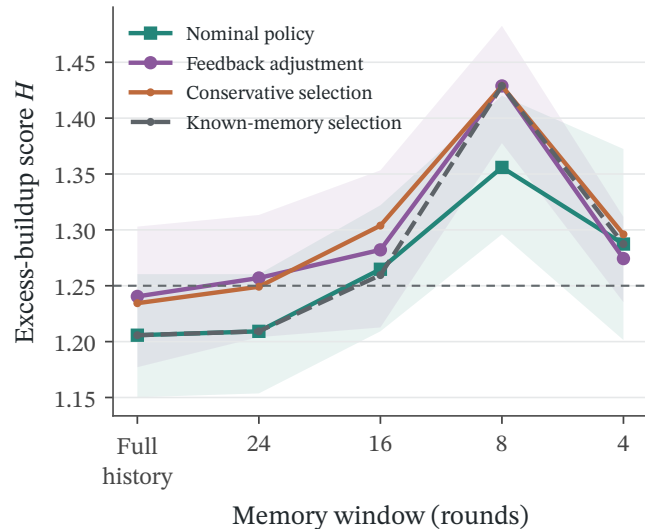
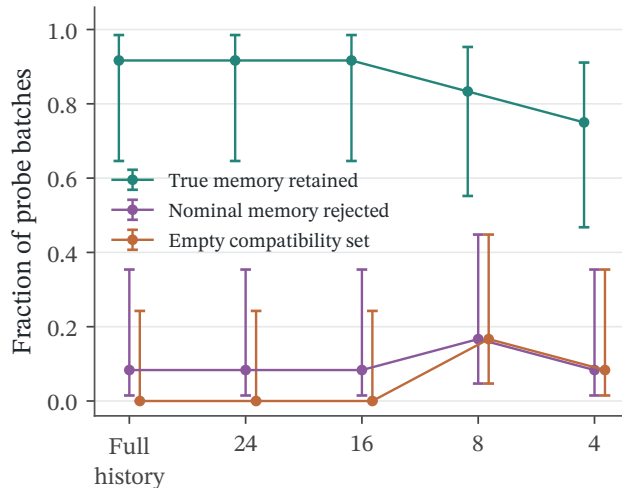


A Correction on fresh episodes

Each decision uses four independent probe episodes and is tested on four fresh episodes (12 batches per memory).

B: 95% Wilson intervals over 12 decisions. Known-memory selection uses training data and the true label; empty sets use the conservative fallback.

B Aggregate feedback is ambiguous**C** Corrections introduce differentiation