Saturday, 3 January 2026 6:01 PM

/add. → static

a=5
b=6.
return str(a+b) → 11

- How do we send data from client to server dynamically?
  → Query parameter

  google.com/search?q=innomatics
  q → query parameter name
  innomatics → query parameter value.

- How many parameter we need to send → a & b → 2 parameters
- Who sends the data → client.
- Who must handle them? → Server (Flask application).

- Why HTML is the correct next step.
  - HTML allows us.
    - Collect user input via forms
    - Send the data automatically to backend.
    - Hide the implementation details
    - Prevent user mistake
    - Improve usability dramatically.

  Also
    - Returning raw strings instead of HTML is not how real app works.

- Flask + HTML : How this work
  - Client request a page.
  - Server return a HTML file
  - Browser render it
  - User enter values.
  - HTML forms sends data to the backend.
  - Backend processes it
  - Backend return result (HTML or text).

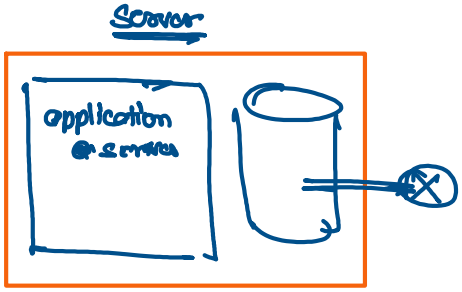

Application Server

Code. → flask — python code

Template serve → HTML file inside.

- Role of the client Server & Browser
  - Client → send a request. (Browser).
  - Server (Flask) → process the request
  - Browser render the response.

Important clarification

- The browser does not understand python
- The browser does understand HTML.
- Therefore, the server must return HTML, not python logic or raw strings.

- Browser → an interpreter for HTML.

- HTML Basics.
  - HTML is it a programming language — No
    - ↳ Hyper Text Markup language.
      - It does not contain logic
      - It does not use loops or condition
      - It is used to structure and format content.

Programming language

- Python
- Java.
- C++.

Markup Language

HTML.

XML

The file line of HTML

<! DOCTYPE html>: → This tell the browser
- That this page uses html5.

HTML work using Tags.

Eg.

 Some text

↓ opening tag

↳ closing tag.

Rule :

- Most tags must be closed. ✓
- Some tags like <meta> do not closing.

HTML

- It is not case-sensitive
- Does not care about identation.
- Care about proper opening & closing of tags.

Header v/s paragraph

- <h1> → Header (large font).
  <p> → paragraph (normal text).

So visually.

- Header appears bigger
- Paragraph appears small.

```
<body>
    <h1> Welcome to our home page </h1>
    <p> Hope to see you again very soon </>
```