Chatbot and Short term memory

Thursday, March 26, 2026 5:59 PM

Recap: Simple graph
↓
Conditional edge

State Schema
↓
python obj ⇒ Dict ≈ [TypedDict]
↓
Class ⇒ Thru class
↓
State

Lang graph
→ app → graph → Nodes, edge
State
↓
Birth START

All the nodes can access state
↓
Nodes can update

Any # Nodes
↓
Any complex interactions
} responsible operation ⇒ update/Modify state

END
↓
Modified State Death

Run ⇒ Invoke (State)
↓
Start
Nodes
End
↓ updated state

output →

Second Invoke ⇒ prev state is not stored in memory
↓
First

in memory

We cannot access modified state (o/p) First invoke call)

in the second invoke

Conditional edges

XDT

Yes NO

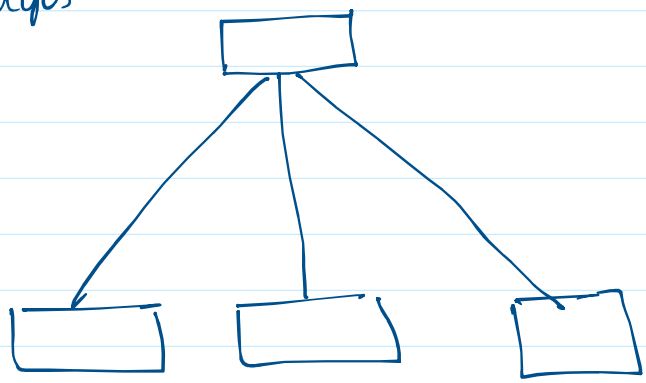

Based on the dec

add_conditional_edges ('node1' , function, Cond

{

True : Node2

False : Node3.

}

graph_builder =

erased by

delete & disconnect

del graph_builder.X

Agenta

parallel exec

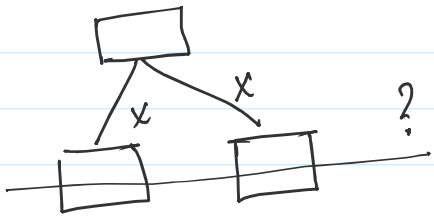

Uar

How to create a memory

Two updates.

List

Chatbot

How to create a context window.