RAG Application

Monday, March 16, 2026 6:01 PM

RAG

1) Indexing
   - → Loading ✓ ⇒ Document Loaders ← Langchain Comm
   - → Splitting ⇒ Text Splitters ← langchain Comm
   - → ✓Embedding (Splits → embeddings)
   - → ✓Storing data into Vector database

Lang chain ↓ Many vector DB.

⇒ $\boxed{\text{Chromadb. ✓ Docs}}$

pine cone

✓ weviate ⇒ Documentation ✓

FAISS.

⋮

2) Retrieve ✓ similar content pertaining to query
   → Runnable → Lang chain LCEL + User query.
   ↓ LLM chain
   Generate response

3) Generation

+

Blogs. [RAG and Agentic RAG].

Chroma db → By default using Sentence tran.

- → OpenAI
- → Google gemini ✓
- → ✓Mistral AI ⇒ Mistral → Syntax V2 ✓
  - → Mistral AI V1
  - ↔ But chromaDB mistral V1 ✓

few weeks

Store in chroma db.

↓

Modify. < update ✓, Del ✓, emb ✓.

Problem: @ Start → doc → GenAI syllabus → recent doc → public data

↓

✗ LLM's are aware of it.

⇒ Build a RAG application
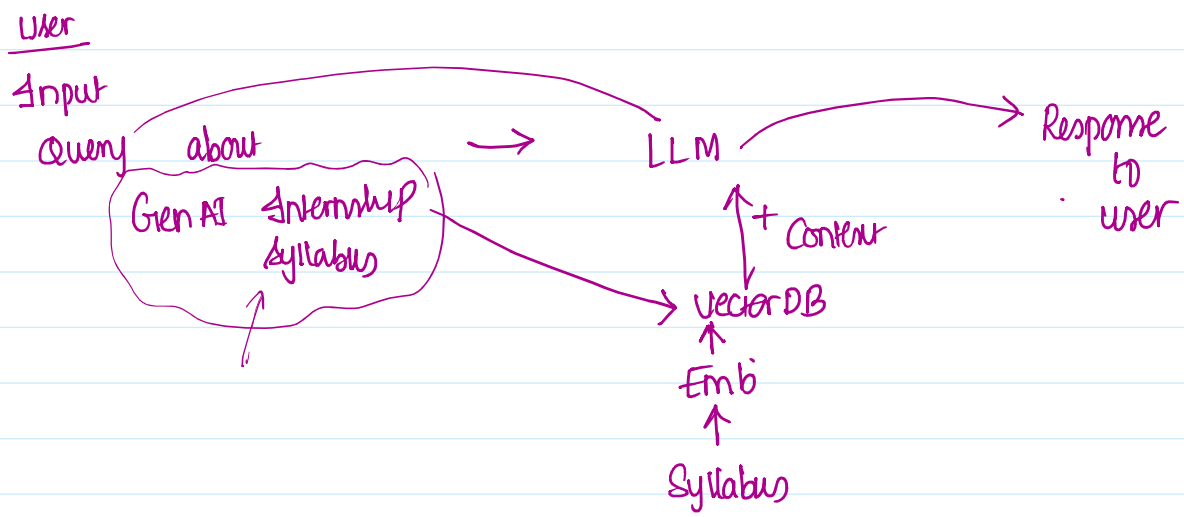
↳ provide Info about GenAI Internship Syllabus.