
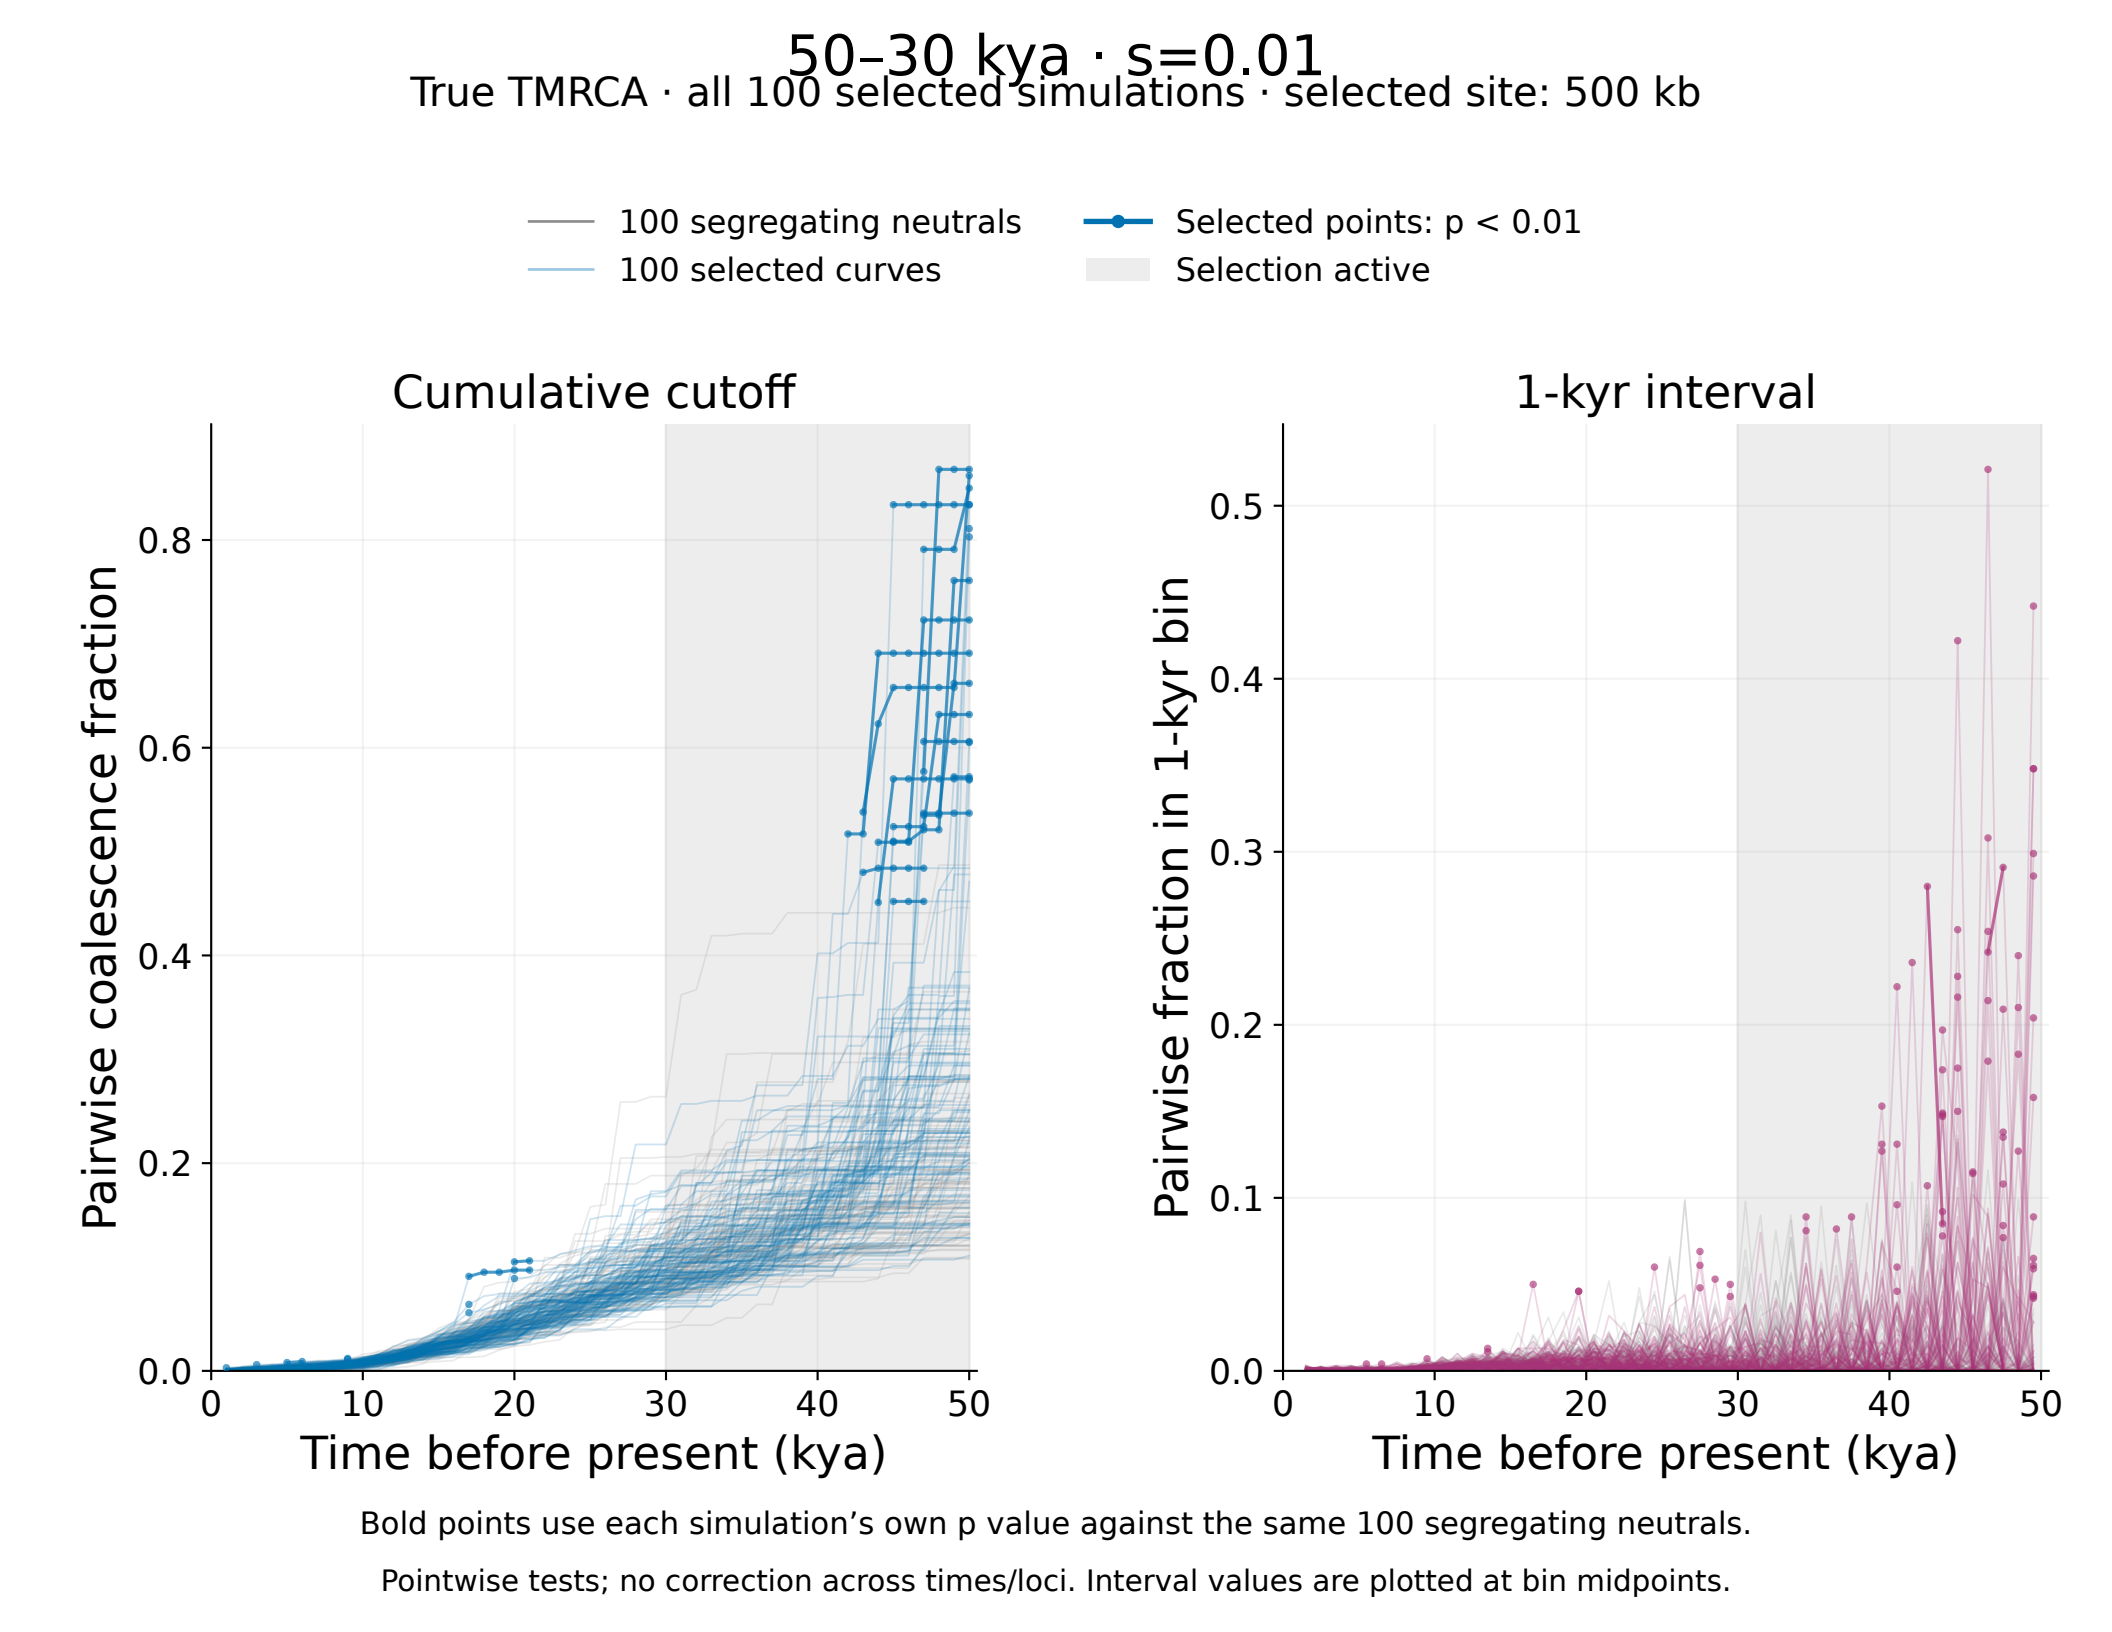



Bold points use each simulation's own p value against the same 100 segregating neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.

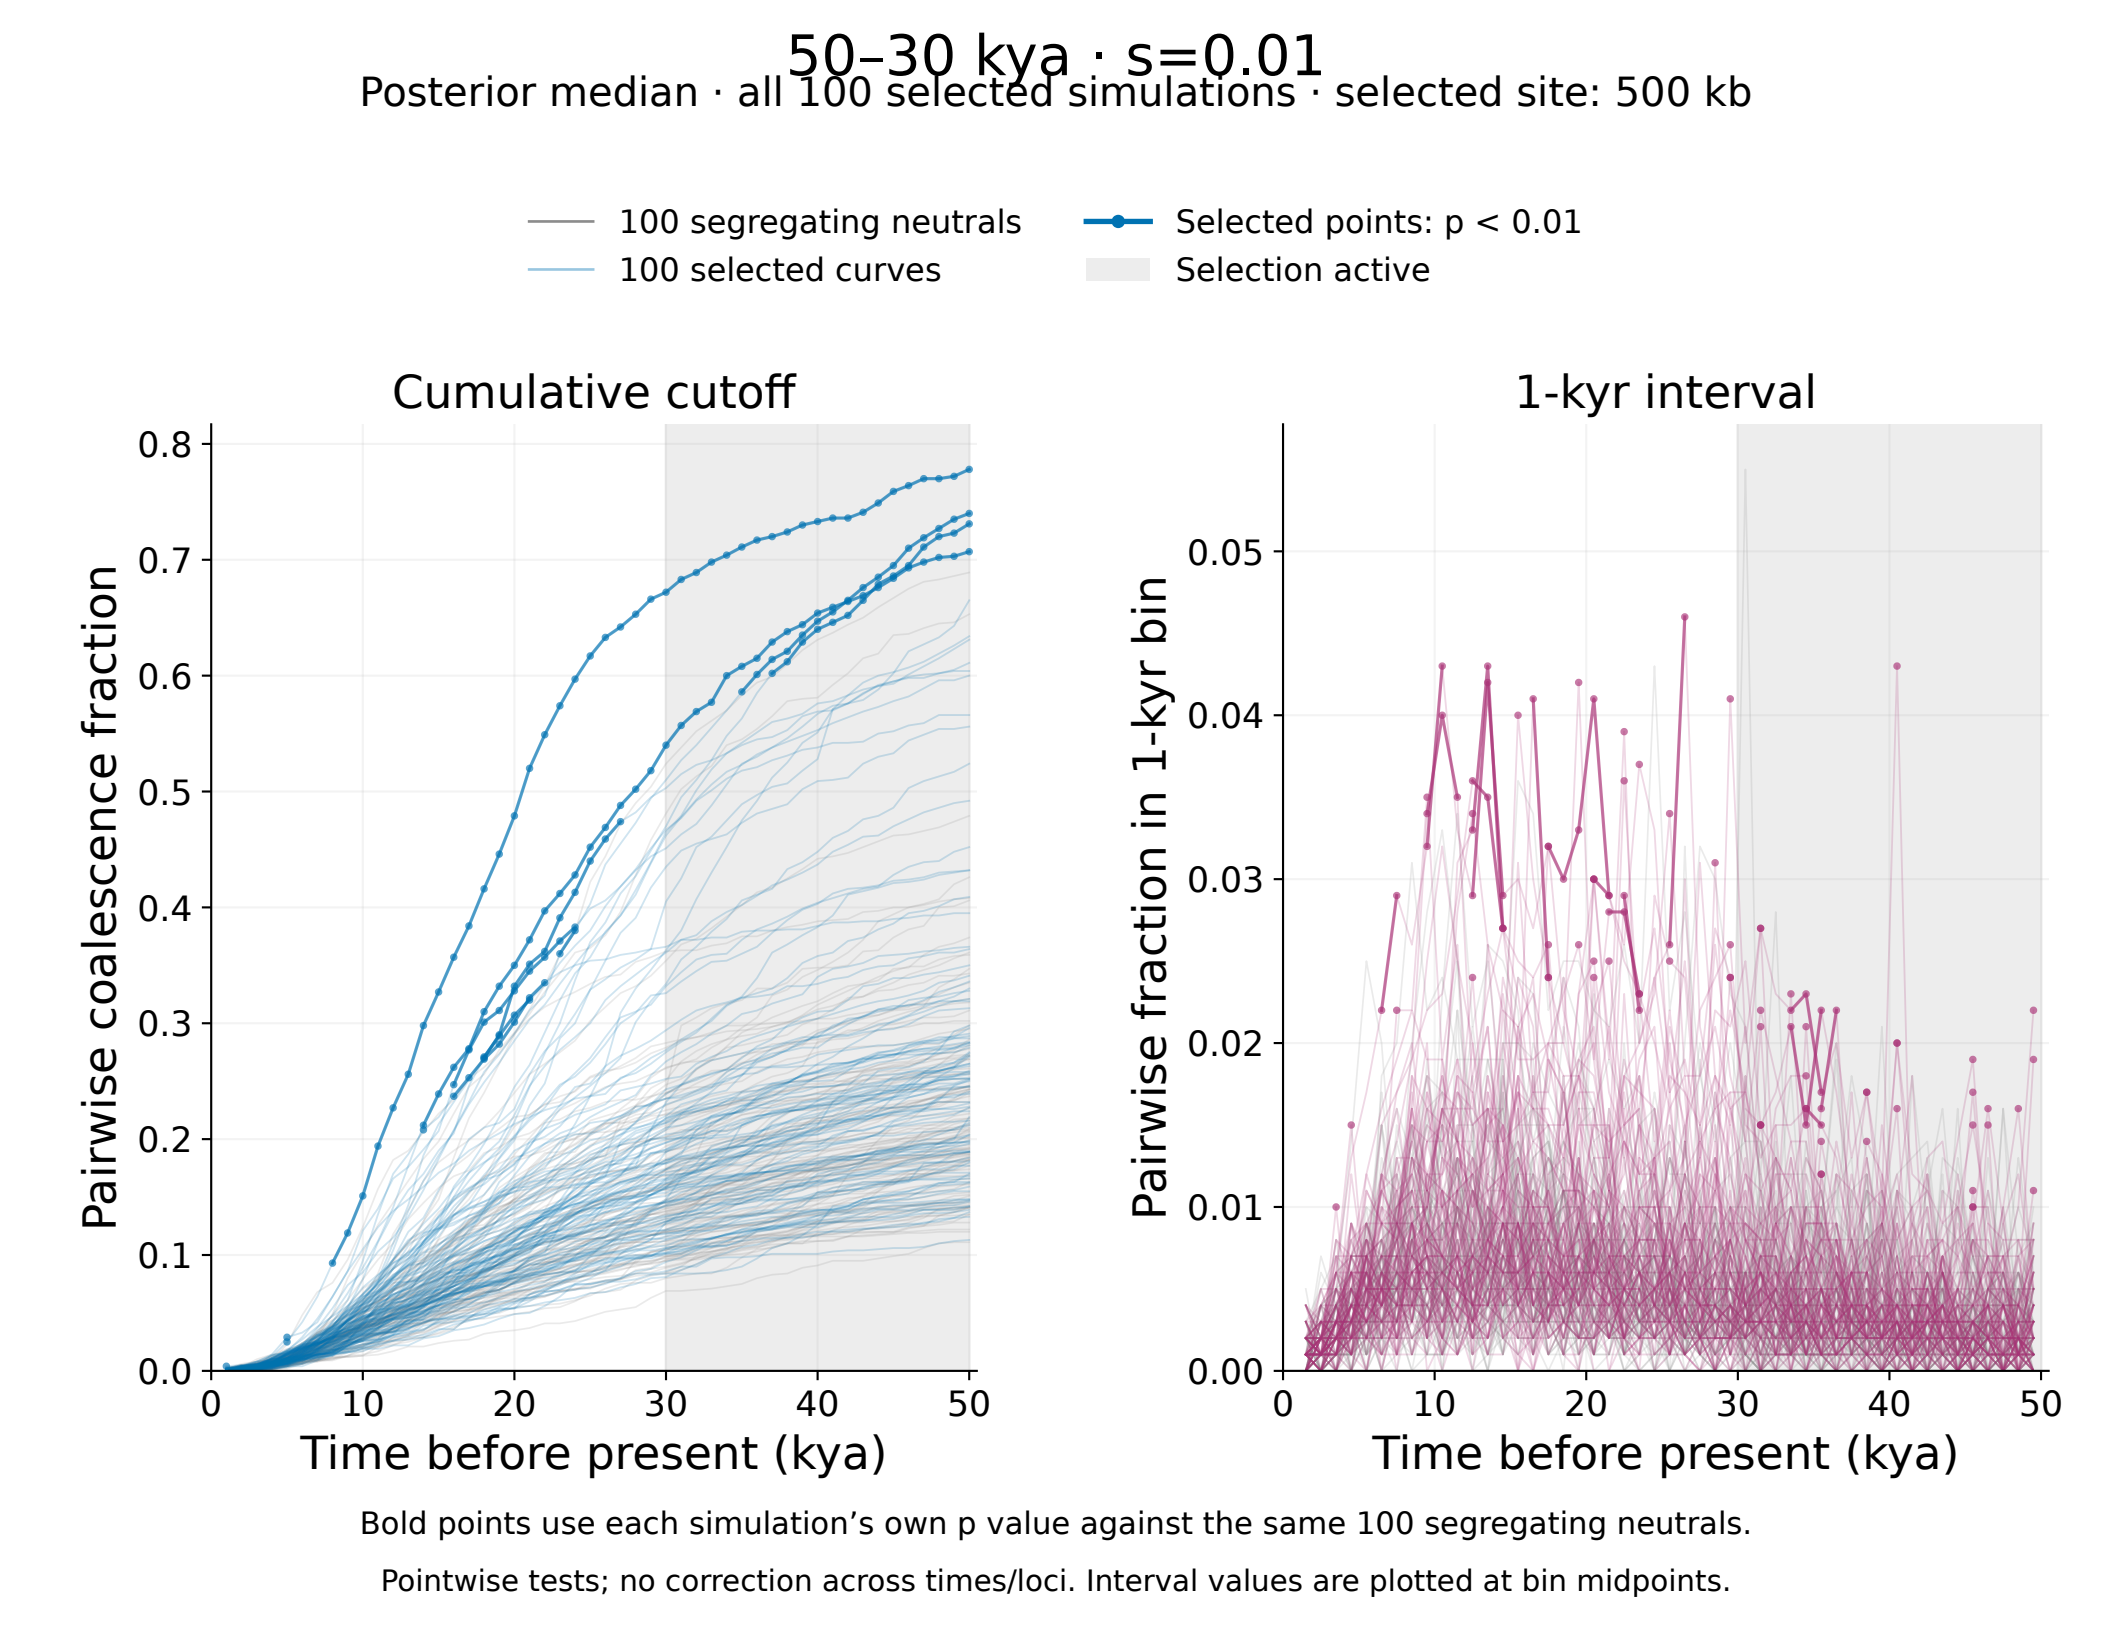

Bold points use each simulation’s own p value against the same 100 segregating neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.

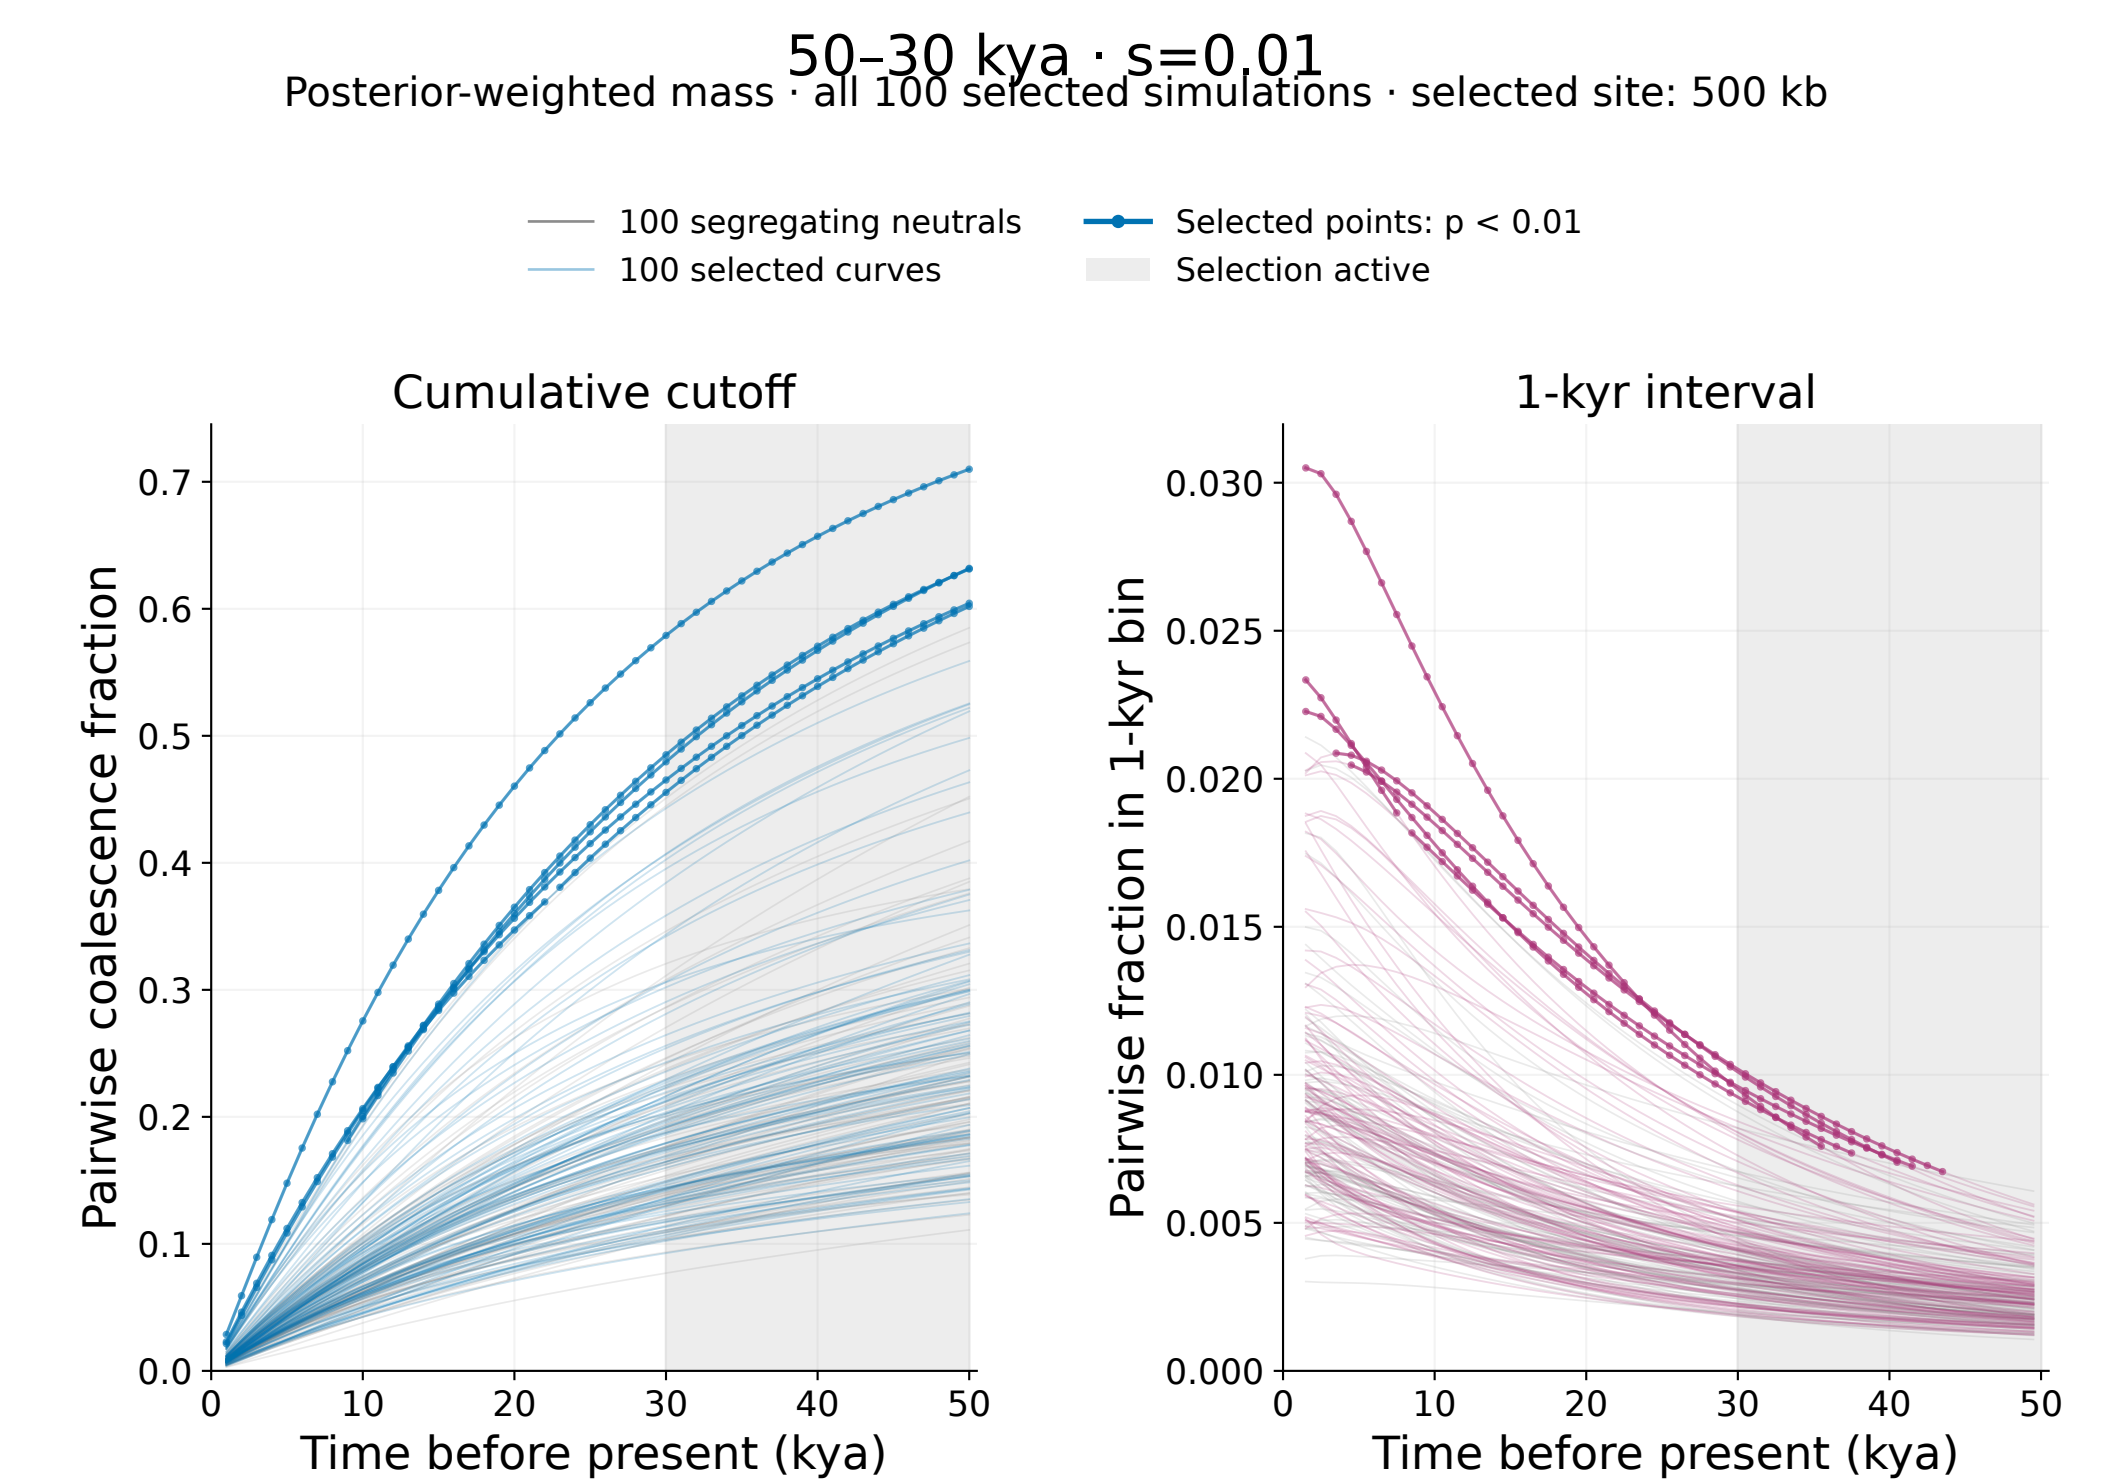


Bold points use each simulation’s own p value against the same 100 segregating neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.

10 kya–present · s=0.01

True TMRCA · all 100 selected simulations · selected site: 500 kb

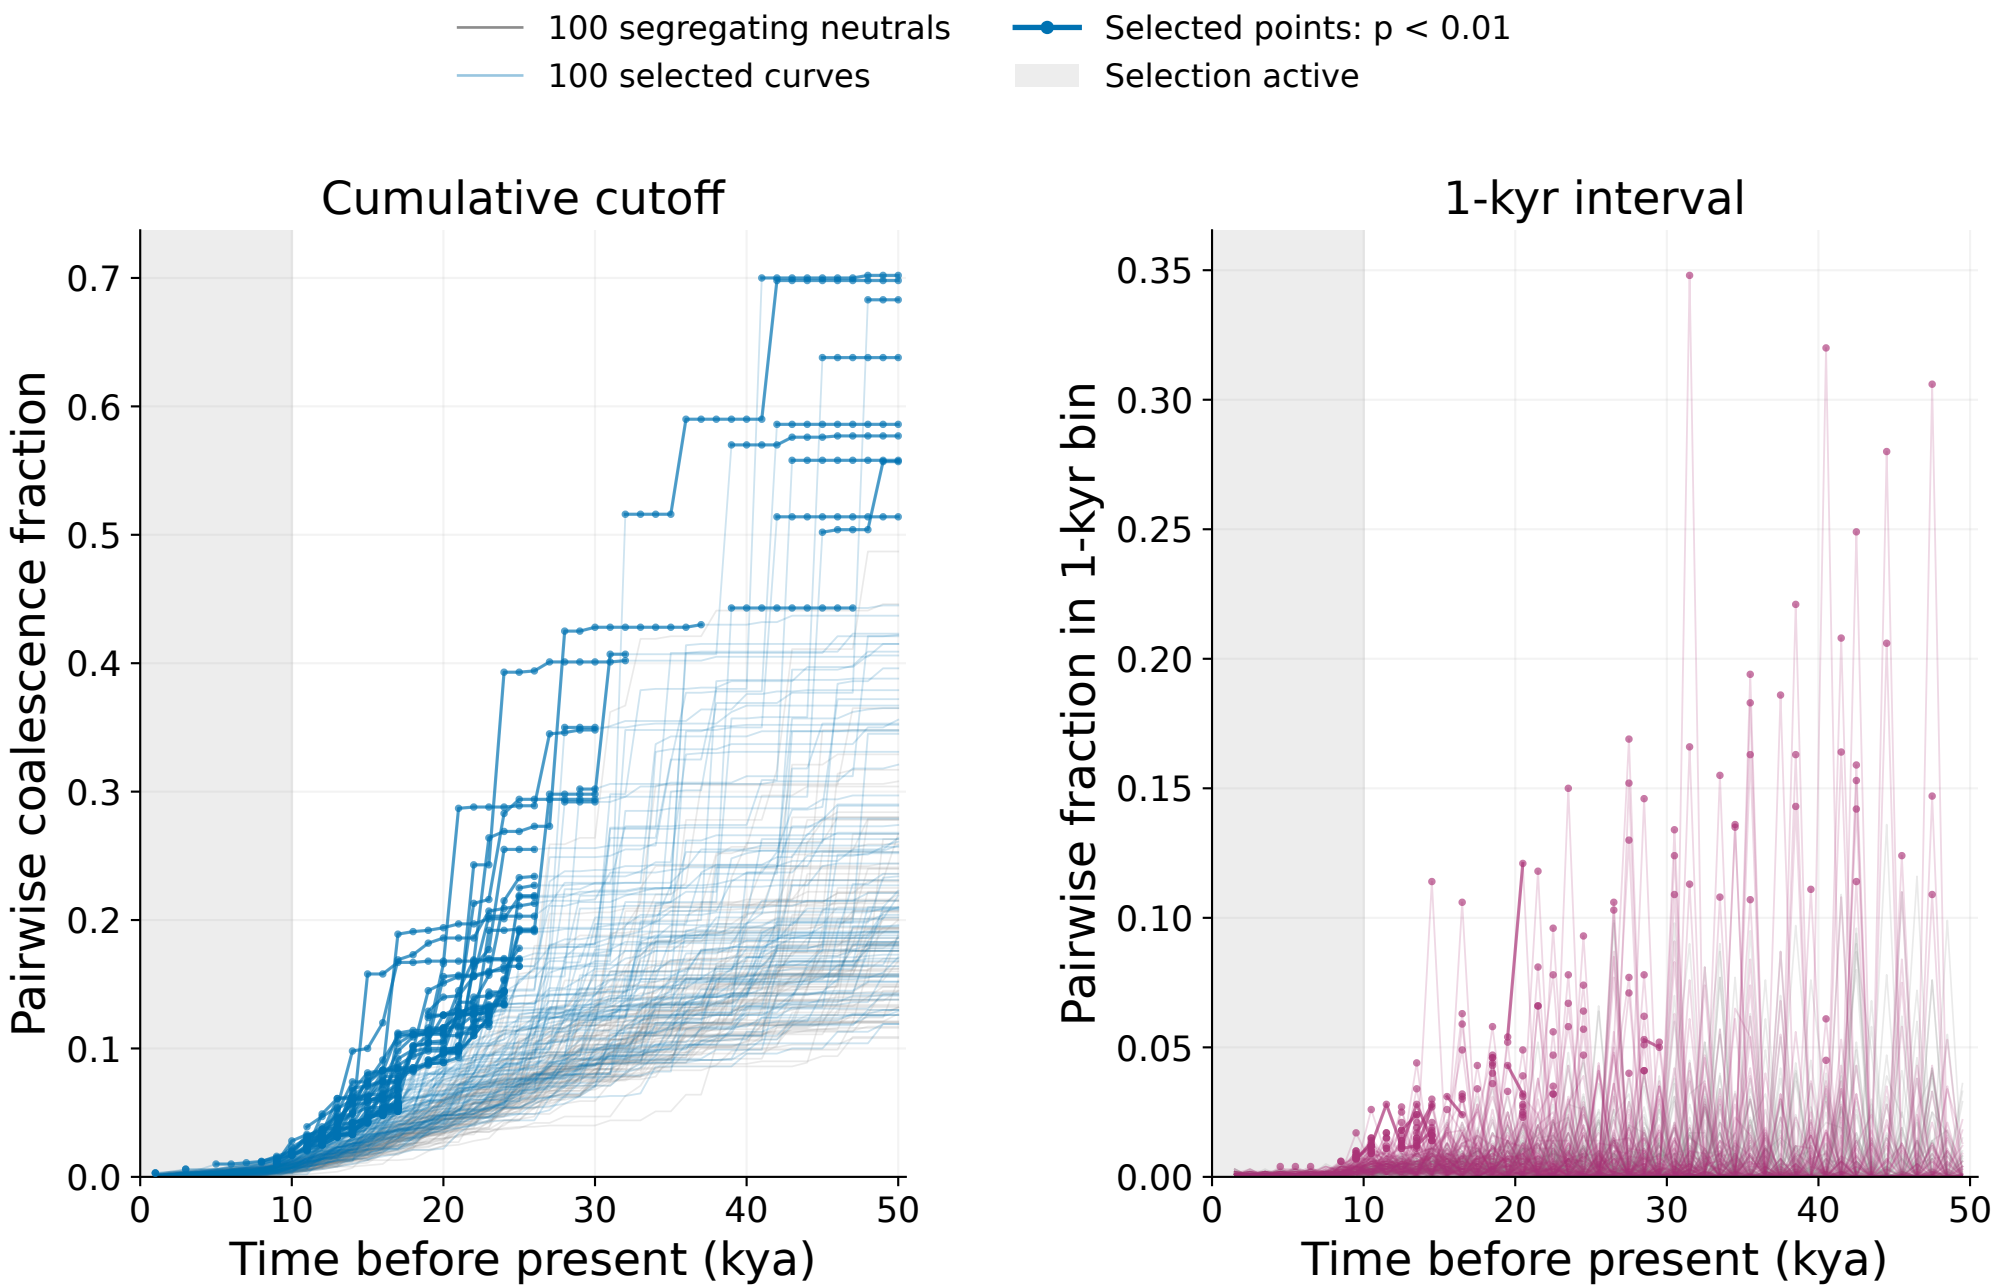


Bold points use each simulation’s own p value against the same 100 segregating neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.


10 kya–present · s=0.01

Posterior median · all 100 selected simulations · selected site: 500 kb

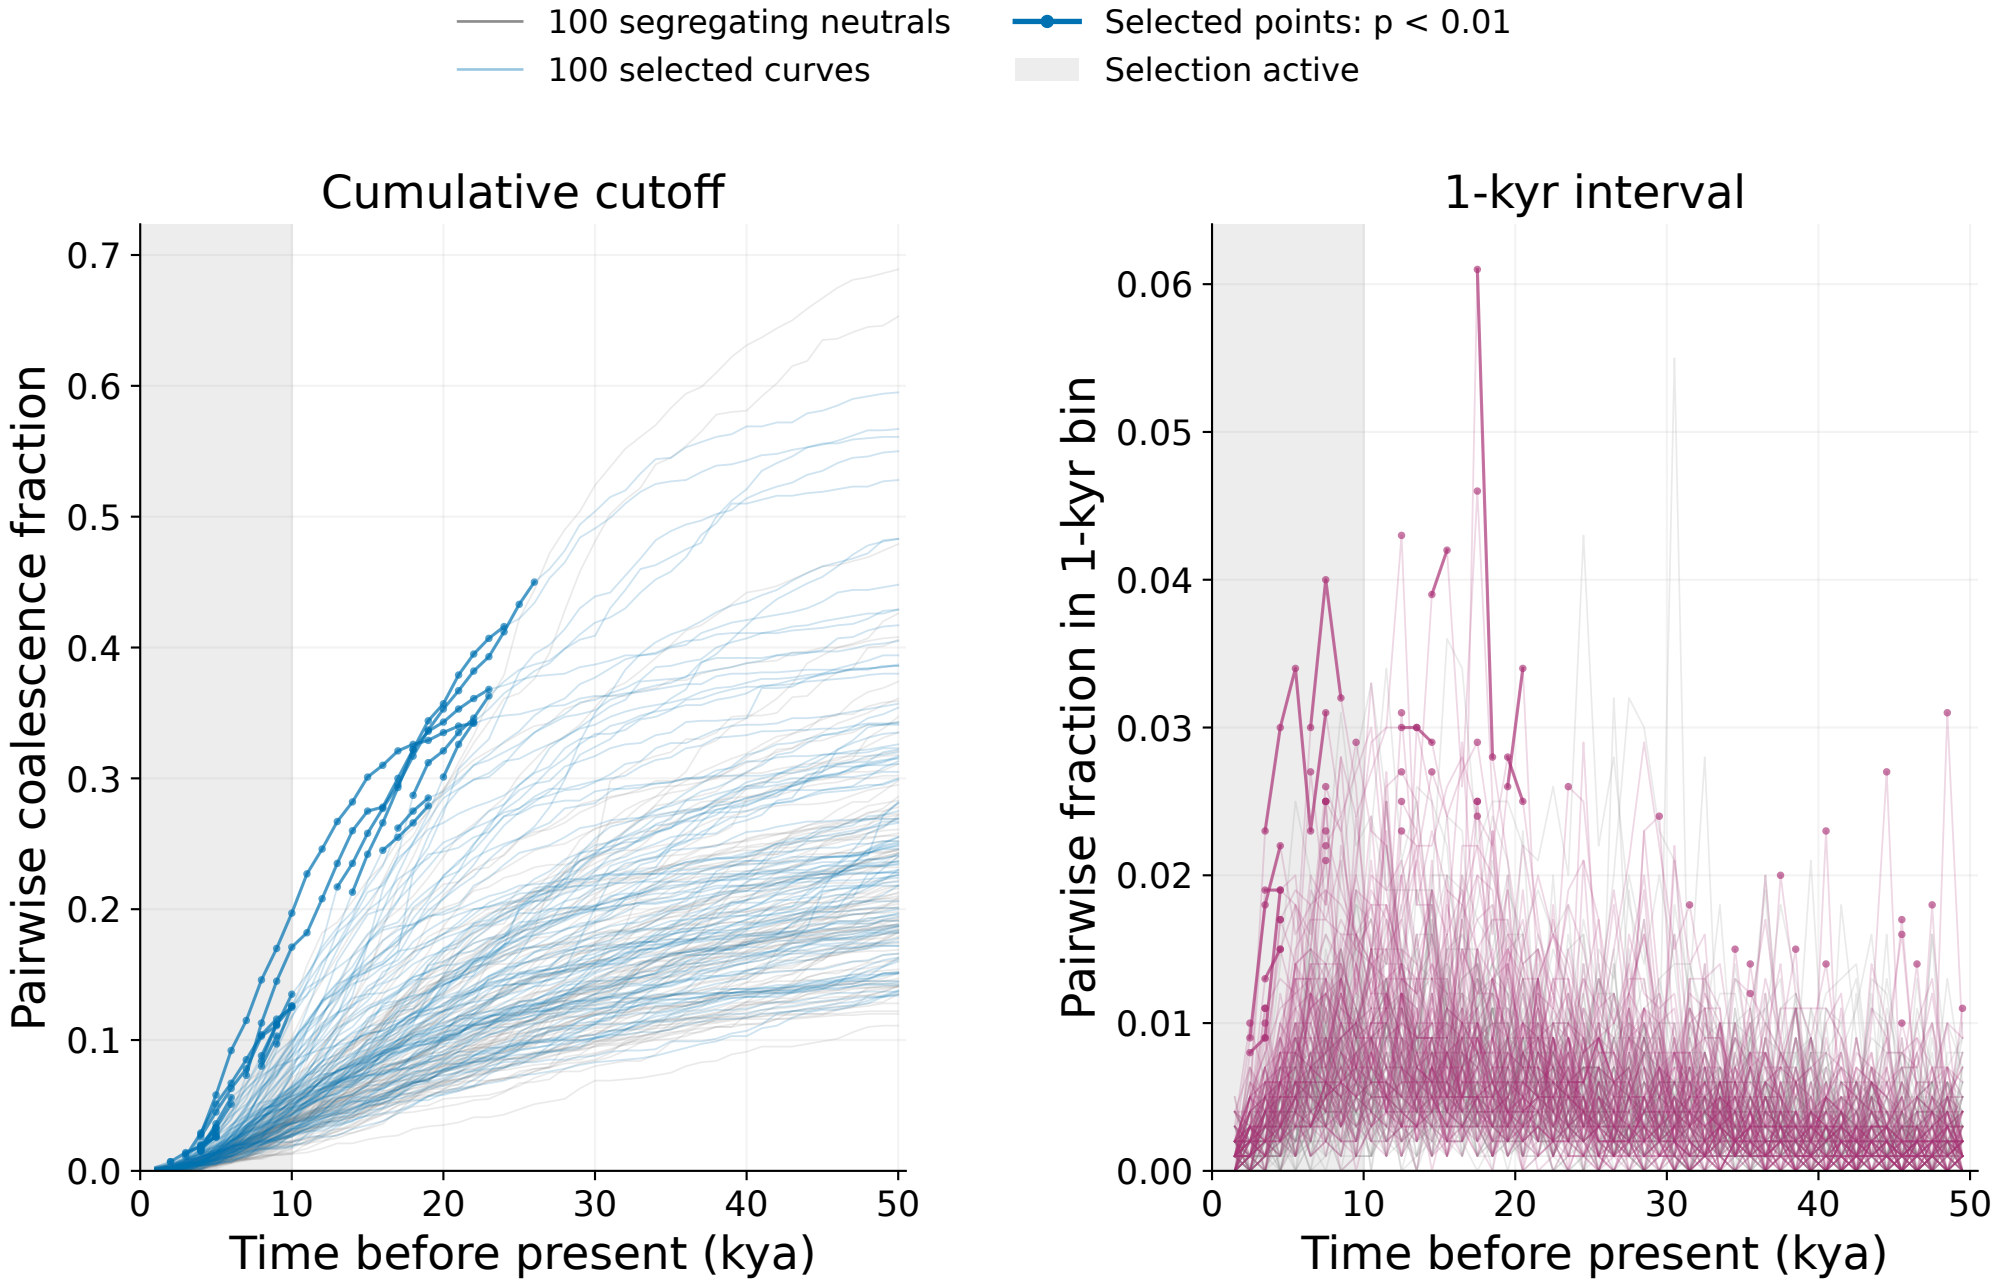

Bold points use each simulation’s own p value against the same 100 segregating neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.

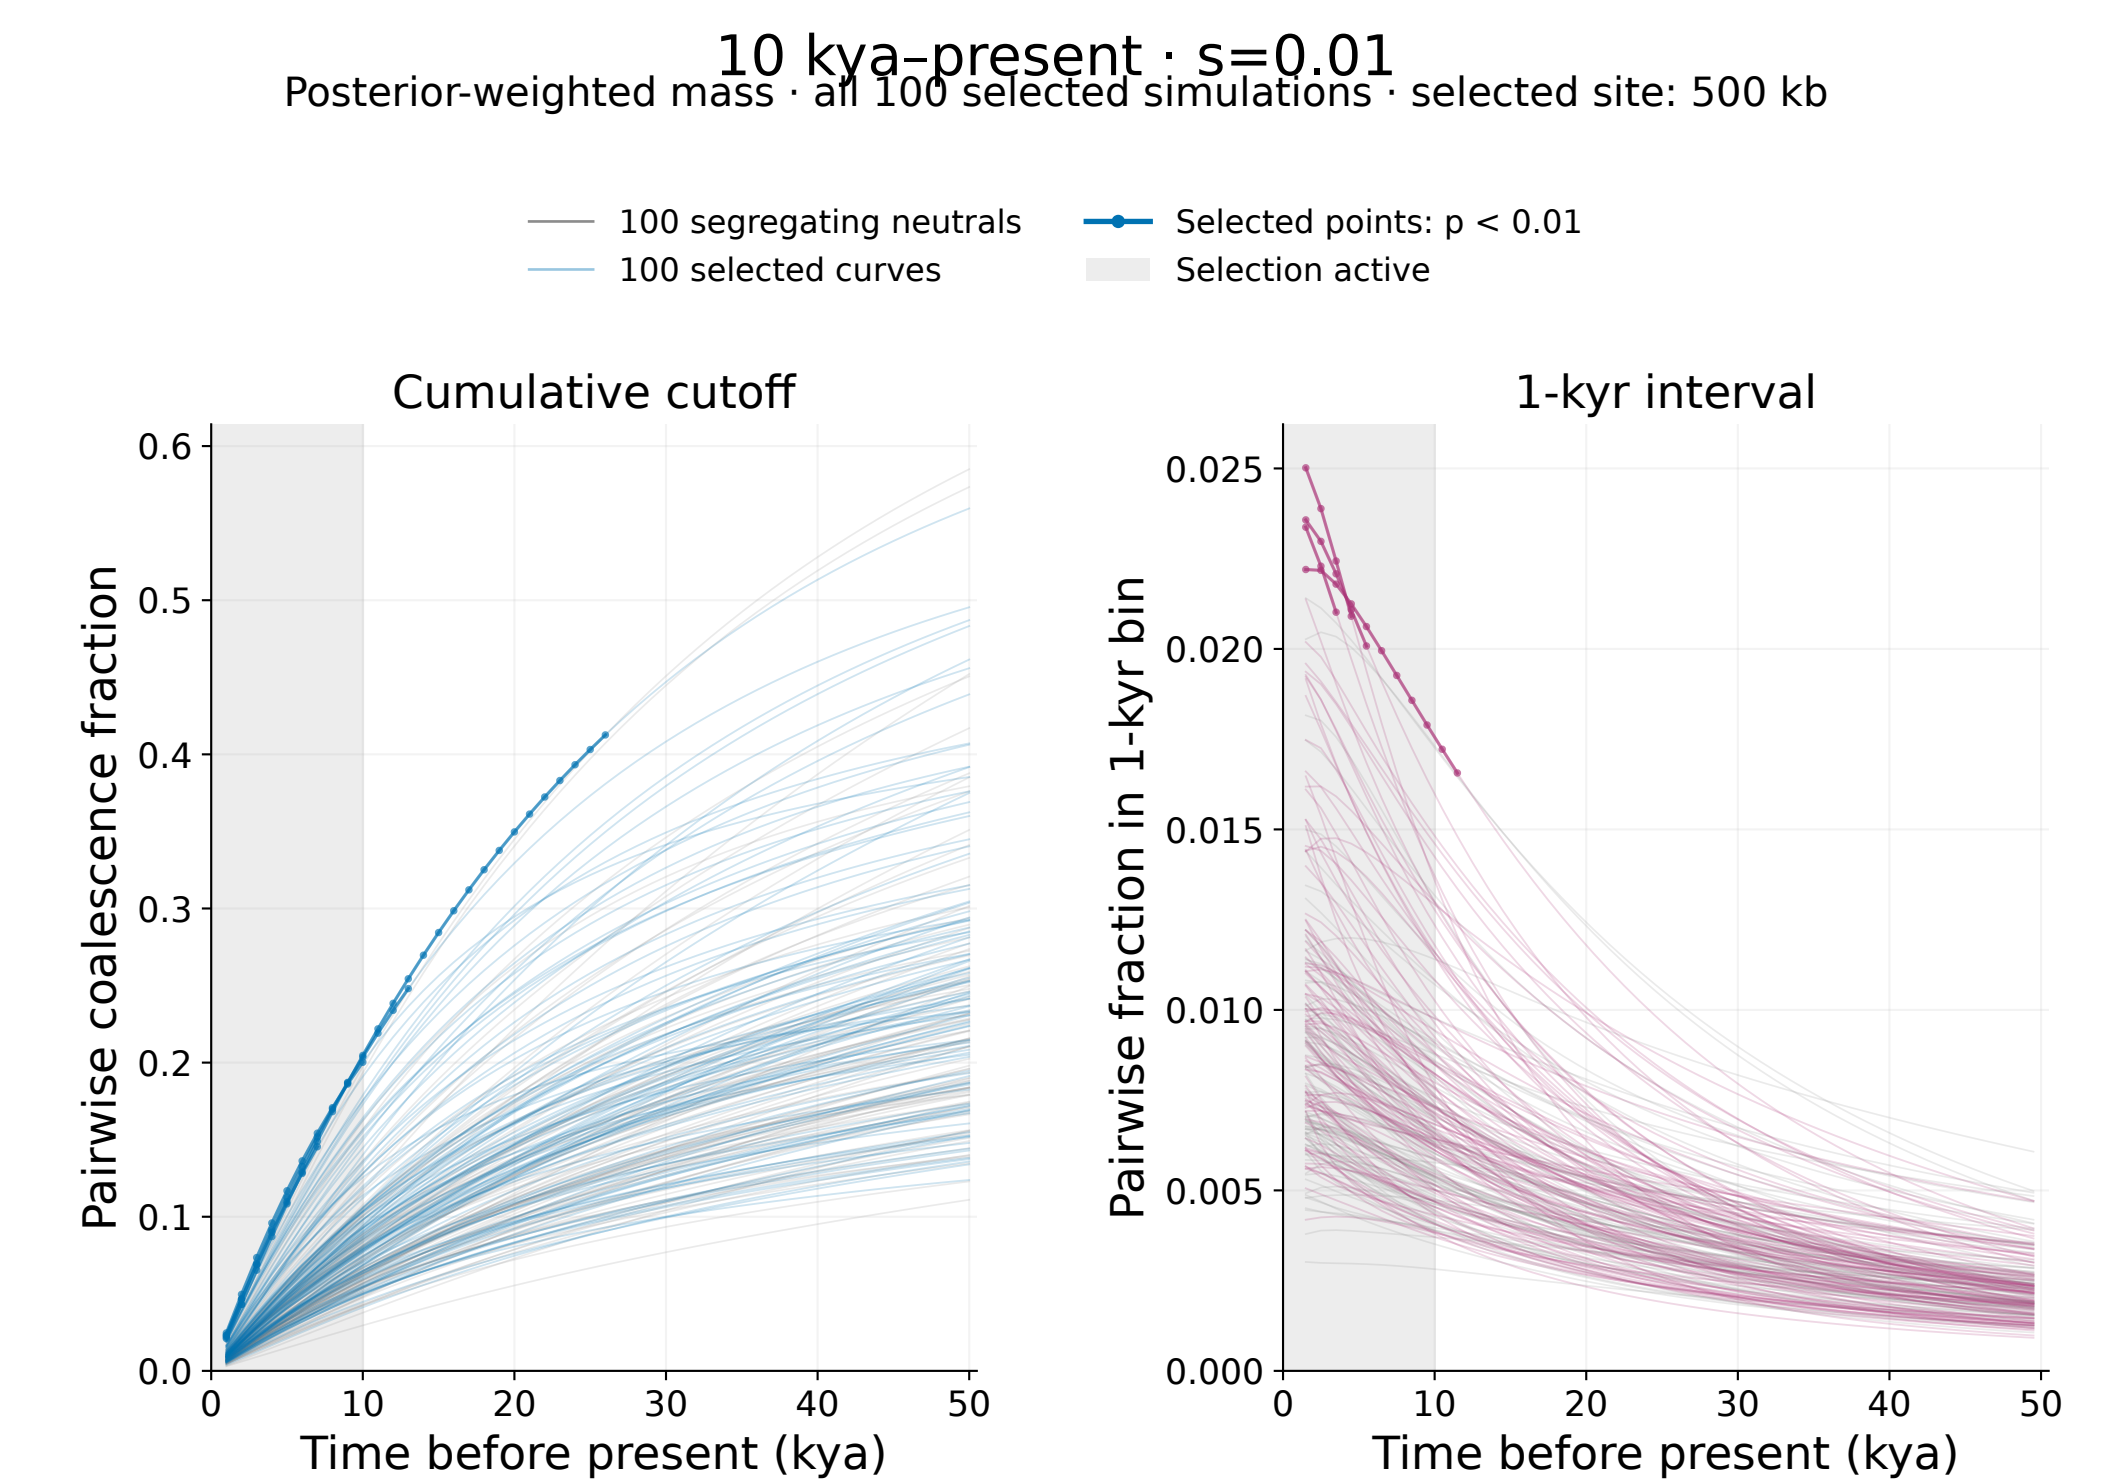


Bold points use each simulation’s own p value against the same 100 segregating neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.

50 kya–present · s=0.01

True TMRCA · all 100 selected simulations · selected site: 500 kb

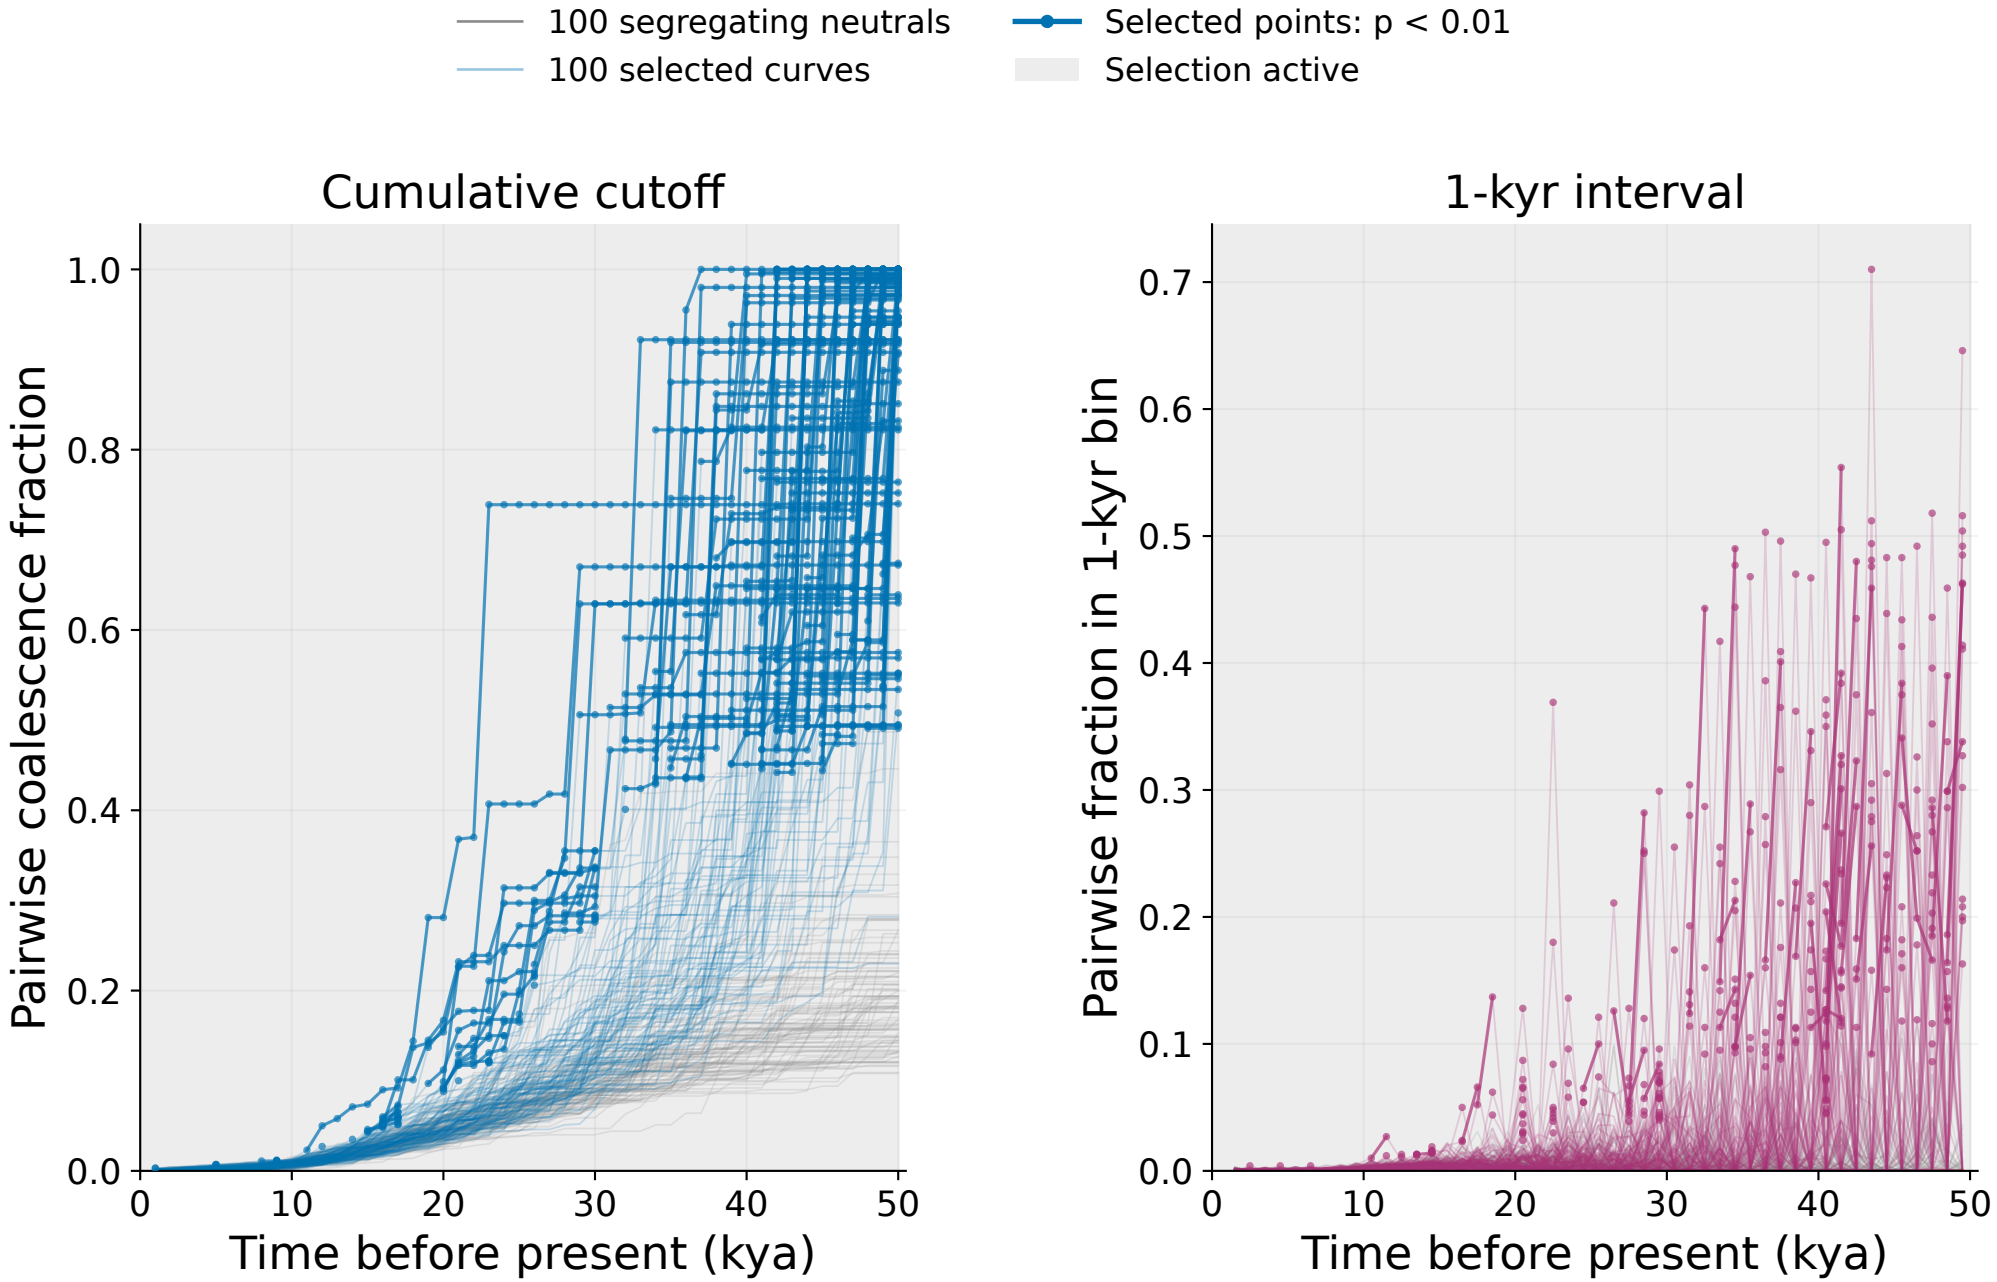


Bold points use each simulation's own p value against the same 100 segregating neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.


50 kya–present · s=0.01

Posterior median · all 100 selected simulations · selected site: 500 kb

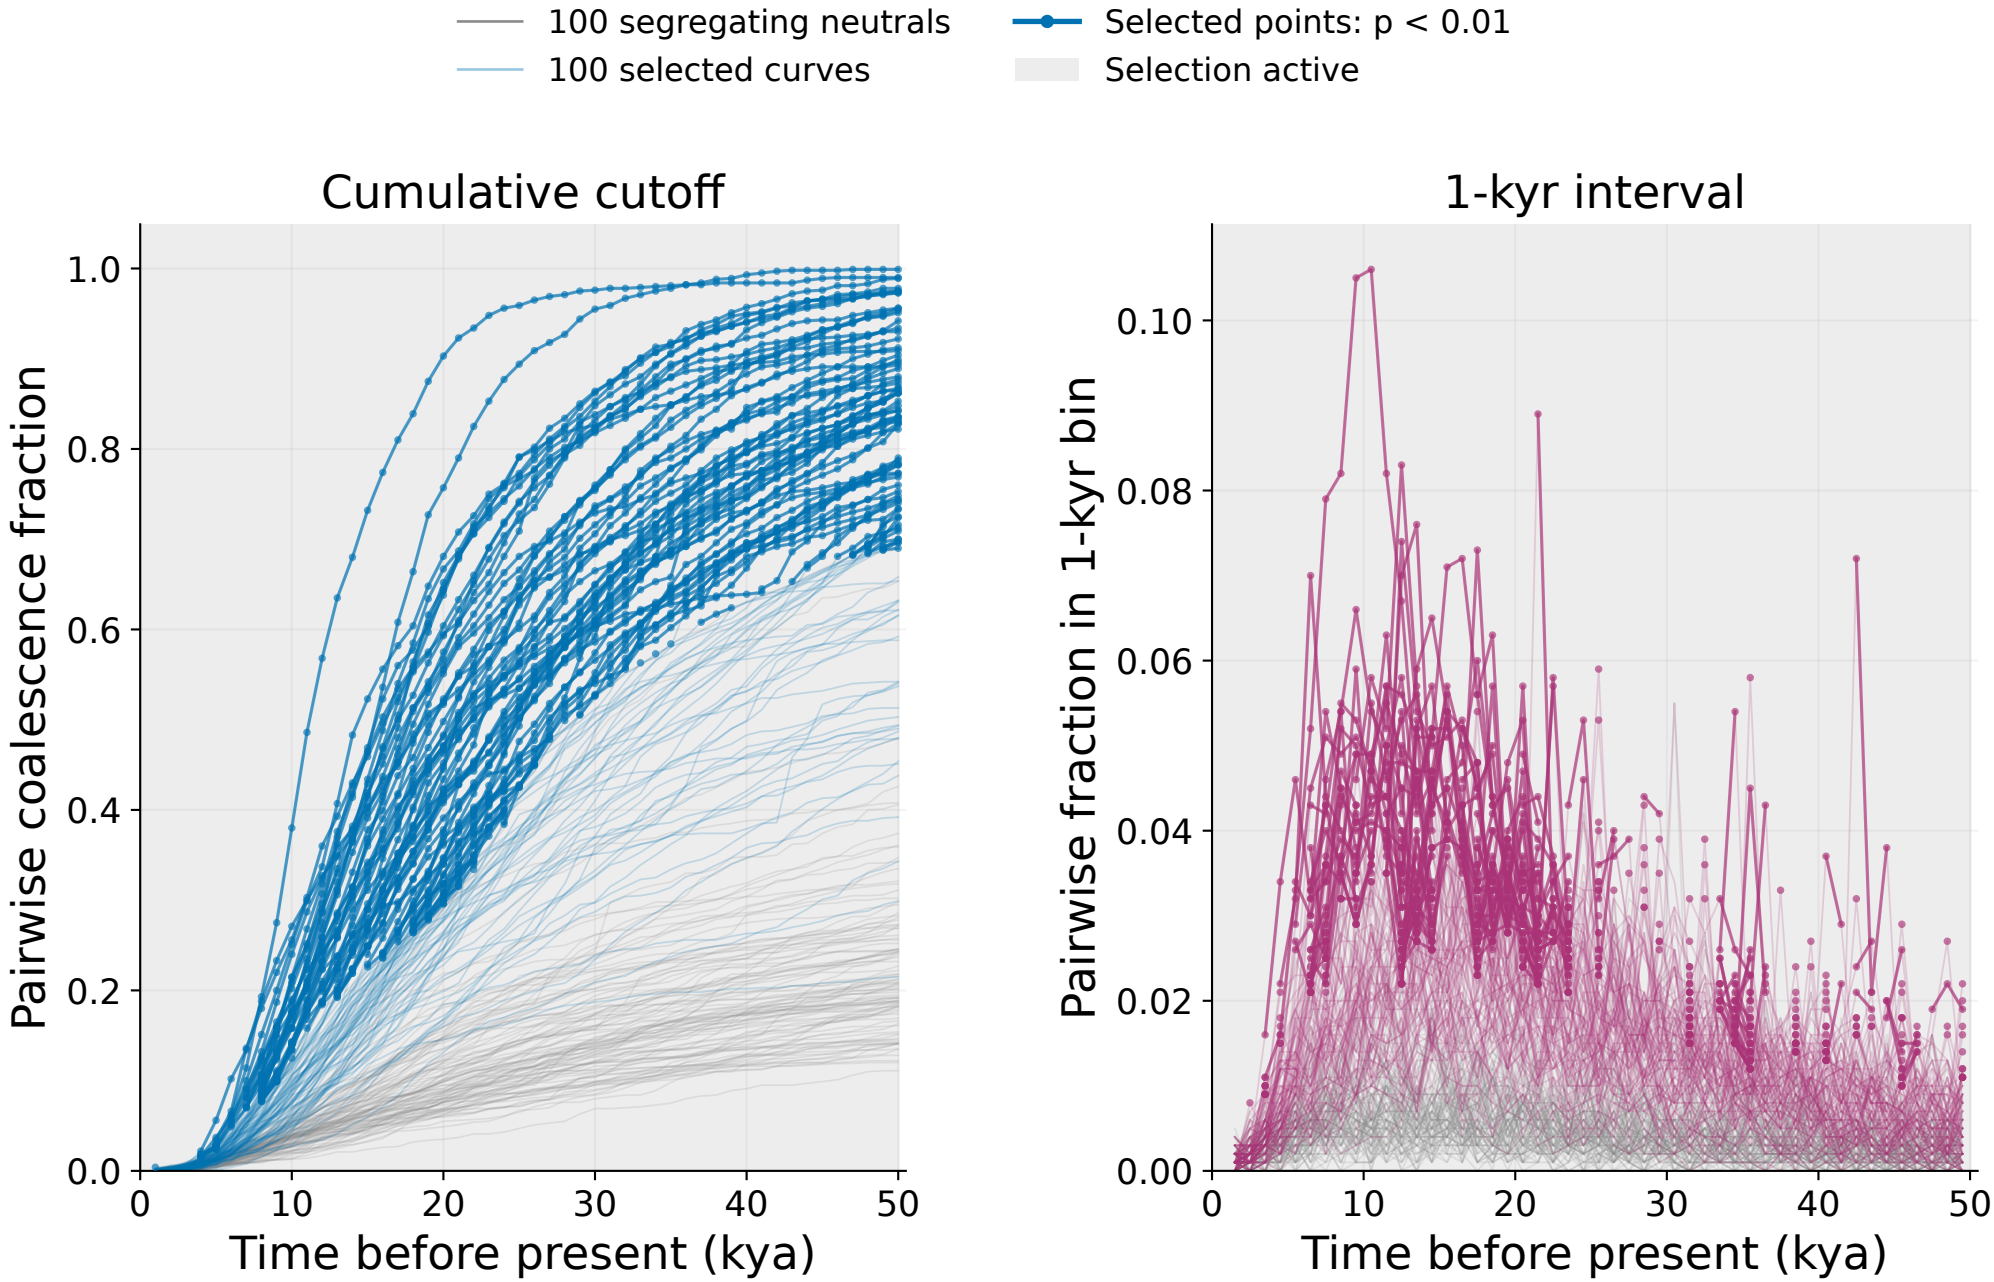

Bold points use each simulation’s own p value against the same 100 segregating neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.

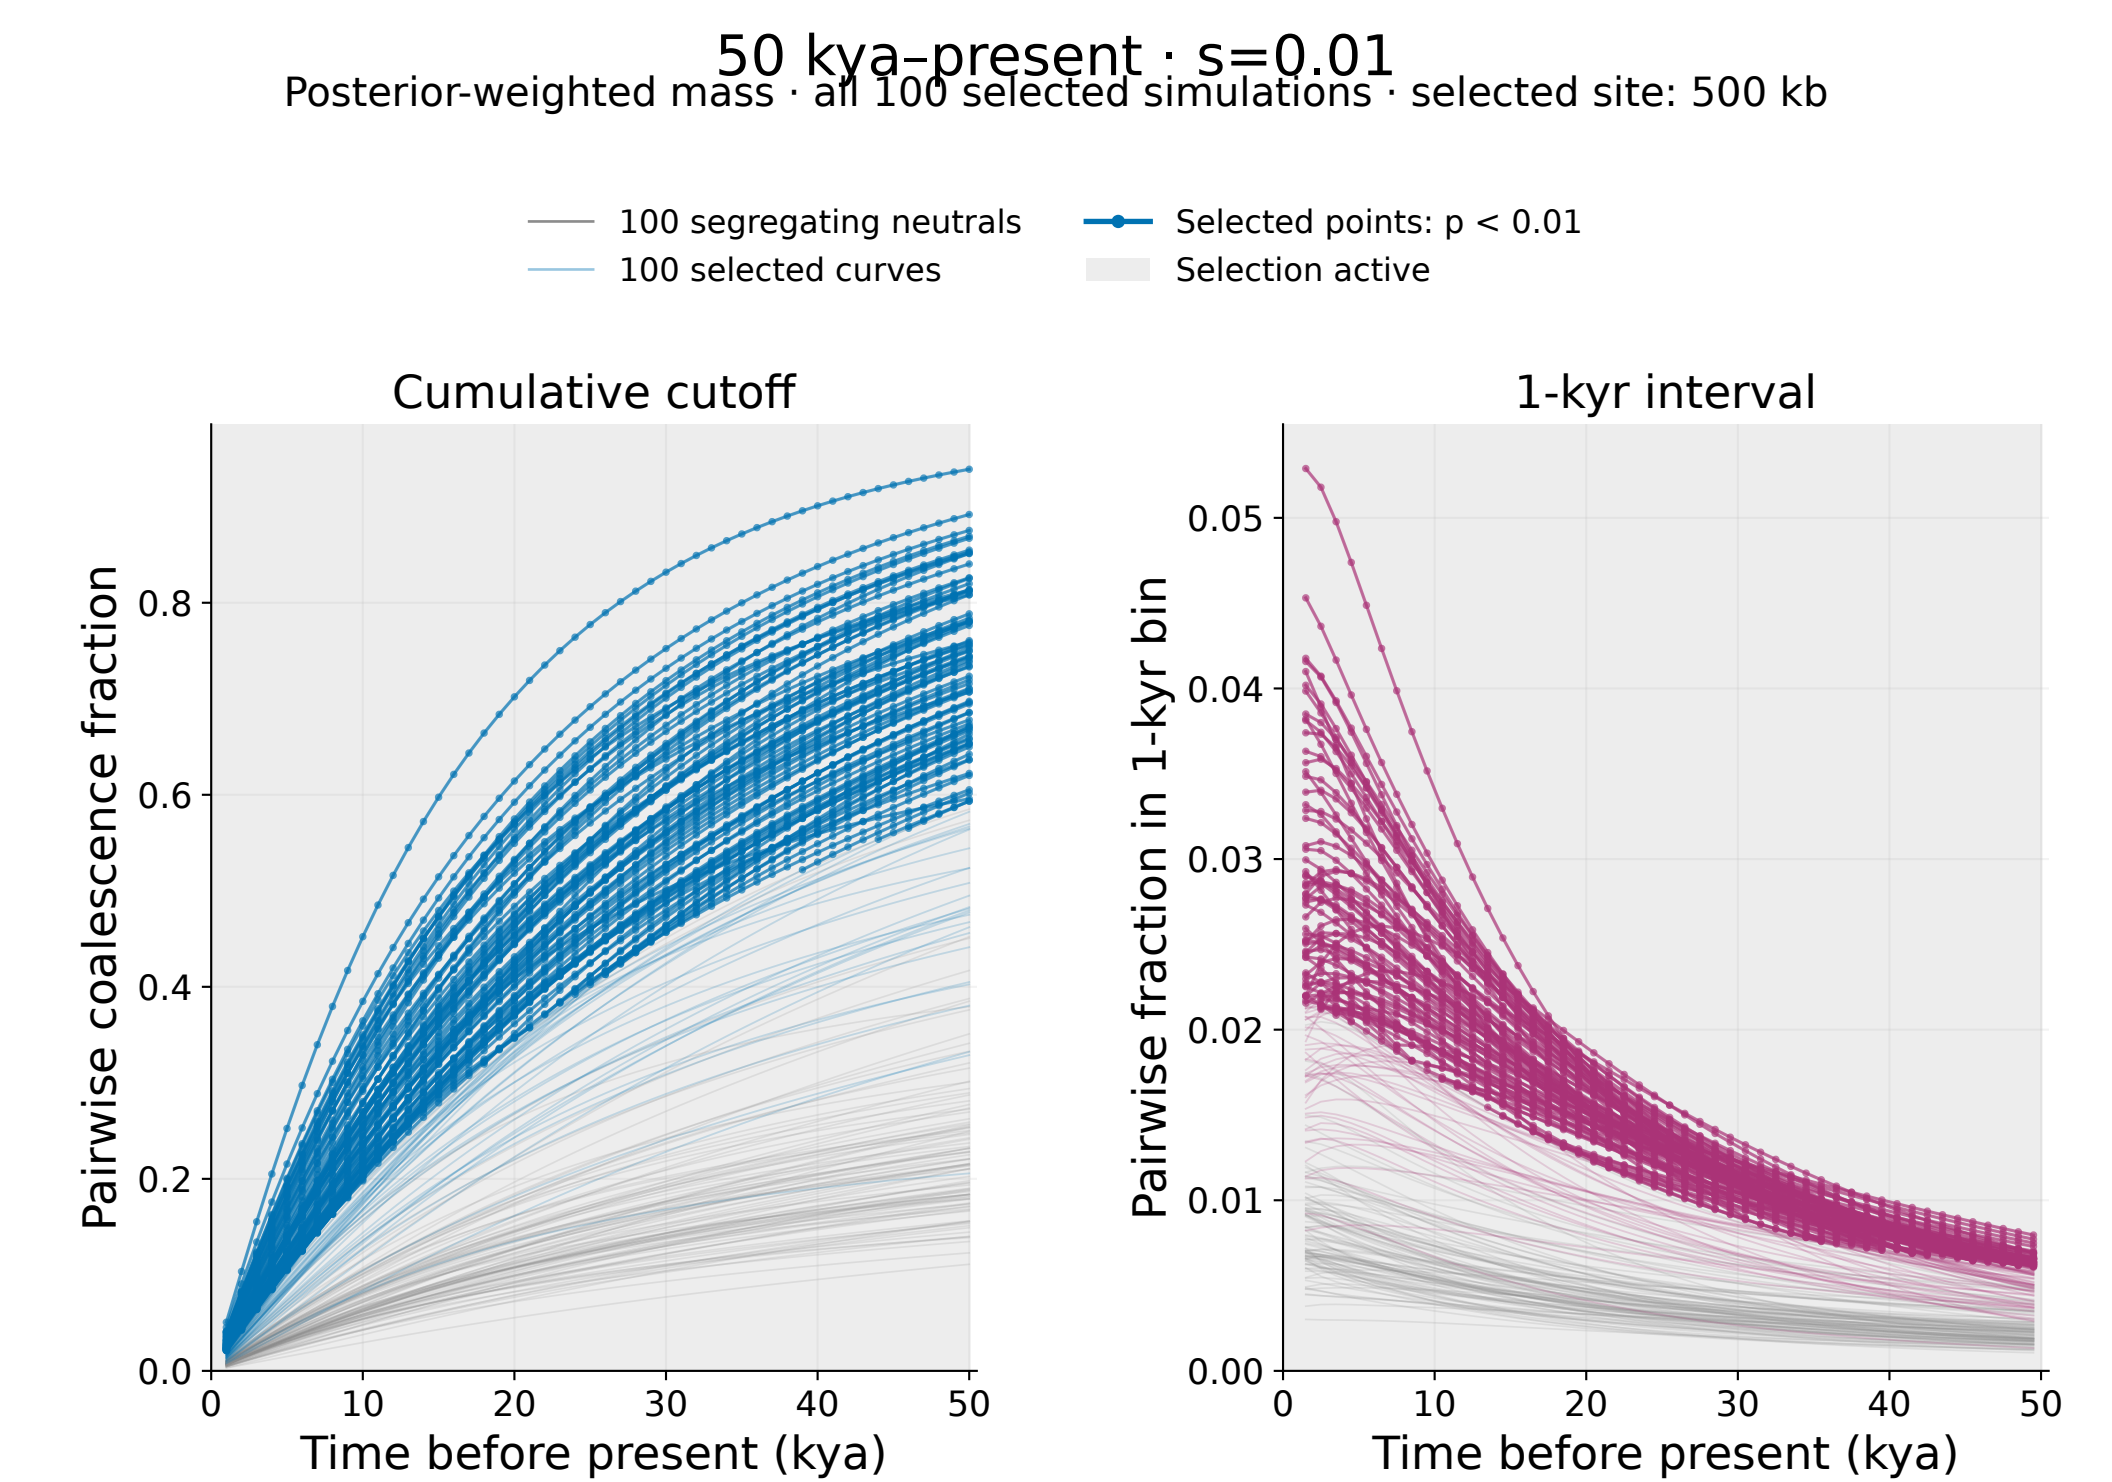


Bold points use each simulation's own p value against the same 100 segregating neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.


50 kya–present · s=0.005

True TMRCA · all 100 selected simulations · selected site: 500 kb

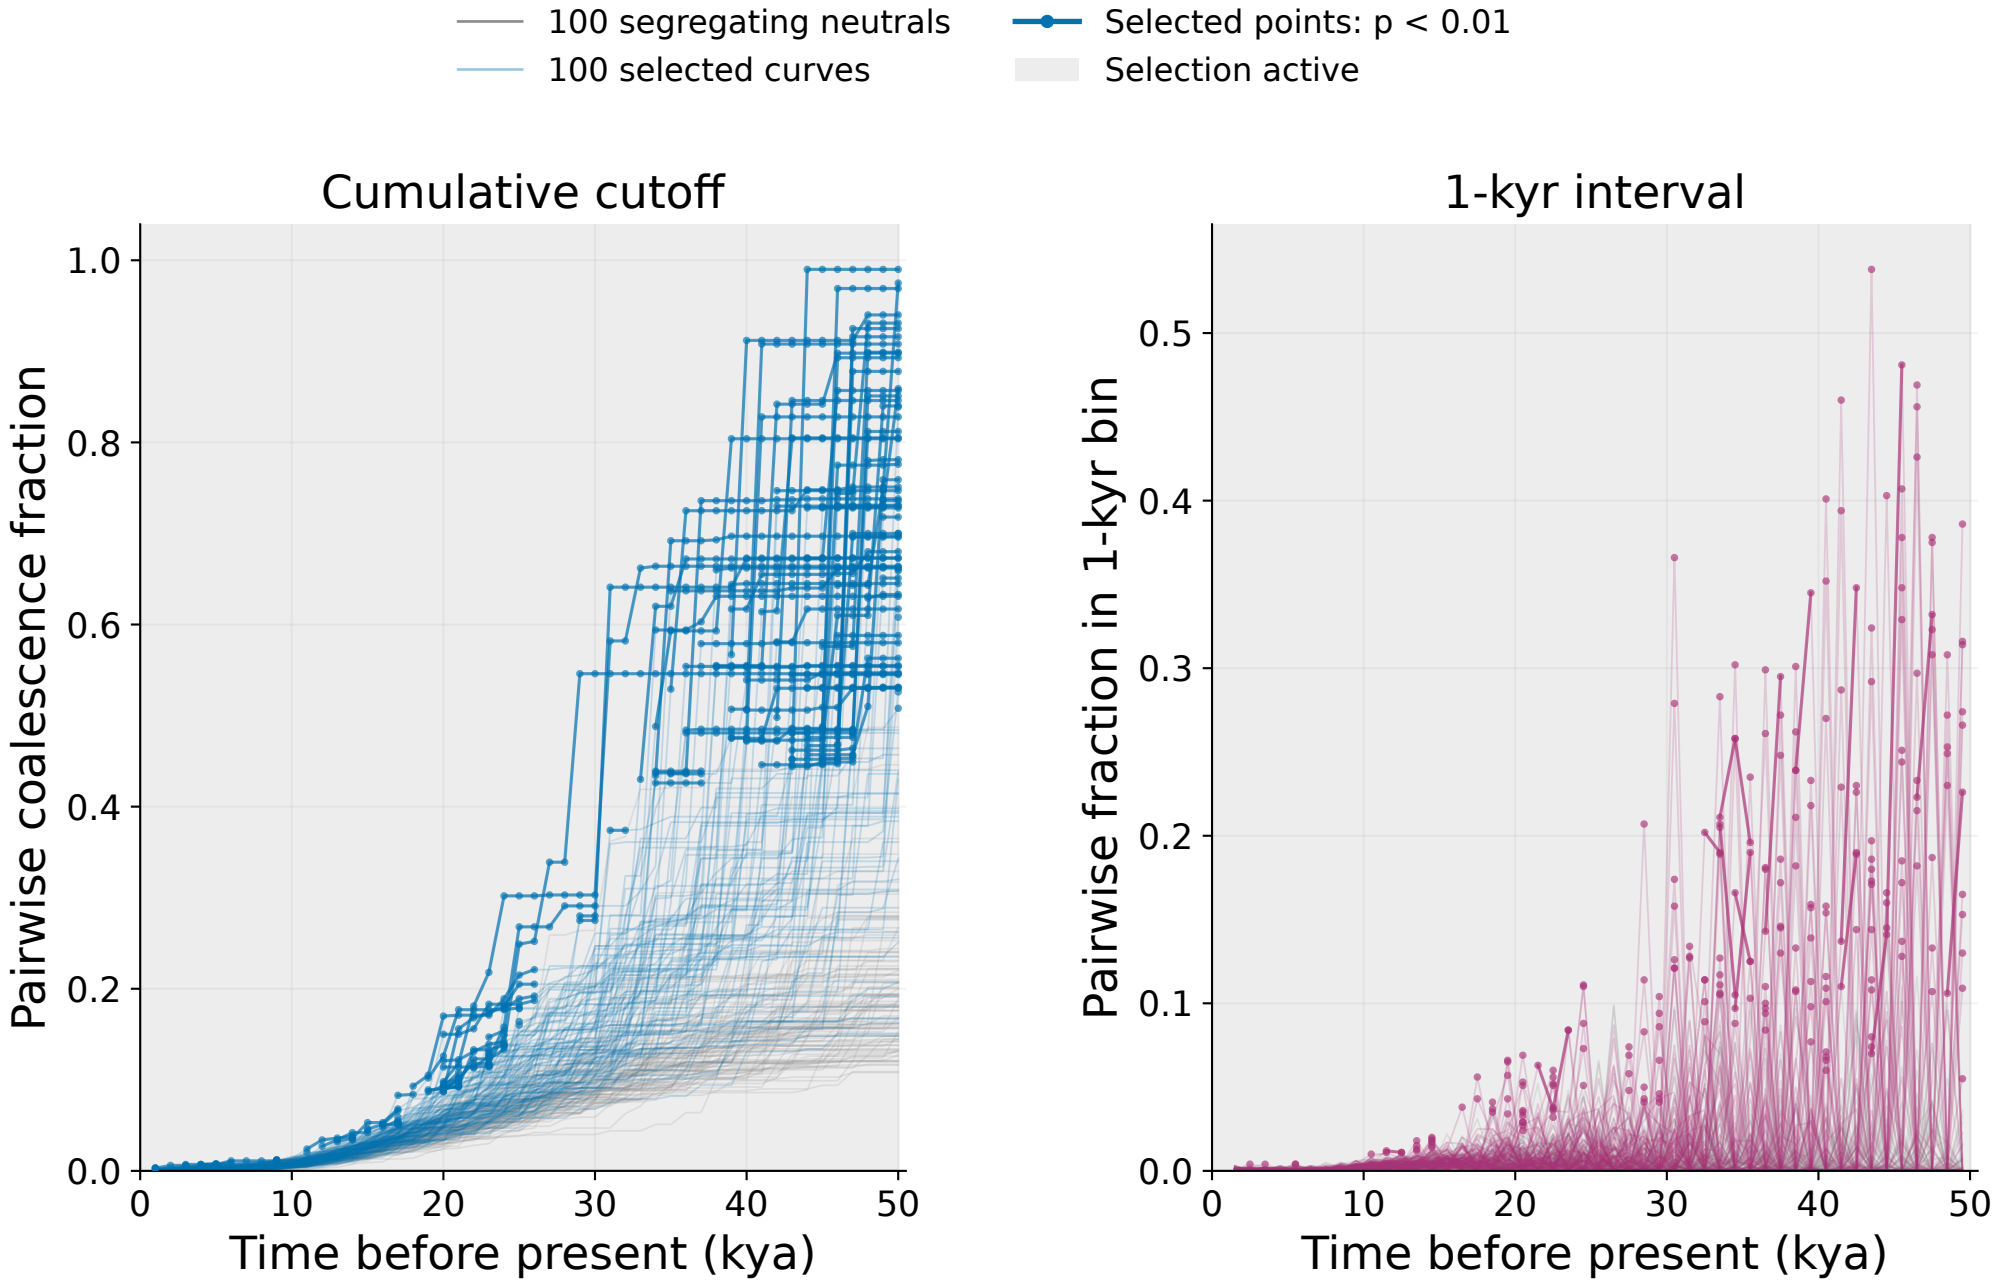


Bold points use each simulation’s own p value against the same 100 segregating neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.

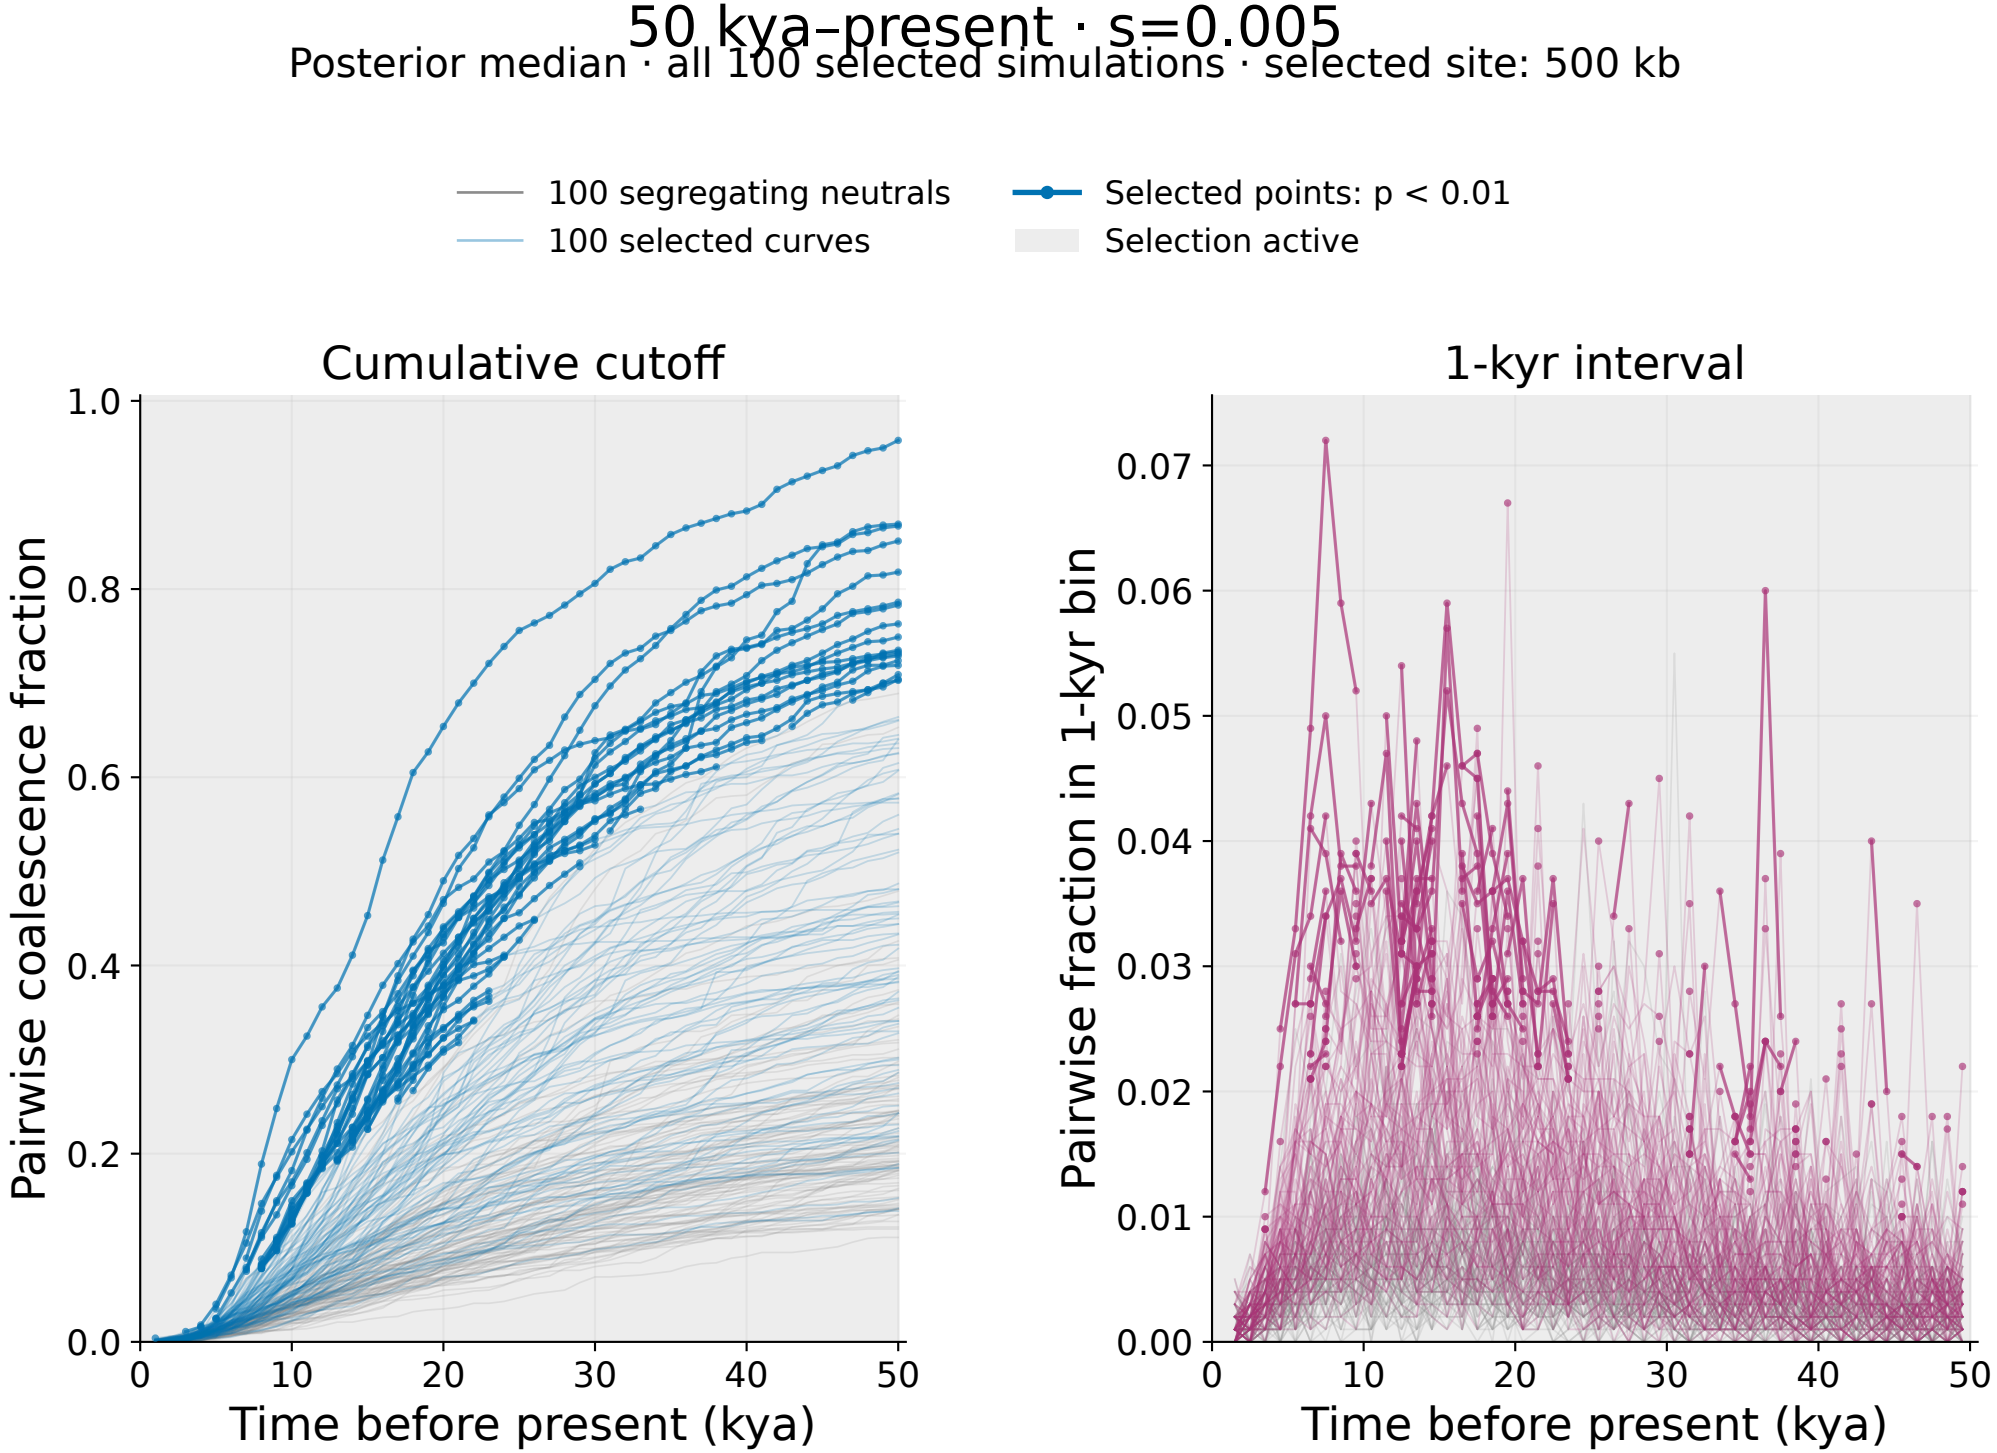

Bold points use each simulation’s own p value against the same 100 segregating neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.

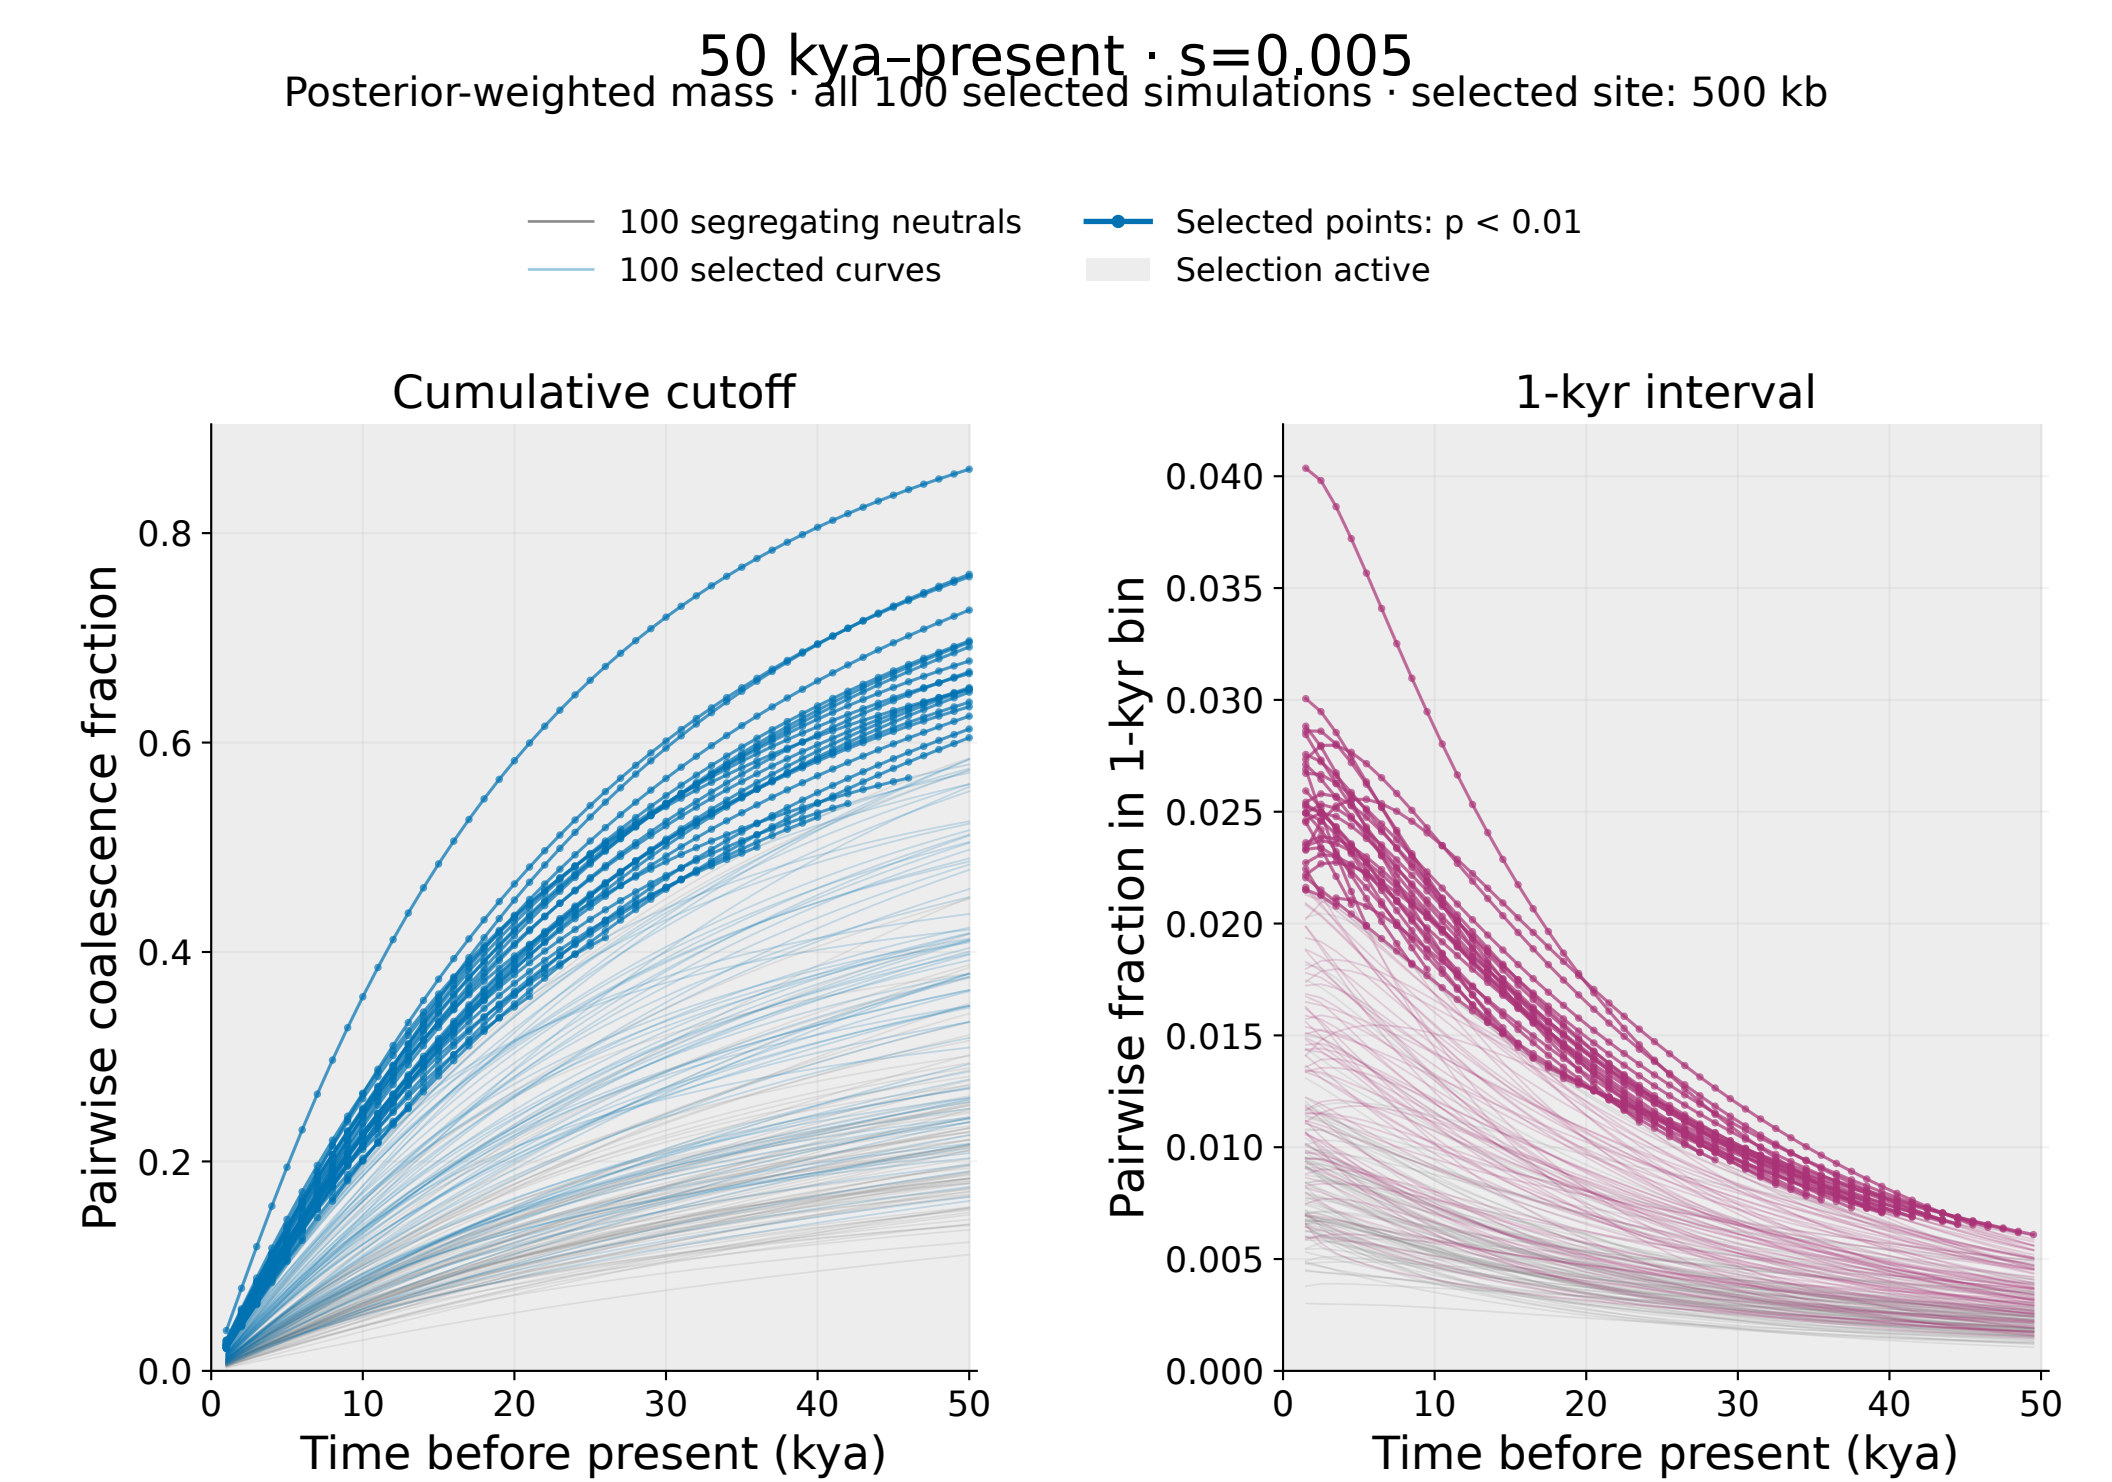

Bold points use each simulation’s own p value against the same 100 segregating neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.