
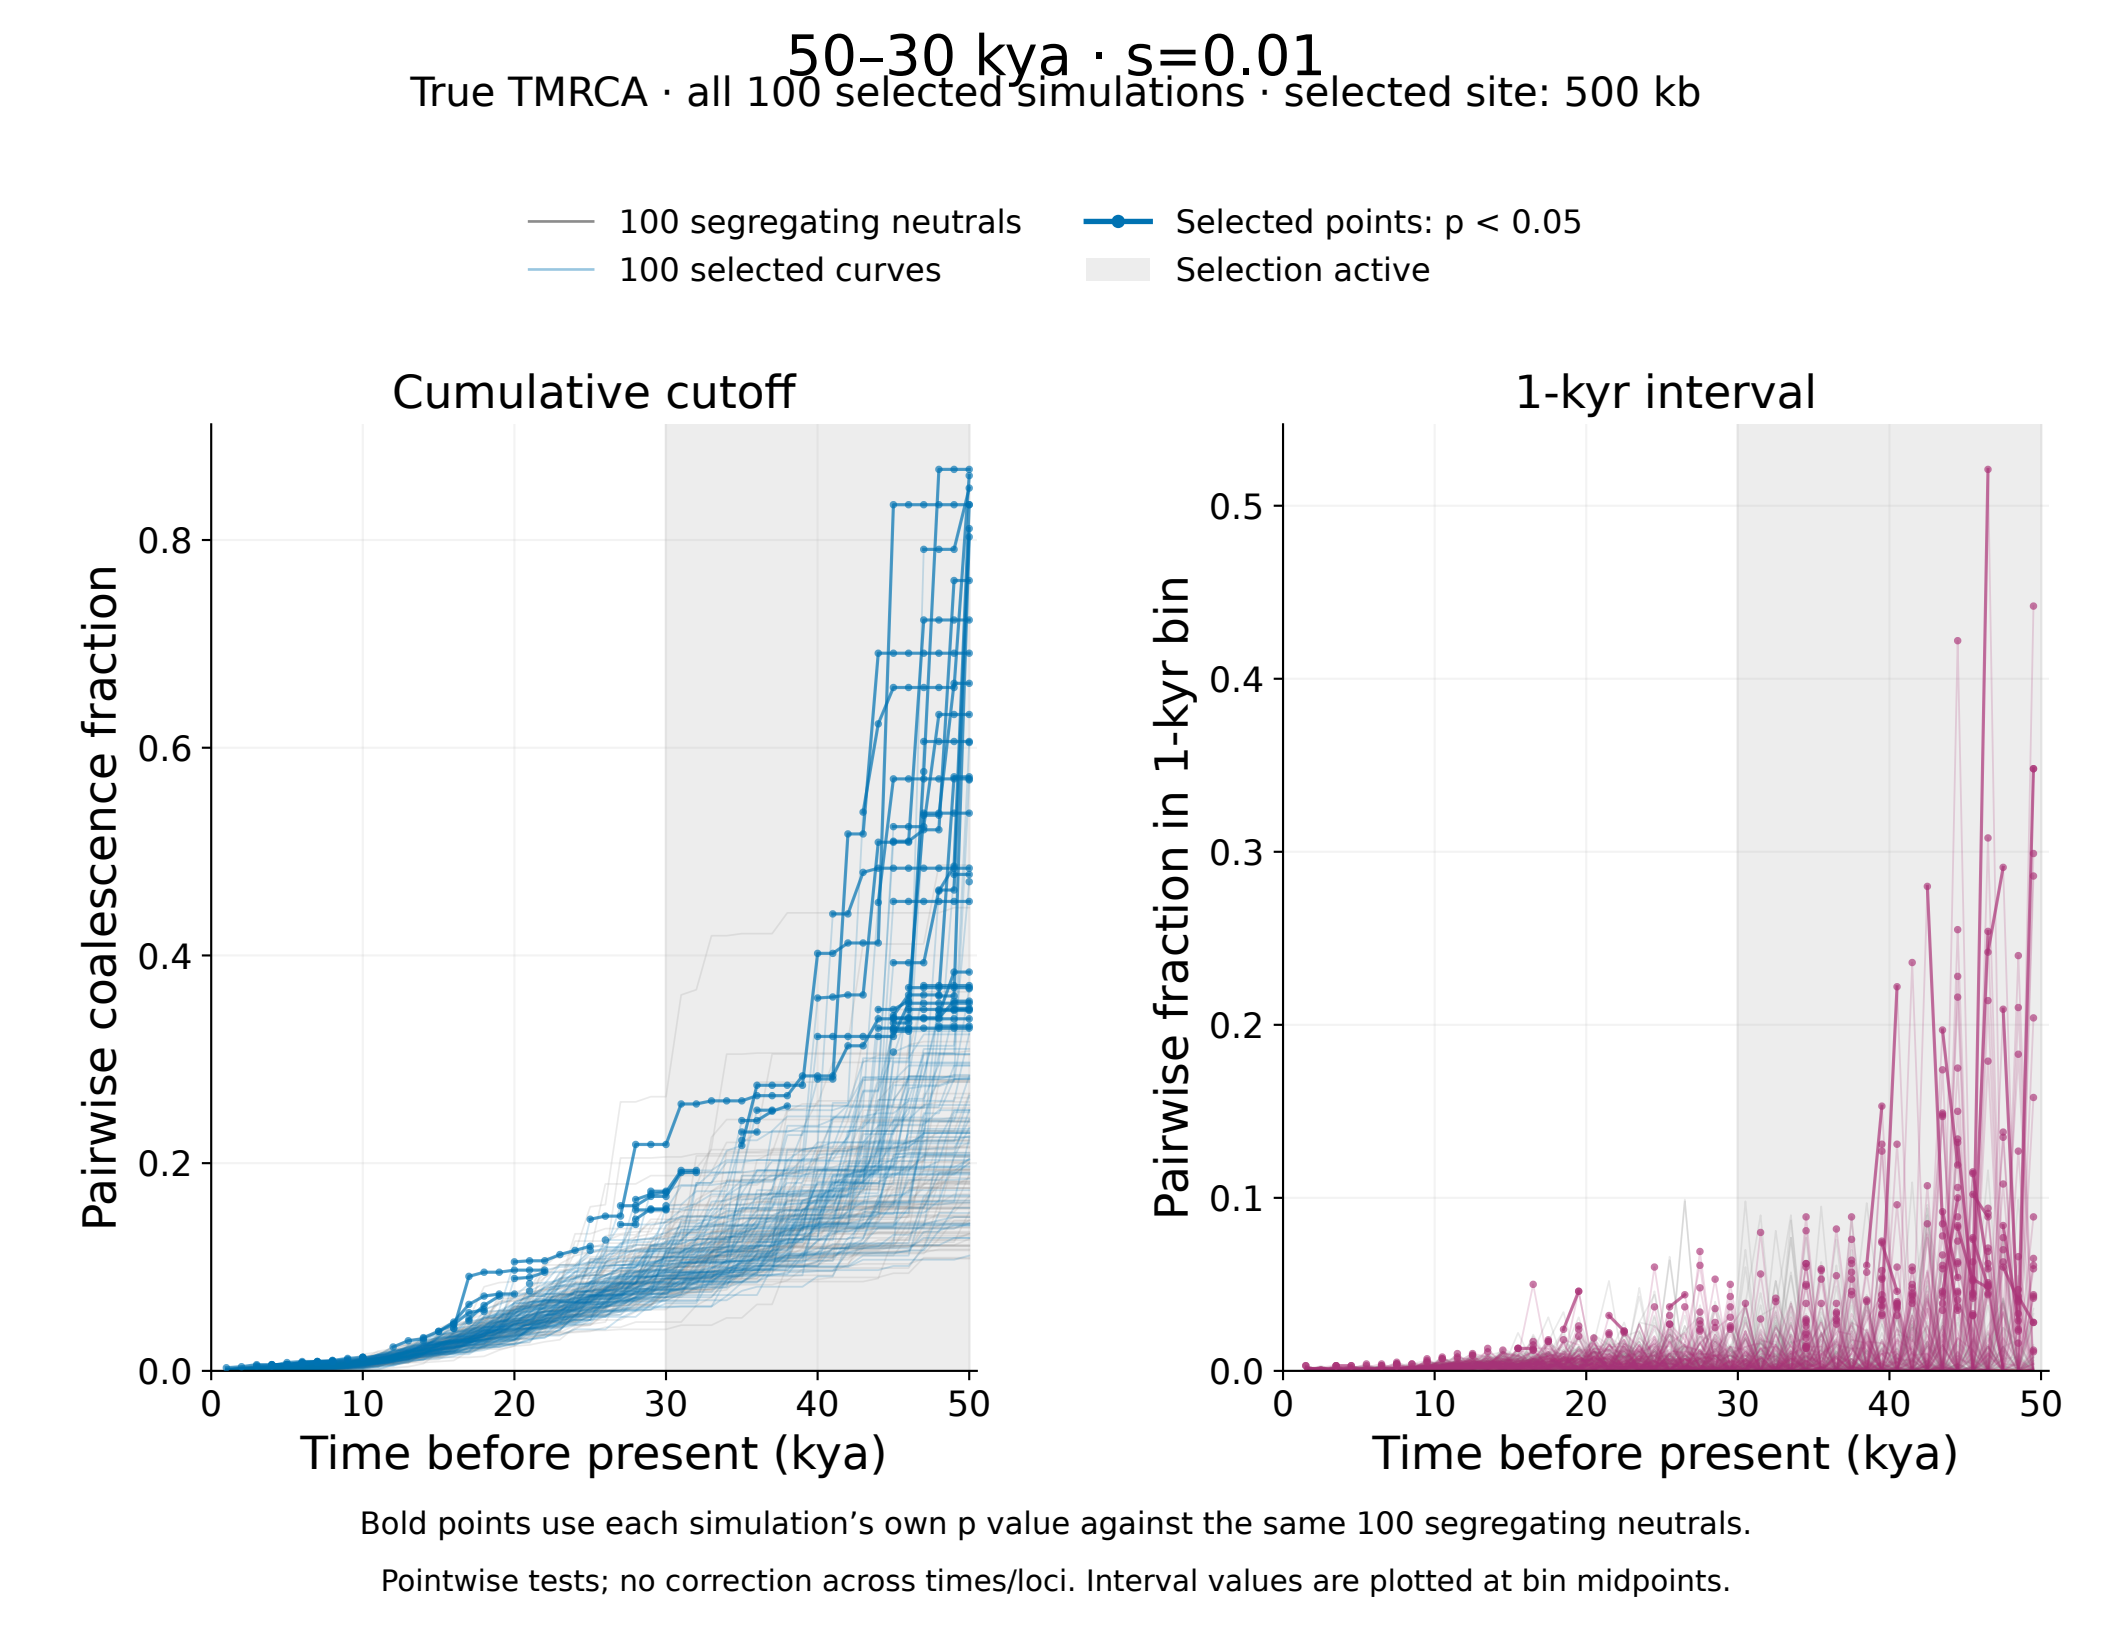



Bold points use each simulation's own p value against the same 100 segregating neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.

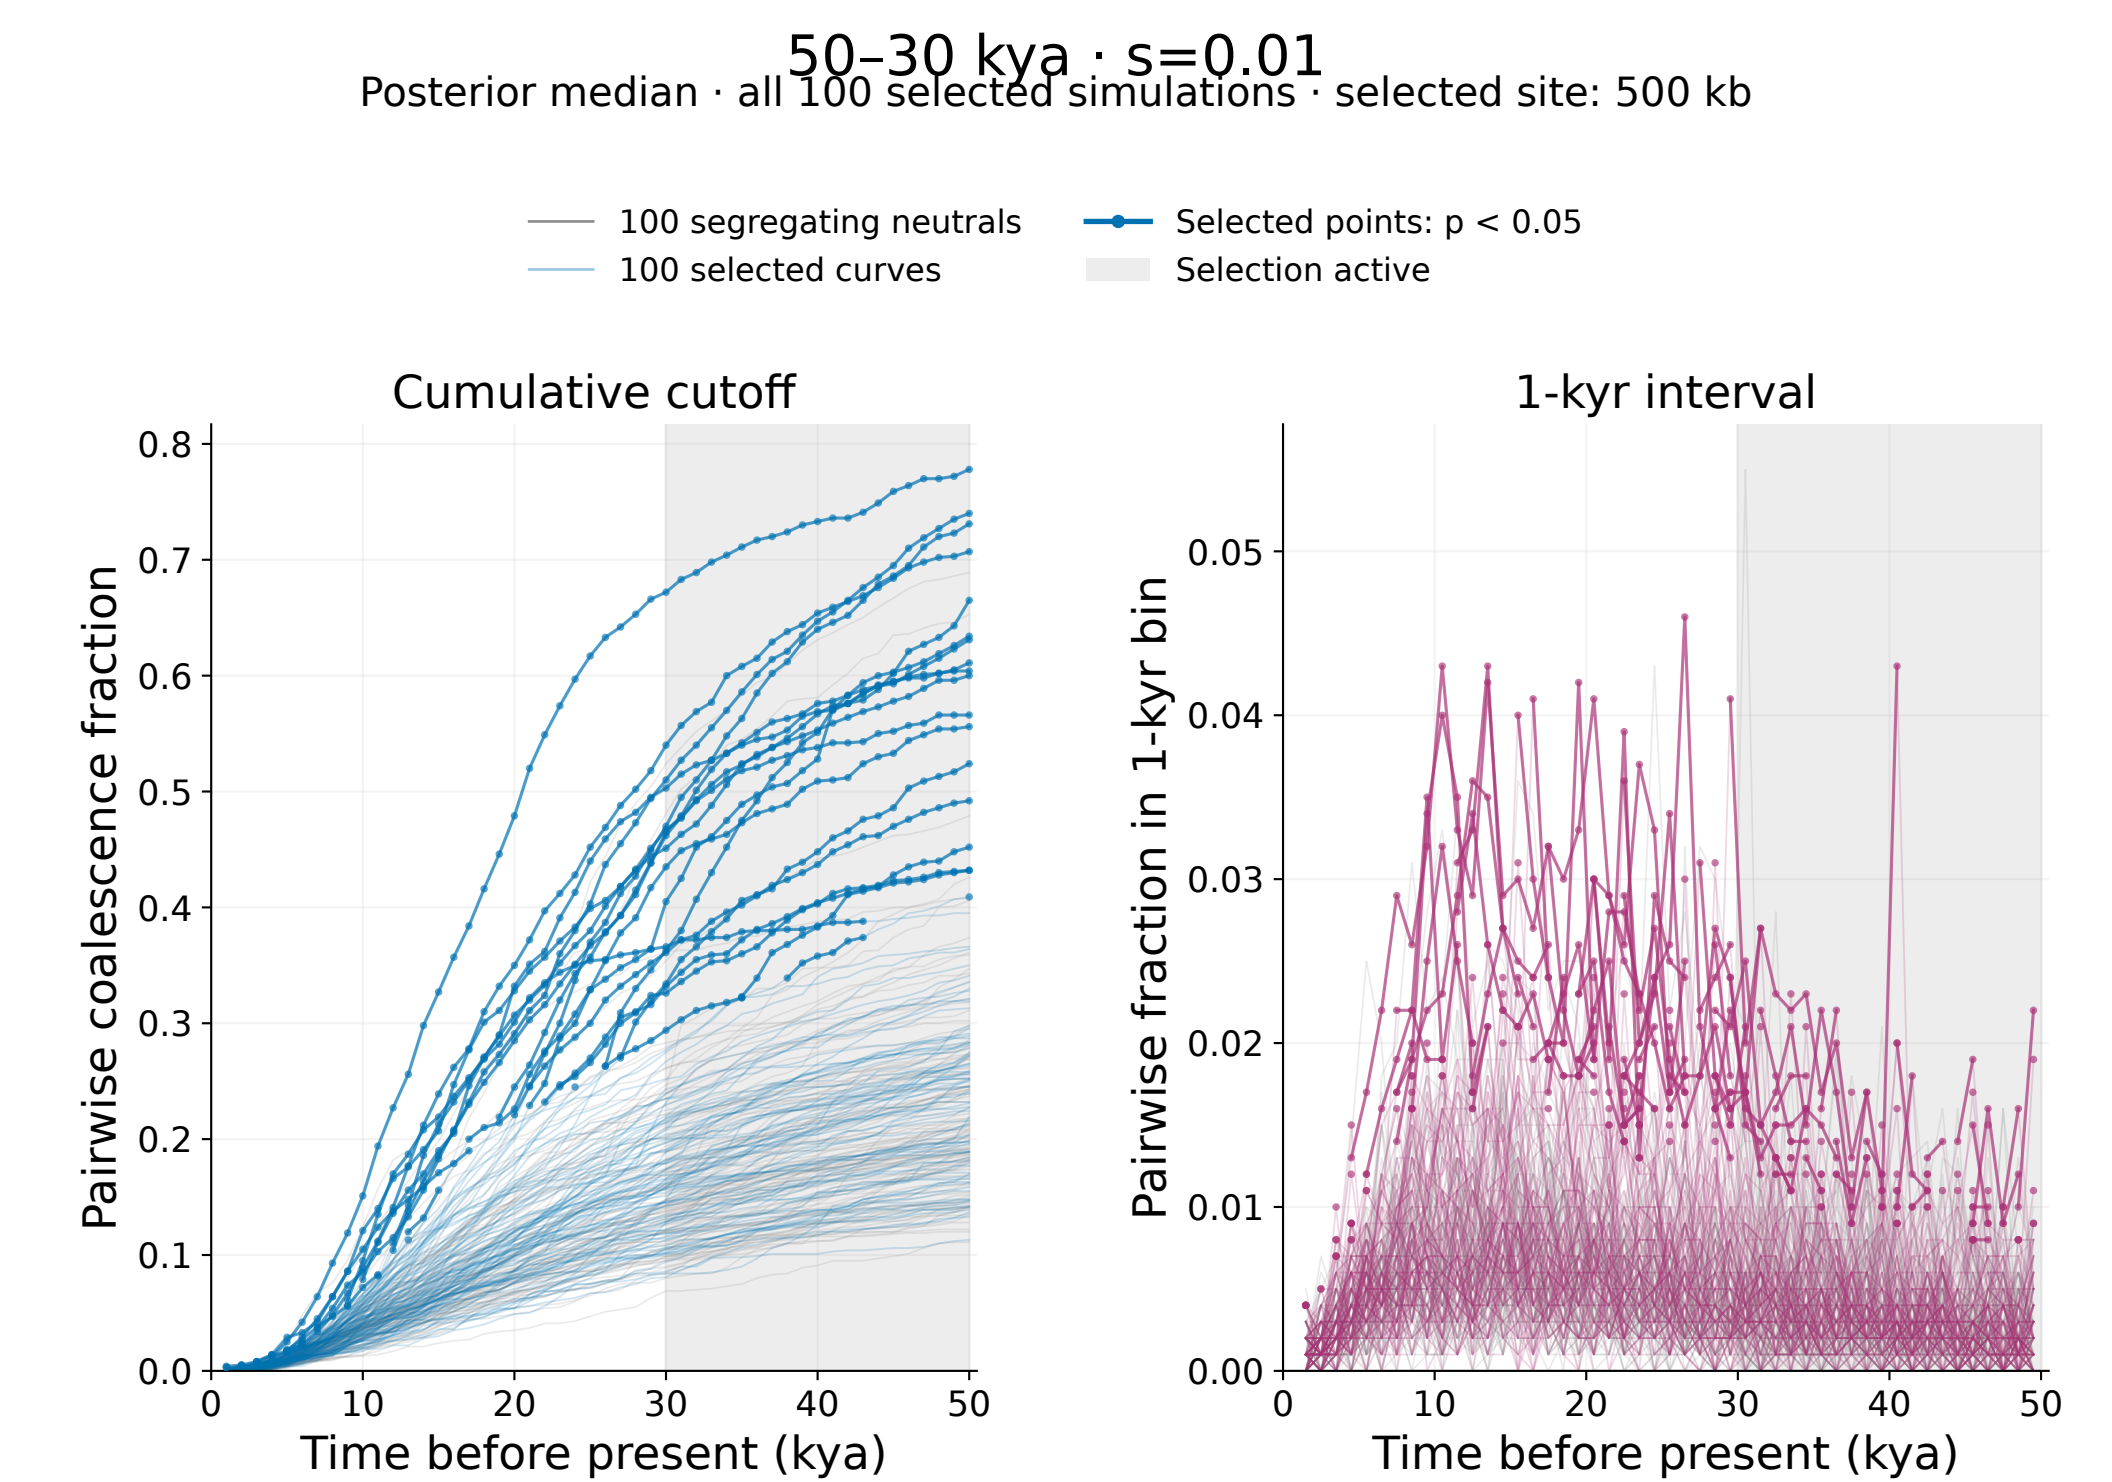


Bold points use each simulation’s own p value against the same 100 segregating neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.

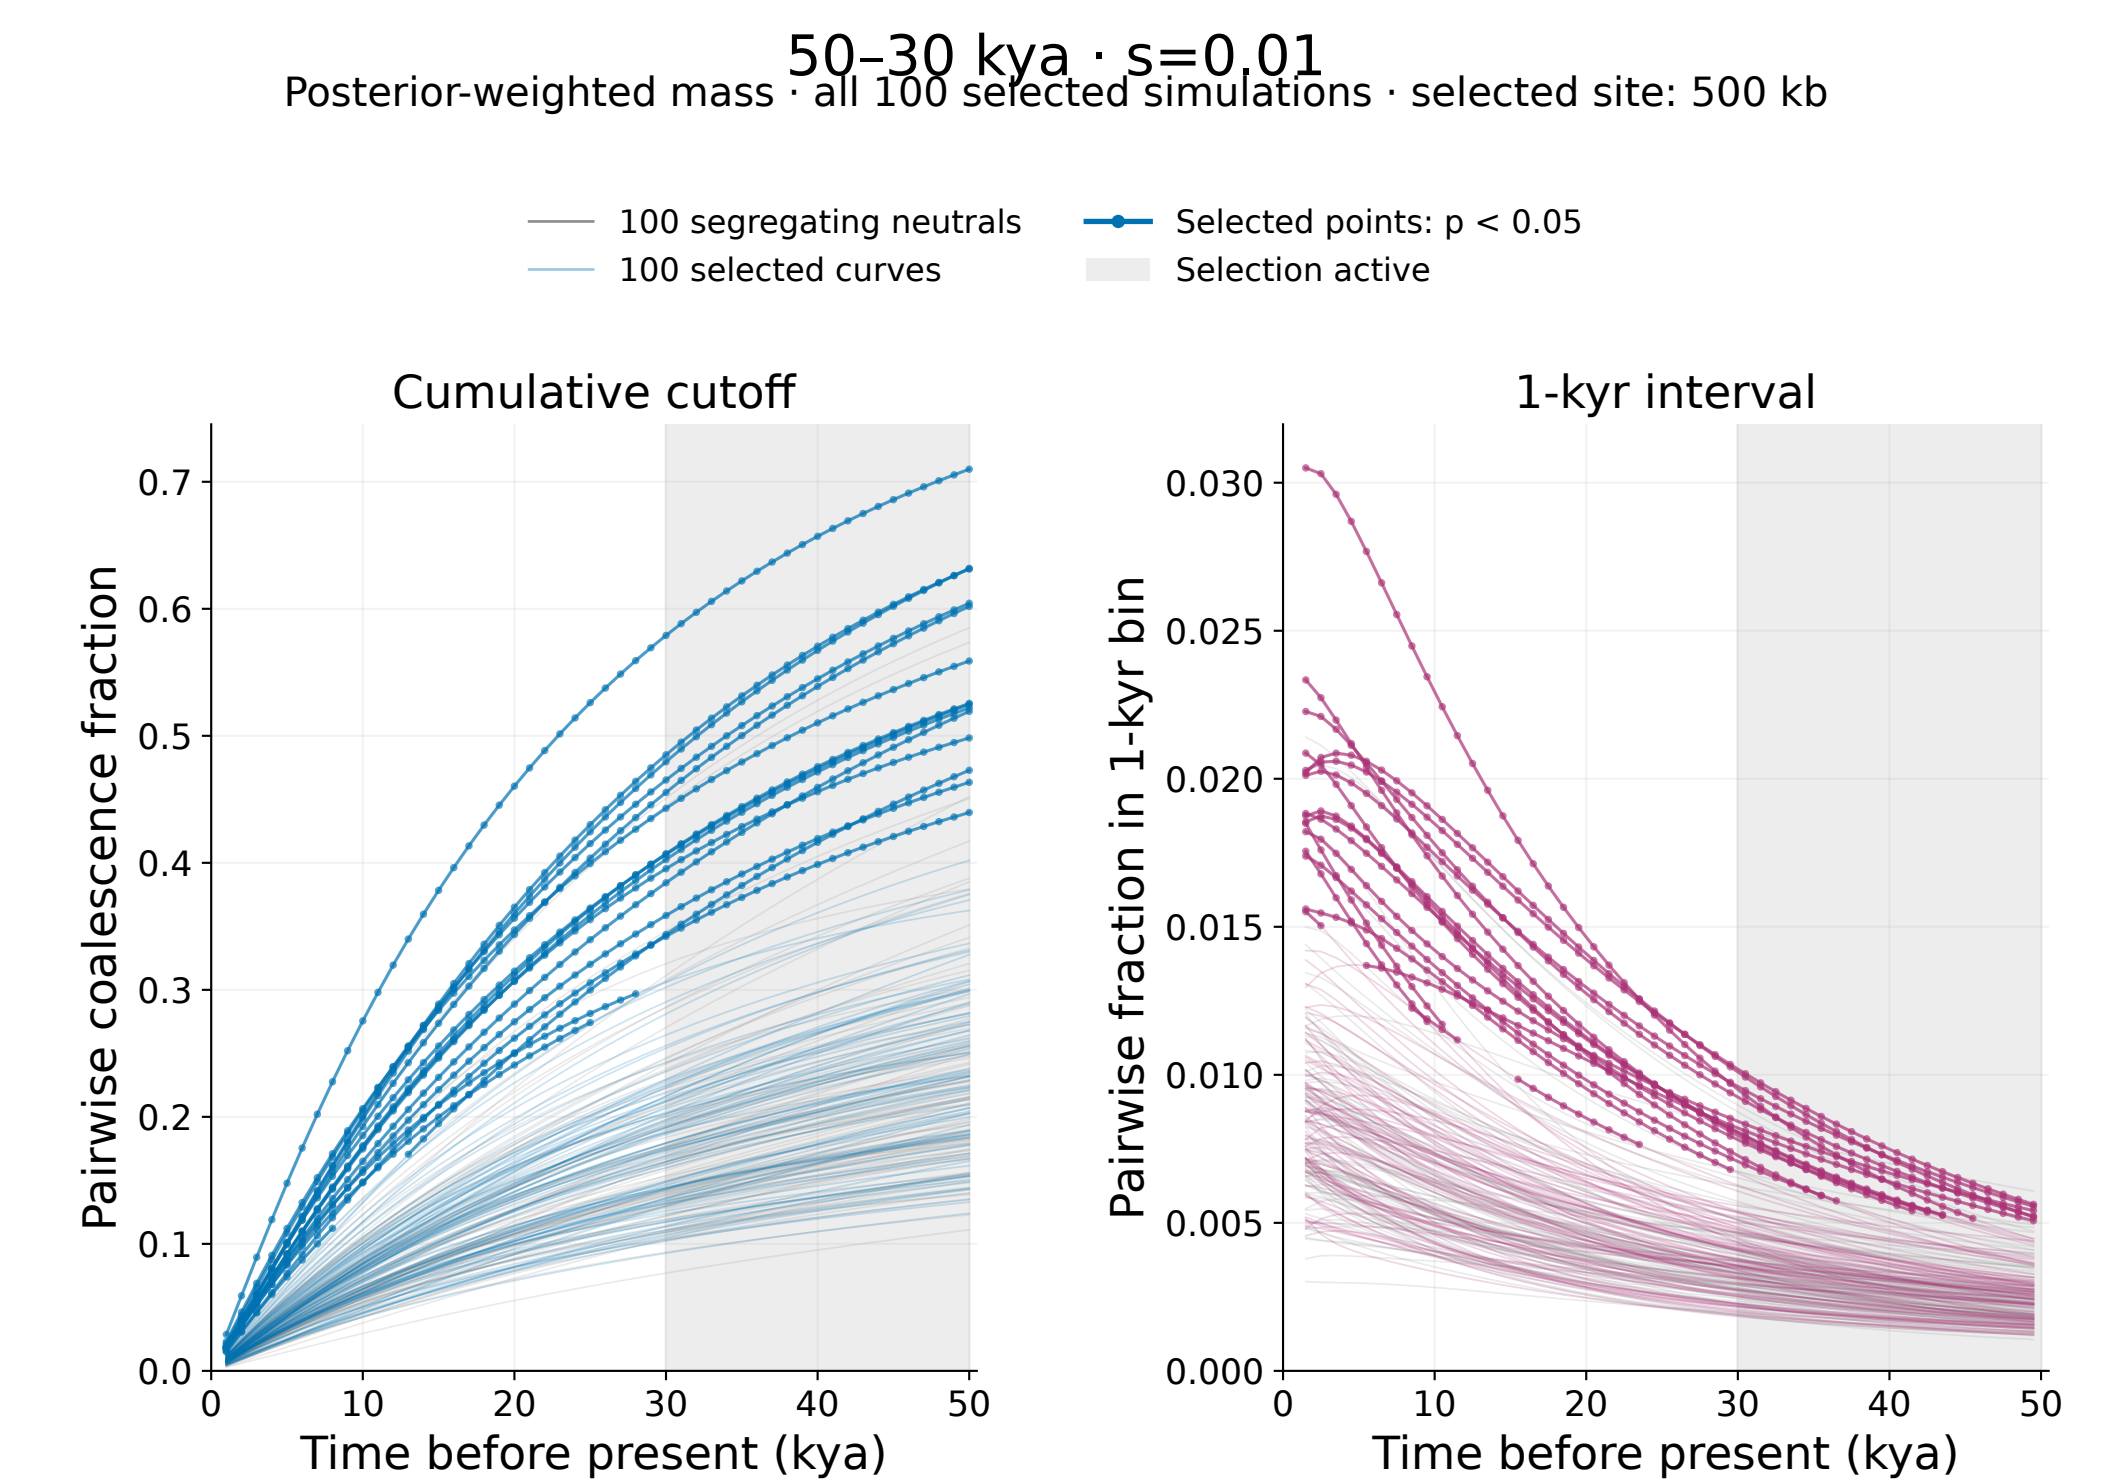


Bold points use each simulation’s own p value against the same 100 segregating neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.

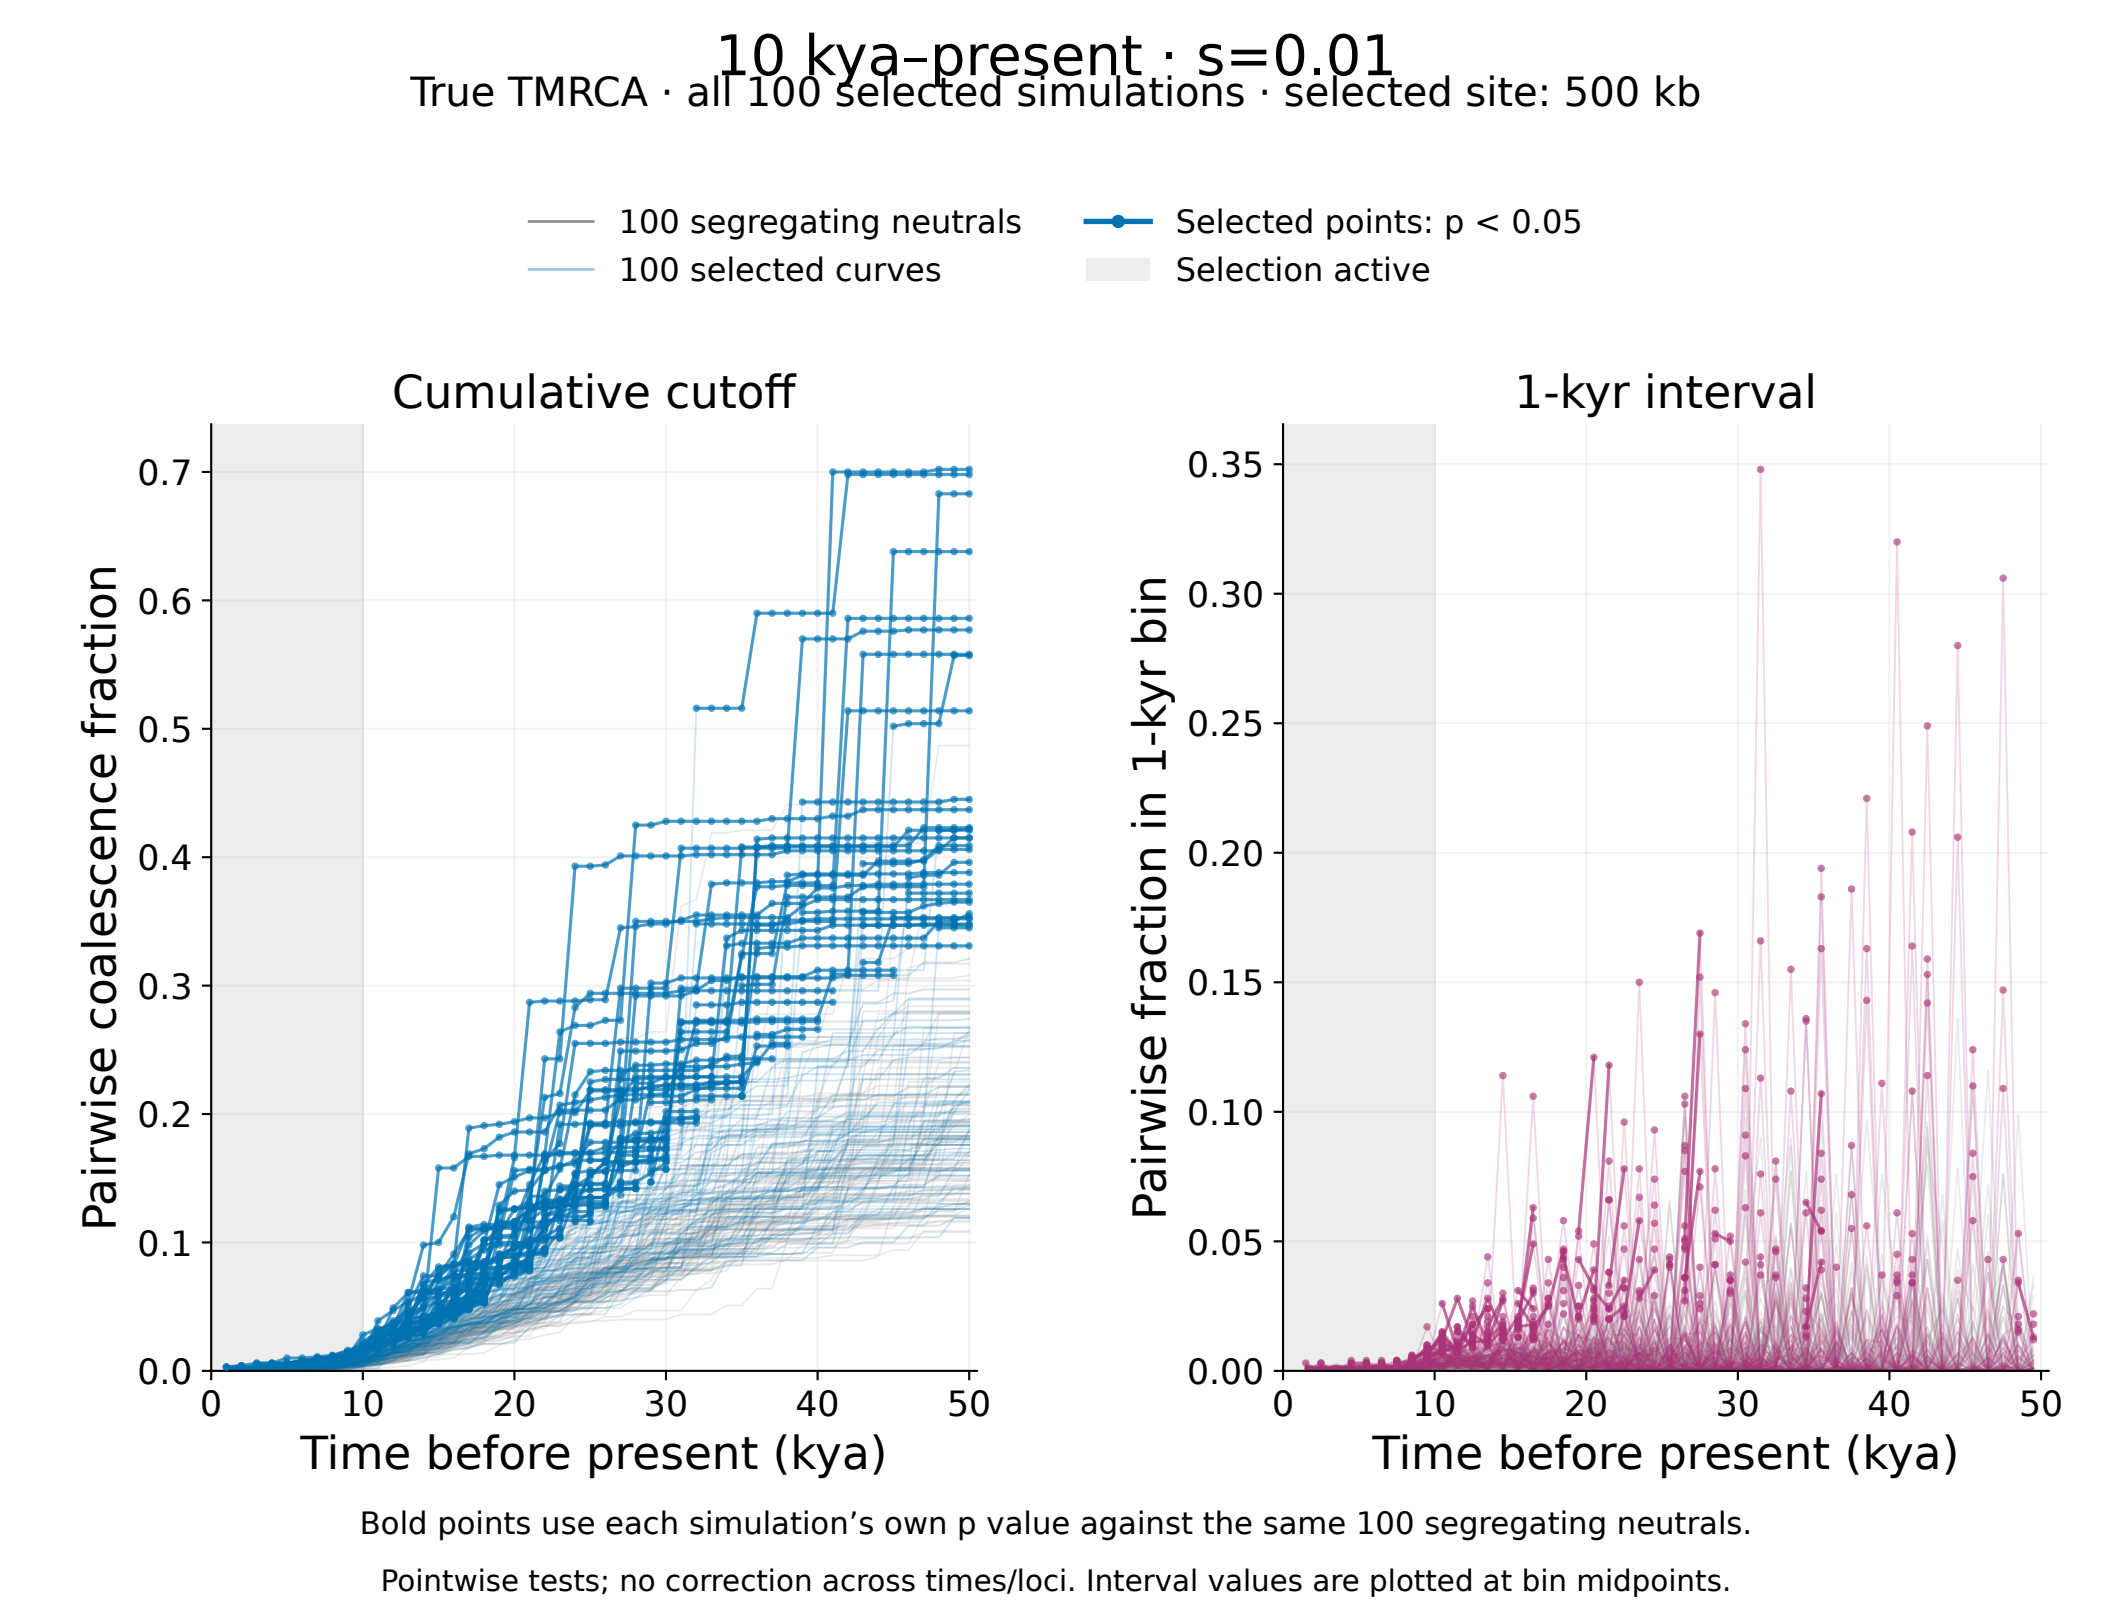
10 kya–present · s=0.01
True TMRCA · all 100 selected simulations · selected site: 500 kb
100 segregating neutrals
100 selected curves
Selected points: p < 0.05
Selection active
Cumulative cutoff
1-kyr interval
Pairwise coalescence fraction
Pairwise fraction in 1-kyr bin
Time before present (kya)
Time before present (kya)
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.00
0.05
0.10
0.15
0.20
0.25
0.30
0.35
0
10
20
30
40
50
Bold points use each simulation’s own p value against the same 100 segregating neutrals.
Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.


10 kya–present · s=0.01

Posterior median · all 100 selected simulations · selected site: 500 kb

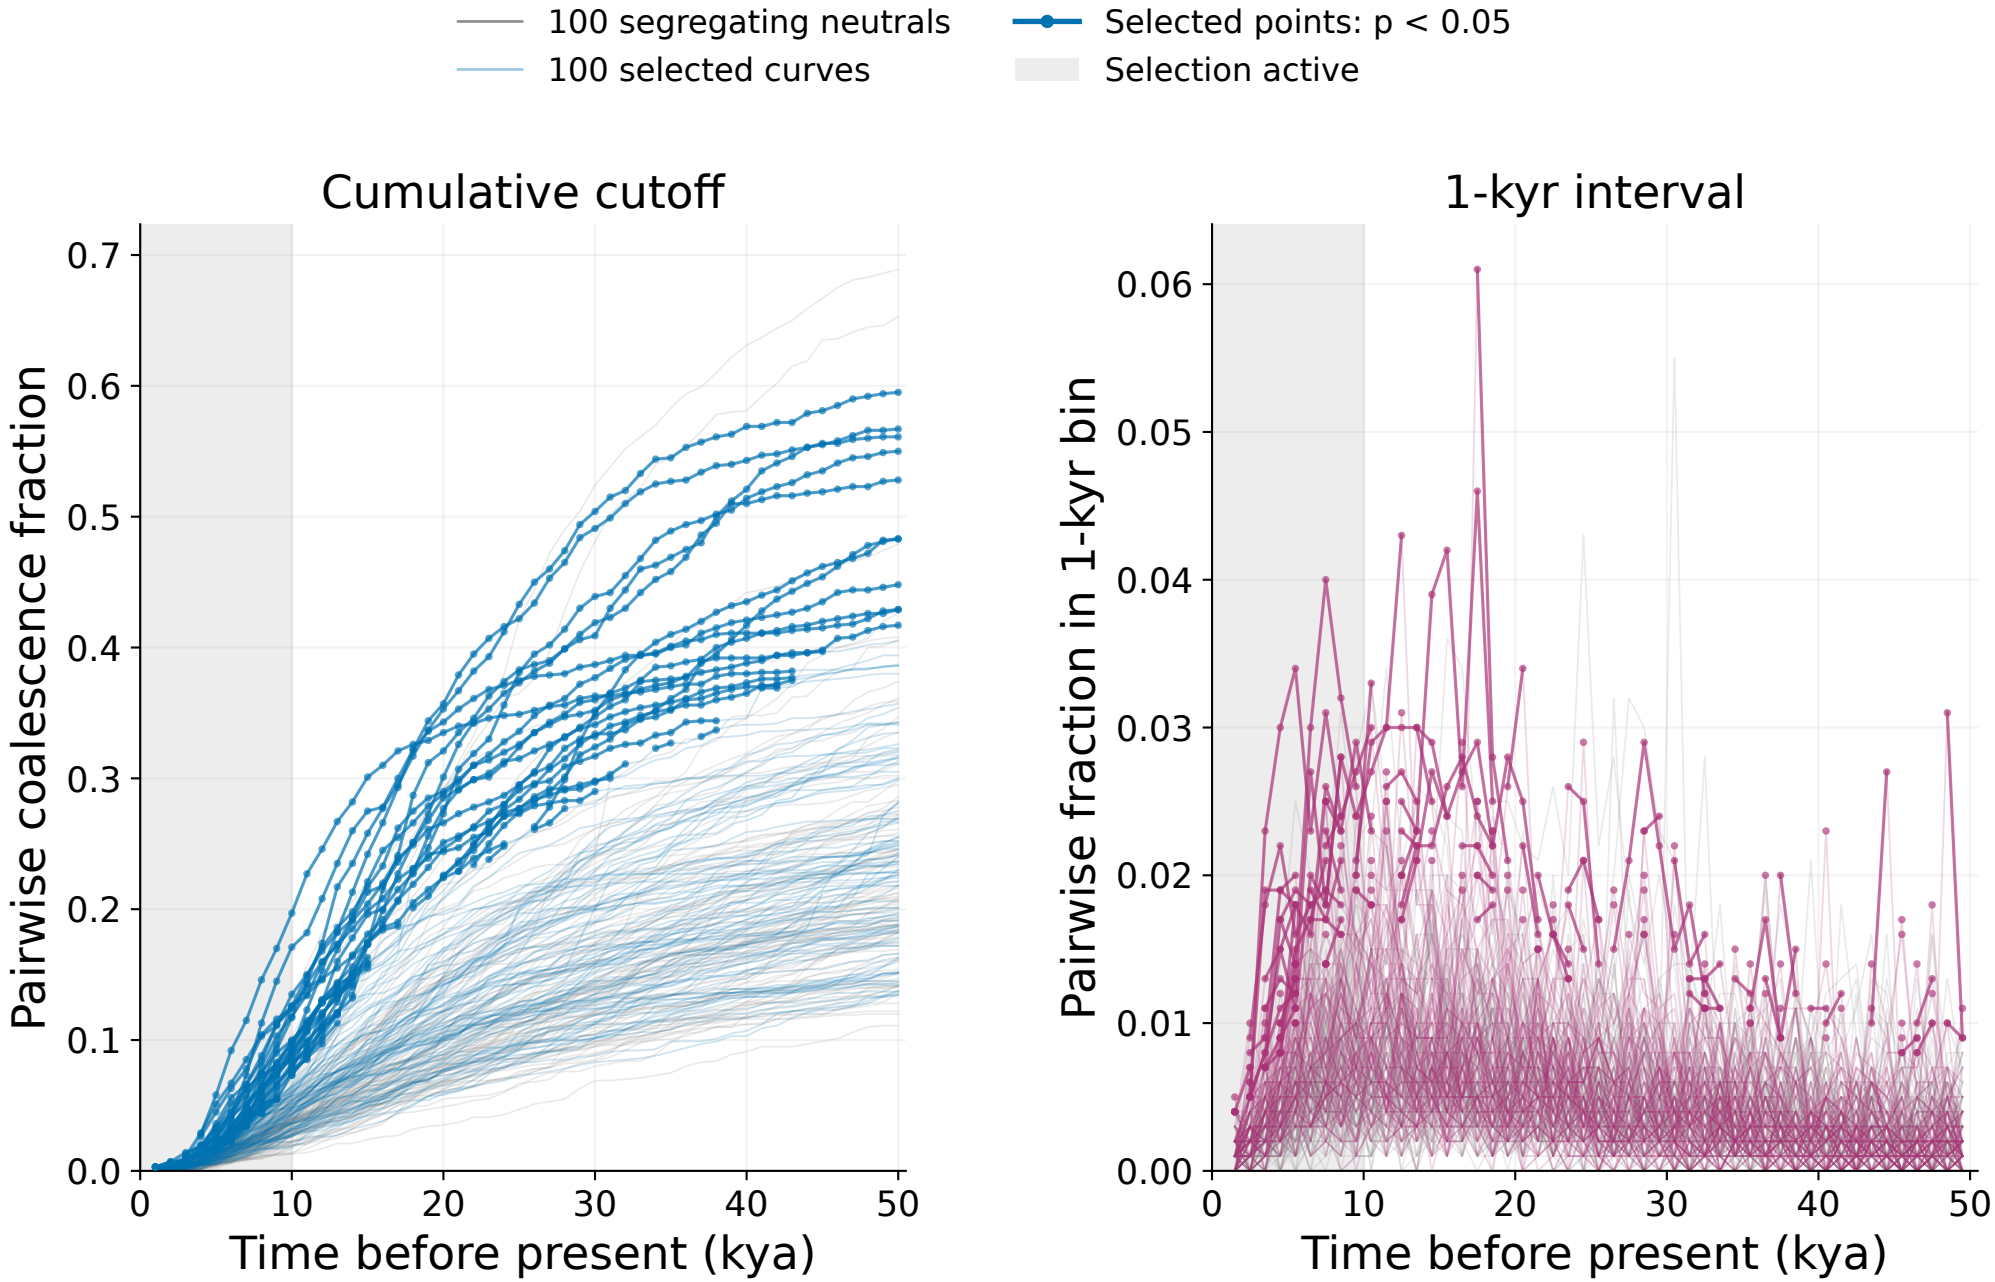

Bold points use each simulation’s own p value against the same 100 segregating neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.

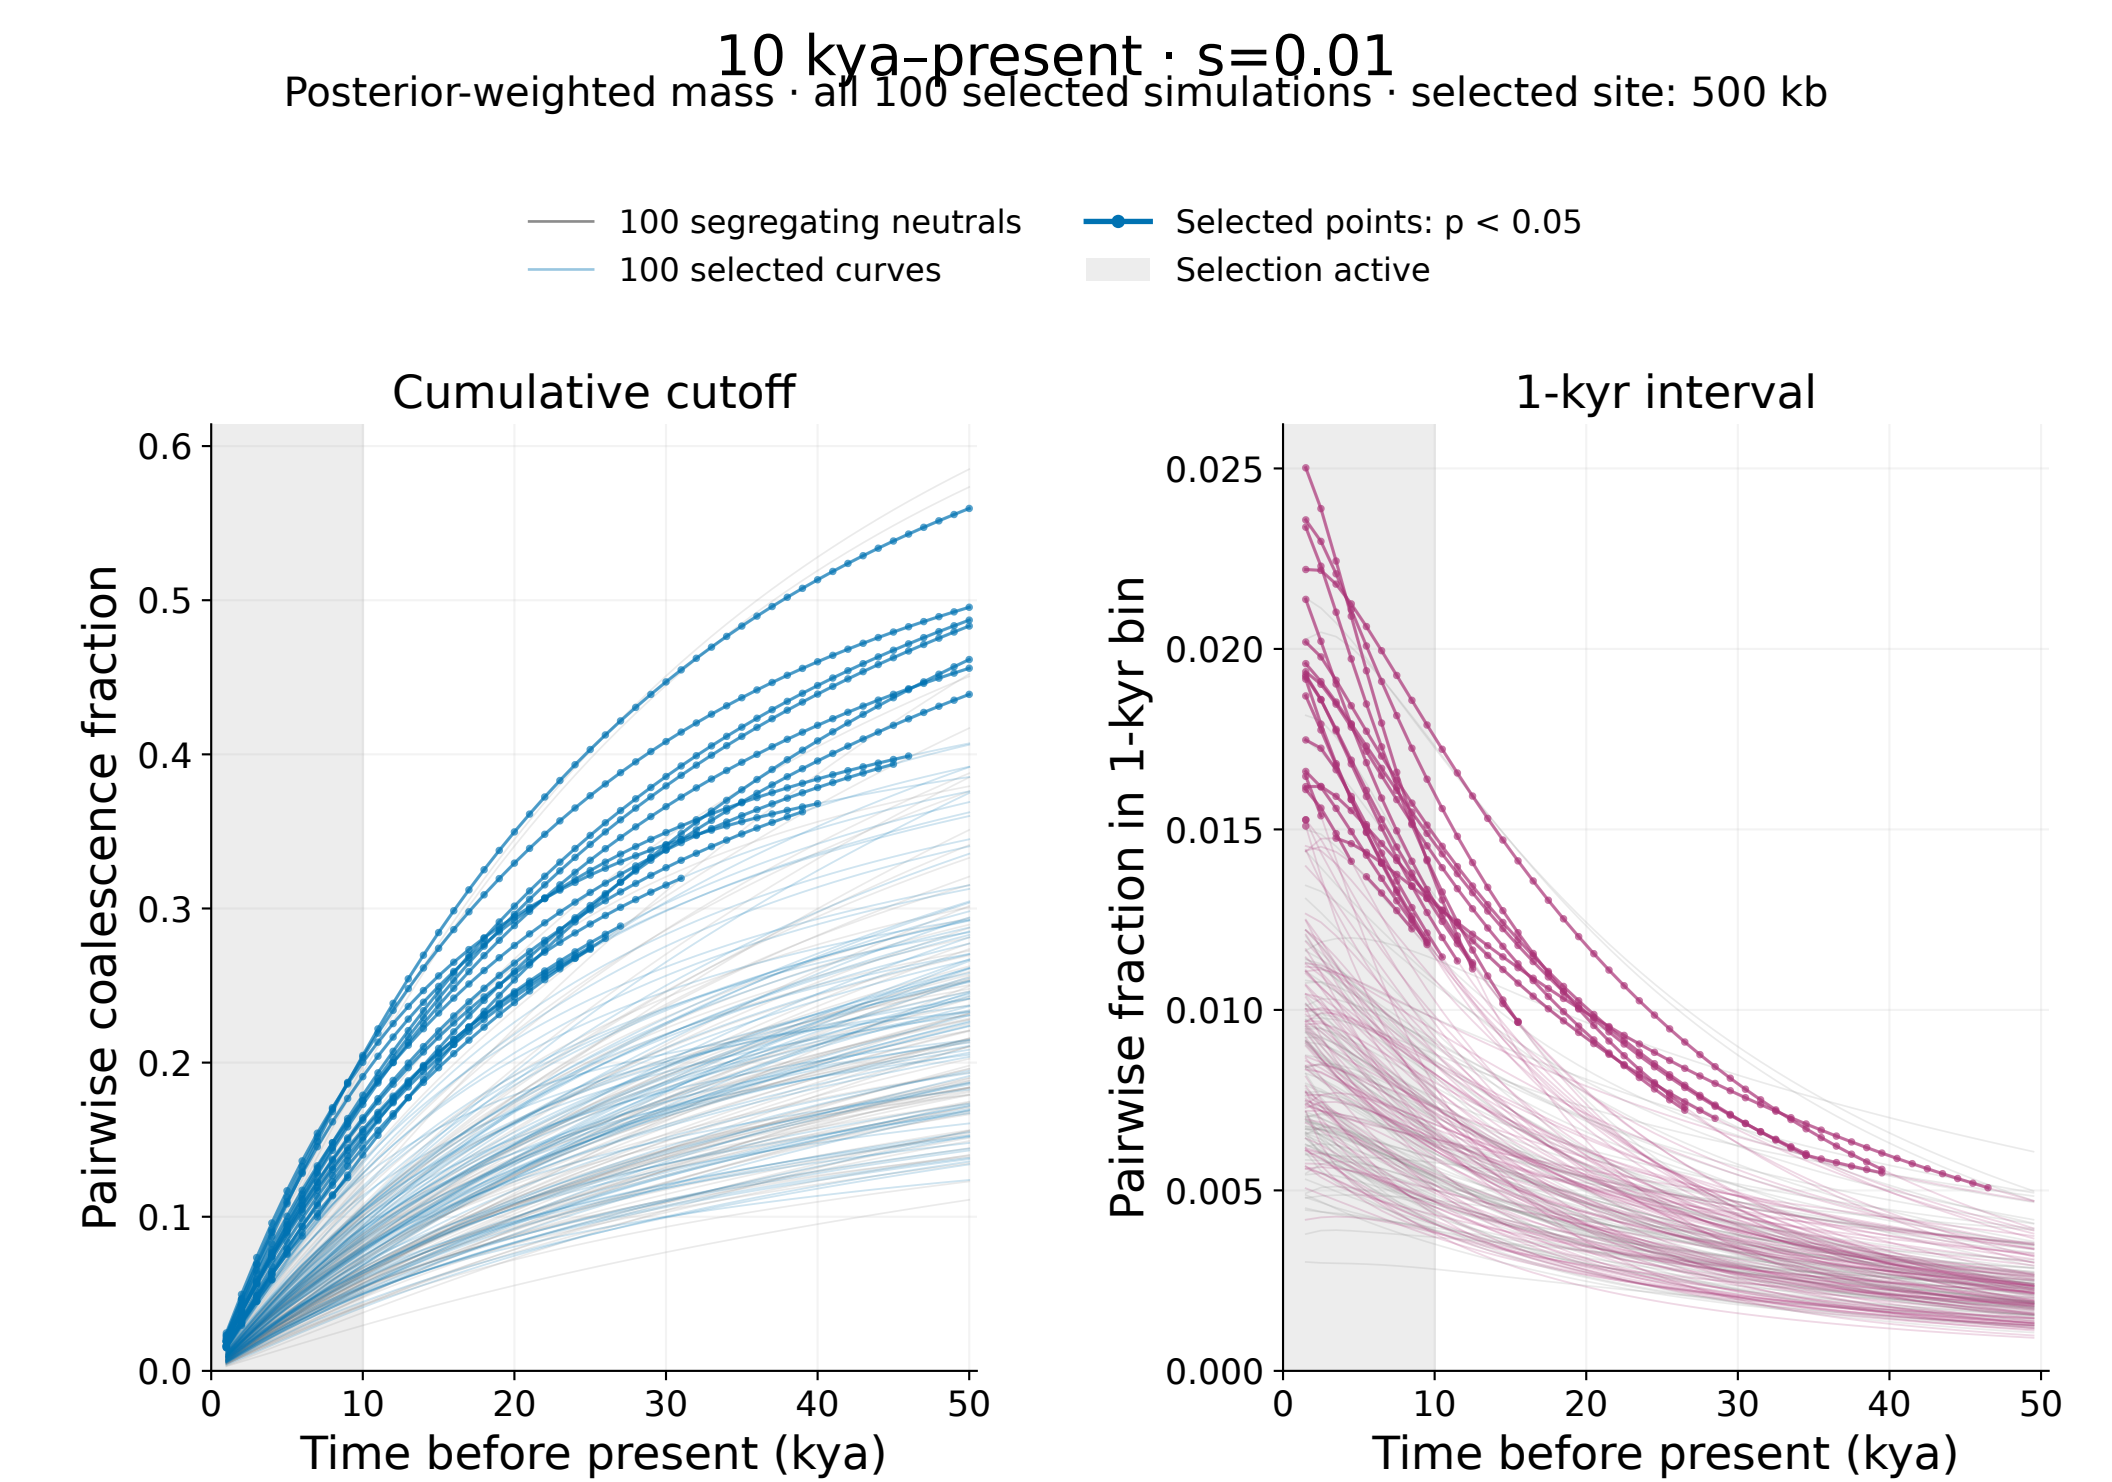


Bold points use each simulation's own p value against the same 100 segregating neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.


50 kya–present · s=0.01

True TMRCA · all 100 selected simulations · selected site: 500 kb

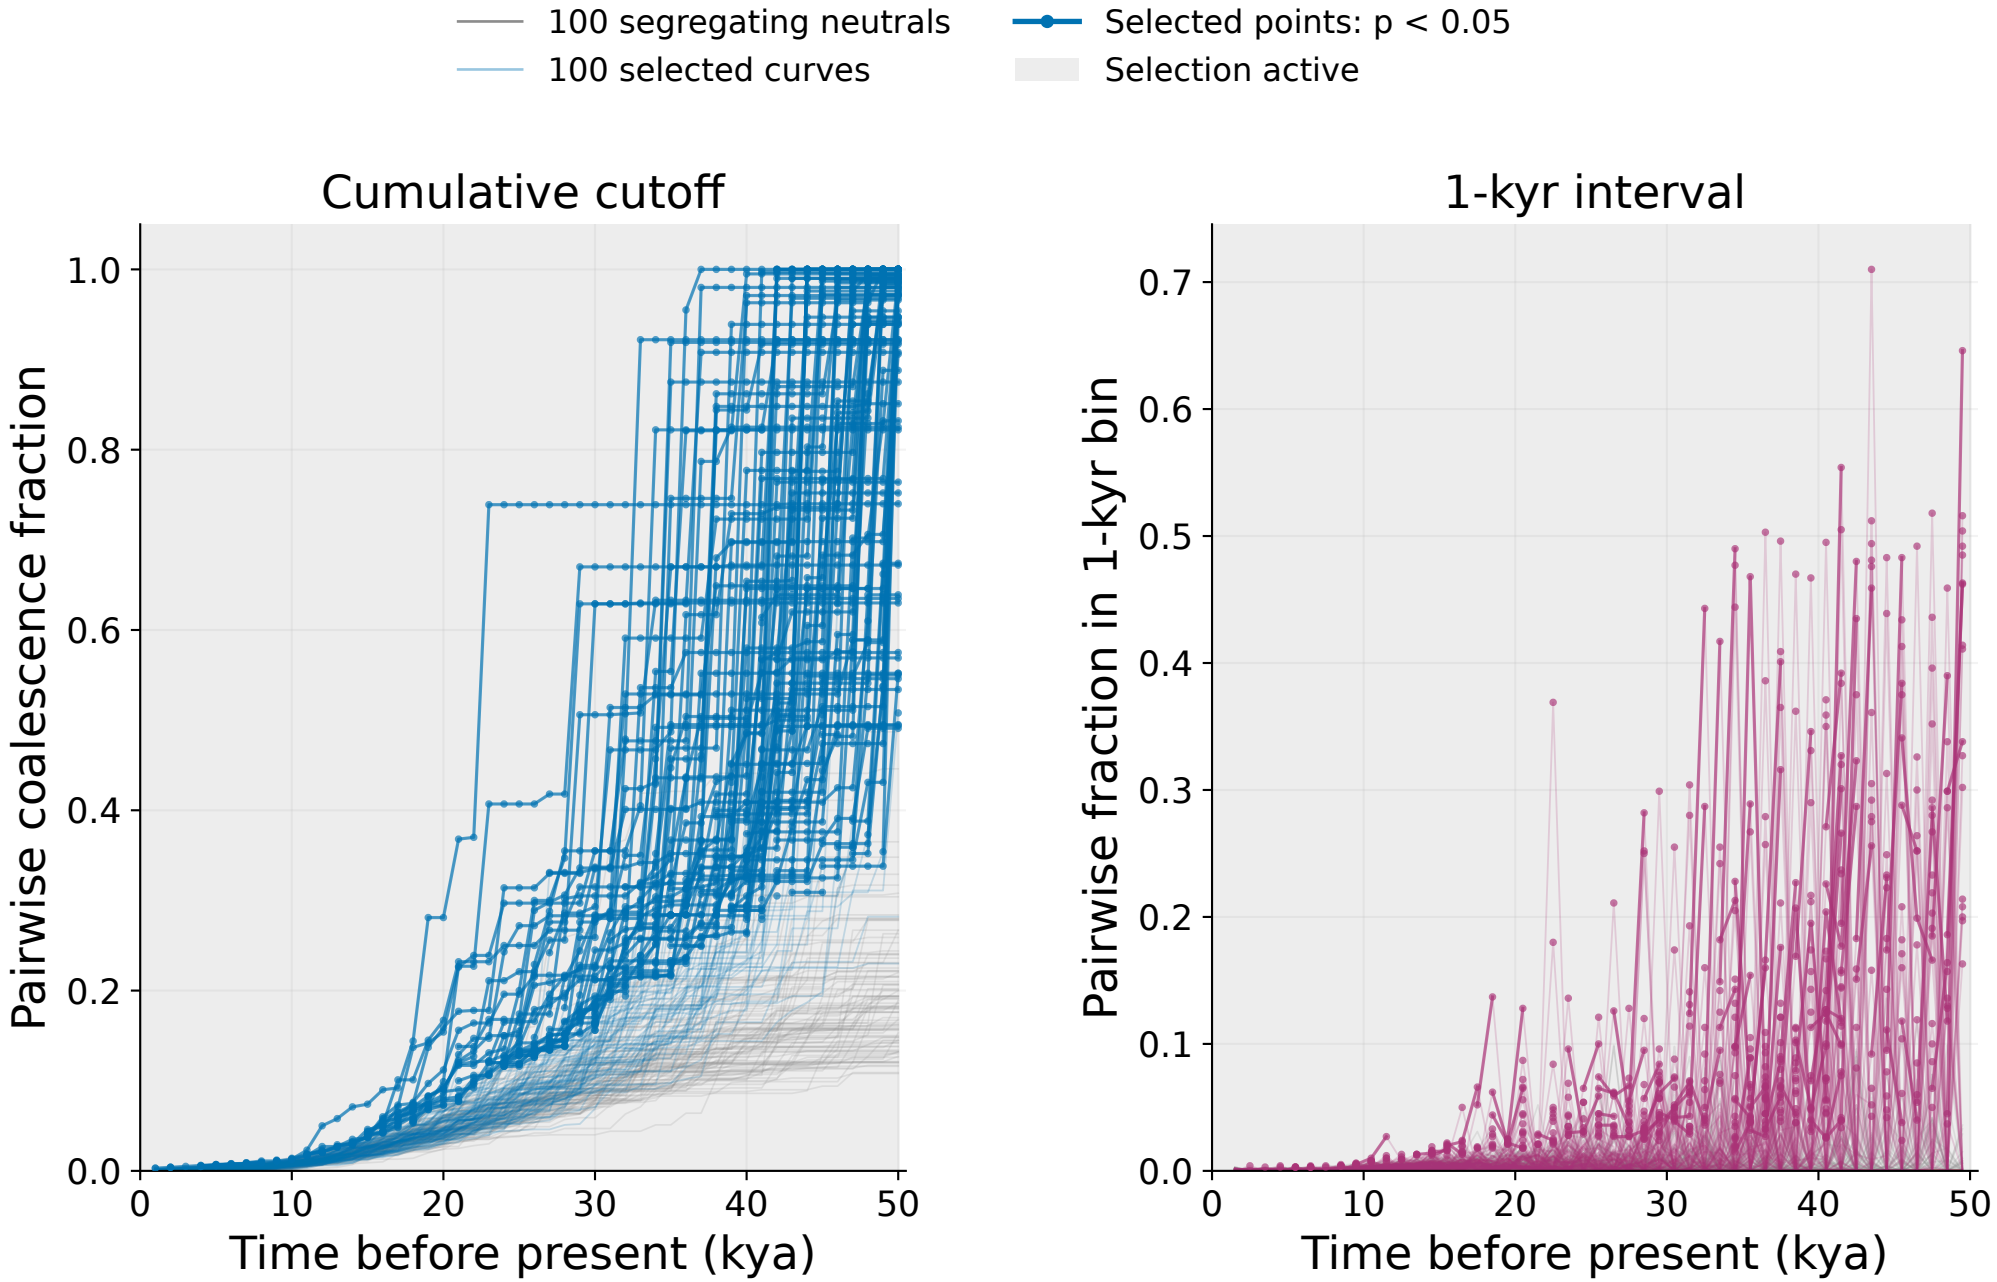


Bold points use each simulation's own p value against the same 100 segregating neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.

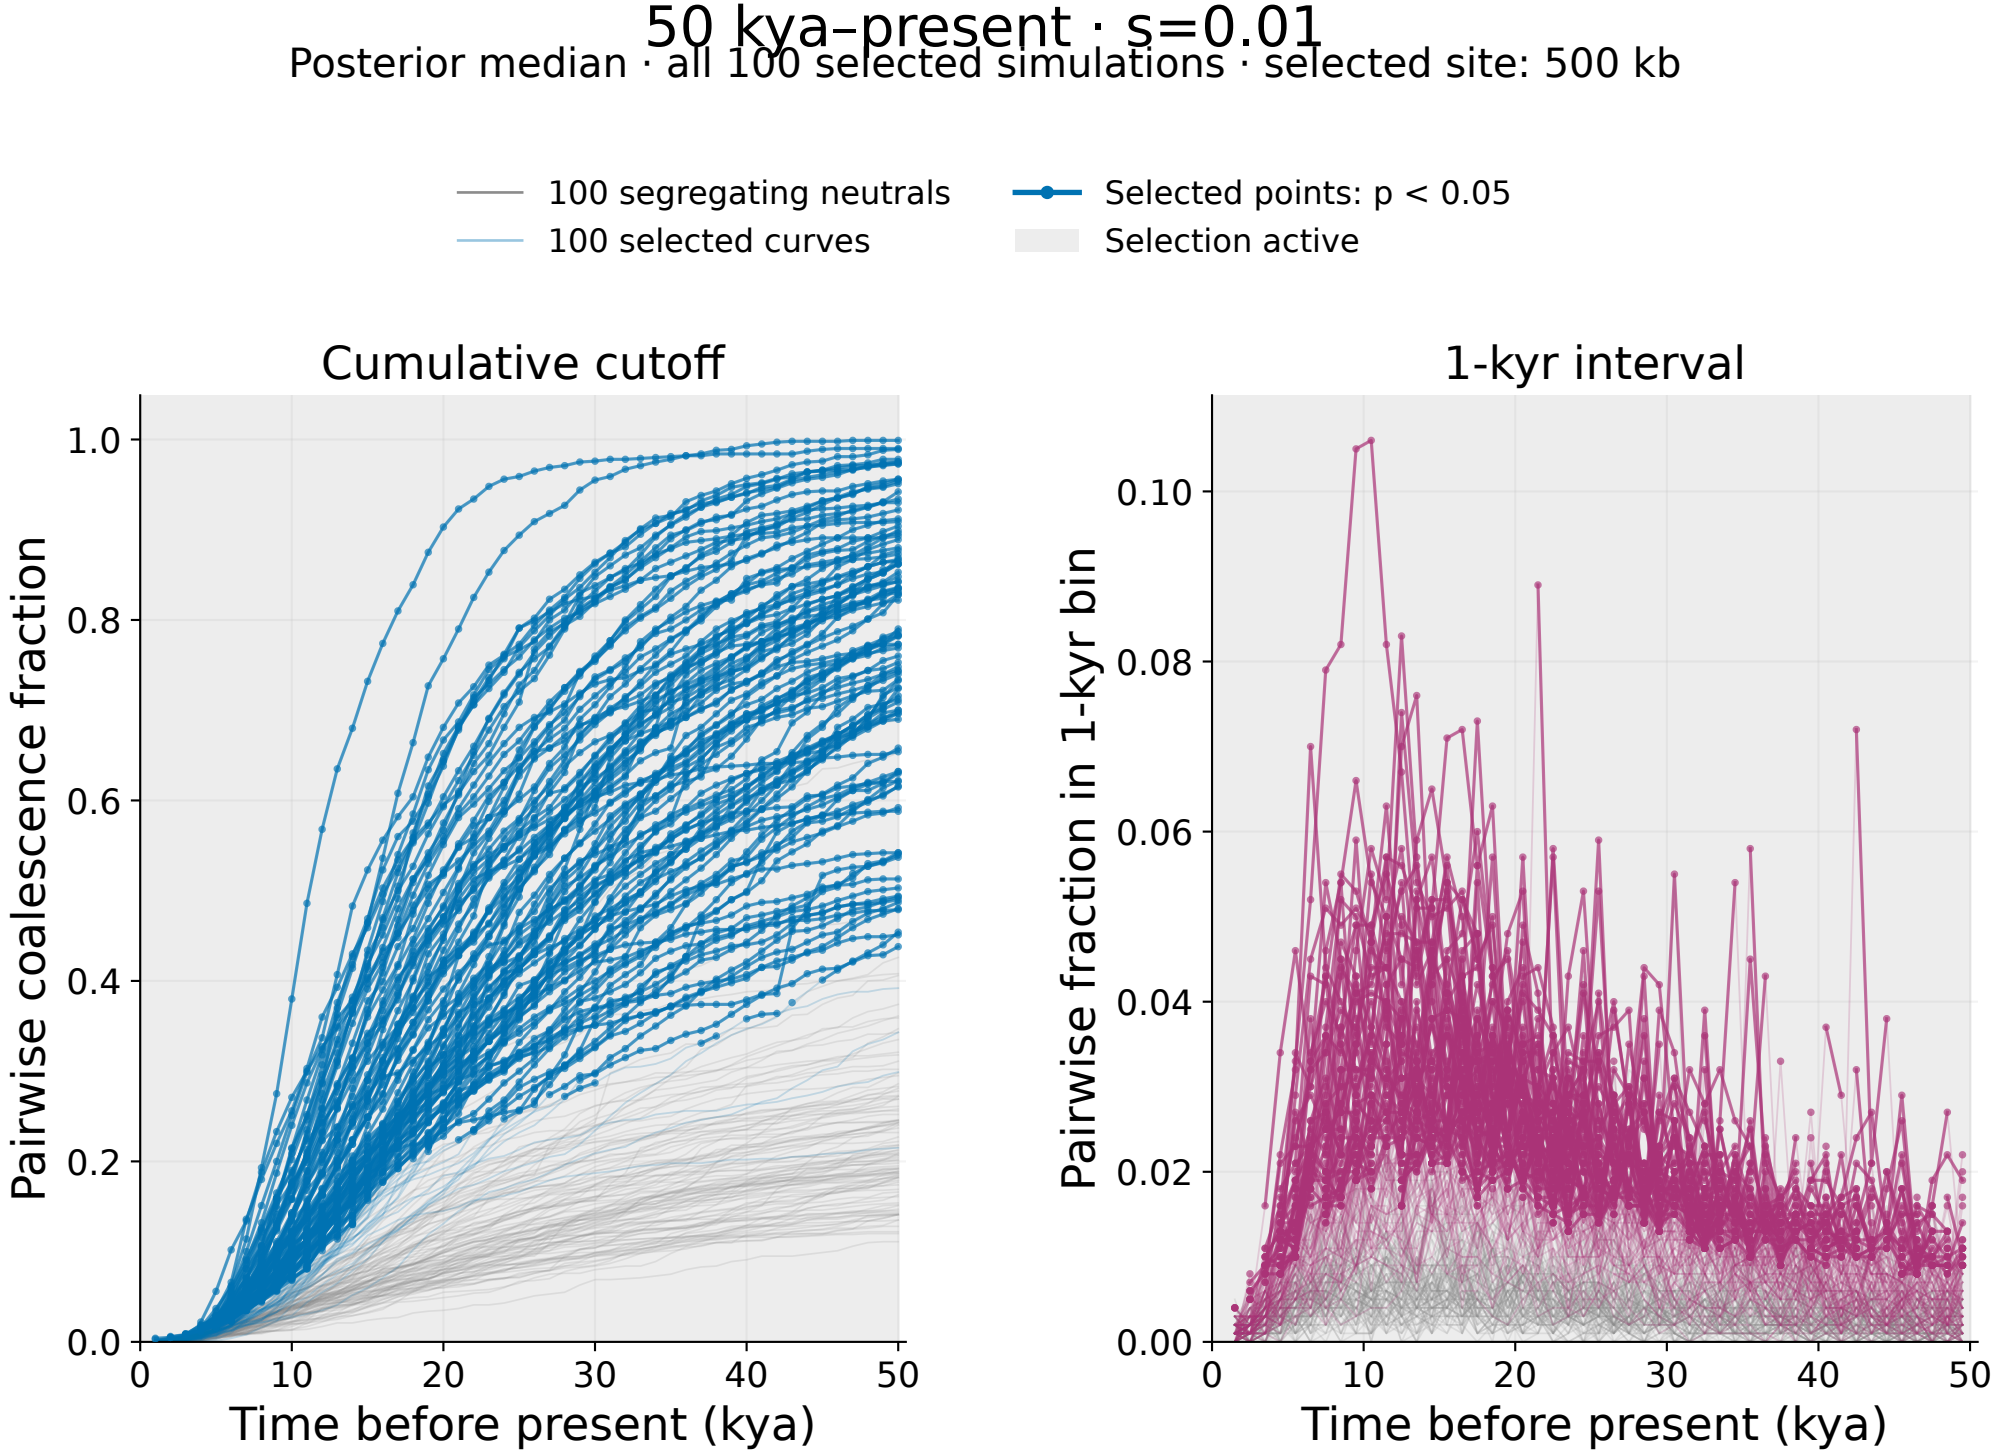

Bold points use each simulation’s own p value against the same 100 segregating neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.

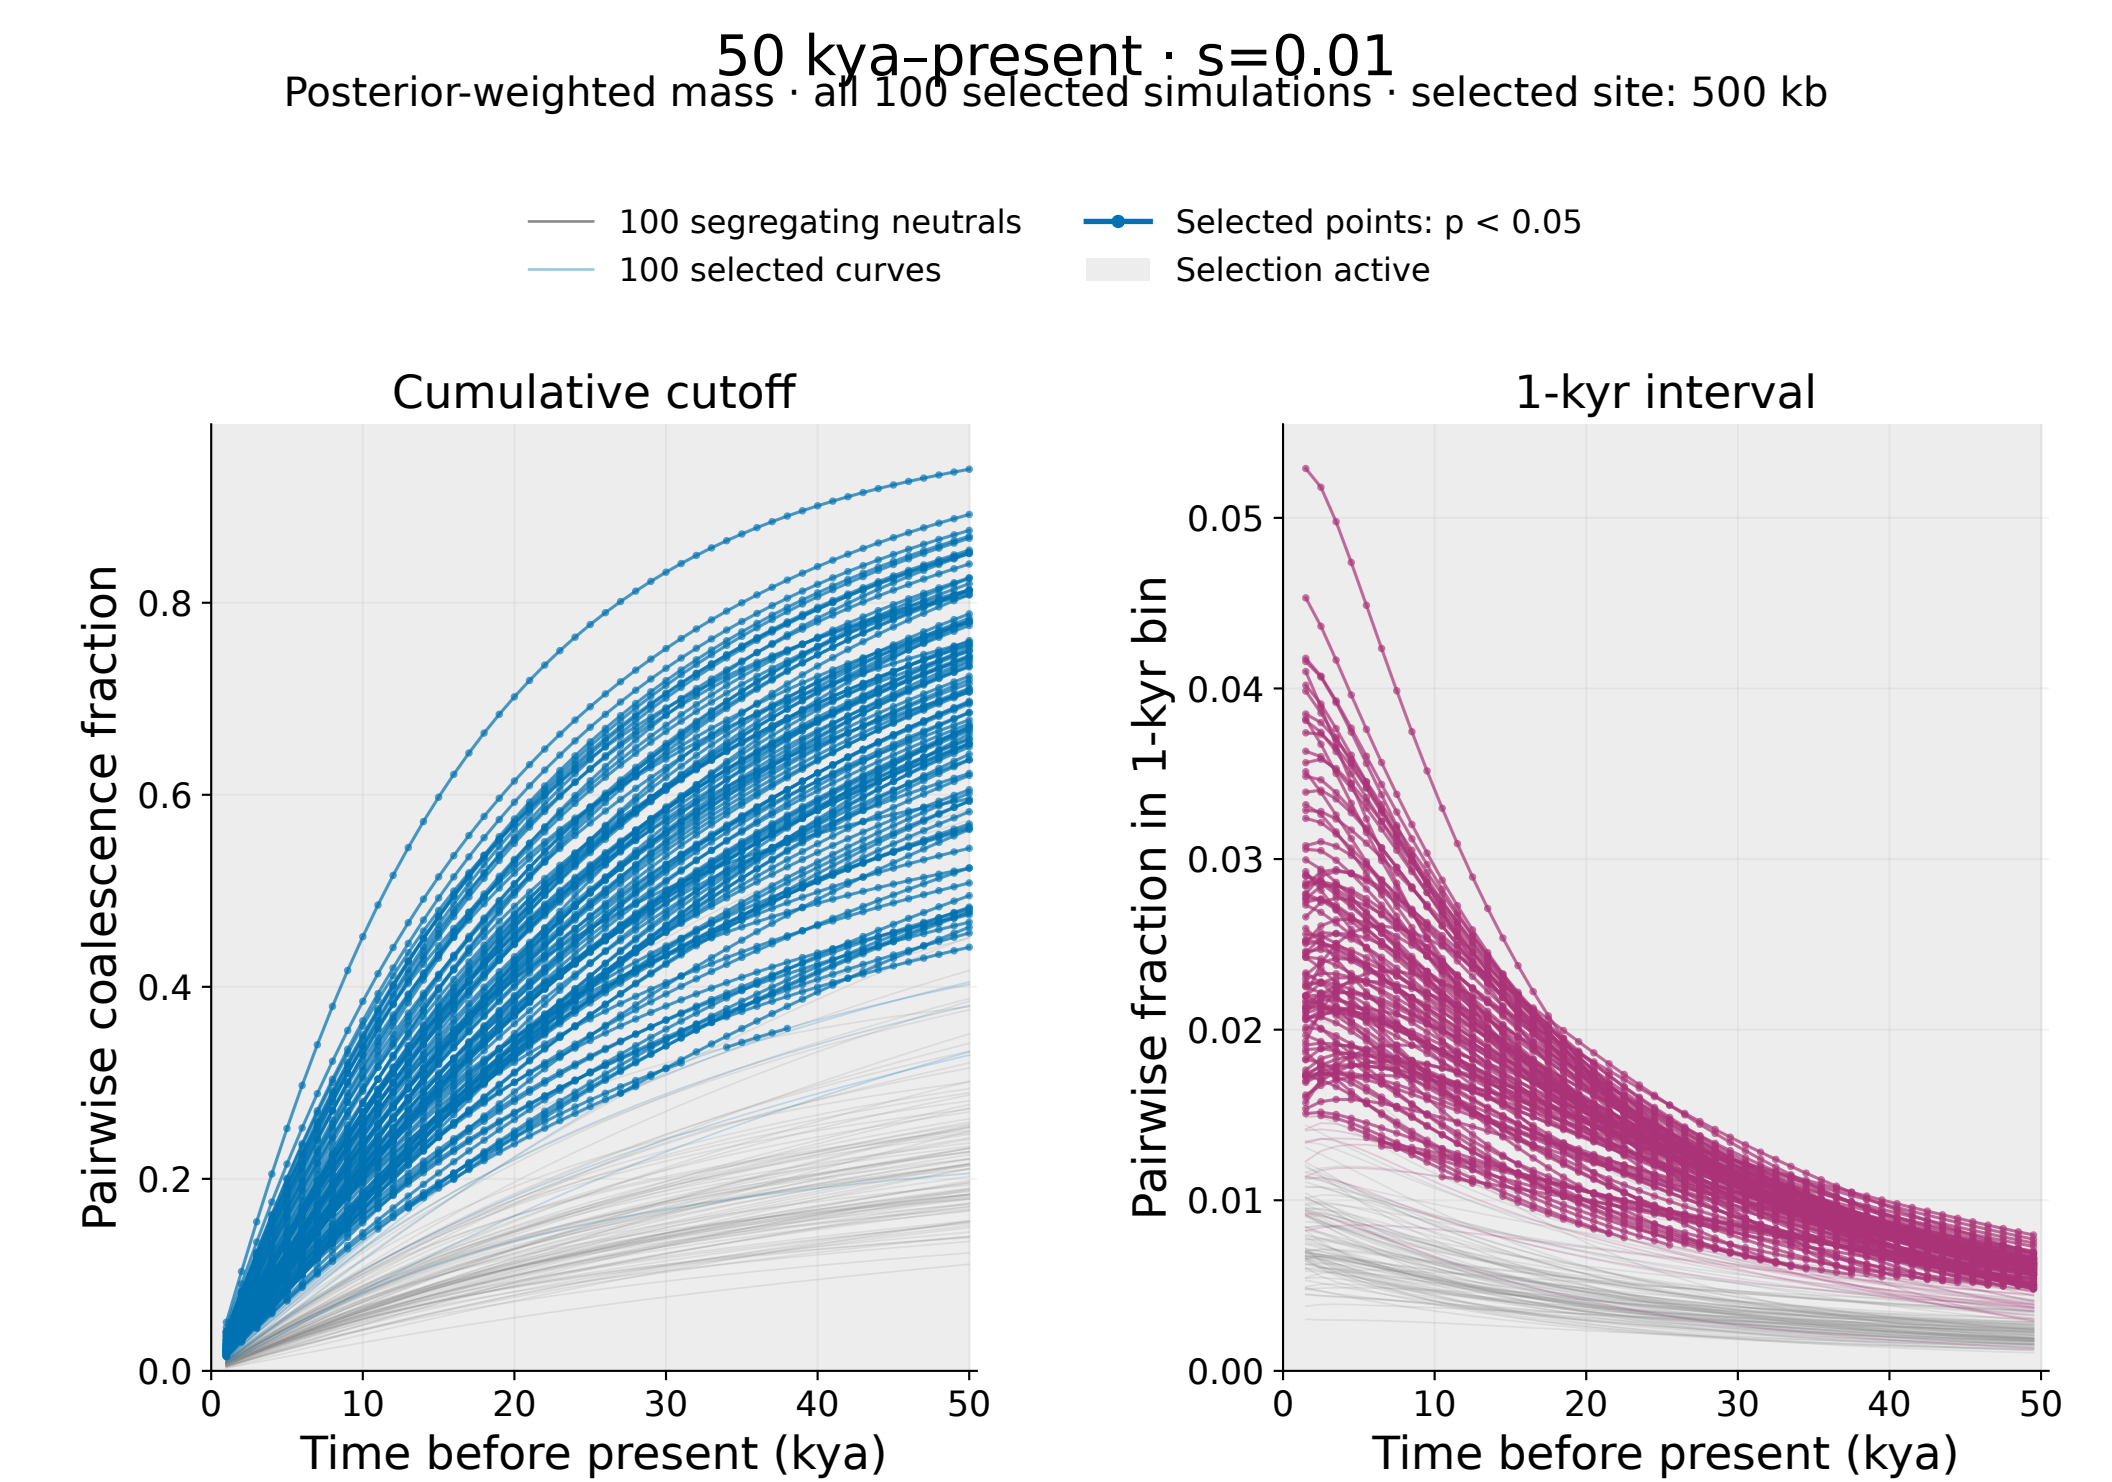


Bold points use each simulation’s own p value against the same 100 segregating neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.


50 kya–present · s=0.005

True TMRCA · all 100 selected simulations · selected site: 500 kb

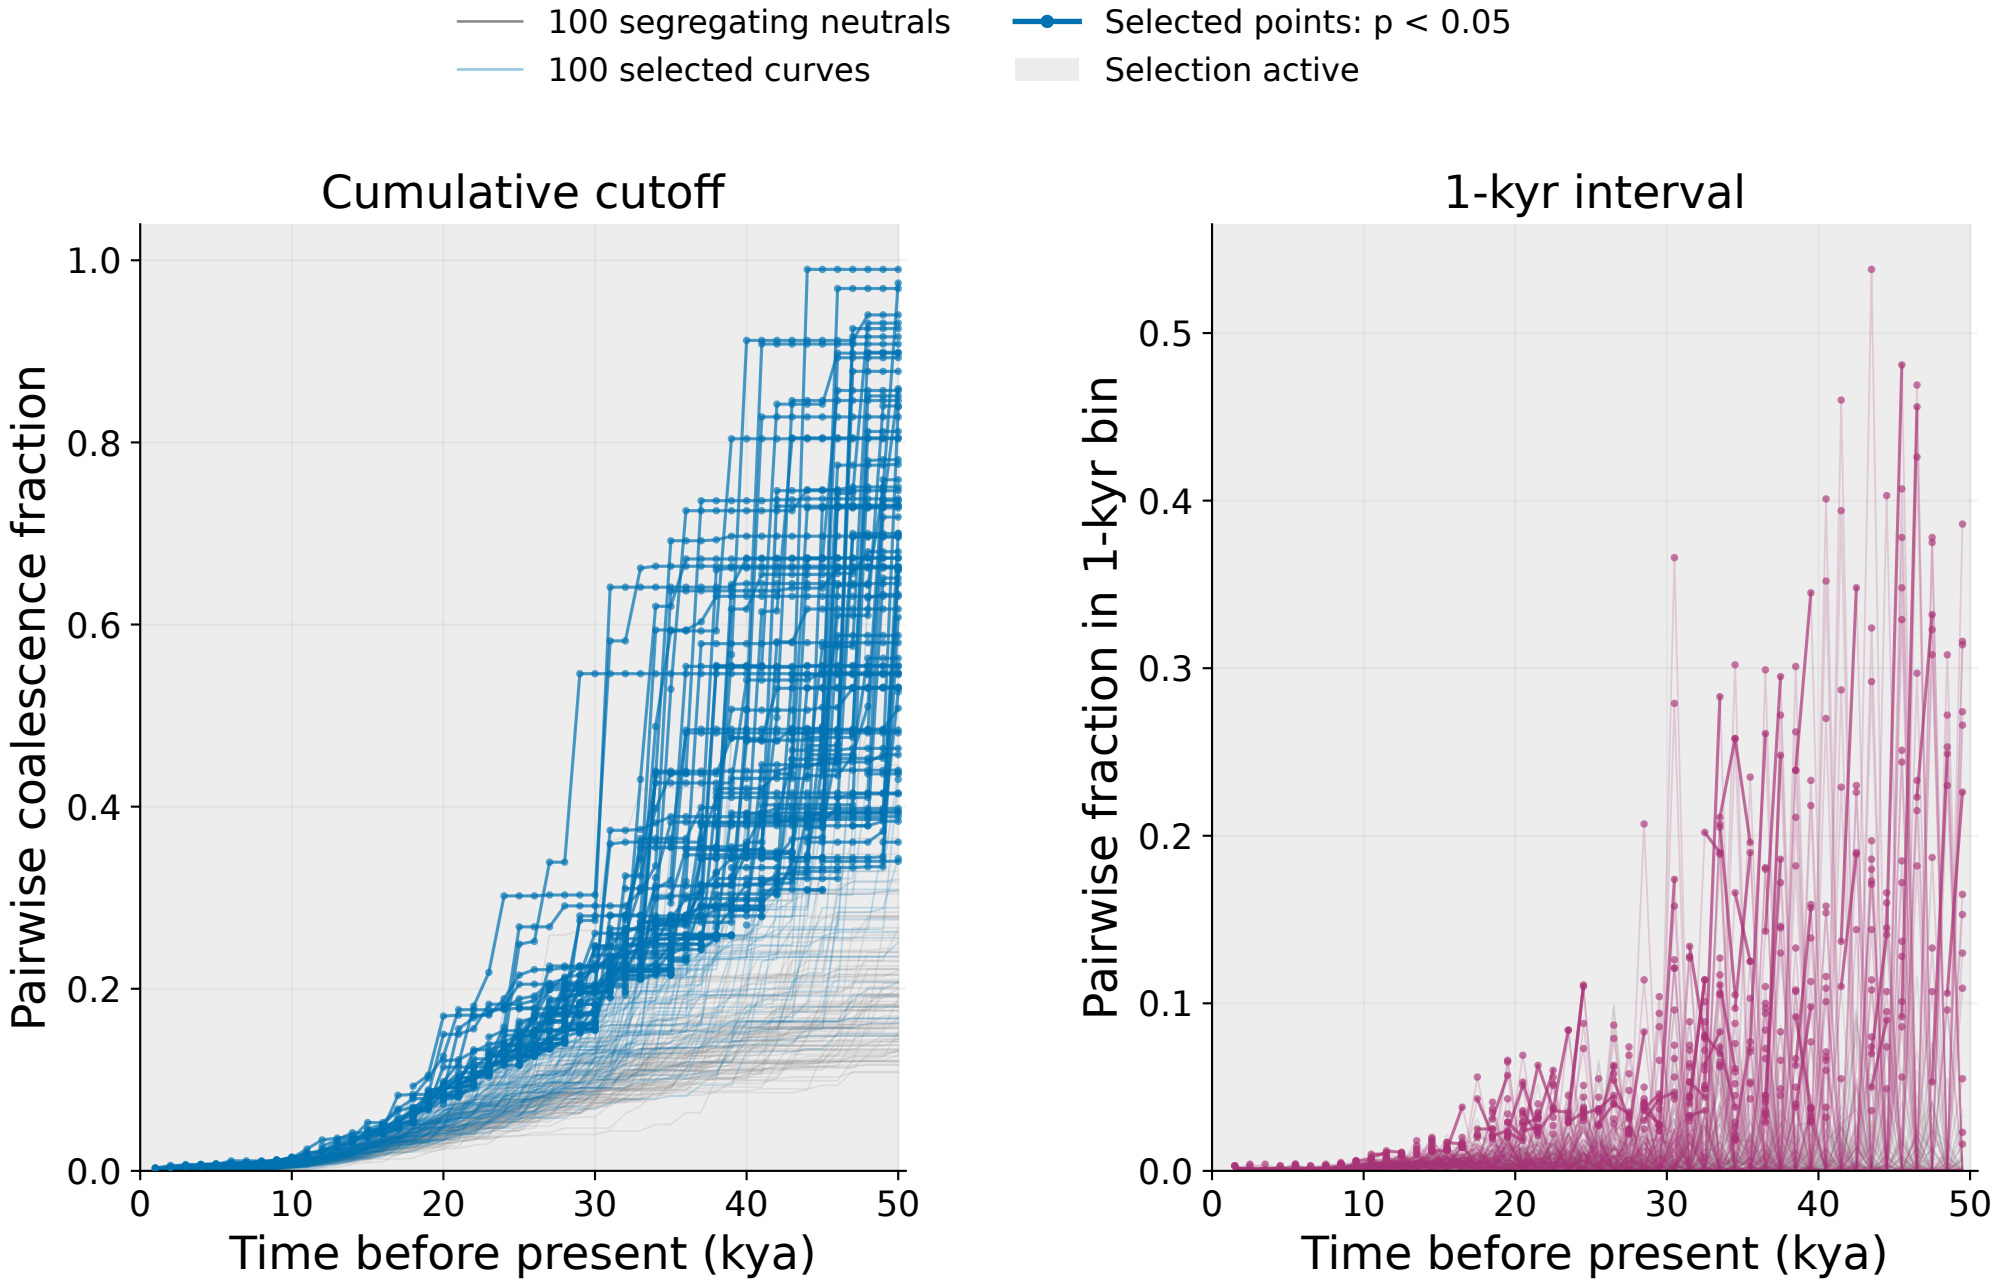


Bold points use each simulation’s own p value against the same 100 segregating neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.

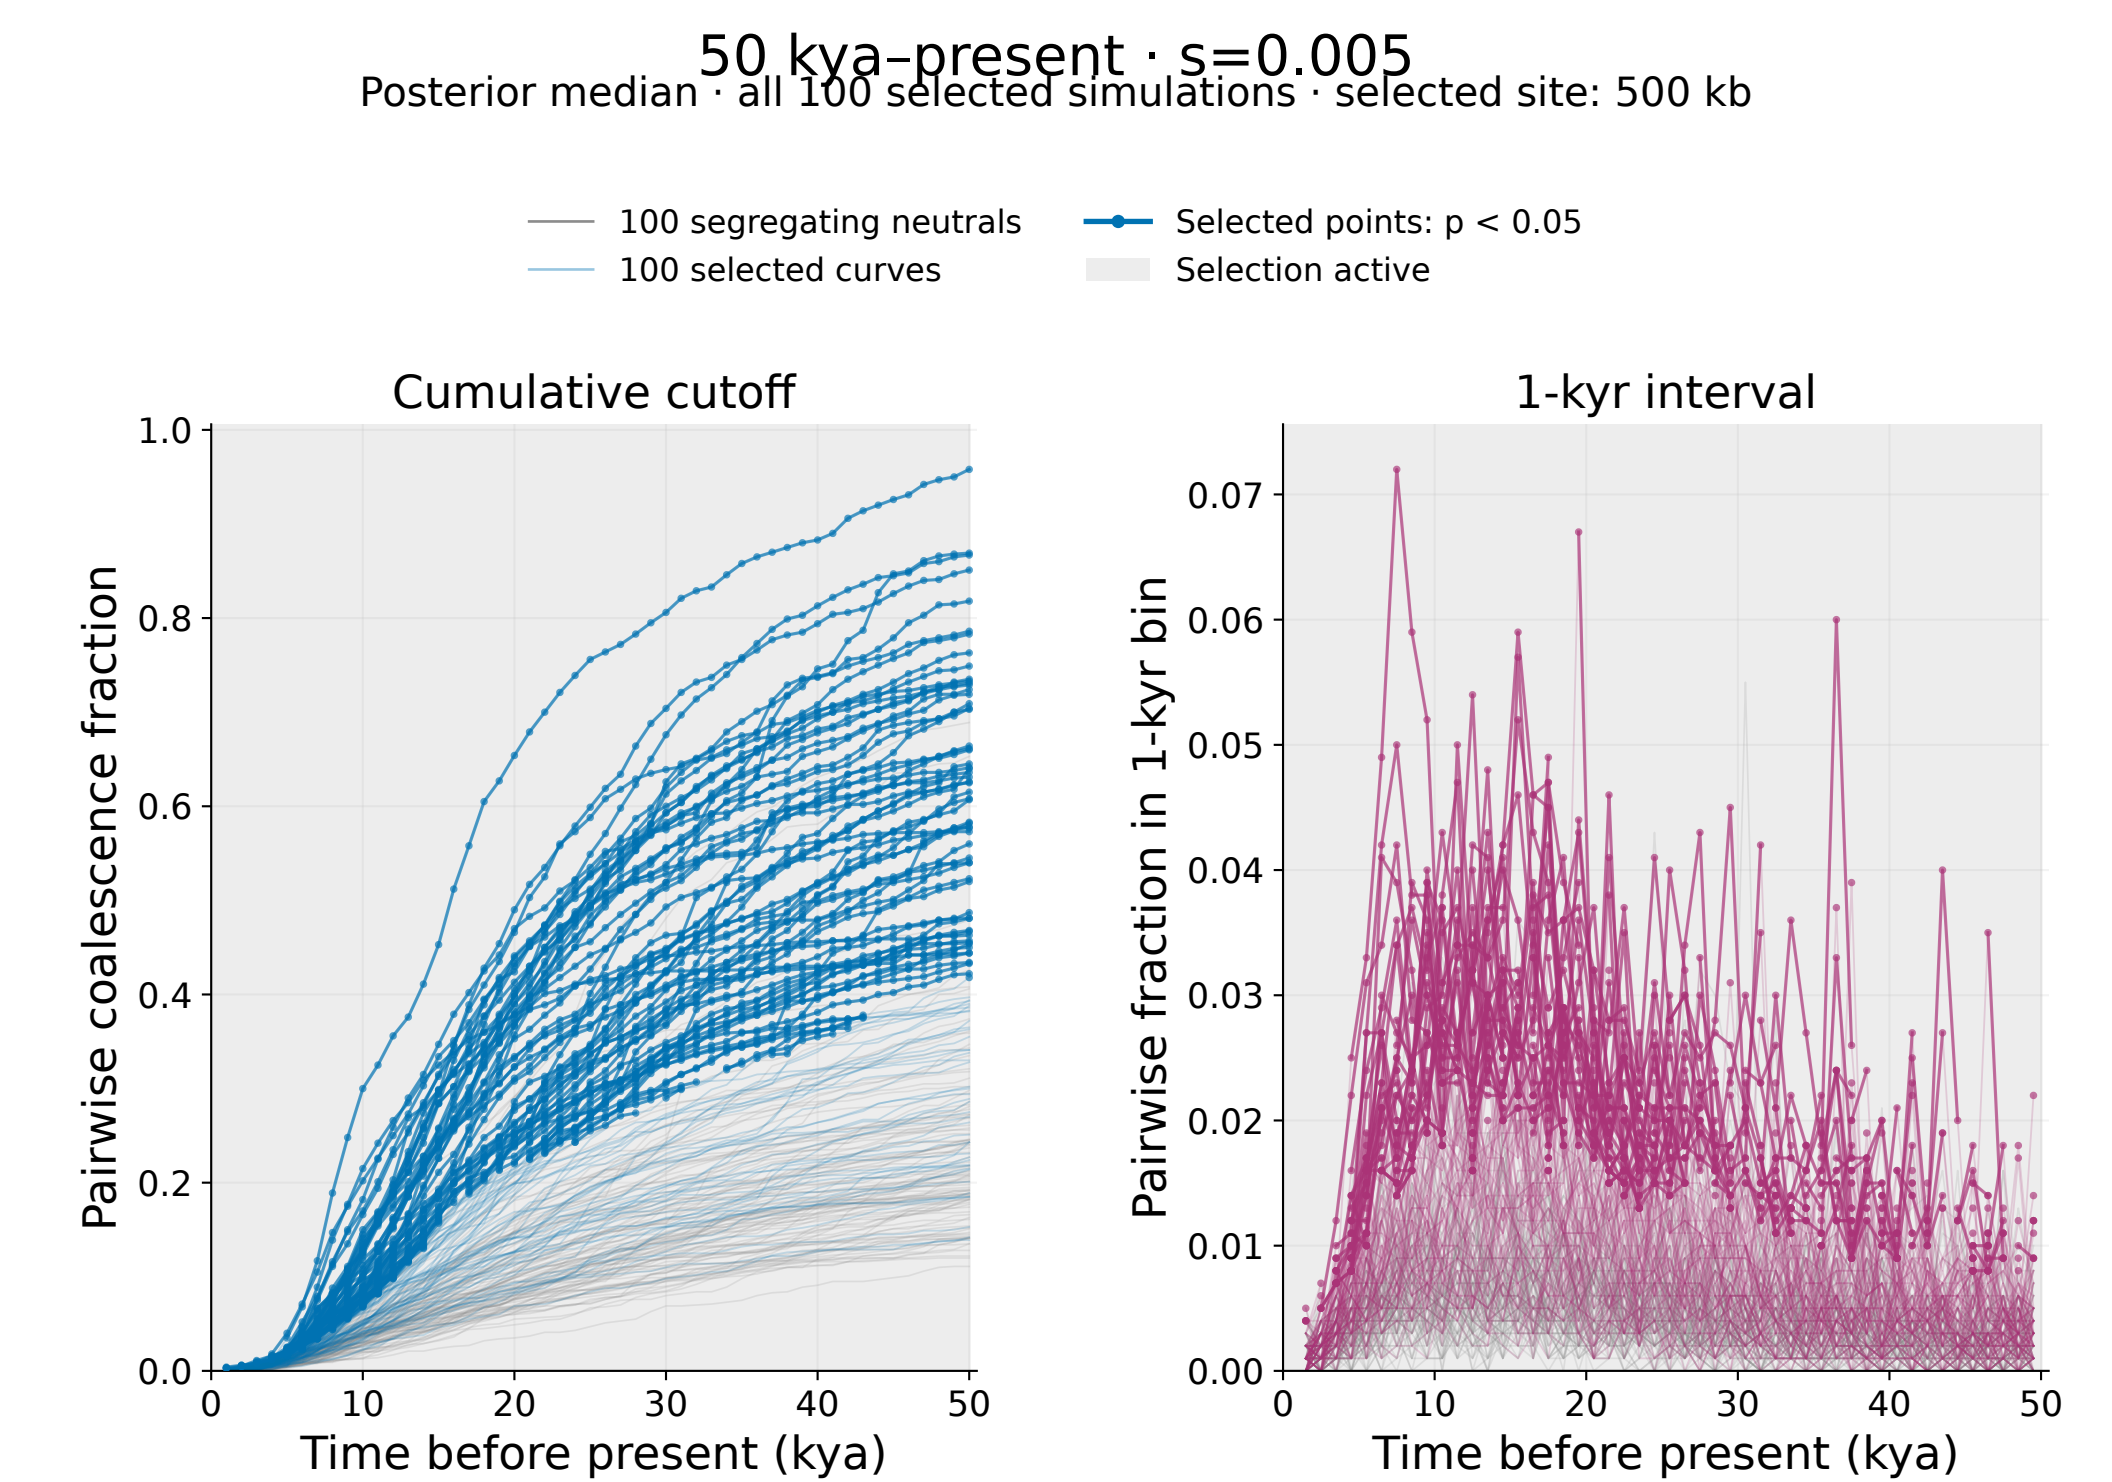

Bold points use each simulation's own p value against the same 100 segregating neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.

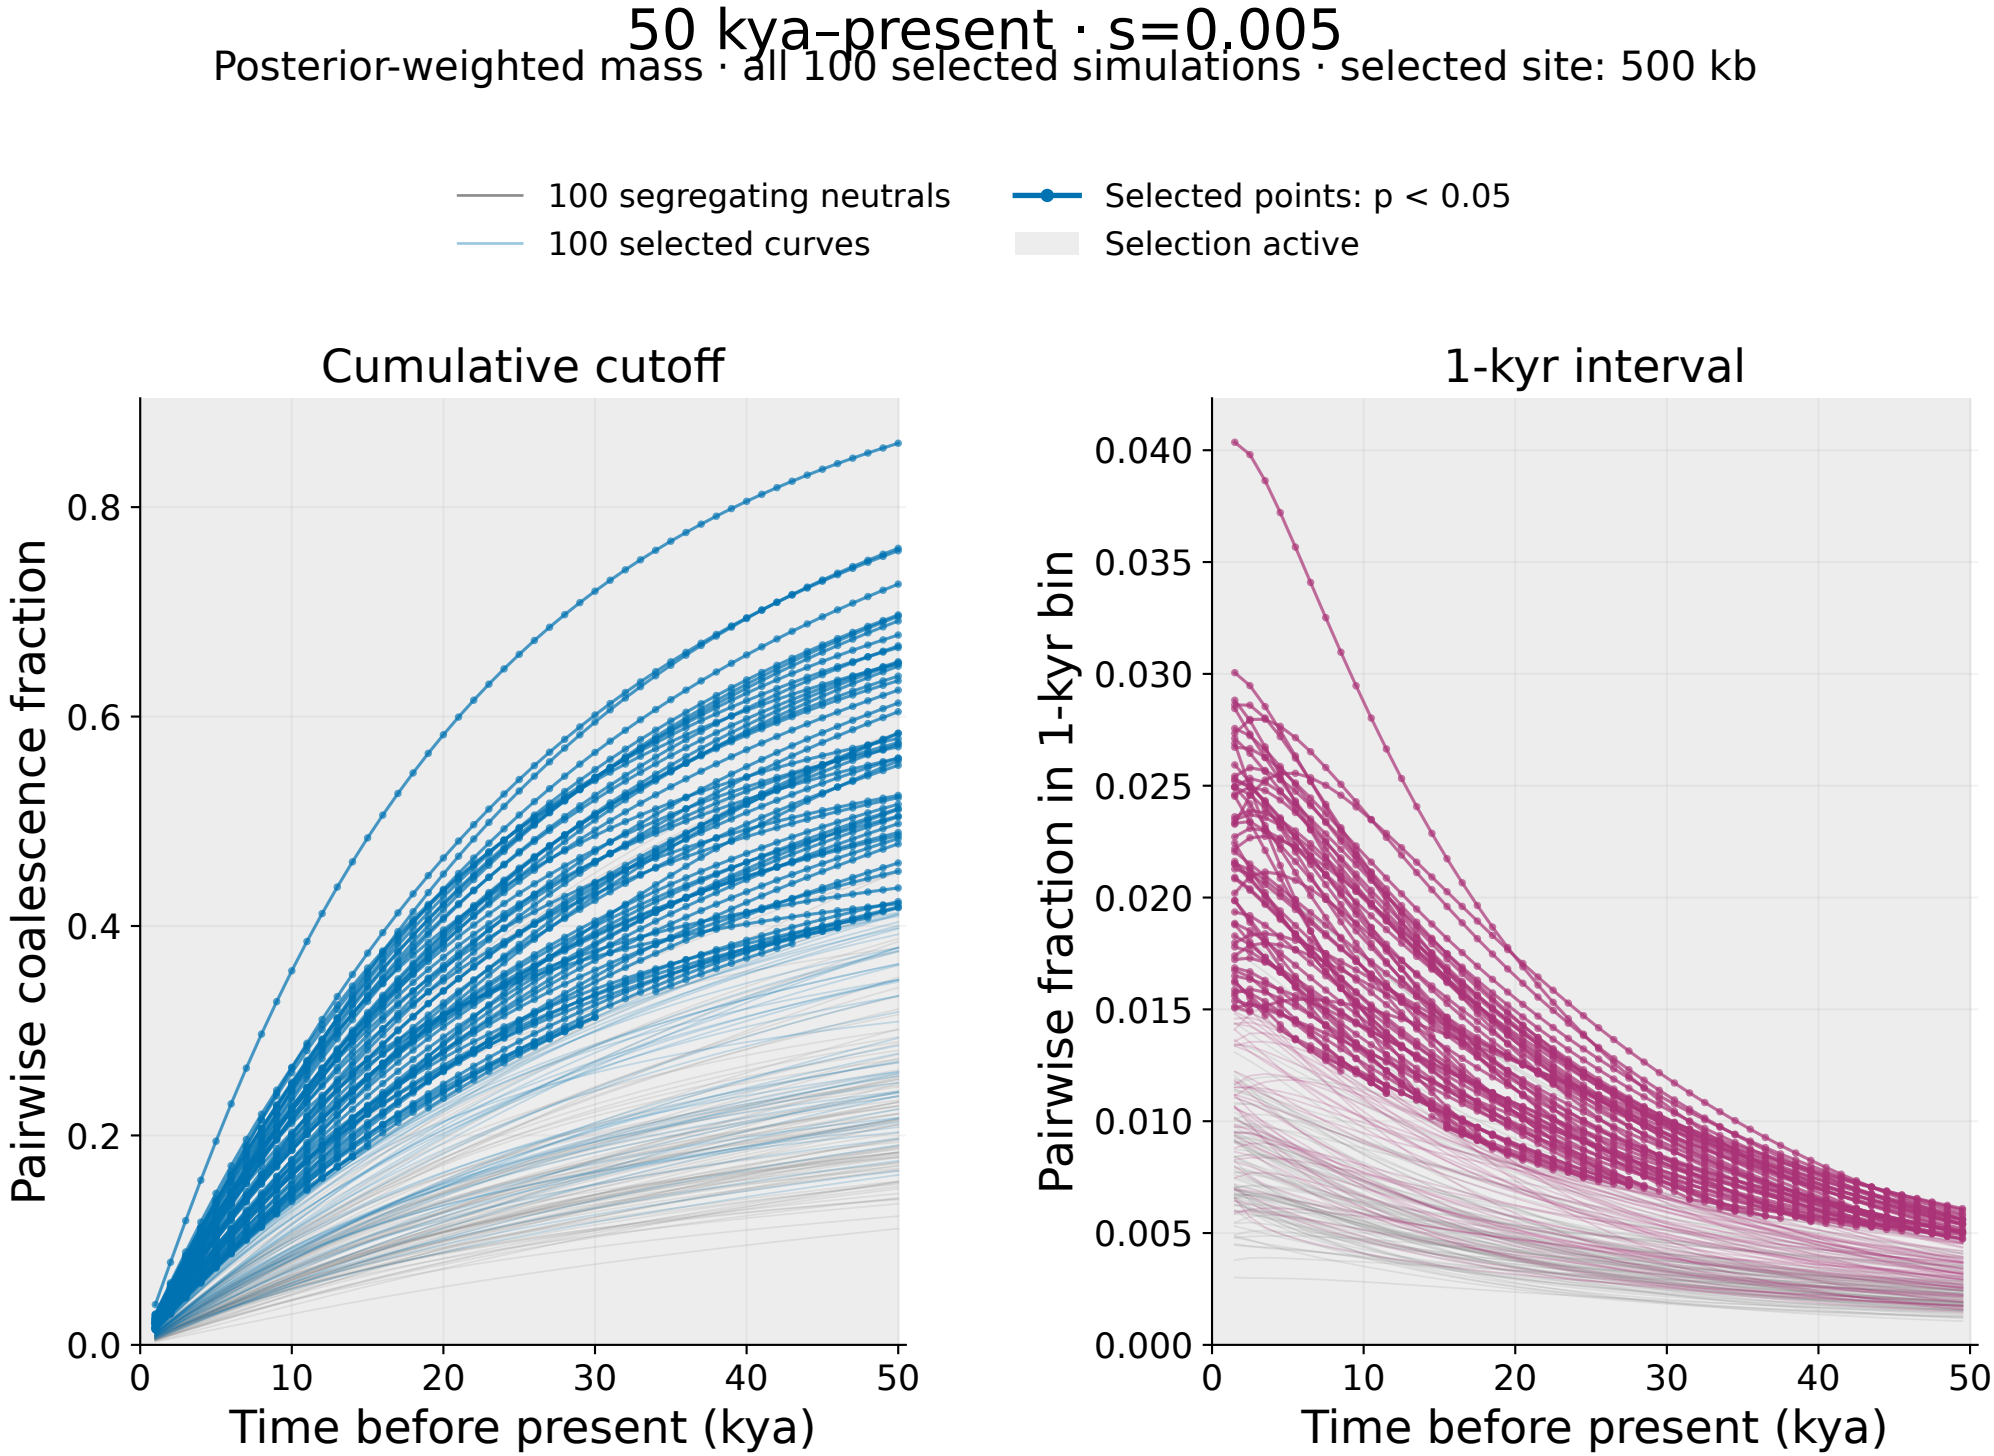

Bold points use each simulation’s own p value against the same 100 segregating neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.