
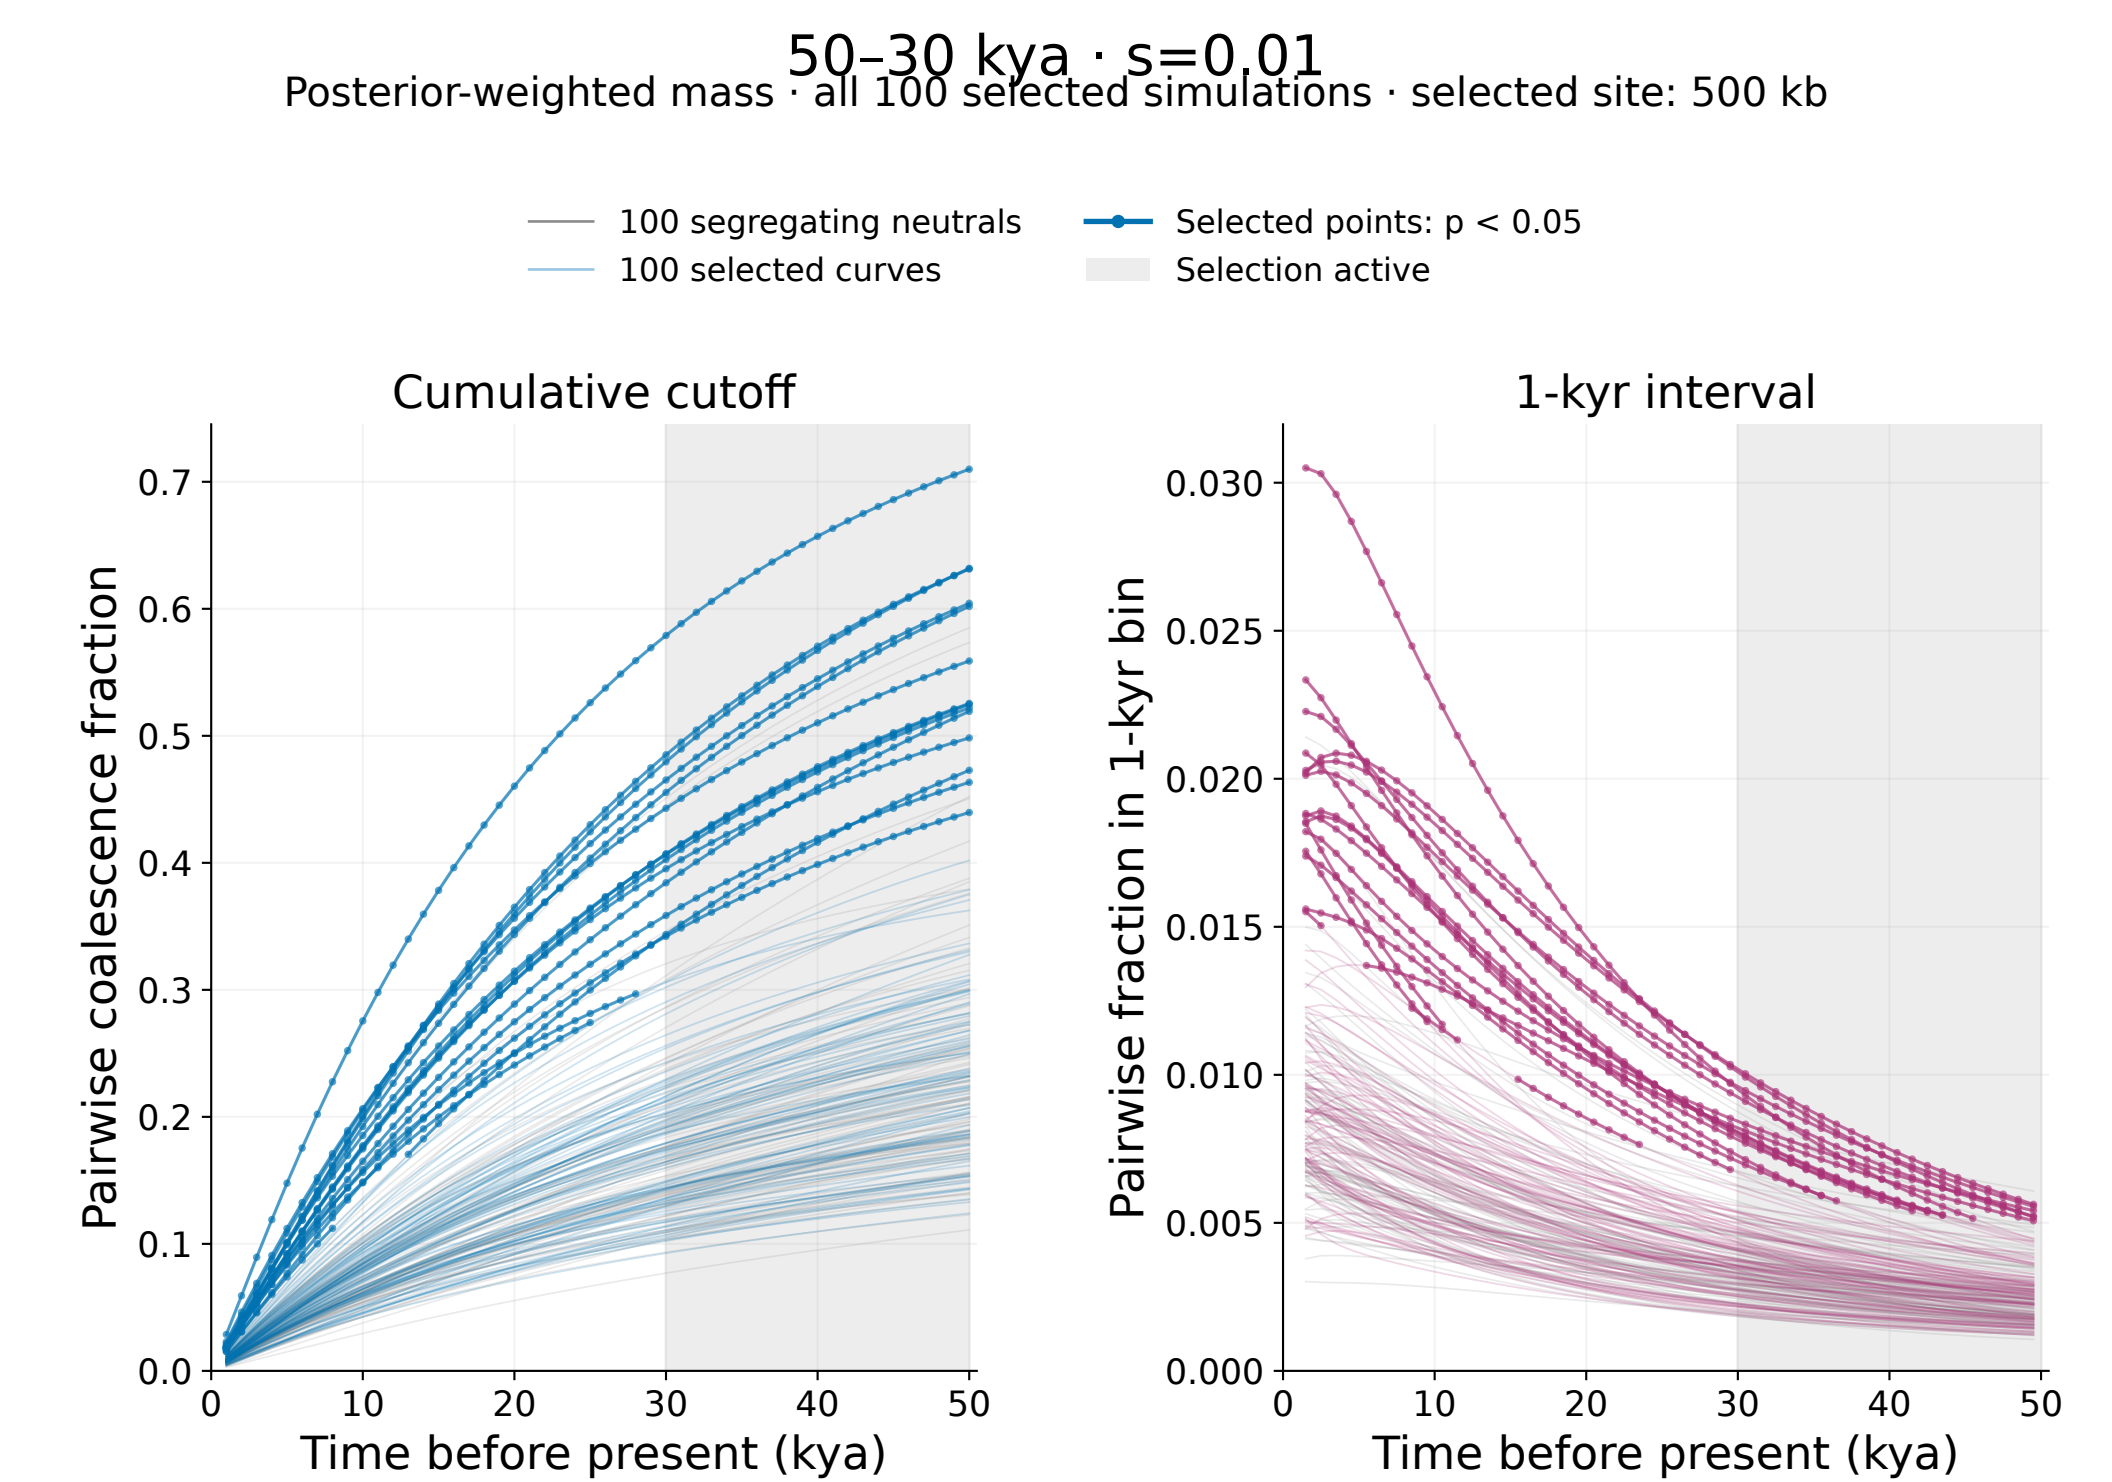



Bold points use each simulation’s own p value against the same 100 segregating neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.

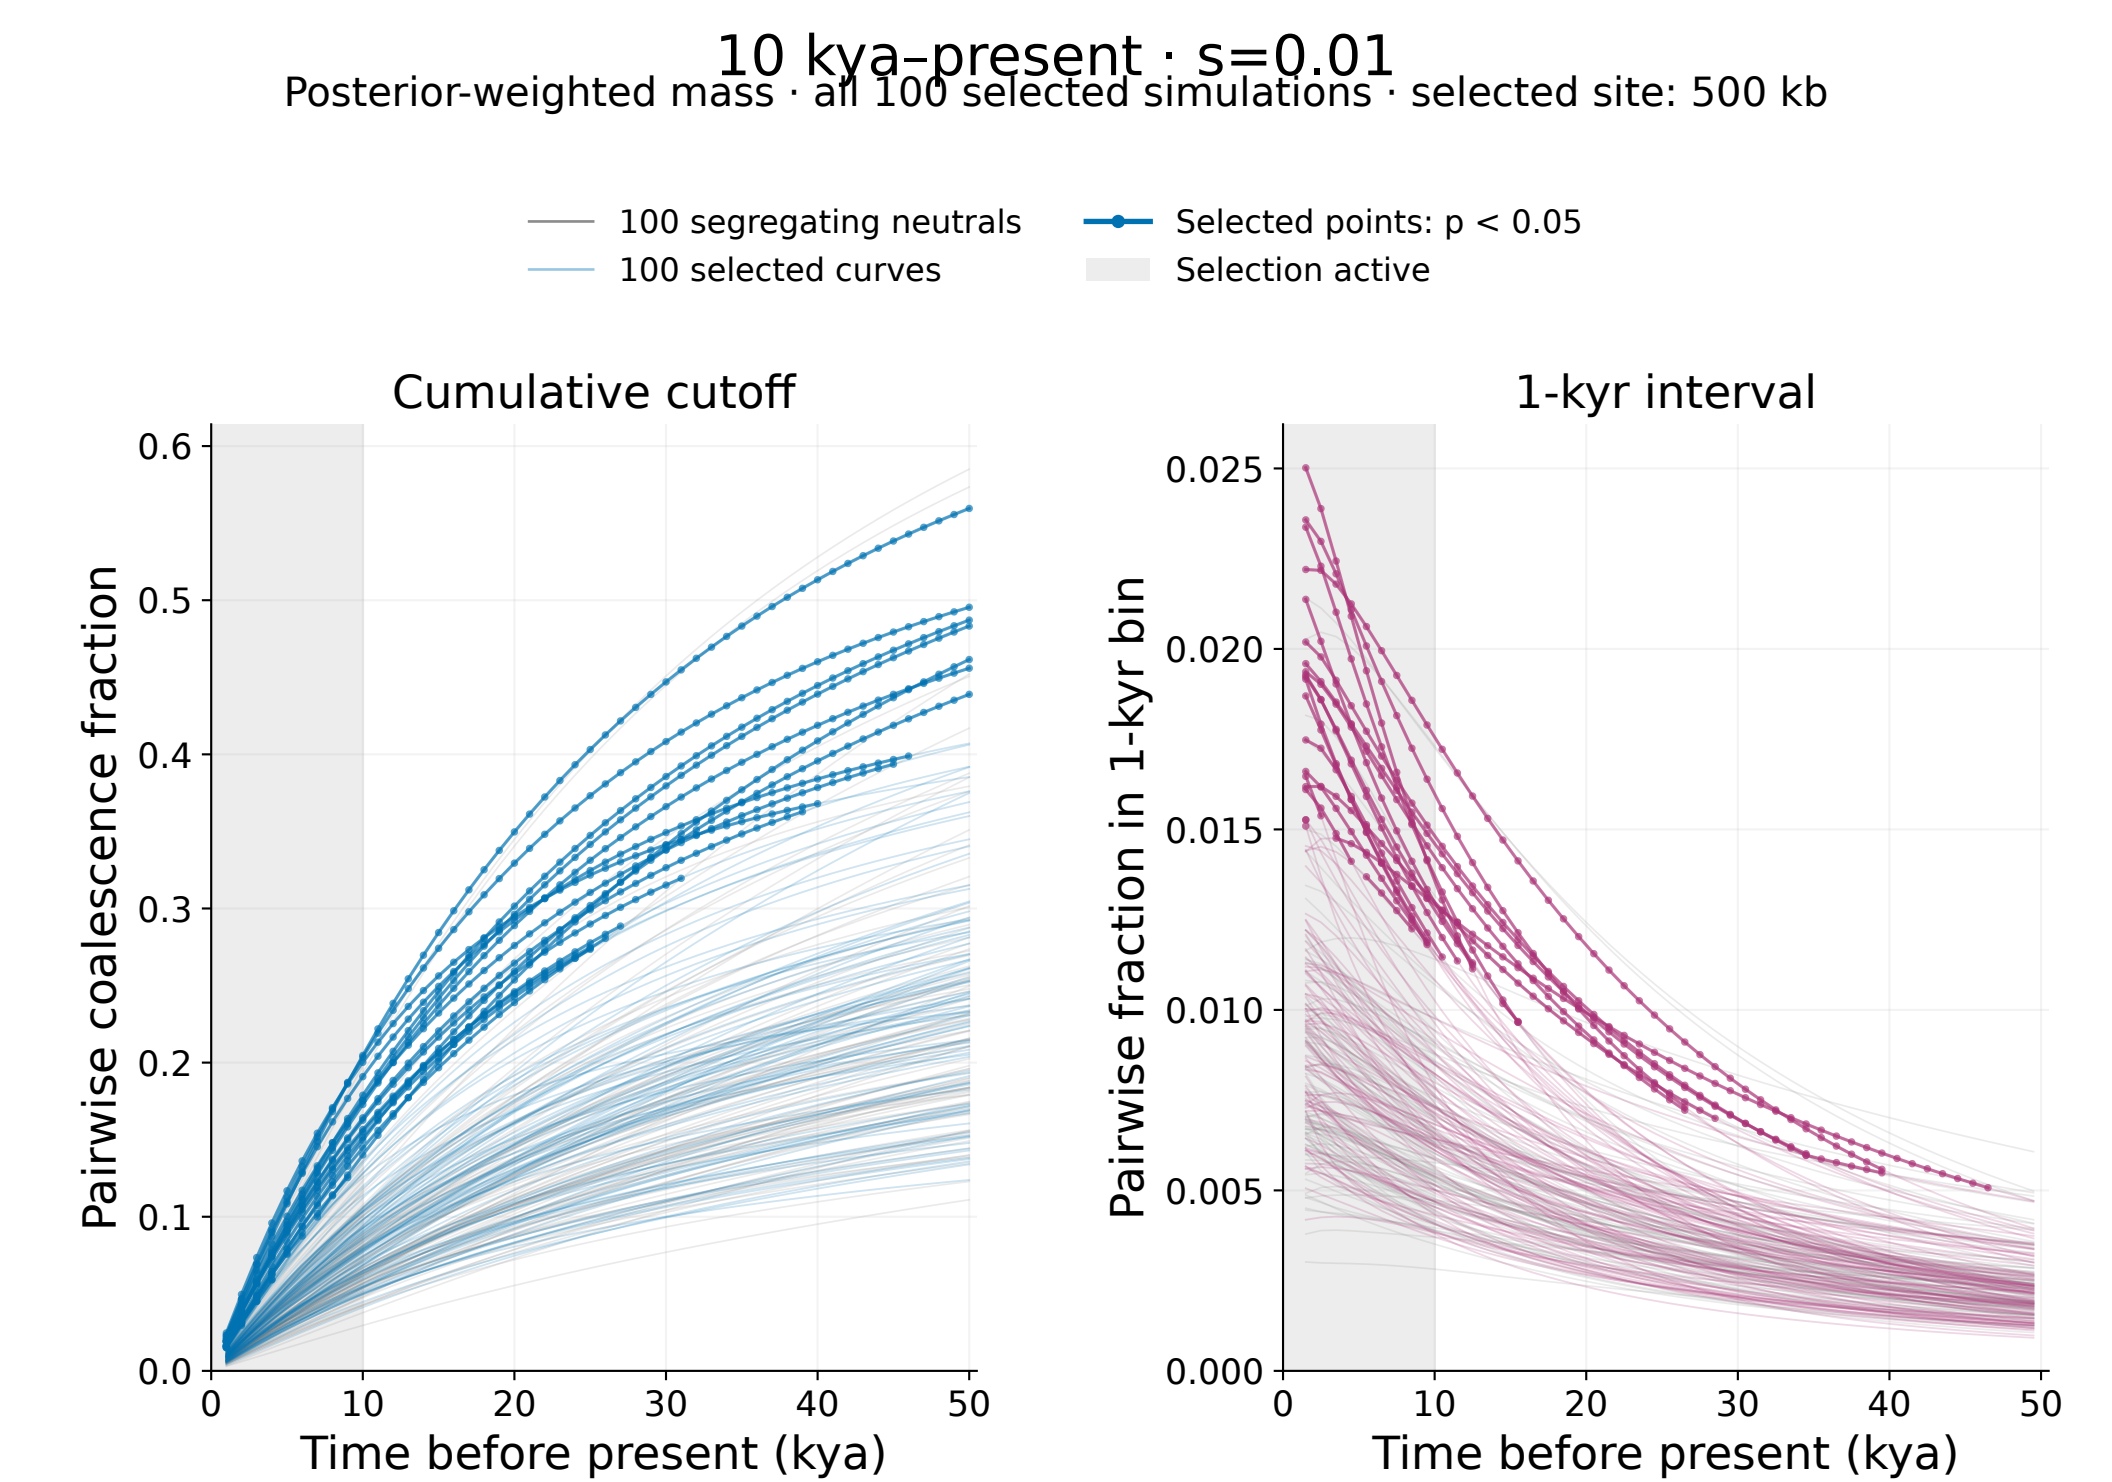


Bold points use each simulation's own p value against the same 100 segregating neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.

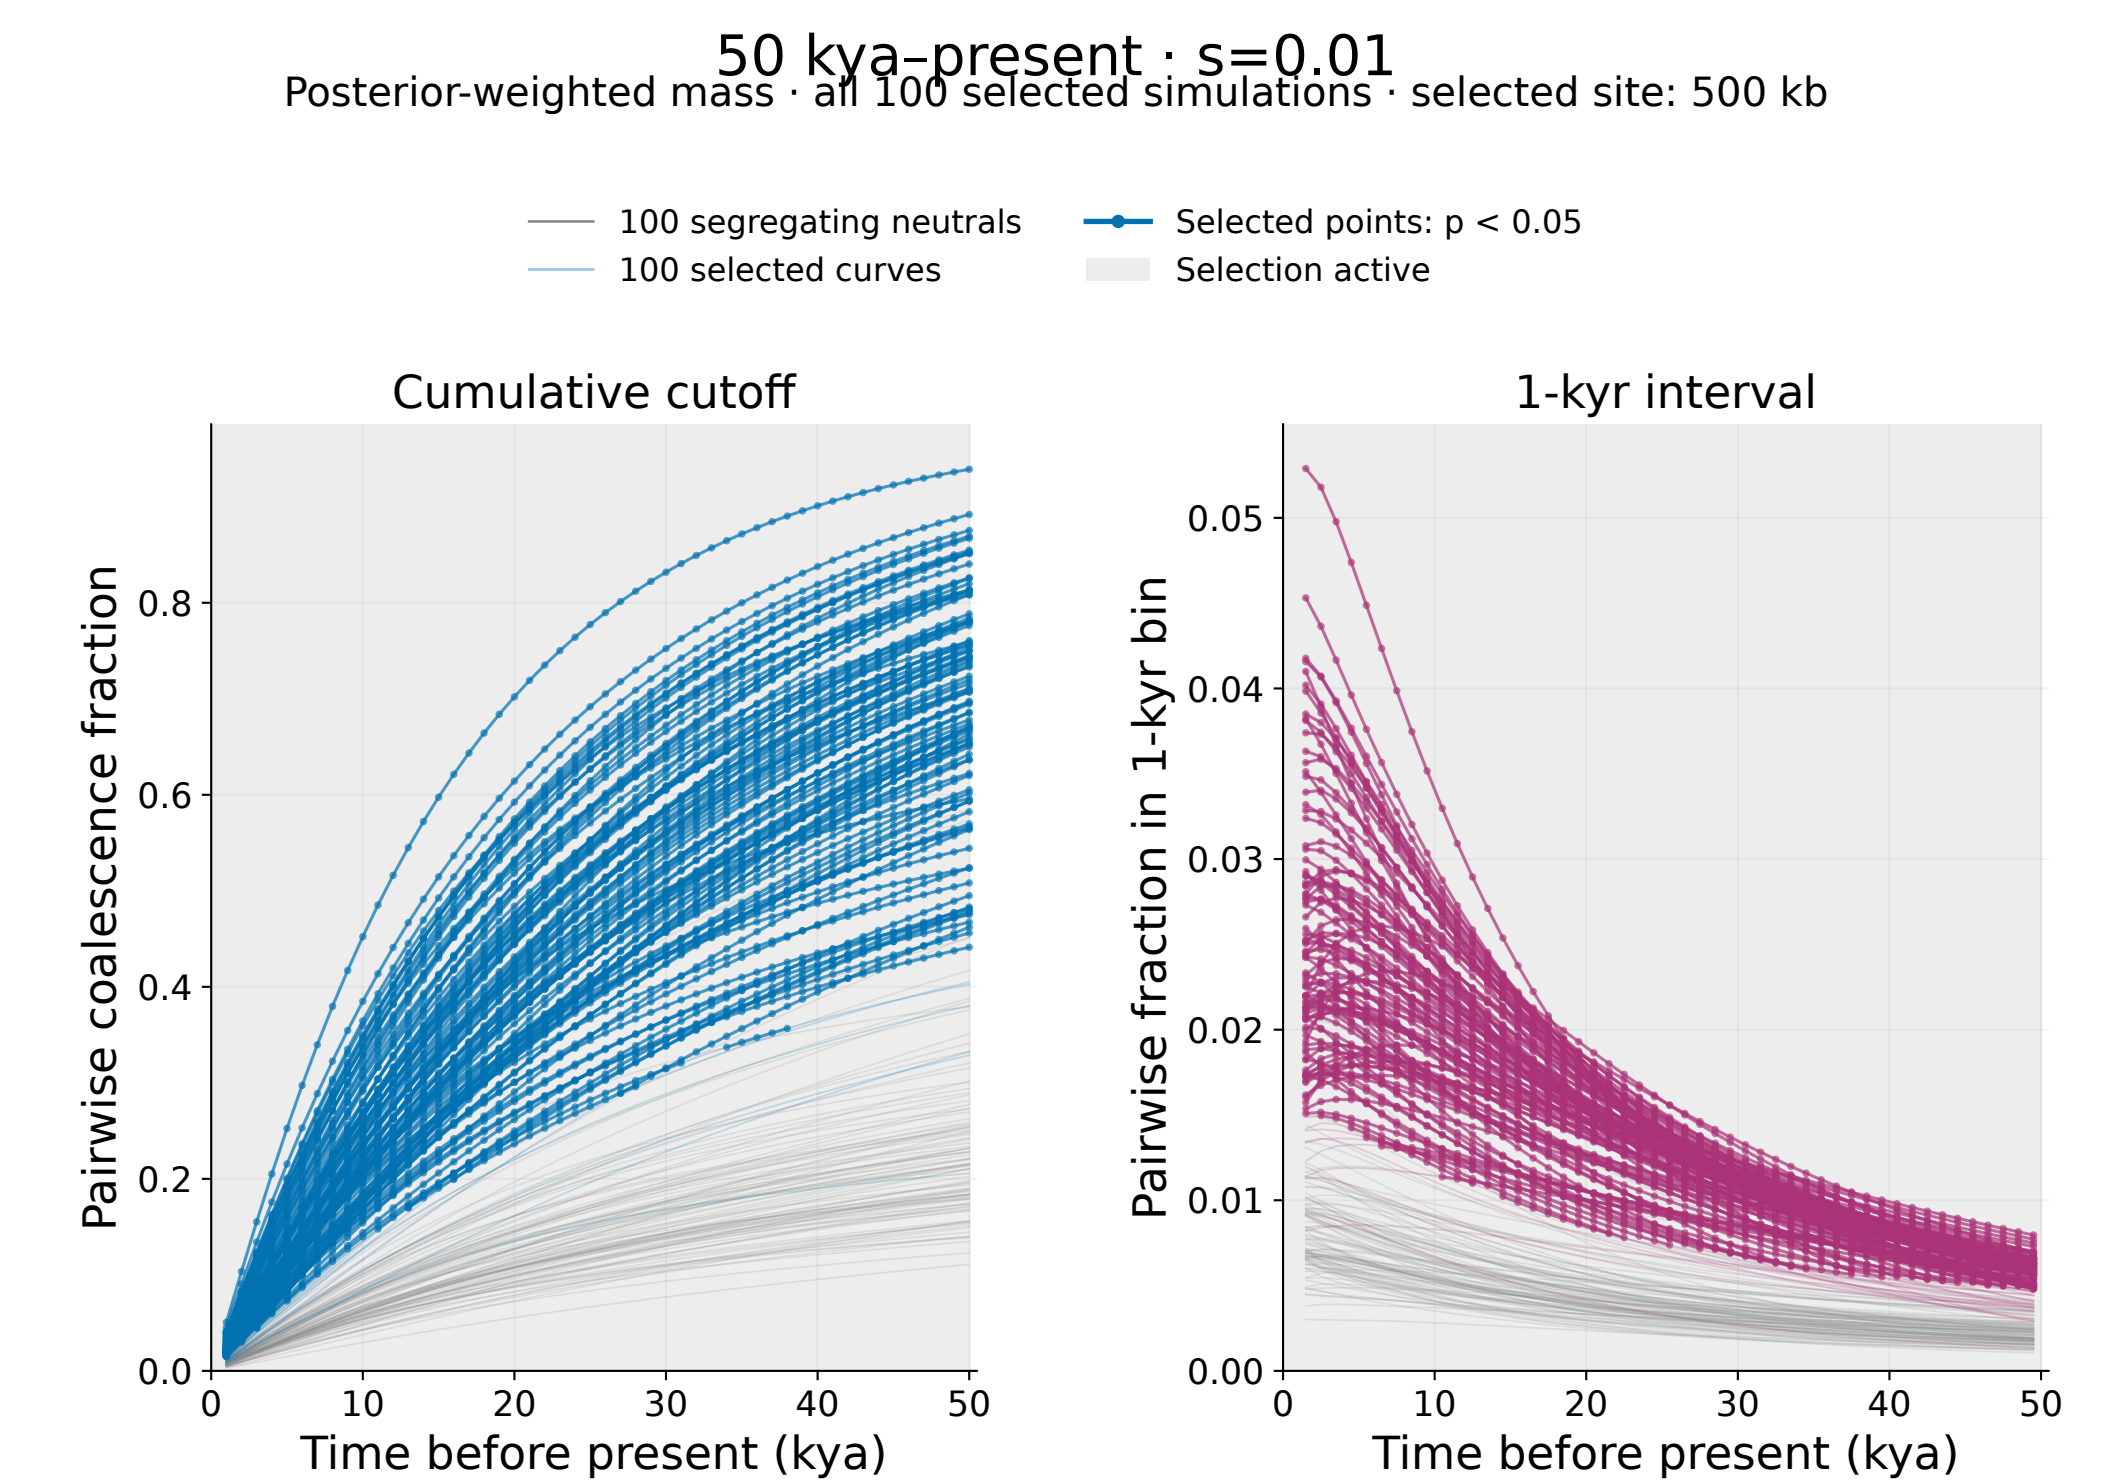

Bold points use each simulation’s own p value against the same 100 segregating neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.

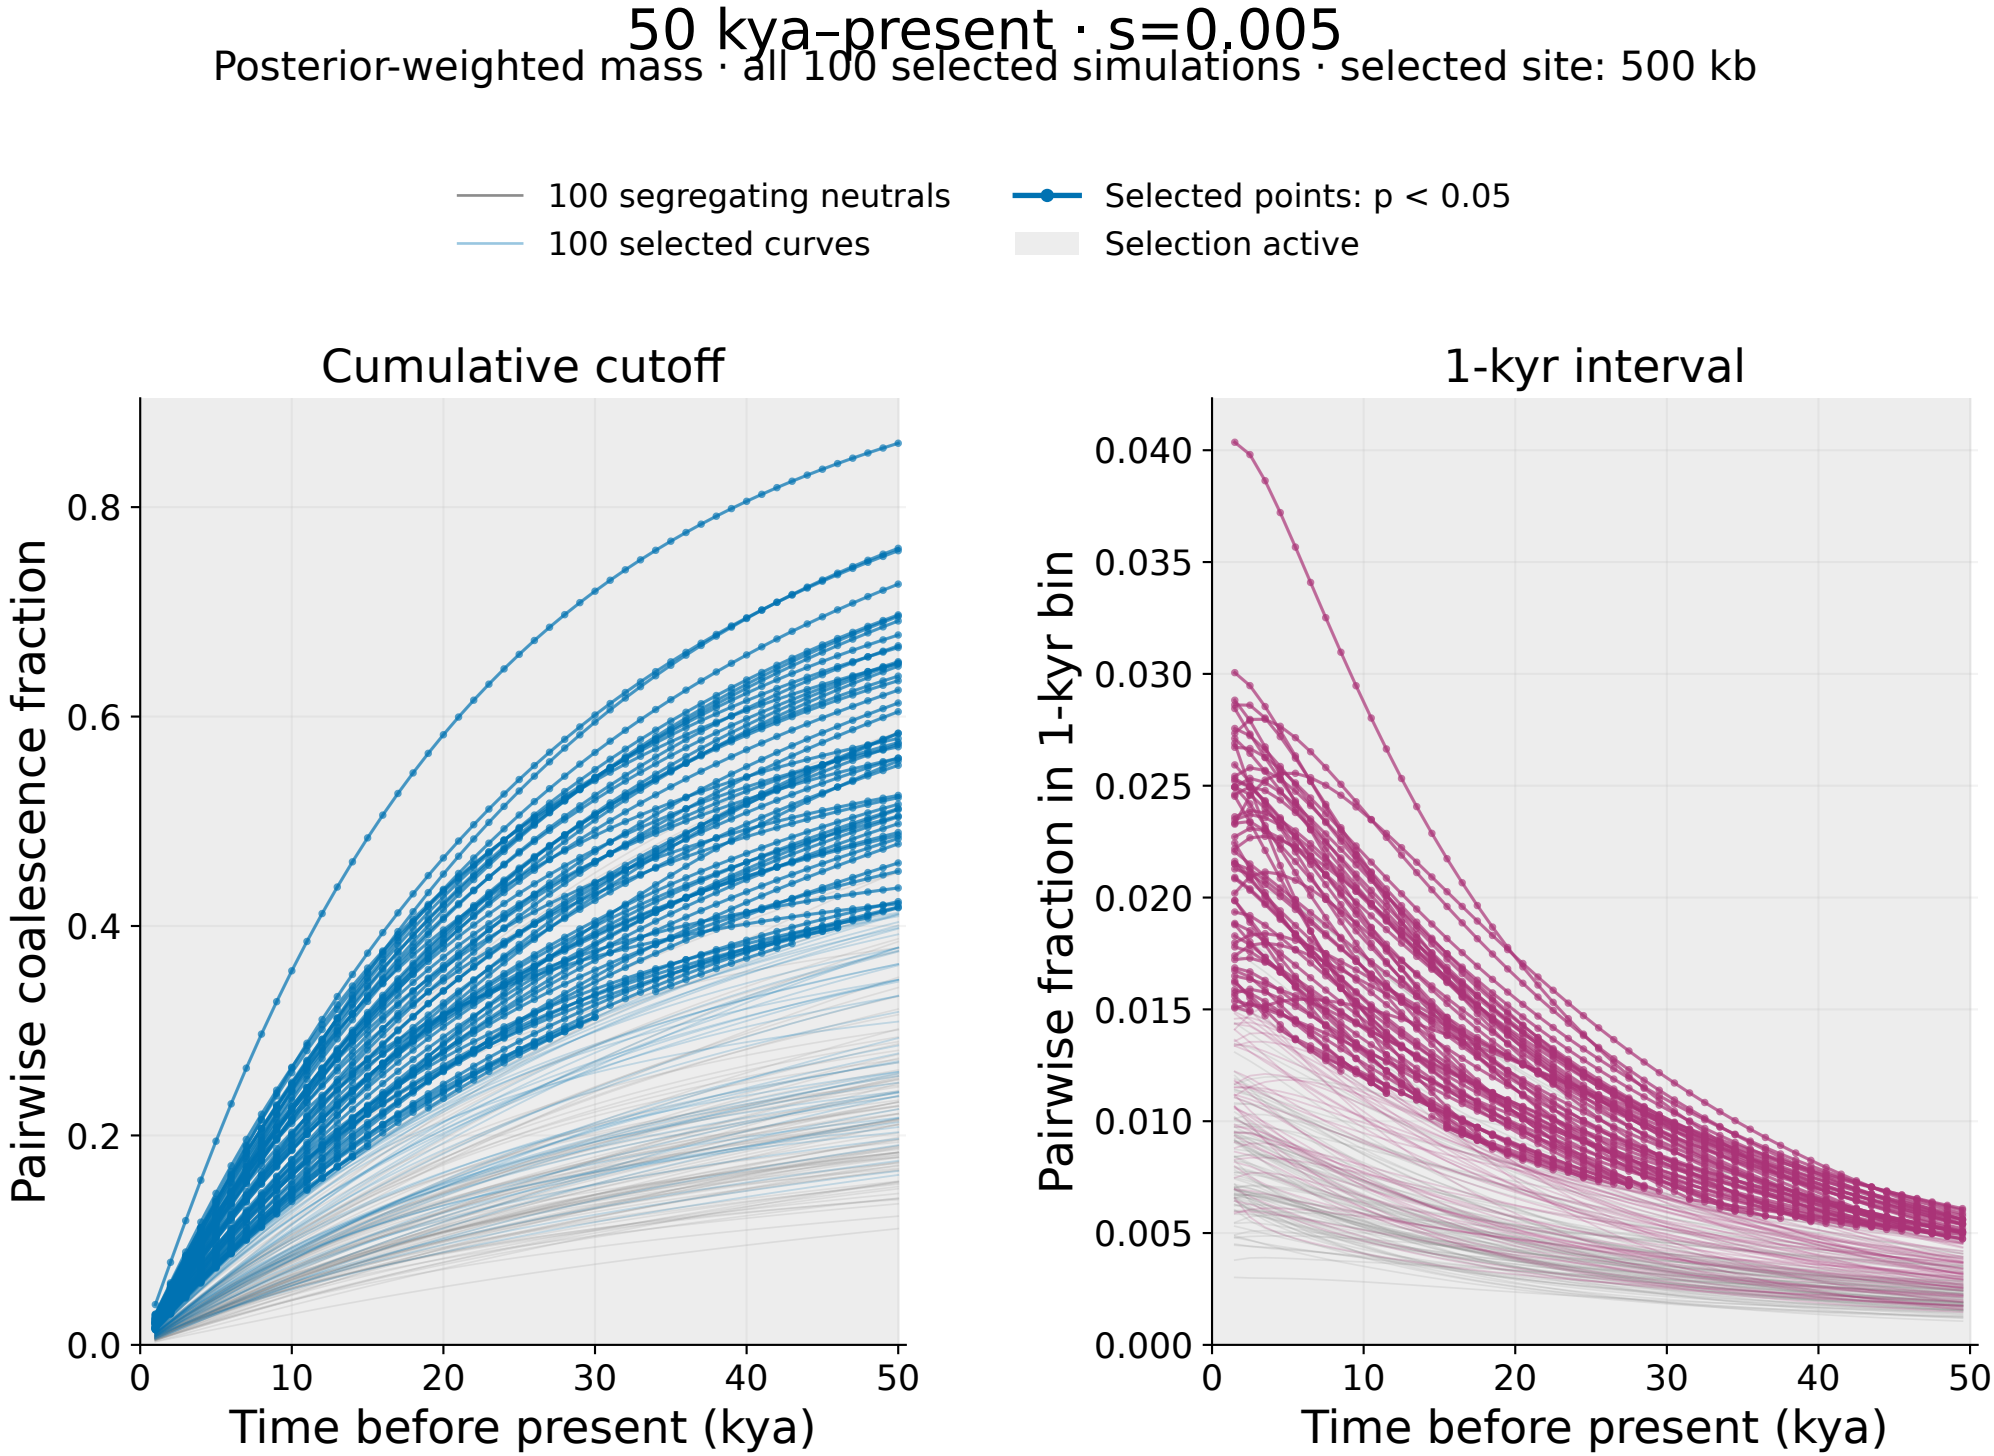

Bold points use each simulation’s own p value against the same 100 segregating neutrals.

Pointwise tests; no correction across times/loci. Interval values are plotted at bin midpoints.